


Experiment -2 .dockerignore in Docker


Create a Sample Project:

- Create a simple project directory with various types of files, including source code, configuration files, and build artifacts.

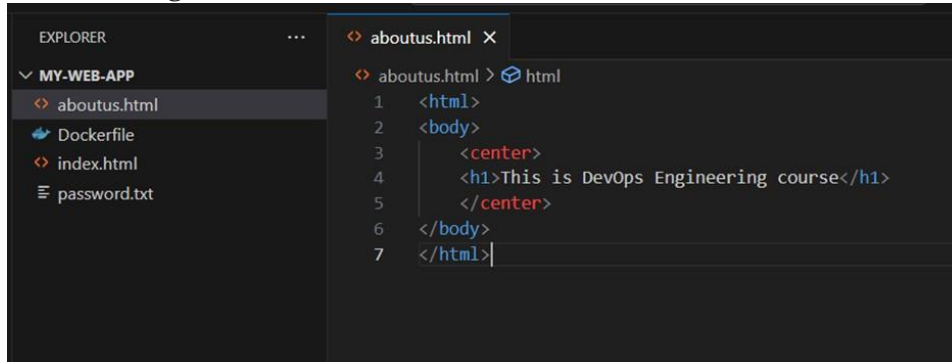


Create a Dockerfile:

- Write a Dockerfile that specifies the build steps for your application, including any necessary dependencies.

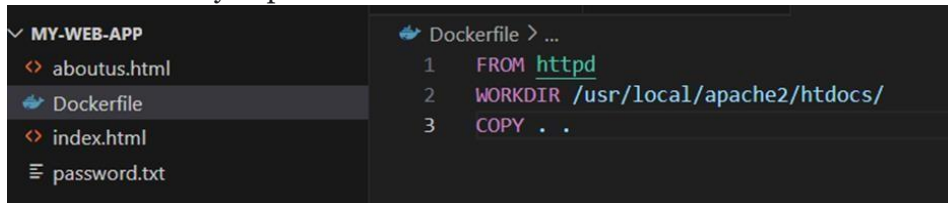

Create a .dockerignore File:

- Create a .dockerignore file in the root directory of your project.
- Add specific files or directories to the .dockerignore file that you do not want to be included in the Docker image during the build process.

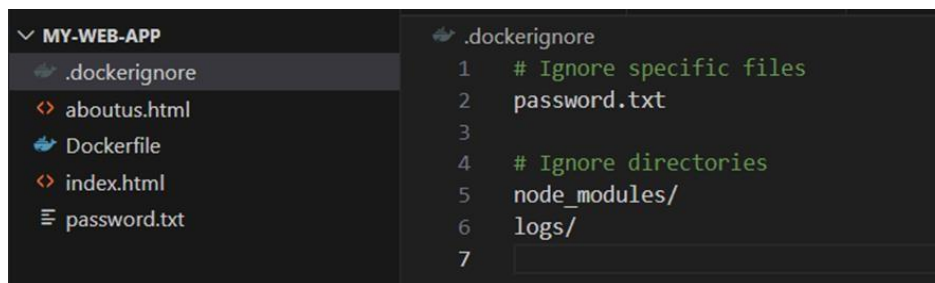

Build the Docker Image:

- Use the docker build command to build the Docker image from the Dockerfile.

```
91983@DELL MINGW64 ~/OneDrive/Desktop/SEMS/ACO-LAB-2021-25(Local)/my-web-app (main)
$ docker build -t my-web-app:1.0.0 .
[+] Building 33.5s (9/9) FINISHED                                docker:default
-> [internal] load .dockerignore                                  0.1s
-> => transferring context: 125B                                   0.0s
-> [internal] load build definition from Dockerfile               0.1s
-> => transferring dockerfile: 93B                                  0.0s
-> [internal] load metadata for docker.io/library/httpd:latest   14.8s
-> [auth] library/httpd:pull token for registry-1.docker.io      0.0s
-> [1/3] FROM docker.io/library/httpd@sha256:4e2a356b4b0aa7a961e7dfb9e1e5025ca3874c532fa5d999f13f8fc33c09d1b7 18.2s
-> => resolve docker.io/library/httpd@sha256:4e2a356b4b0aa7a961e7dfb9e1e5025ca3874c532fa5d999f13f8fc33c09d1b7 0.0s
-> => sha256:4e2a356b4b0aa7a961e7dfb9e1e5025ca3874c532fa5d999f13f8fc33c09d1b7 1.06kB / 1.06kB
-> => sha256:d70861224a52d0175c4b485ef7b70f56125f2c74d8a489a9a8ca10e3656029c9 1.37kB / 1.37kB
-> => sha256:7f6a969e81a54d01e2fc08fd45025badf8f2418d3530a3a484b77ab026a1b4a7 9.09kB / 9.09kB
-> => sha256:c1a8c8567b78fc222c6d8381081d5578fd80e6c30ee0bcf8a79019824301a1 178B / 178B
-> => sha256:10b9ab03bf458e12adc435ae235b1f58f473fea23c2cdfed88407d92a4a51c41 4.20kB / 4.20kB
-> => sha256:74dbedfddc012b3398b2c645974f1f6e30a9502fef541d02faf456e40b67bc4 31.40kB / 31.40kB
-> => extracting sha256:c1a8c8567b78fc222c6d8381081d5578fd80e6c30ee0bcf8a79019824301a1 0.0s
-> => sha256:6a3b76b70f7385a99e72877fac4d1e00f466859ed3ea50891bab08908e22c0b 296B / 296B
-> => extracting sha256:10b9ab03bf458e12adc435ae235b1f58f473fea23c2cdfed88407d92a4a51c41 0.4s
-> => extracting sha256:74dbedfddc012b3398b2c645974f1f6e30a9502fef541d02faf456e40b67bc4 1.6s
-> => extracting sha256:6a3b76b70f7385a99e72877fac4d1e00f466859ed3ea50891bab08908e22c0b 0.0s
-> [internal] load build context                                  0.0s
-> => transferring context: 555B                                    0.0s
-> [2/3] WORKDIR /usr/local/apache2/htdocs/                     0.2s
-> [3/3] COPY . .                                                 0.0s
-> exporting to image                                             0.1s
-> => exporting layers                                             0.0s
-> => writing image sha256:99650d2deb6c970c64395f70d741ec0c46b73a0eda4f7b7d3a903102c7f6a4ff 0.0s
-> => naming to docker.io/library/my-web-app:1.0.0               0.0s

What's Next?
View a summary of image vulnerabilities and recommendations -> docker scout quickview
```

- Observe the build context and check which files are being included in the Docker image.

```
PS C:\Users\91983\OneDrive\Desktop\SEMS\ACO-LAB-2021-25(Local)\my-web-app> docker run -it my-web-app:1.0.1 /bin/bash
root@756bb3129e81:/usr/local/apache2/htdocs# ls
Dockerfile aboutus.html index.html
root@756bb3129e81:/usr/local/apache2/htdocs#
```

Modify .dockerignore and Rebuild:

- Modify the .dockerignore file to exclude different types of files or directories from the Docker image.
- Rebuild the Docker image and observe the changes in the build context.

Test the Docker Image:

- Run the Docker image as a container using the docker run command.
- Verify that the container works as expected, despite certain files being excluded from the Docker image.

```
PS C:\Users\91983\OneDrive\Desktop\SEMS\ACO-LAB-2021-25(Local)\my-web-app> docker run --name Container1 my-web-app:1.0.1
AH00558: httpd: could not reliably determine the server's fully qualified domain name, using 172.17.0.2. Set the 'ServerName' directive globally to suppress this message
AH00558: httpd: Could not reliably determine the server's fully qualified domain name, using 172.17.0.2. Set the 'ServerName' directive globally to suppress this message
[Thu Nov 16 07:14:34.387957 2023] [mpm_event:notice] [pid 1:tid 140016788367232] AH00489: Apache/2.4.58 (Unix) configured -- resuming normal operations
[Thu Nov 16 07:14:34.388445 2023] [core:notice] [pid 1:tid 140016788367232] AH00094: Command line: 'httpd -D FOREGROUND'
```

Optimize the .dockerignore File:

- Experiment with different patterns and wildcards in the .dockerignore file to optimize the build context and reduce the image size.

Check Image Size and Contents:

- Use the docker image ls and docker image inspect commands to check the size of the Docker image and its contents.

```
91983@DELL MINGW64 ~/OneDrive/Desktop/SEM5/ACO-LAB-2021-25(Local)/MY-WEB-APP (main)
$ docker image ls
```

REPOSITORY	TAG	IMAGE ID	C
my-web-app	1.0.0	99650d2deb6c	4
my-web-app	1.0.1	99650d2deb6c	4

```
PS C:\Users\91983\OneDrive\Desktop\SEM5\ACO-LAB-2021-25(Local)\my-web-app> docker run my-web-app:1.0.1 ls /usr/local/apache2/htdocs/
Dockerfile
aboutus.html
index.html
```

```
91983@DELL MINGW64 ~/OneDrive/Desktop/SEM5/ACO-LAB-2021-25(Local)/MY-WEB-APP (main)
$ docker image inspect my-web-app:1.0.1
[
  {
    "Id": "sha256:99650d2deb6c970c64395f70d741ec0c46b73a0eda4f7b7d3a903102c7f6a4ff",
    "RepoTags": [
      "my-web-app:1.0.0",
      "my-web-app:1.0.1"
    ],
    "RepoDigests": [],
    "Parent": "",
    "Comment": "buildkit.dockerfile.v0",
    "Created": "2023-11-16T06:35:34.884308068Z",
    "Container": "",
    "ContainerConfig": {
      "Hostname": "",
      "Domainname": "",
      "User": "",
      "AttachStdin": false,
      "AttachStdout": false,
      "AttachStderr": false,
      "Tty": false,
      "OpenStdin": false,
      "StdinOnce": false,
      "Env": null,
      "Cmd": null,
      "Image": "",
      "Volumes": null,
      "WorkingDir": "",
      "Entrypoint": null,
      "OnBuild": null,
      "Labels": null
    }
  },
]
```

```

",
"DockerVersion": "",
"Author": "",
"Config": {
  "Hostname": "",
  "Domainname": "",
  "User": "",
  "AttachStdin": false,
  "AttachStdout": false,
  "AttachStderr": false,
  "ExposedPorts": {
    "80/tcp": {}
  },
  "Tty": false,
  "OpenStdin": false,
  "StdinOnce": false,
  "Env": [
    "PATH=/usr/local/apache2/bin:/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin",
    "HTTPD_PREFIX=/usr/local/apache2",
    "HTTPD_VERSION=2.4.58",
    "HTTPD_SHA256=fa16d72a078210a54c47dd5bef2f8b9b8a01d94909a51453956b3ec6442ea4c5",
    "HTTPD_PATCHES="
  ],
  "Cmd": [
    "httpd-foreground"
  ],
  "Image": "",
  "Volumes": null,
  "WorkingDir": "/usr/local/apache2/htdocs/",
  "Entrypoint": null,
  "OnBuild": null,
  "Labels": null,
  "StopSignal": "SIGWINCH"
},

```

```

",
"DockerVersion": "",
"Author": "",
"Config": {
  "Hostname": "",
  "Domainname": "",
  "User": "",
  "AttachStdin": false,
  "AttachStdout": false,
  "AttachStderr": false,
  "ExposedPorts": {
    "80/tcp": {}
  },
  "Tty": false,
  "OpenStdin": false,
  "StdinOnce": false,
  "Env": [
    "PATH=/usr/local/apache2/bin:/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin",
    "HTTPD_PREFIX=/usr/local/apache2",
    "HTTPD_VERSION=2.4.58",
    "HTTPD_SHA256=fa16d72a078210a54c47dd5bef2f8b9b8a01d94909a51453956b3ec6442ea4c5",
    "HTTPD_PATCHES="
  ],
  "Cmd": [
    "httpd-foreground"
  ],
  "Image": "",
  "Volumes": null,
  "WorkingDir": "/usr/local/apache2/htdocs/",
  "Entrypoint": null,
  "OnBuild": null,
  "Labels": null,
  "StopSignal": "SIGWINCH"
},

```

```

    "Architecture": "amd64",
    "Os": "linux",
    "Size": 168330828,
    "VirtualSize": 168330828,
    "GraphDriver": {
      "Data": {
        "LowerDir": "/var/lib/docker/overlay2/raghyrahvv19aq5392566yf8/diff:/var/lib/docker/overlay2/778f58b3cc6d9c17e38271347f0f0aaada0e2f1f754b6f1f85b9bcc5659387e5/diff:/var/lib/docker/overlay2/c9c6bf88e15953edf846934fcdeefda71cc3beba523582573907a91c5397bc42/diff:/var/lib/docker/overlay2/92e60c772046397f63b9301cd8151227736843736aa6d7712611f735ca972538/diff:/var/lib/docker/overlay2/dc91793ba1cf6c60fb1868a28f78318e0b9934e8fcfe7f7ed0483dee4f8ea57a/diff:/var/lib/docker/overlay2/eac545cc9cc2c7297fc771d82e491e8fb68004e6b029ac08121285c5af3fda3b/diff",
        "MergedDir": "/var/lib/docker/overlay2/t9k0rmz2y5kc297lzos08j2z/merged",
        "UpperDir": "/var/lib/docker/overlay2/t9k0rmz2y5kc297lzos08j2z/diff",
        "WorkDir": "/var/lib/docker/overlay2/t9k0rmz2y5kc297lzos08j2z/work"
      }
    },
    "Name": "overlay2"
  },
  "RootFS": {
    "Type": "layers",
    "Layers": [
      "sha256:ec983b16636050e69677eb81537e955ab927757c23aaf73971ecf5f71fcc262a",
      "sha256:2905795cb5b834a2e1912922d93bb6f4188c4ae4c786025a2b2337f675ee6e57",
      "sha256:e0ba343b5cab49f2b354f240b5bccf1c29b4ffcef0cc086102fbaef6ec2bf0fc",
      "sha256:5ca84525a215131486e53202ee9d047f6b7c417ffa5d5f487c8ce0adab3af4d",
      "sha256:cdae29f197b2311e9cb11606d872df70e4b2041d48db081854d6a82c62d3f55d",
      "sha256:5f70bf18a086007016e948b04aed3b82103a36bea41755b6cddfaf10ace3c6ef",
      "sha256:f15bf7eea301210fb694c774d8f0ff1576ef59429a570fa2f7b81ed8fe4ae4ab"
    ]
  },
  "Metadata": {
    "LastTagTime": "2023-11-16T07:03:19.234628065Z"
  }
}
]

```

- Command that list the hash id of the image being created and then list the size of the image using its hash id :

```

91983@DELL MINGW64 ~/OneDrive/Desktop/SEM5/ACO-LAB-2021-25(Local)/MY-WEB-APP (main)
$ docker images -q --no-trunc my-web-app:1.0.1
sha256:99650d2deb6c970c64395f70d741ec0c46b73a0eda4f7b7d3a903102c7f6a4ff

91983@DELL MINGW64 ~/OneDrive/Desktop/SEM5/ACO-LAB-2021-25(Local)/MY-WEB-APP (main)
$ docker inspect --format '{{.Size}}' sha256:99650d2deb6c970c64395f70d741ec0c46b73a0eda4f7b7d3a903102c7f6a4ff
168330828

```

Documentation and Best Practices:

- Document your findings and the best practices for using the .dockerignore file in your projects.

Through this exercise, you'll gain a better understanding of how to use the .dockerignore file effectively to optimize Docker image builds and reduce image sizes. Adjust the exercise based on your specific project requirements.

