

AGENDA DAY-1:

1. What is Docker and its need in IT ✓
2. VMs vs Container ✓
3. Docker Fundamental Commands
 - a. Docker Images Commands ✓
 - b. Docker Container Commands
4. Build own Docker Image
5. Volume ✓

Docker pull, docker rmi

- docker run


- docker ps


- docker ps -a

- docker exec
start
stop
rm

Before Docker





Docker Need





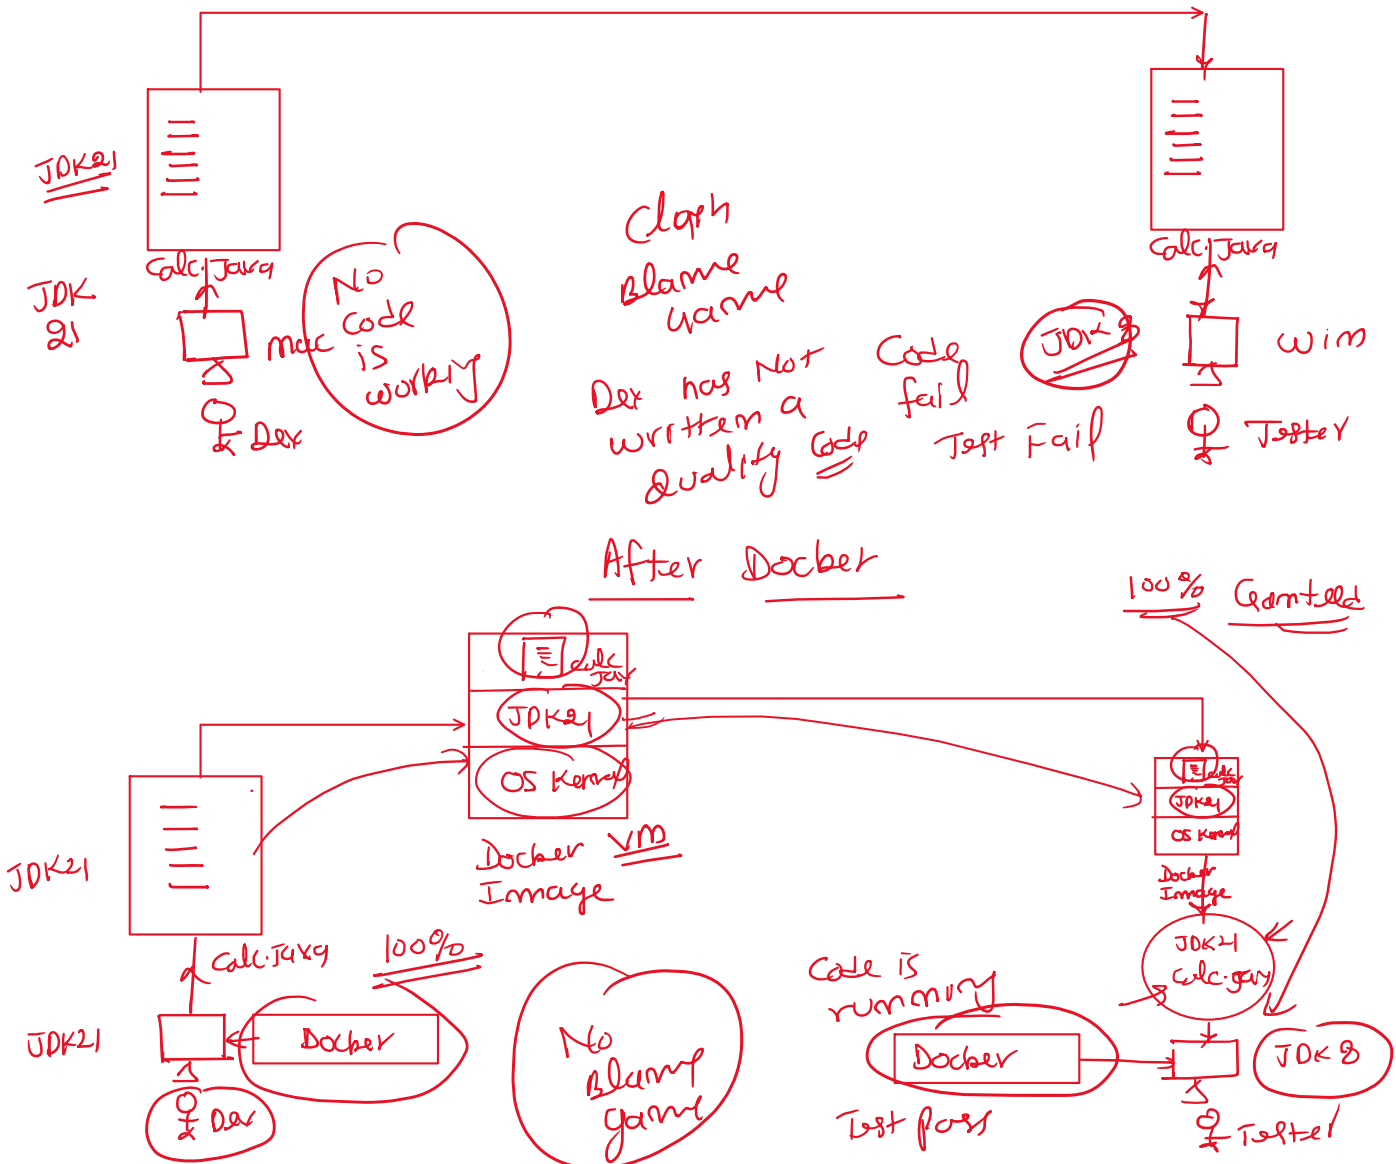



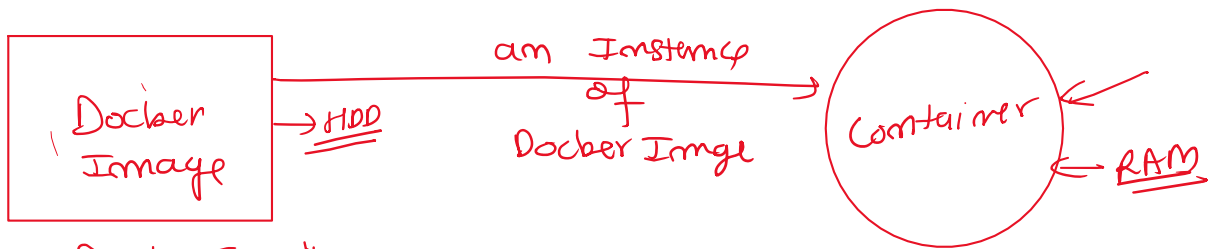


- 1- Static Entity
- 2- Blue Print
- 3- Class
- 4- one for one App


- 1- Instance of DI
- 2- Dynamic Entity
- 3- many contain from one DI
- 4- Objects

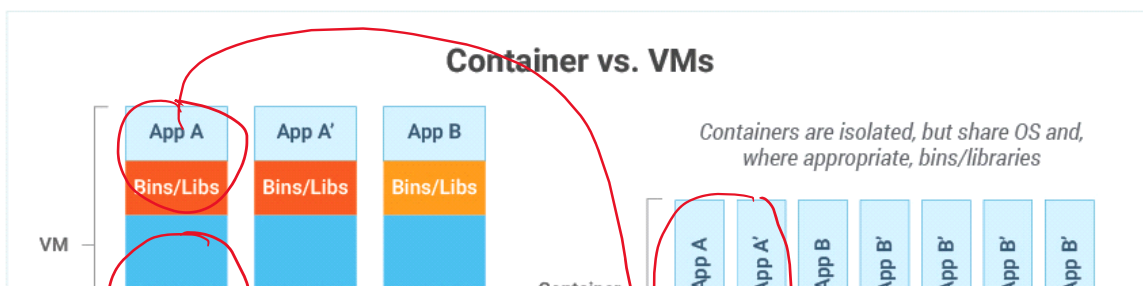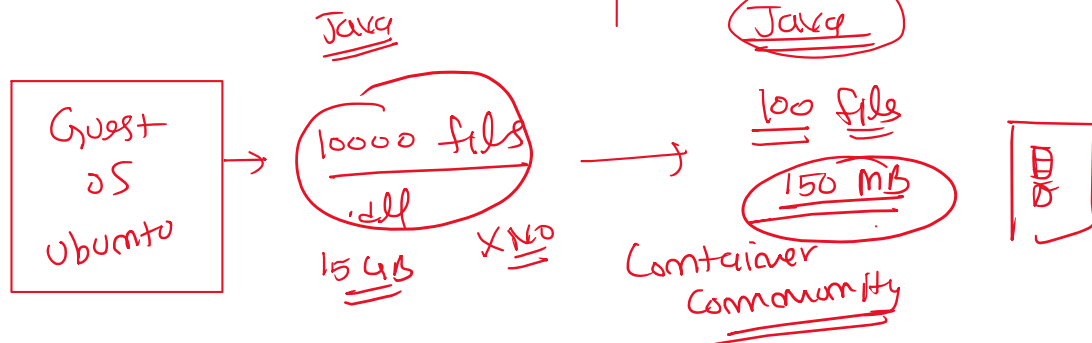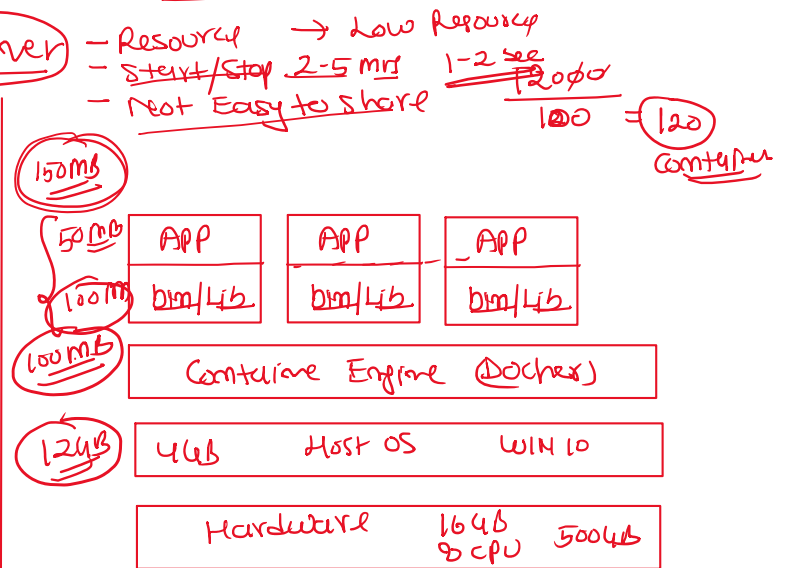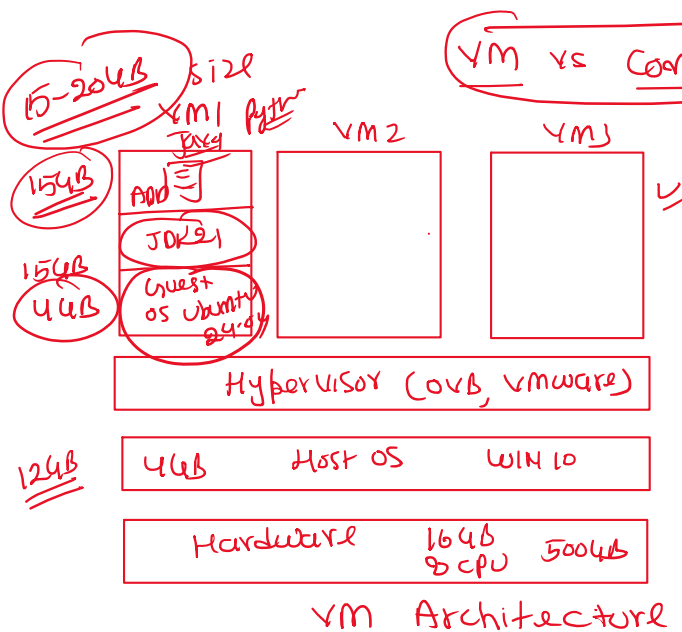

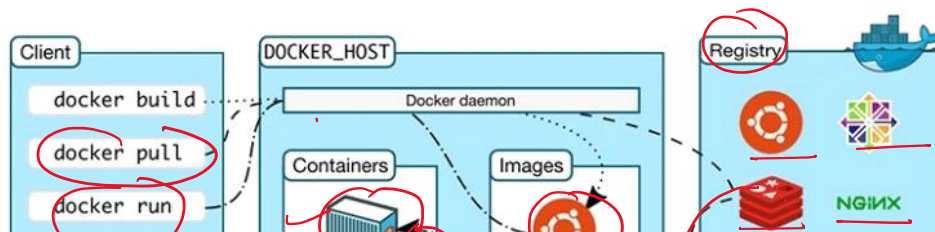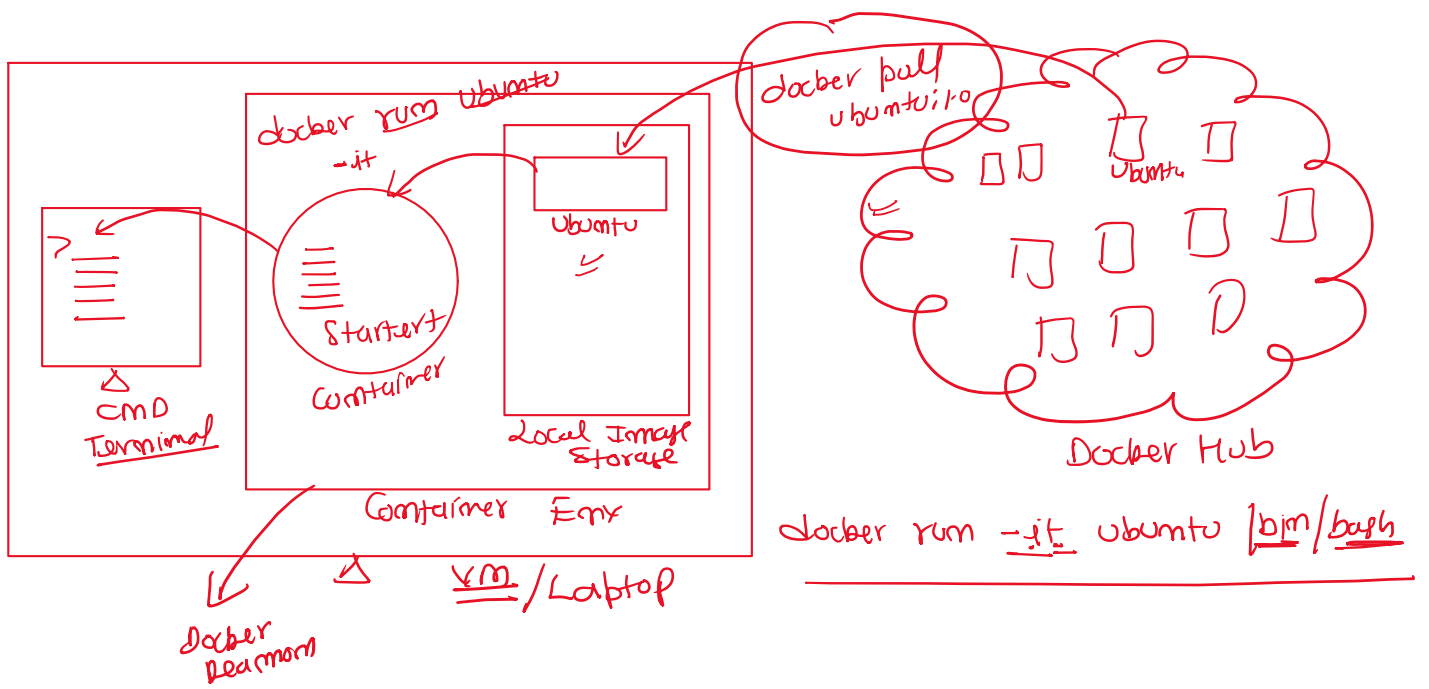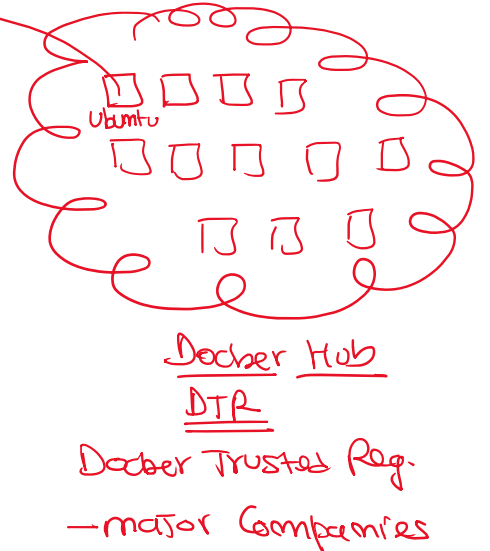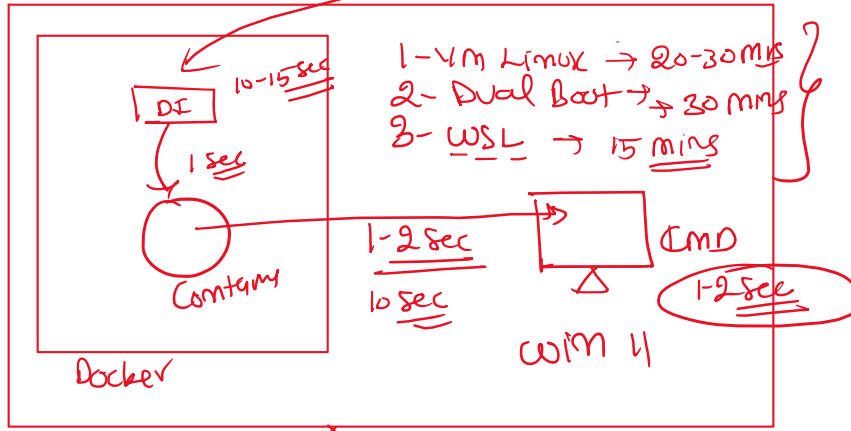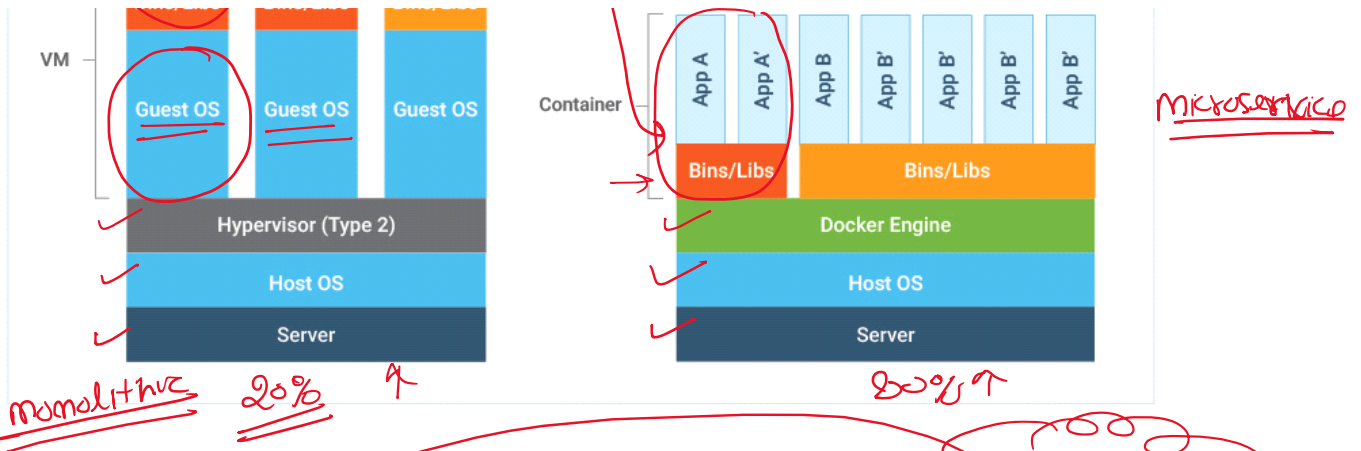

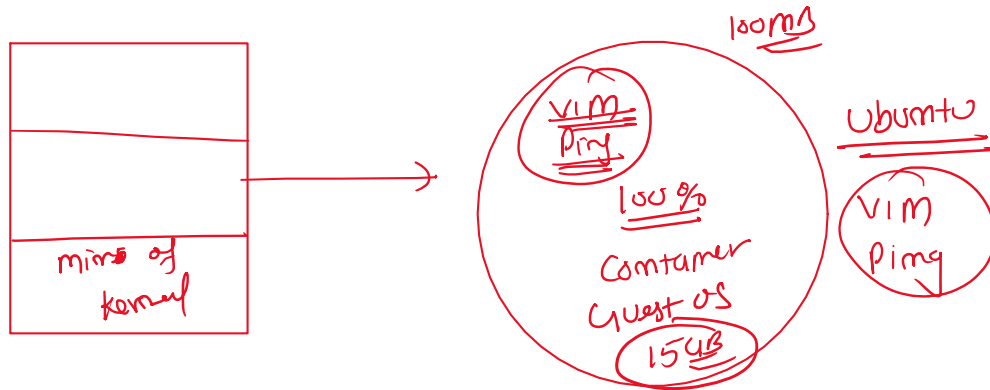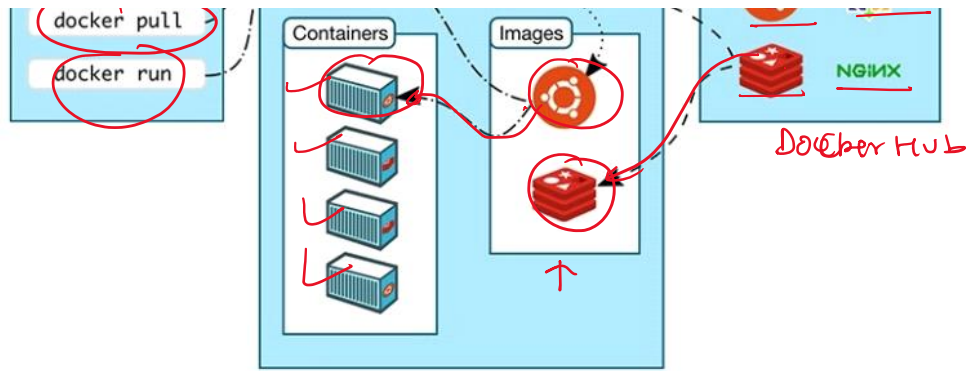

`docker ps` → list all running Container
`docker ps -a` → list all "all non-running Container" (Stopped)
`docker ps -aq` → list only Container IDs

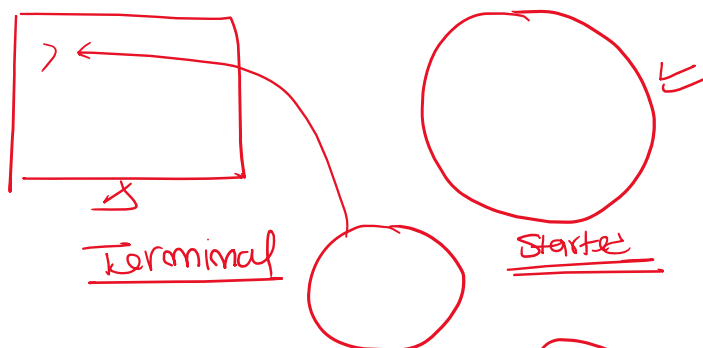


~~X~~ `docker run -it ubuntu /bin/bash`
`docker exec -it (Cont-ID) /bin/bash`

Volume

Container
relative
in container
Data & FS
Non-Persistent


Volume
mapping

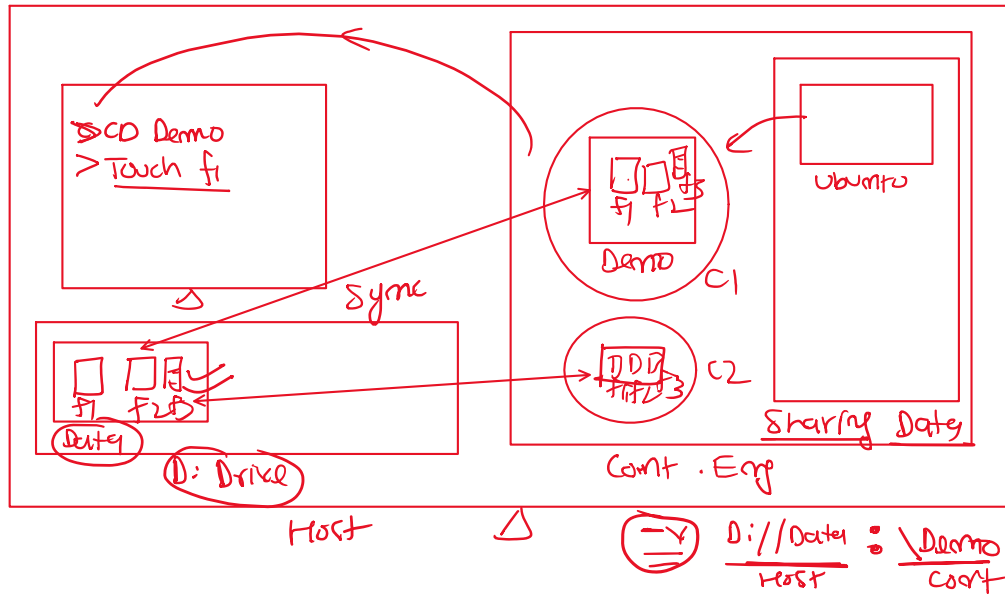

docker run -it -v D://Data : /demo ubuntu /bin/bash

Volume


Disk M

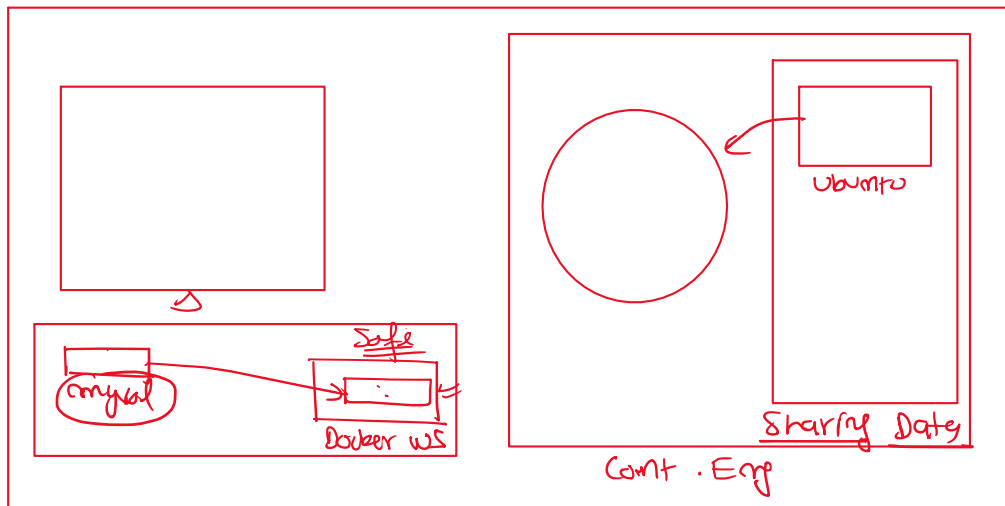

docker volume create myvol


docker run -it -v myvol : /demo ubuntu bin/bash

Volume mapping

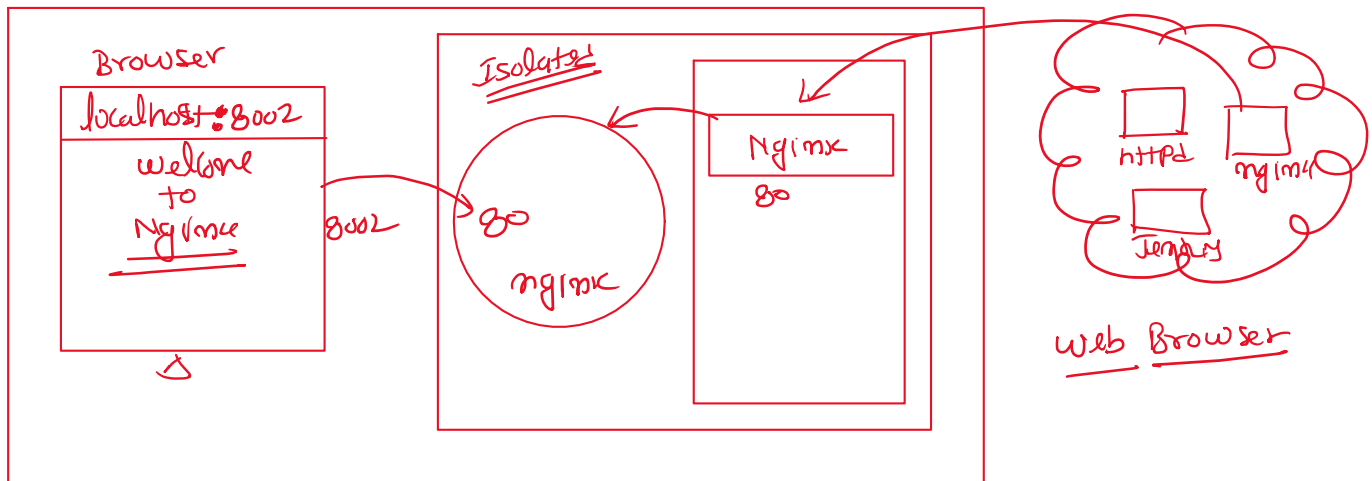

`docker run -p 8002:80 nginx`

→ detected Background

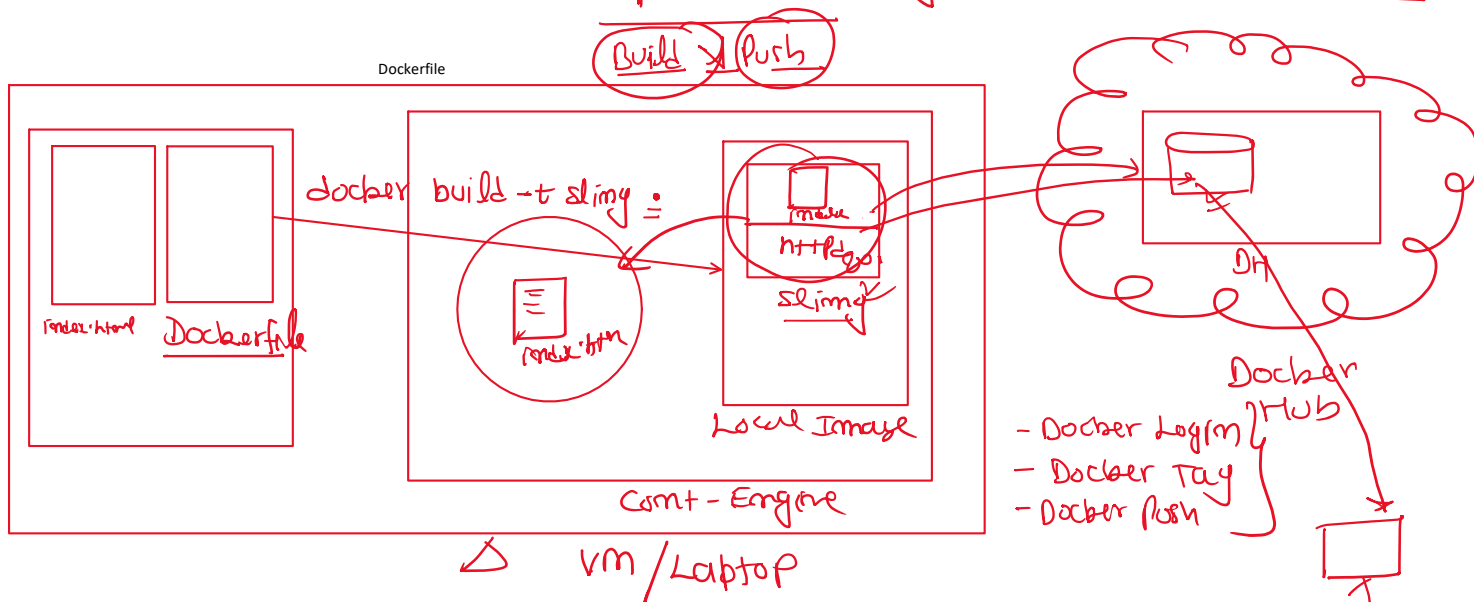

`docker build -t slim .`