
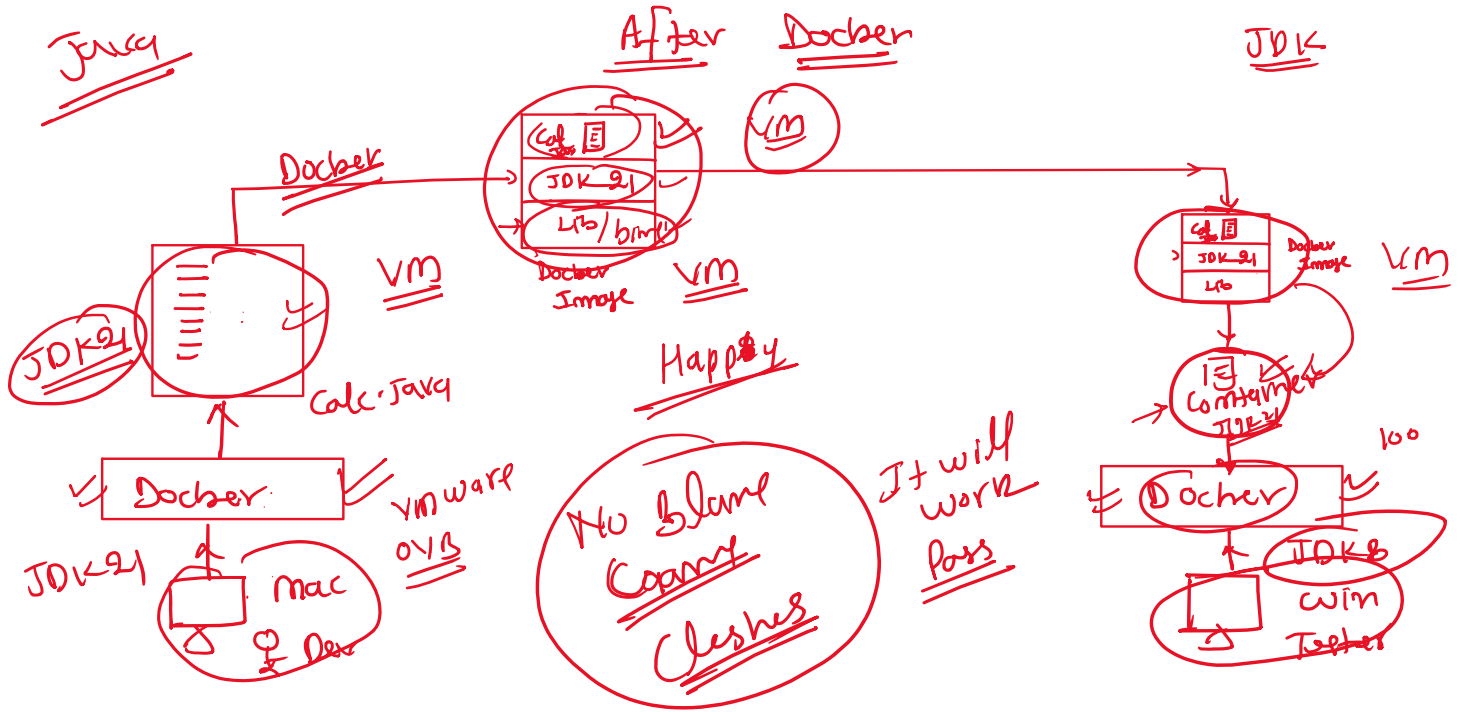


Before Docker

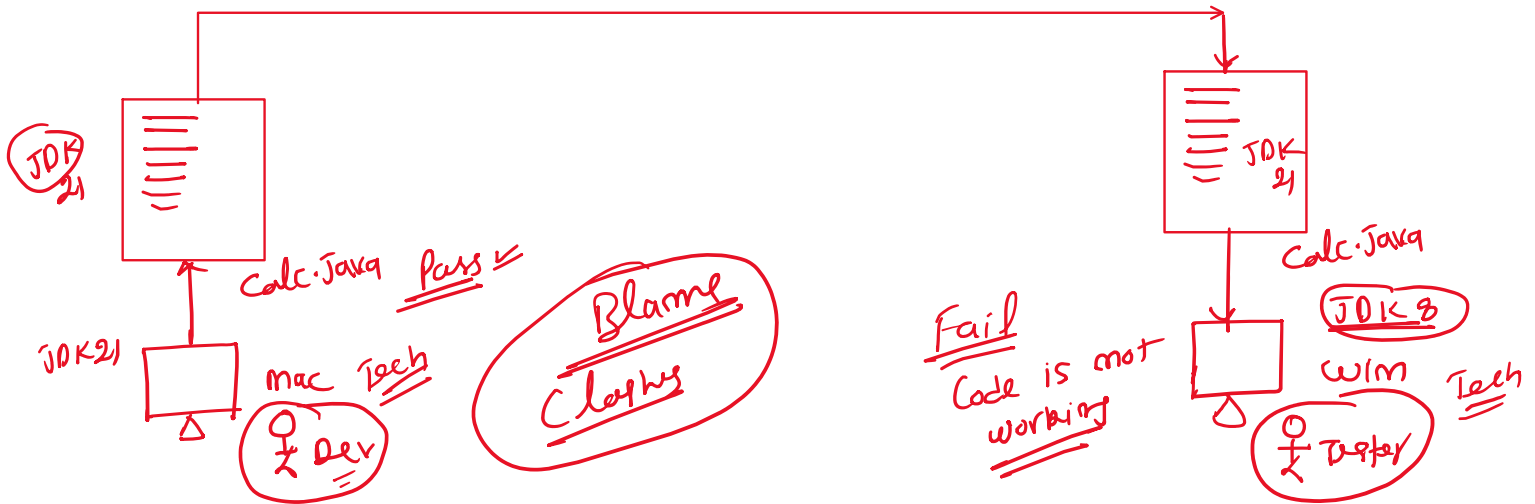

- 1- Docker is fast
- 2- Docker & Container are light weight
- 3- less Resource Consuming

2048 4096 3 Max

VM	APP.	Lib/Bin	OS
Ubuntu	APP.	Lib/Bin	Ubuntu
Ubuntu	APP.	Lib/Bin	Ubuntu
Ubuntu	APP.	Lib/Bin	Ubuntu

Heavy (2048) Resource 2-3 mbs

100-200 mbs


100MB

Containerization	APP.	Lib/Bin	OS
Ubuntu	APP.	Lib/Bin	Ubuntu
Ubuntu	APP.	Lib/Bin	Ubuntu


$$\frac{1249}{100 \text{ mbs}} = 12.49$$

$$\frac{12000 \text{ mbs}}{100 \text{ mbs}} = 120$$




100-200m

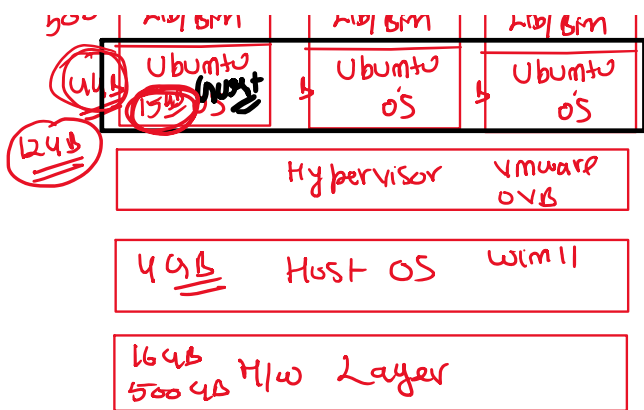

Laptop

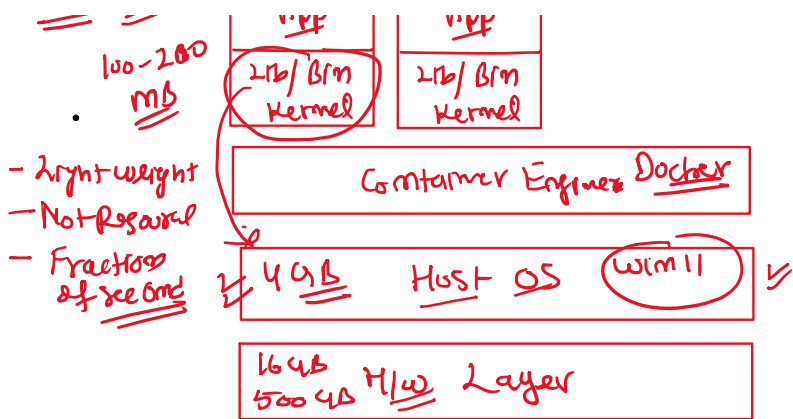

Laptop

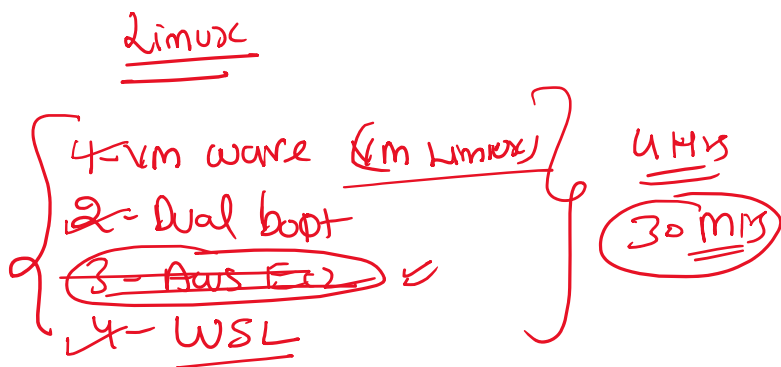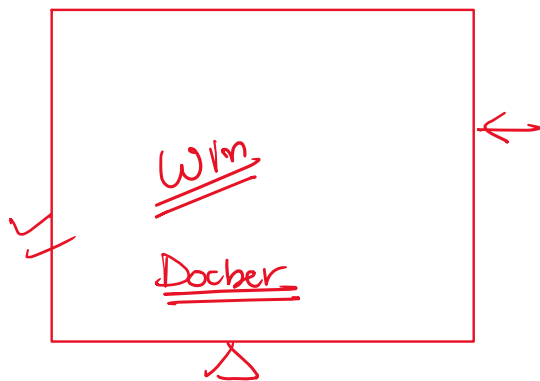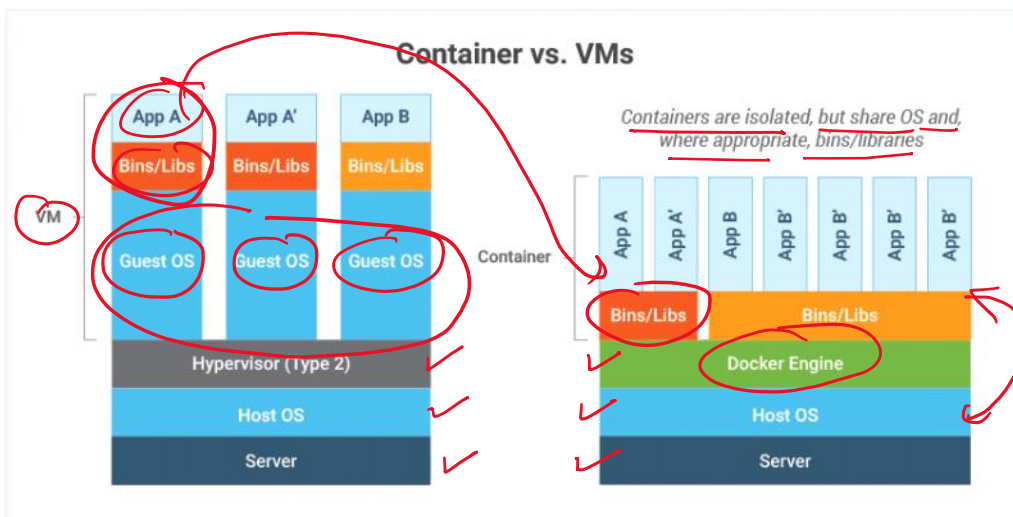

Heavy → monolithic → many app is running in same Env


Light → micro service

VM

Formam

Elemen

- ① web server
- ② DB
- ③ FrontEnd
- ④ Back End
- ⑤ P.G.
- ⑥ Search
- ⑦ Refund

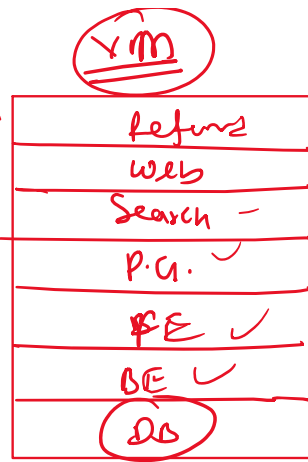


monolithic

15-20%


m/c Simple

micro service

80-85%

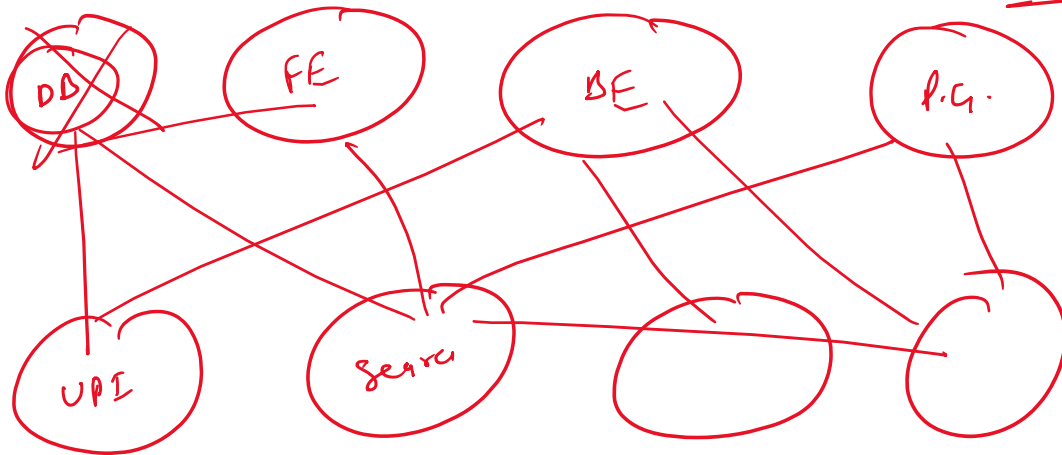


Complex

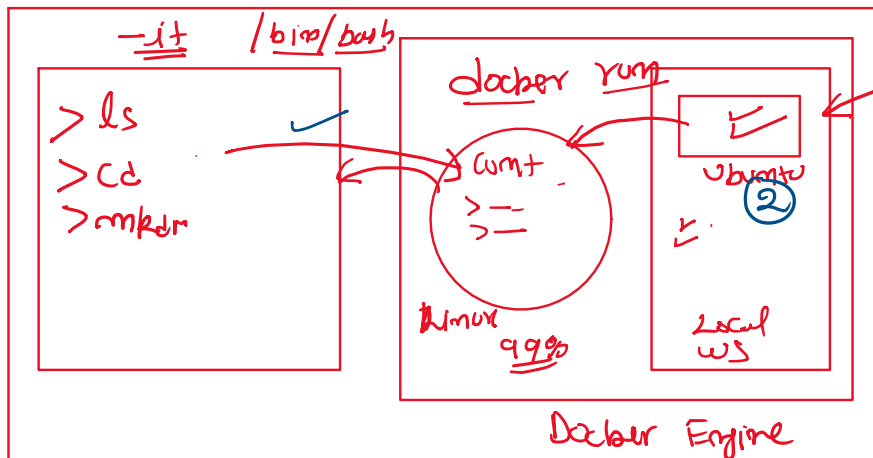

docker pull

①

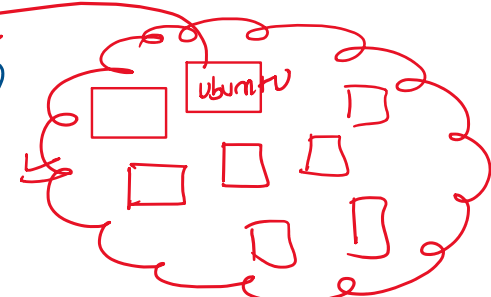


Cycle


Docker Hub
DTL

Docker Trusted Registry

Docker Image
Static (Template)
(Blueprint)

Docker Container
(Dynamic)
(Instance)

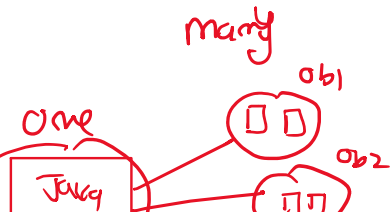


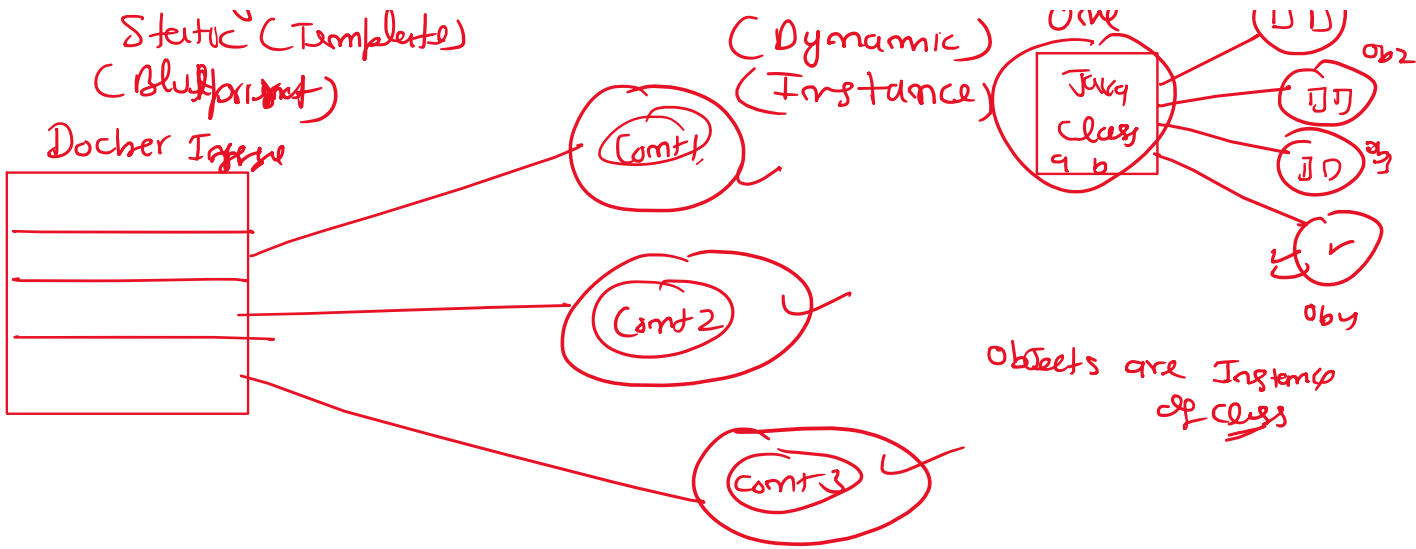


Docker Volume

✓ docker run -it ubuntu /bin/bash

pull

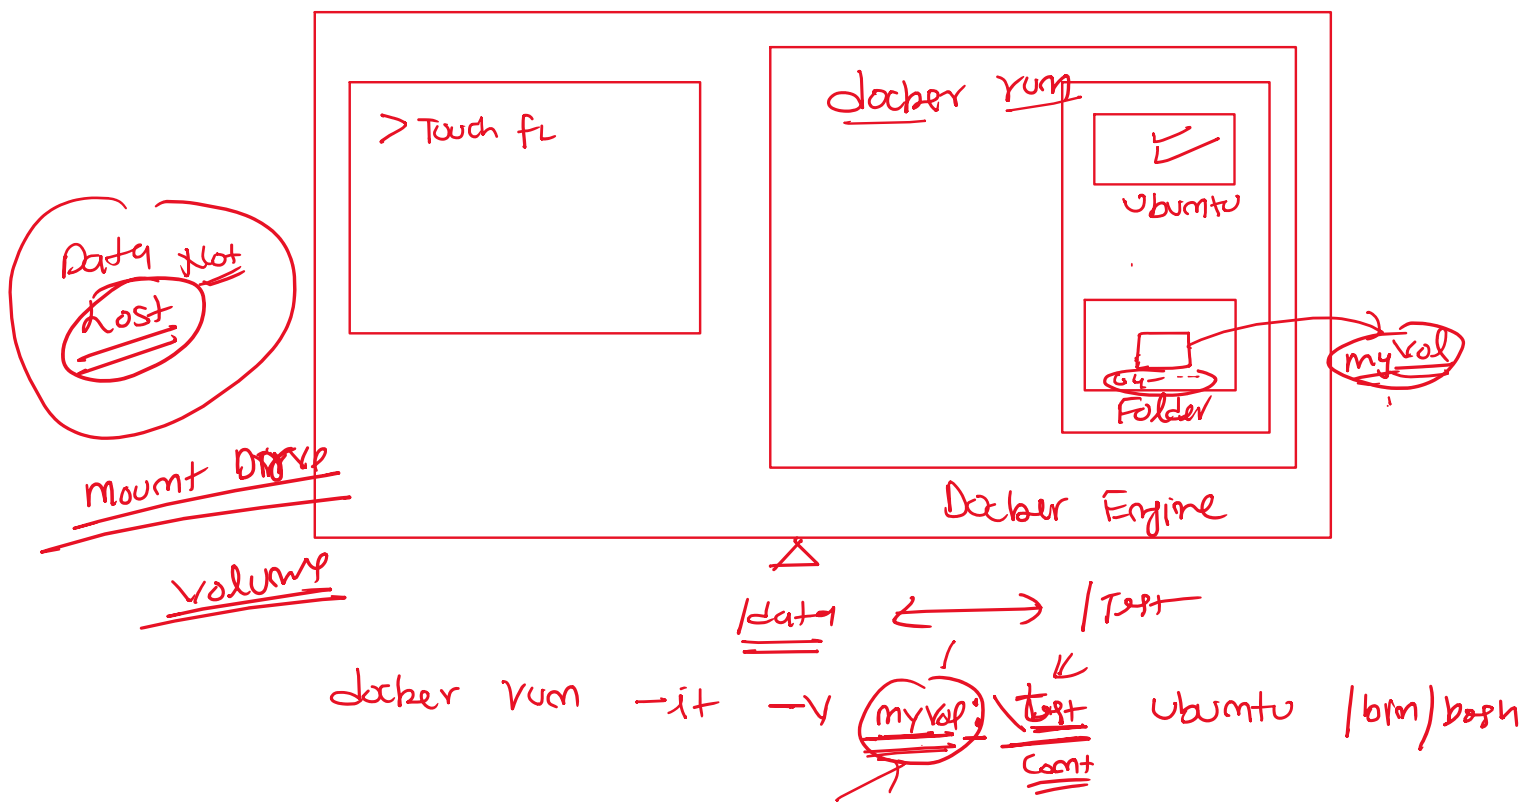

`docker run -d -p 8002:80 nginx`

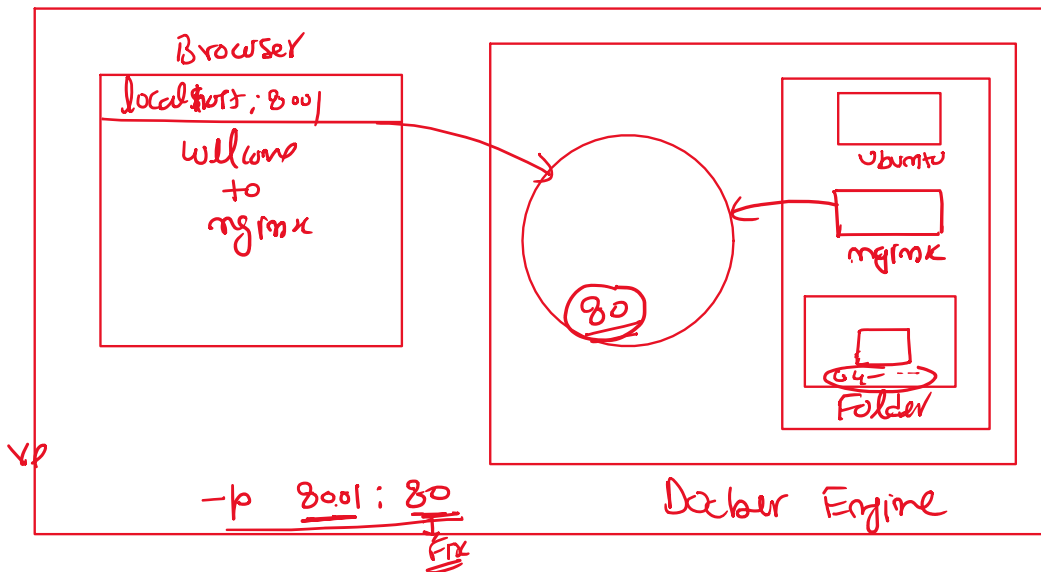

- Build own Docker Image
- Push DI on Docker Hub
- Pull DE each/other Image
- Run App in our Containers

