

HKTVmall hybris with automatically install script

- [Expectation](#)
- [Pre-flight](#)
 - [Windows Firewall Rules](#)
 - [Install cmdr](#)
 - [Install WSL2](#)
 - [Install JDK8 on Windows](#)
 - [Install Rancher Desktop](#)
- [Hybris Setup](#)
 - [Download Hybris Codebase](#)
 - [Pull new patches from Git](#)
 - [Use the auto setup script](#)
 - [Optional: If you are not installing in C: drive](#)
 - [Check whether you have installed cmdr](#)
 - [Run the auto setup script](#)
 - [Set up RabbitMQ, solr](#)
 - [Building the app](#)
 - [Webpack related error](#)
 - [Import DB](#)
 - [Download the supplemented version of local.properties \(optional\)](#)
 - [System Update](#)
 - [Properties Missing](#)
 - [Invalid composed type](#)
 - [Can not connect to MySQL \(This problem should have been fixed in the local.properties above\)](#)
 - [Start hybris](#)
 - [Hybris frontend development auto complications](#)
 - [Apply patch_hktvmall_data.impex](#)
 - [Check](#)
 - [Import other data](#)
- [Other tools you may want](#)
- [Common error](#)
 - [Error response from daemon: invalid volume specification:](#)
 - [error during connect: This error may indicate that the docker daemon is not running](#)
 - [unexpected EOF](#)
 - [ERROR: Windows named pipe error: The pipe has been ended. \(code: 109\)](#)
 - [ERROR: ant clean all fail with random java/frontend errors](#)
 - [NullPointerException without trace](#)
 - [Debug: Network inspect: netcat netstat](#)
 - [Manual Rsync](#)
 - [Manual Update local.properties](#)
 - [Drop Table](#)
- [Reference](#)

Expectation

The console can output various buggy logs that may or may not affect your deployment. Try searching for some existing solutions in the Confluence space and Slack channel if it doesn’t work.

Pre-flight

Windows Firewall Rules

Docs for **netsh**: [netsh interface](#)

Make sure there are no portproxy rules affecting your browser connection to the Hybris container.

Run As Administrator only for the netsh commands.

To list all existing rules:

```
1 | netsh interface portproxy show all
```

And remove any rules that might affect port 9111/9112:

```
1 | netsh interface portproxy delete v4tov4 listenport=<port>
listenaddress=<addr>
```

Install cmdr

Download here: [Cmdr | Console Emulator](#)

cmdr is a console emulator enables Linux Terminal-style commands running in Windows.
Heavily used in our setup.

Install WSL2

Make sure you have at least 4 CPUs and 10GB memory for Hybris, create file `.wslconfig` in `C:\Users\%USERNAME%`

```
1 [wsl2]
2 memory=10GB
3 processors=4
```

Install wsl2 in Command Prompt

```
1 wsl --install
2 wsl --update
```

Install JDK8 on Windows

We recommend using Eclipse Temurin

Download here: <https://adoptium.net/temurin/releases/?version=8>



Your PC normally have multiple JDK version installed (like 11, 17, etc.), since Hybris is built on top of version 8, you **must** use JDK8, and **cannot** use higher JDK versions during Hybris development.


As Windows cannot allocate JDK by project / directory. We recommend using a Java version switching script to set the JAVA_HOME environment variable according to the project needs. The script is included in the Hybris Tutorial Repo and later you will find it in the installation process.

Script: [一鍵切換java版本bat](#)

Tips: Use Windows (x64), you may use installer (.msi) or standalone (.zip) depends on your preference.




If install JDK through installer, please enable the option of **Set JAVA_HOME environment variable**.

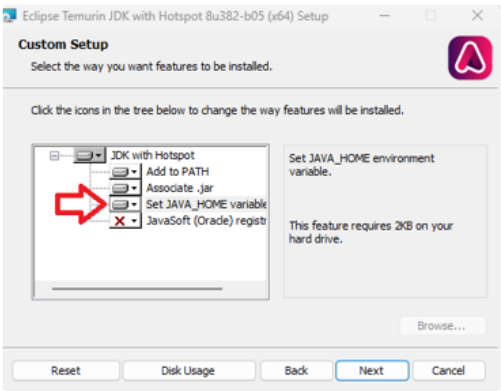

Then, check environment variable is being set correctly.

```
1 echo %JAVA_HOME%
2 java -version
```

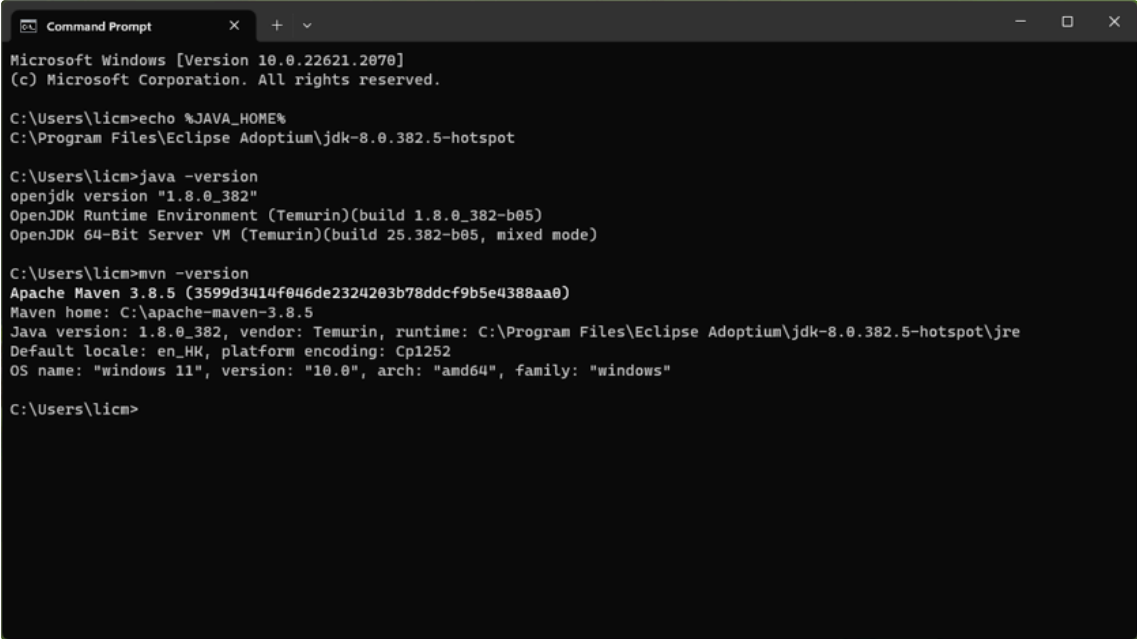


Don't forget to log out and log in again to apply the new path.

Install Rancher Desktop

We use Rancher Desktop for Hybris development.

If you also installed Docker Desktop, do not let Docker Desktop start automatically

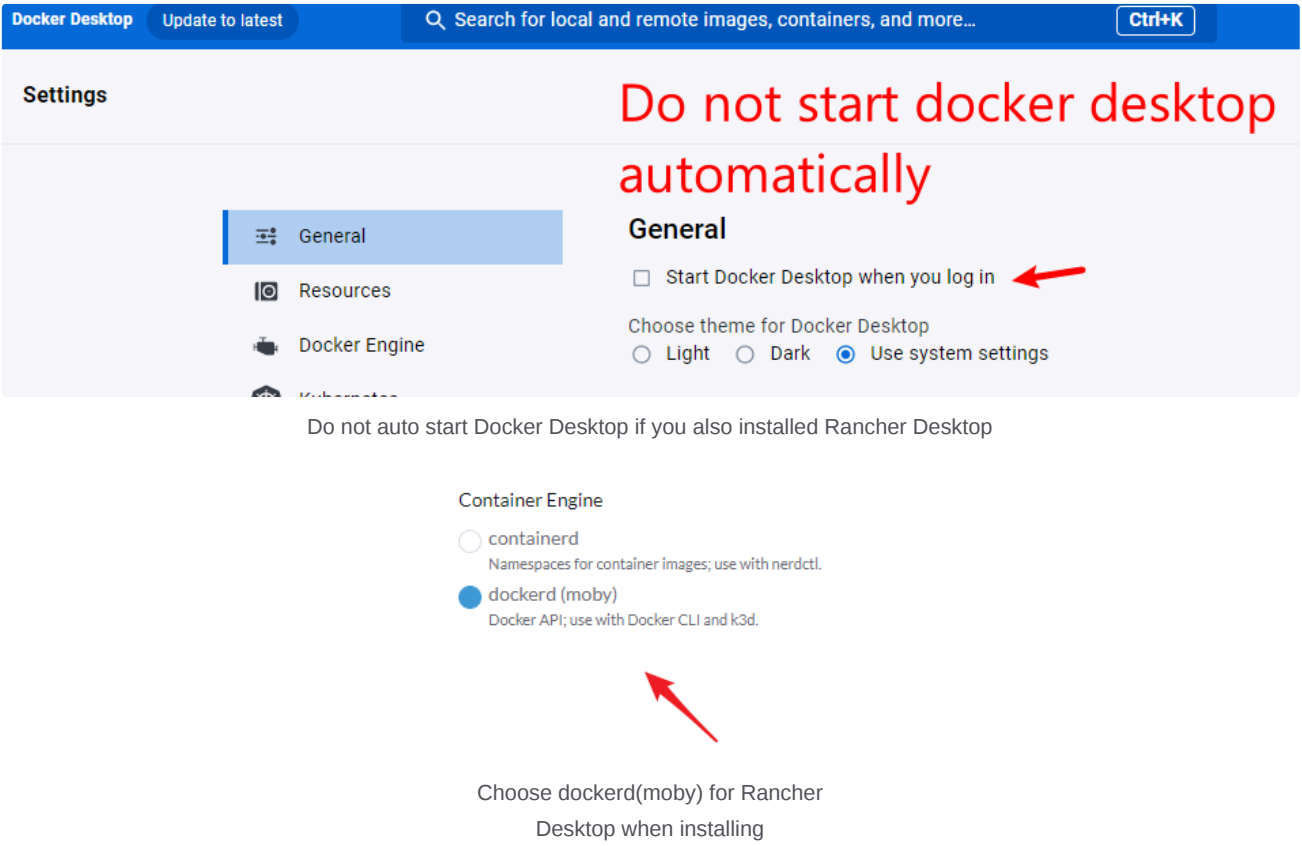

We can use `dockerd (moby)` for the container engine, and k8s is optional. You can change this setting in Rancher Desktop at any time.

If you encounter the error: Requires WSL with kernel 5.15 or newer (have 0.0.0.0), please download the latest package [WSL2 Linux kernel update package for x64 machines](#). Run the update package downloaded (Double-click to run - you will be prompted for elevated permissions, select ‘yes’ to approve this installation.) and open the Rancher Desktop again.

Tips: Highly recommended to update Rancher Desktop version frequently, as major version update enhances performance and stability of the containerized applications. :)

General

Containers

Port Forwarding

Images

Snapshots

Troubleshooting

Diagnostics

Extensions

Welcome to Rancher Desktop by SUSE

Rancher Desktop provides Kubernetes and image management through the use of a desktop application.

Project Discussions: [#rancher-desktop](#) in Rancher Users Slack

Project Links: [Homepage](#) [Issues](#)

Version: 1.19.1

☒ Check for updates automatically

☐ Allow collection of anonymous statistics to help us improve Rancher Desktop

Send anonymized usage info, error reports, etc. to help improve Rancher Desktop. Your data will not be shared with anyone else, and no information about what specific resources or endpoints you are deploying is included.

Network status: online


Preferences

Version: 1.19.1 Network status: online Kubernetes: deactivated CE: moby

To check if Rancher Desktop is initiated properly:

First, Click **Images** in the left panel, you should only have image `rdx-proxy` or some images with the word `rancher` .

After that, Click **Diagnostics** in the left panel, you should see a Tick ✓ in the middle, with `0 failed` plus `0 muted` status on the left hand corner.

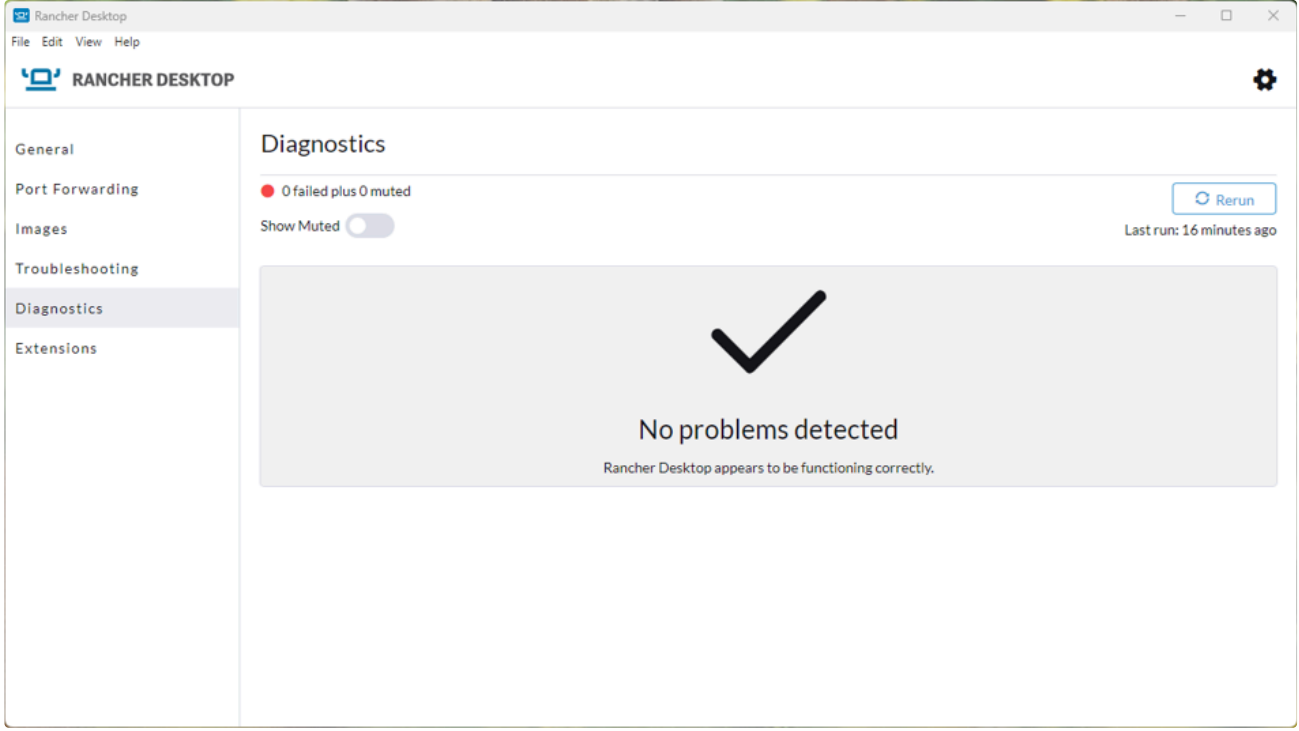

 If not, try to do a Factory Reset. Click **Troubleshooting** in the left panel, and click Factory Reset button.


 **Deprecated setting !** : In older Rancher Desktop versions, you'll need to **enable Networking Tunnel** by clicking the checkbox in Preferences > WSL: <https://docs.rancherdesktop.io/ui/preferences/wsl/network/>

Hybris Setup

[Hybris](#) is a B2B eCommerce solution developed by SAP, and the development of HKTVmall is based on the solution.


Download Hybris Codebase

First, download **2** zip files from slack `hktvmall_hybris_docker_setup` to `C:\Users\%USERNAME%\Downloads` . These zip files are the source code of Hybris (Version 1811.2).

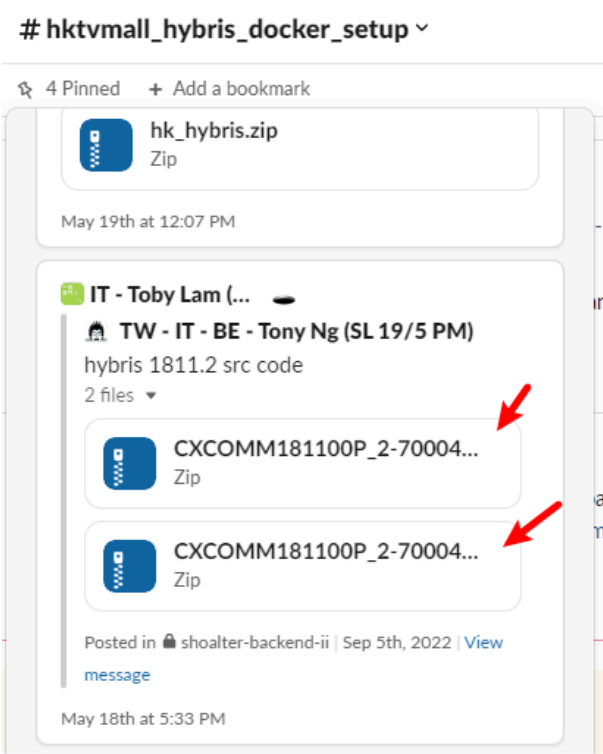

Then, download the remaining zip - `hybris_alphamall_setup_static_files-master.zip` at `https://ite-git01.hktv.com.hk/hktv/ite/hktv-learning-material/hybris_docker_setup_static_files/-/raw/master/hybris_alphamall_setup_static_files-master.zip` (or [click here](#)) to `C:\Users\%USERNAME%\Downloads` . This zip file contains the zipped patch for Hybris (Version 1811.2) - `hybris1811_bin_patch_updatedAt20210329.zip` .

So in total, you will have **3** zip files in **Download** path.

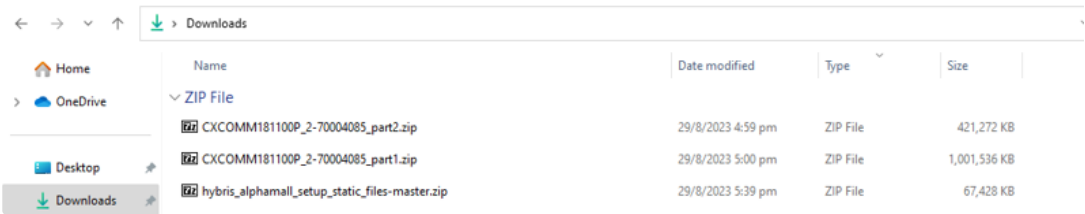

Pull new patches from Git

Use https://ite-git01.hktv.com.hk/hktv/ite/hktv-learning-material/hybris_docker/-/tree/HKTVmall , with `HKTVmall` branch. Here we assume the Hybris will be installed in C: drive.


```
1 mkdir C:\work\hybris_docker
2 cd C:\work\hybris_docker
3 git clone --branch HKTVMall https://ite-git01.hktv.com.hk/hktv/ite/hktv-learning-material/hybris_docker.git
C:\work\hybris_docker\hybris_docker_hktvmall
```

i If you going to use a non C: drive, change the git clone above command to
git clone --branch HKTVMall https://ite-git01.hktv.com.hk/hktv/ite/hktv-learning-material/hybris_docker.git {{your drive}}:\work\hybris_docker\hybris_docker_hktvmall

Use the auto setup script

Optional: If you are not installing in C: drive


i If you run out of C: drive space, you may choose to use other drive for work folder, but remember also change the `setup_hybris.bat` and `.env` to your new location

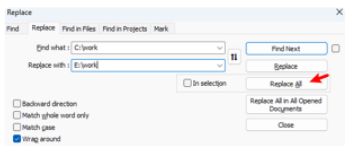

If you do not install hybris in C:\work, replace all the C:\work to your new location in `setup_hybris.bat` and `.env`

Check whether you have installed cmdr

w The below bat file is designed for [cmdr](#), needs the command `unzip` and `cp`.
You can type `unzip` in your terminal. If you got
'unzip' is not recognized as an internal or external command, operable program or batch file.
Then you are not using the correct terminal.



You can not run the following bat file if you don't have unzip. We recommend using [cmdr](#)


Run the auto setup script

i Before running the next step, make sure you have access to the GitLab repo: <https://ite-git01.hktv.com.hk/hktv/ite/ecom/hktv-hybris>


run `setup_hybris.bat`

```
1 cd C:\work\hybris_docker\hybris_docker_hktvmall
2 setup_hybris.bat
```

If you see it done **without an error message**, go ahead.

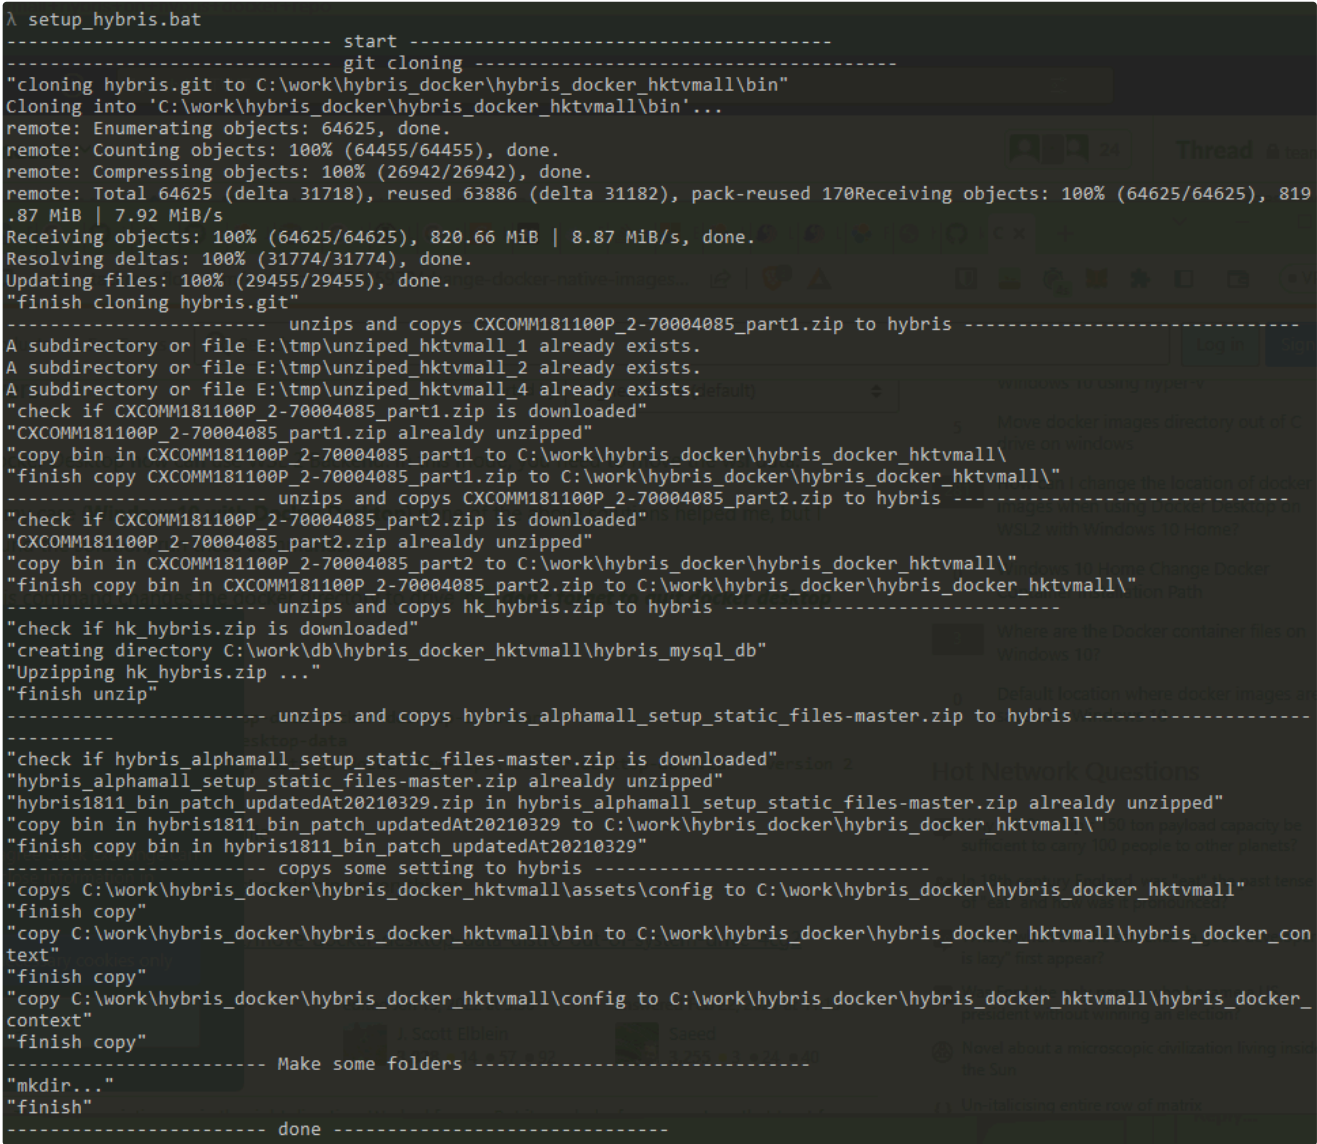

 Tips: After decompress complete, you may delete the temporary files located in `C:\tmp` to save disk space

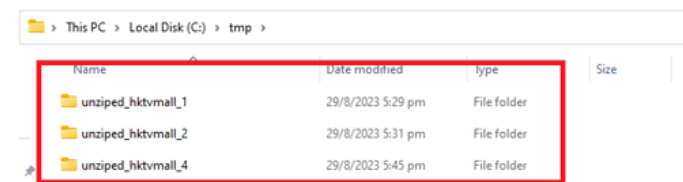

Afterwards, build up the docker images, it may take >30 mins


 Ensure Rancher Desktop is in **running** state before executing docker-compose

```
1 cd C:\work\hybris_docker\hybris_docker_hktvmall
2 docker-compose up --build
```



 If you end up with an error `ERROR: Windows named pipe error: The pipe has been ended. (code: 109)`


You will need to uninstall Docker Desktop.

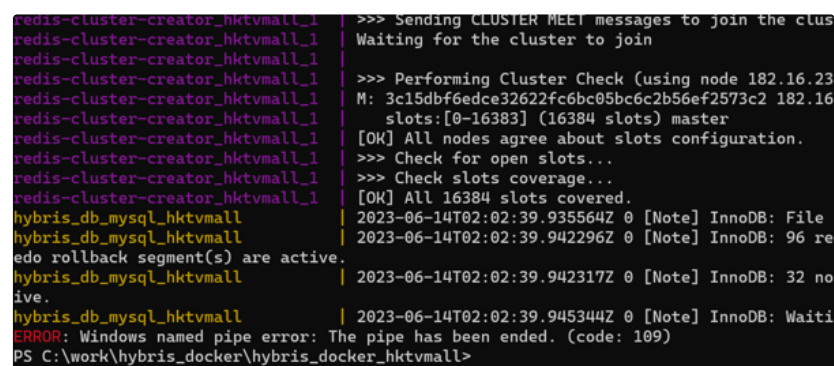

If you get this error, uninstall Docker Desktop

 If you face this error: `Error response from daemon: invalid volume specification: 'C:\work\db\hybris_docker_hktvmall\zookeeper_1_data:/data:rw'`


Use `docker-compose up` to start it again (no need --build)

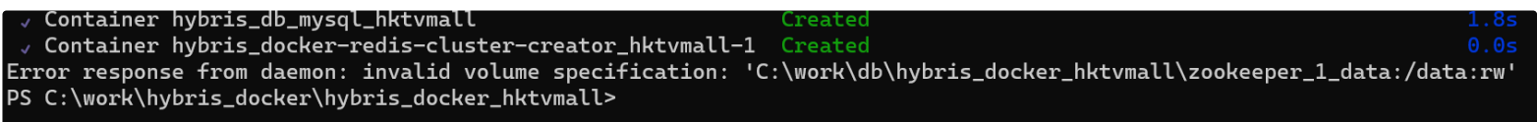

Use docker-compose up to start it again if you face this error (no need --build)

Set up RabbitMQ, solr

 Do not do this unless you have run `docker-compose up` and the pods had been started

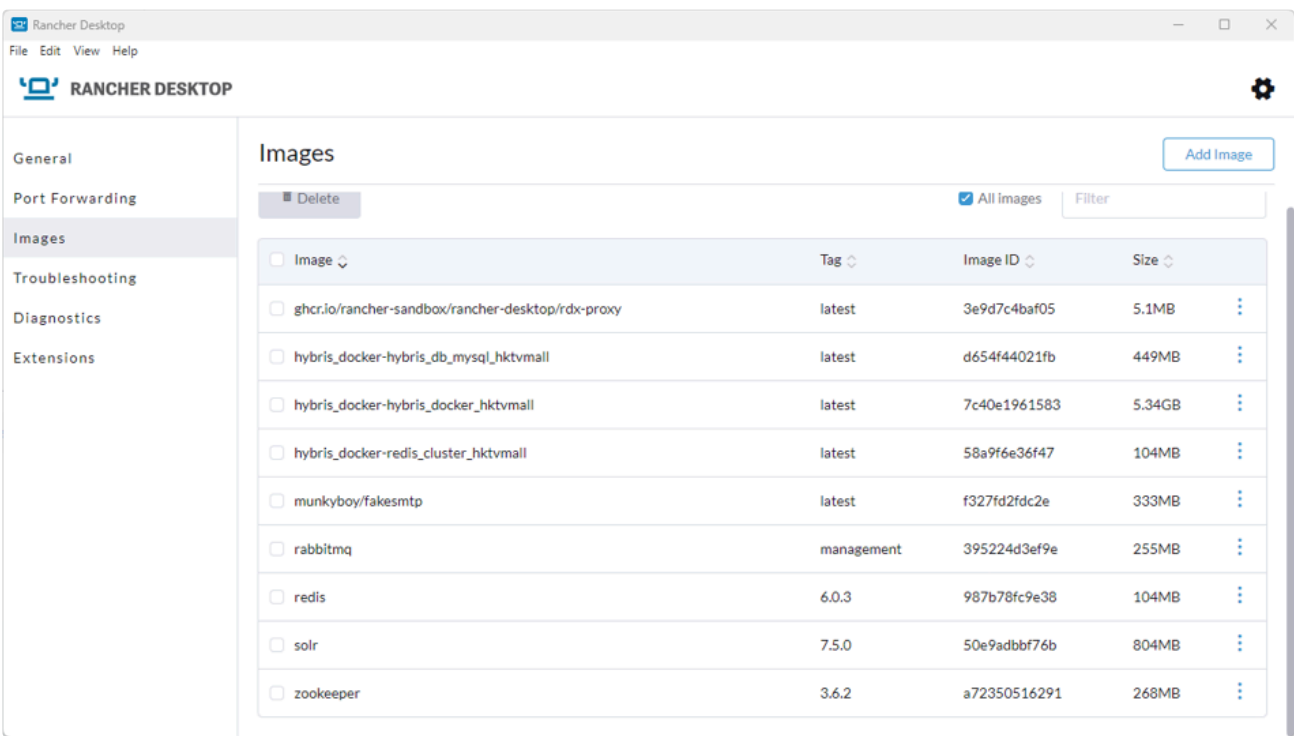

```
1 cd C:\work\hybris_docker\hybris_docker_hktvmall\setup
2 setup_rabbitmq.bat
3 setup_solr.bat
```

 If you see the following error when running `setup_rabbitmq.bat`,

```
1 error: unexpected argument 'name=imax_topic' found
2 Usage: rabbitmqadmin declare exchange [OPTIONS] --name <name>
```

You need to replace `setup_rabbitmq.bat` with the following content (`rabbitmqadmin v2` command)

▼ setup_rabbitmq.bat

```
1  echo "start setup_rabbitmq_hktvmall.bat"
2
3  docker exec -it rabbitmq_hktvmall rabbitmqadmin declare exchange --
4      name imax_topic --type topic
5  docker exec -it rabbitmq_hktvmall rabbitmqadmin declare exchange --
6      name hktvmall_hybris_topic --type topic
7  docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
8      name hktvmall_hybris_dev_sku_stock_queue
9  docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
10     name hktvmall_hybris_dev_product_control_map_queue
11 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
12     name hss_create_message_queue
13 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
14     name hss_create_sms_queue
15 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
16     name hss_create_userpk_queue
17 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
18     name hss_create_email_queue
19 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare binding --
20     source imax_topic --destination-type queue --destination
21     hktvmall_hybris_dev_sku_stock_queue --routing-key imax.sku_stock
22 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare binding --
23     source imax_topic --destination-type queue --destination
24     hktvmall_hybris_dev_product_control_map_queue --routing-key
25     imax.sku_stock
26
27 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
28     name hktvmall_hybris_dev_waybill_packing_box_type_grouping_queue
29 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
30     name hktvmall_hybris_dev_update_overweight_delivery_zone_queue
31 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
32     name hktvmall_hybris_create_hktv_voucher_code_entry_queue
33
34 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
35     name hktvmall_hybris_update_plus_membership_level_queue
36 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
37     name hktvmall_hybris_create_plus_promotion_queue
38 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
39     name hktvmall_hybris_invalidate_model_cache_queue
40 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
41     name hktvmall_hybris_update_membership_level_queue
42 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
43     name hktvmall_hybris_grant_lucky_draw_reward_queue
44 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
45     name hktvmall_hybris_renew_saved_card_message_queue
46 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
47     name hktvmall_hybris_sync_hybris_address_queue
48 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
49     name shoalter-caching-management-server_sync-cache-to-
50     revampsystem_queue
51 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
52     name shoalter-internal-api-gateway_getcart-parallel-run_queue
53 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
54     name shoalter-internal-api-gateway_getcart-parallel-run-promotion-
55     rule_queue
56 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
57     name shoalter-caching-management-server_clear-product-data-
58     cache_queue
59
60 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
61     name hktvmall_update_recycle_packing_waybill_queue
62 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
63     name
64     hktvmall_hybris_update_product_from_mms_product_to_hktvmall_hybris_
65     queue
66 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
67     name hktvmall_hybris_create_hktv_paid_voucher_redemption_code_queue
68 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
69     name
70     hktvmall_hybris_handle_voucher_flat_code_restriction_flat_code_queu
71     e
72 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
73     name hktvmall_hybris_product_control_map_queue
74 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
75     name hktvmall_hybris_update_recycle_packing_waybill_queue
76 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
77     name hktvmall_hybris_sync_order_from_qcs_queue
78 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
79     name hktvmall_hybris_update_overweight_delivery_zone_queue
80 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
81     name hktvmall_hybris_waybill_packing_box_type_grouping_queue
82 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
83     name hktvmall_hybris_sku_stock_queue
84 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
85     name hktvmall_hybris_set_unlimited_addon_for_qcs_queue
86 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
87     name hktvmall_hybris_sync_product_stock_to_hktvmall_hybris_queue
88 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
89     name hktvmall_hybris_set_unlimited_addon_for_qcs_queue
90 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
91     name hktvmall_hybris_manage_vip_pricing_queue
92 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
93     name hktvmall_hybris_invalidate_ehcache_queue
94 docker exec -it rabbitmq_hktvmall rabbitmqadmin declare queue --
95     name hktvmall_hybris_sync_vip_pricing_exchange_rate_queue
96
97 echo "end setup_rabbitmq_hktvmall.bat"
98
```

Building the app

In your PC

```
1 cd C:\work\hybris_docker\hybris_docker_hktvmall\bin\platform
2 setantenv.bat
3 ant clean all
```

```
all:
[echo] Build finished on 19-May-2023 16:34:08.
[echo]

BUILD SUCCESSFUL
Total time: 2 minutes 59 seconds
```

wait for this success message

In hybris container

```
1 docker exec -it hybris_docker_hktvmall bash
2 ant clean all && ./compile.sh "" complete
```

Webpack related error



Skip this part if you don't have this error

If you face an error related to webpack, like this

```
1 [exec]
2 [exec] webpack 5.86.0 compiled with 38 errors in 590 ms
3
4 BUILD FAILED
```

```
t.<anonymous> (/apps/hktv/hybris/bin/ext-hktv/hktvstorefront/web/webroot/resource/singleCheckoutMinify/node_modules/semver/index.js:4
:16)\n    at Module._compile (node:internal/modules/cjs/loader:1256:14)\n    at Module._extensions..js (node:internal/modules/cjs/loa
der:1310:10)\n    at Module.load (node:internal/modules/cjs/loader:1119:32)\n    at Module._load (node:internal/modules/cjs/loader:96
0:12)\n    at Module.require (node:internal/modules/cjs/loader:1143:19)");
[exec]
[exec] webpack 5.86.0 compiled with 38 errors in 590 ms

BUILD FAILED
/apps/hktv/hybris/bin/platform/build.xml:56: The following error occurred while executing this line:
/apps/hktv/hybris/bin/platform/resources/ant/antmacros.xml:447: The following error occurred while executing this line:
/apps/hktv/hybris/bin/platform/resources/ant/antmacros.xml:500: The following error occurred while executing this line:
/apps/hktv/hybris/bin/platform/resources/ant/util.xml:20: The following error occurred while executing this line:
/apps/hktv/hybris/bin/platform/resources/ant/antmacros.xml:502: The following error occurred while executing this line:
/apps/hktv/hybris/bin/platform/resources/ant/antmacros.xml:652: The following error occurred while executing this line:
/apps/hktv/hybris/bin/platform/resources/ant/util.xml:146: The following error occurred while executing this line:
/apps/hktv/hybris/bin/ext-hktv/hktvstorefront/buildcallbacks.xml:180: The following error occurred while executing this line:
/apps/hktv/hybris/bin/ext-hktv/hktvstorefront/buildcallbacks.xml:100: exec returned: 1

Total time: 36 seconds
root@5d300ce3e16c:/apps/hktv/hybris/bin/platform#
```

try this:

```
ln -s /home/hybris_docker/bin/ext-hktv/hktvstorefront/web/webroot/resource/singleCheckoutMinify/node_modules/semver/classes /apps/hktv/hybris/bin/ext-hktv/hktvstorefront/web/webroot/resource/singleCheckoutMinify/node_modules/semver
```

and ant clean all again

```
root@5d300ce3e16c:/apps/hktv/hybris/bin/platform# cp -R /home/hybris_docker/bin/ext-hktv/hktvstorefront/web/webroot/resource/singleCheckoutMinify/node_modules/semver/classes /apps/hktv/hybris/bin/ext-hktv/hktvstorefront/web/webroot/resource/singleCheckoutMinify/node_modules/semver
root@5d300ce3e16c:/apps/hktv/hybris/bin/platform# ant clean
```

Import DB

hktvmall_hybris_docker_setup ▾

🔖 6 Pinned + Add a bookmark

IT - Toby Lam (S... 🗨

20230914

hk_hybris.zip
Zip

Today at 3:00 PM

Download the most latest DB file from slack hktvmall_hybris_docker_setup

Unzip the file hk_hybris.sql into C:\work\db\hybris_docker_hktvmall\hybris_mysql_db

This PC > Local Disk (C:) > work > db > hybris_docker_hktvmall > hybris_mysql_db >

Name	Date modified	Type	Size
mysql	5/25/2023 11:25 AM	File folder	
performance_schema	5/25/2023 11:25 AM	File folder	
sys	5/25/2023 11:25 AM	File folder	
auto.cnf	5/25/2023 11:25 AM	CNF File	1 KB
ca.pem	5/25/2023 11:25 AM	PEM File	2 KB
ca-key.pem	5/25/2023 11:25 AM	PEM File	2 KB
client-cert.pem	5/25/2023 11:25 AM	PEM File	2 KB
client-key.pem	5/25/2023 11:25 AM	PEM File	2 KB
hk_hybris.sql	5/5/2023 12:25 PM	SQL Source File	1,270,772 KB
ib_buffer_pool	5/25/2023 11:27 AM	File	1 KB

Open `C:\work\hybris_docker\hybris_docker_hktvmall\bin\ext-hktv\hktvwebervices\resources\oauthpersistence\oauthdb.sql` , copy this file to `C:\work\db\hybris_docker_hktvmall\hybris_mysql_db`

```
1 copy C:\work\hybris_docker\hybris_docker_hktvmall\bin\ext-hktv\hktvwebervices\resources\oauthpersistence\oauthdb.sql
   C:\work\db\hybris_docker_hktvmall\hybris_mysql_db
```

Add this line before line 4 `C:\work\db\hybris_docker_hktvmall\hybris_mysql_db\oauthdb.sql`

```
1 USE hktvoauthdb;
```

```
C: > work > db > hybris_docker_hktvmall > hybris_mysql_db > oauthdb.sql
1 create database hktvoauthdb character set utf8 col
2 grant all on hktvoauthdb.* to hktvmall@'%';
3
4 USE hktvoauthdb;
5
6 create table ClientDetails (
Add this line
```

import the SQL

Import oauthdb takes less than **5 sec**, while import hybris db need **~10 mins**. Please remains still when importing hybris db.

```
1 docker exec -it hybris_db_mysql_hktvmall bash
2 mysql -h127.0.0.1 -uroot -pHKtv2014 < /var/lib/mysql/oauthdb.sql
3 mysql -h127.0.0.1 -uroot -pHKtv2014 < /var/lib/mysql/hk_hybris.sql
4 exit
```

Download the supplemented version of local.properties (optional)

This is for system update. If you are not sure what is system update or local.properties, you need it.

如果你不知道 local.properties 或者 system update , 那麼這部分就一起做吧。

Backup(rename) the original local.properties first.

```
1 move
   C:\work\hybris_docker\hybris_docker_hktvmall\config\local.properties
   C:\work\hybris_docker\hybris_docker_hktvmall\config\local-backup.properties
```

Download the new local.properties file here, and place it in `C:\work\hybris_docker\hybris_docker_hktvmall\config`



↑ The file is here ↑, it works with 2023-07-20 main branch.

This PC > Local Disk (C:) > work > hybris_docker > hybris_docker_hktvmall > config

Name	Date modified	Type	Size
.project	7/20/2023 11:20	PROJECT File	1 KB
local.properties	7/20/2023 14:26	PROPERTIES File	76 KB
local-backup.properties	7/20/2023 11:20	PROPERTIES File	71 KB

System Update

Go into the container, run

```
1 docker exec -it hybris_docker_hktvmall bash
2 ant updatesystem -Dtenant=master
```

Properties Missing

You may find some errors about properties missing at your first run.

```
[java] [INFO ]|2023-05-04 11:57:48,840|Thread-0|9|de.hybris.platform.core.HybrisContextFactory$GlobalContextFactory.build(L:179) - Initializing <<global>> Spring ApplicationContext took: (8.600 µs)
[java] [ERROR]|2023-05-04 11:57:48,840|Thread-0|9|de.hybris.platform.cache.impl.RegionCacheAdapter.clear(L:301) - Unable to clear cache. Failed on region null. Last key null
[java] org.springframework.beans.FatalBeanException: Context hybris Global Context Factory  couldn't be created correctly due to, Invalid bean definition with name 'hktvVoucherCodeCreateConsumer' define
d in null: Could not resolve placeholder 'spring.rabbitmq.hktvmall.hybris.voucher.code.entry.queue' in value "${spring.rabbitmq.hktvmall.hybris.voucher.code.entry.queue}"; nested exception is java.lang.IllegalArgument
Exception: Could not resolve placeholder 'spring.rabbitmq.hktvmall.hybris.voucher.code.entry.queue' in value "${spring.rabbitmq.hktvmall.hybris.voucher.code.entry.queue}"
[java] at de.hybris.platform.core.HybrisContextFactory.build(HybrisContextFactory.java:314) ~[coreserver.jar:?]
[java] at de.hybris.platform.core.HybrisContextFactory$GlobalContextFactory.buildSelf(HybrisContextFactory.java:186) ~[coreserver.jar:?]
[java] at de.hybris.platform.core.HybrisContextFactory$GlobalContextFactory.build(HybrisContextFactory.java:172) ~[coreserver.jar:?]
[java] at de.hybris.platform.core.HybrisContextHolder.getGlobalInstanceCached(HybrisContextHolder.java:131) ~[coreserver.jar:?]
[java] at de.hybris.platform.core.HybrisContextHolder.getGlobalInstance(HybrisContextHolder.java:110) ~[coreserver.jar:?]
[java] at de.hybris.platform.core.Registry.getSingletonGlobalApplicationContext(Registry.java:1132) ~[coreserver.jar:?]
[java] at de.hybris.platform.cache.impl.RegionCacheAdapter.getController(RegionCacheAdapter.java:73) ~[coreserver.jar:?]
[java] at de.hybris.platform.cache.impl.RegionCacheAdapter.clear(RegionCacheAdapter.java:285) [coreserver.jar:?]
[java] at de.hybris.platform.cache.impl.RegionCacheAdapter.destroy(RegionCacheAdapter.java:518) [coreserver.jar:?]
[java] at de.hybris.platform.core.AbstractTenant.shutdownCache(AbstractTenant.java:1117) [coreserver.jar:?]
[java] at de.hybris.platform.core.AbstractTenant.doShutdown(AbstractTenant.java:981) [coreserver.jar:?]
[java] at de.hybris.platform.core.AbstractTenant.doShutdown(AbstractTenant.java:924) [coreserver.jar:?]
[java] at de.hybris.platform.core.Registry.destroy(Registry.java:331) [coreserver.jar:?]
[java] at de.hybris.platform.util.RedeployUtilities.shutdown(RedeployUtilities.java:75) [coreserver.jar:?]
[java] at de.hybris.platform.util.RedeployUtilities$1.internalRun(RedeployUtilities.java:39) [coreserver.jar:?]
[java] at de.hybris.platform.core.threadRegistry.RegistrableThread.run(RegistrableThread.java:134) [coreserver.jar:?]
[java] [INFO ]|2023-05-04 11:57:48,843|Thread-0|9|de.hybris.platform.cluster.DefaultClusterNodeManagementService.releaseAutomaticClusterID(L:277) - Unregistering assigned cluster node id 0...

BUILD FAILED
/apps/hktv/hybris/bin/platform/build.xml:167: The following error occurred while executing this line:
/apps/hktv/hybris/bin/platform/resources/ant/platformadministration.xml:122: The following error occurred while executing this line:
/apps/hktv/hybris/bin/platform/resources/ant/antmacros.xml:764: Java returned: 255
```

You can find these properties here: <https://ite-git01.hktv.com.hk/hktv/ite/ecom/hktv-hybris/-/blob/dev/resources/config.server.test/local.properties>

Add the missing properties to `C:\work\hybris_docker\hybris_docker_hktvmall\config\local.properties`

Here are some examples:

```
1 solrserver.instances.default.autostart=false
2 google.service.mabs.account.credential.file.path=/home/sysadm/eclipse/
   msa-adc-hybris_hktv-big-data-prod.json
3 google.service.bi.project.mabs.id=hktv-big-data-prod
4 spring.rabbitmq.hktvmall.hybris.renew.saved.card.message.queue=hktvmal
   l_hybris_renew_saved_card_message_queue
5 spring.rabbitmq.hktvmall.hybris.renew.saved.card.message.autoStart=fal
   se
6
7 payment.switch.transaction.baseUrl=${payment.switch.baseUrl}/oapi/{lan
   guage}/v2/transaction
8 payment.switch.merchant.baseUrl=${payment.switch.baseUrl}/oapi/v1/merc
   hant
9 spring.rabbitmq.hktvmall.hybris.update.membership.level.queue=hktvmall
   _hybris_update_membership_level_queue
10 spring.rabbitmq.hktvmall.hybris.update.membership.level.autoStart=fals
   e
11 membership.service.domain=https://membership-level.hkmpcl.com.hk
12   everuts.voucher.api.url=https://hktv-api.everuts.com/hktv-member-
   hubs/hktv-members
13 mfood.app.id=c16e54993e83403cbfc141868e0de925
14 mfood.app.secret=
15 mfood.auth.page.url=https://open.mfoodapp.com
16 mfood.open.api.url=https://open.api.o2o.mfoodapp.com
17 mfood.open.get.access.token.endpoint=/oauth2/get_access_token
18 mfood.open.get.refresh.token.endpoint=/oauth2/refresh_token
19 mfood.open.get.userInfo.endpoint=/oauth2/user_info
20 mfood.open.get.userSddress.endpoint=/oauth2/user_address
21 mfood.open.get.validate.token.endpoint=/oauth2/validate_access_token
22 spring.rabbitmq.hktvmall.hybris.grand.lucky.draw.reward.queue=hktvmall
   _hybris_grant_lucky_draw_reward_queue
23 spring.rabbitmq.hktvmall.hybris.grand.lucky.draw.reward.autoStart=fals
   e
24 spring.rabbitmq.hktvmall.hybris.sync.oas.address.autoStart=false
25 spring.rabbitmq.hktvmall.hybris.sync.oas.address.queue=hktvmall_hybris
   _sync_hybris_address_queue
26 spring.rabbitmq.hktvmall.hybris.clear.ecom.engine.product.data.cache.r
   outing.key=hktvmall_hybris.clear-product-data-cache
27 spring.rabbitmq.hktvmall.hybris.get.cart.parallel.run.flow.routing.key
   =hktvmall_hybris.getcart-parallel-run
28
29   hss.orderPdf.webservice.oversea.path=https://dbox-
   staging.hkmpcl.com.hk/webservices/s2s/invoice/oversea/pdf/
```

Invalid composed type

If you see error like this:

```
1      Caused by: java.lang.IllegalStateException: invalid composed type
      HktvProductCatRestriction2DeliveryModeRel::
      ((hktvfulfilmentprocess)):YRelation[hktvfulfilmentprocess-
      items.xml:222(RelationTypeTagListener)] due to missing deployment
      'de.hybris.platform.persistance.link.hktvfulfilmentprocess_HktvProductC
      atRestriction2DeliveryModeRel'
```

It means that during the system update, a collision occurred between the “item type code” of this model and another existing MySQL table, resulting in an error.

- Find the `typecode` from the `*-items.xml` files.
- Run `SELECT * FROM ydeployments WHERE Typecode = typecode;`
- Remove the conflicting table.

```
1 DELETE FROM attributedescriptors WHERE PK IN (
2 SELECT * FROM (
3 SELECT pk FROM composedtypes WHERE ItemTypeCode = typecode
4 ) AS p
5 );
6
7 DELETE FROM composedtypes WHERE ItemTypeCode = typecode;
```

4. Run `ant updatesystem -Dtenant=master` again

you may find this error

```
[INFO ] 2023-07-05 12:07:23,458 localhost-startStop-1[29]de.hybris.platform.core.ssl.JerseyClientDefaultSslContextProvider.useJvmDefaultSslContext(L:131) - Jersey client will use jvm default SslContext
[INFO ] 2023-07-05 12:07:23,458 localhost-startStop-1[29]de.hybris.platform.core.ssl.JerseyClientDefaultSslContextProvider.useJvmDefaultSslContext(L:131) - Additional Trust Store has been merged with the default SslContext.
Wed Jul 05 12:07:23 HKT 2023 WARN: Establishing SSL connection without server's identity verification is not recommended. According to MySQL 5.5.45+, 5.6.26+ and 5.7.6+ requirements SSL connection must be established by default if explicit option is set. For compliance with existing applications not using SSL the verifyServerCertificate property is set to 'false'. You need either to explicitly disable SSL by setting useSSL=false, or set useSSL=true and provide truststore for server certificate verification.
[INFO ] 2023-07-05 12:07:23,738[localhost-startStop-1[29]de.hybris.platform.jdbcwrapper.interceptor.recover.SQLRecoverableExceptionHandler.logChange(L:42) - Changing state from 'OPEN@2023-07-05T04:07:23.506Z' to 'CLOSED(@)2023-07-05T04:07:23.727Z'. A-PT0, 2215
[ERROR] 2023-07-05 12:07:23,738[localhost-startStop-1[29]de.hybris.platform.jdbcwrapper.DataSourceImpl.adjustDatabaseInfos(L:655) - error connecting to DataSource having url jdbc:mysql://hybris_db_mysql_hktvmall:3306/hktvmall?useConfigs=maxPerformance&characterEncoding=utf8&tcpRcvBuf=1024000&tcpSendBuf=1024000: Communications link failure

The last packet successfully received from the server was 12 milliseconds ago. The last packet sent successfully to the server was 7 milliseconds ago.
Jul 05, 2023 12:07:23 PM org.apache.catalina.core.StandardContext.listenerStart
SEVERE: Exception sending context initialized event to listener instance of class [hk.com.hktv.storefront.filters.HybrisStorefrontContextLoaderListener]
java.lang.RuntimeException: com.mysql.jdbc.exceptions.jdbc4.CommunicationsException: Communications link failure

The last packet successfully received from the server was 12 milliseconds ago. The last packet sent successfully to the server was 7 milliseconds ago.
    at de.hybris.platform.jdbcwrapper.DataSourceImpl.adjustDatabaseInfos(DataSourceImpl.java:660)
    at de.hybris.platform.jdbcwrapper.DataSourceImpl.<init>(DataSourceImpl.java:218)
    at de.hybris.platform.jdbcwrapper.DataSourceImpl.<init>(DataSourceImpl.java:153)
    at de.hybris.platform.core.DataSourceImplFactory.createDataSource(DataSourceImplFactory.java:53)
```

C:\work\hybris_docker\hybris_docker_hktvmall\config\local.properties

[illegible]

(reference: [📺 HKTVmall local setup 2024-02-20 | 可能遇到的問題](#))

Start hybris

In the container `hybris_docker_hktvmall` container

```
1 docker exec -it hybris_docker_hktvmall bash
2 ./hybrisserver.sh debug
```

Again, if you have a problem, you may read the session [Properties missing](#)

Hybris frontend development auto complications

In the container `hybris_docker_hktvsmall` container

If there are frontend code changes, `compile.sh` will be auto execute.

```
1 docker exec -it hybris_docker_hktvmall bash
2 ./hotReload.sh
```


Apply patch_hktvmall_data.impex

Remember to apply patch before opening the landing page, otherwise the page will be broken

Go to hac <https://localhost:9112/hac/console/impex/import> , with username `admin` , and password `philipsspilihp`


Go to **Console > ImpEx Import**, Click the **Import script** Tab, Choose file with

```
C:\work\hybris_docker\hybris_docker_hktvmall\patch_hktvmall_data.impex
```

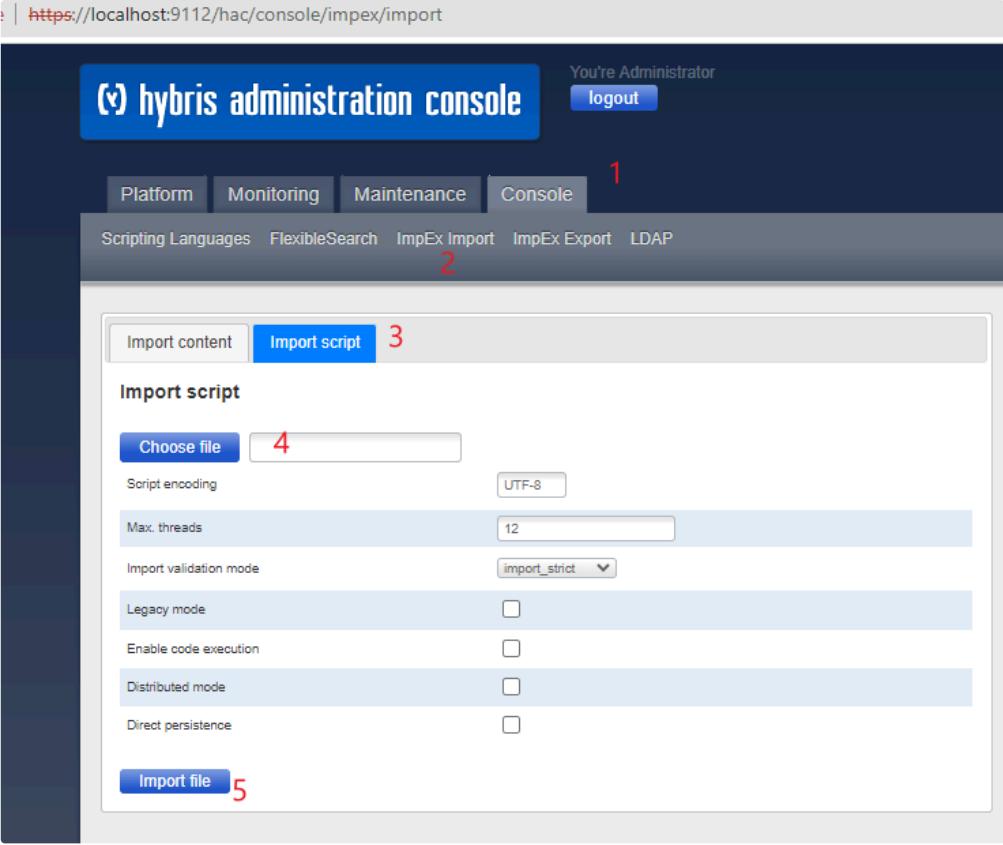

Check

You can go to the landing page: <https://localhost:9112/?site=hktv>

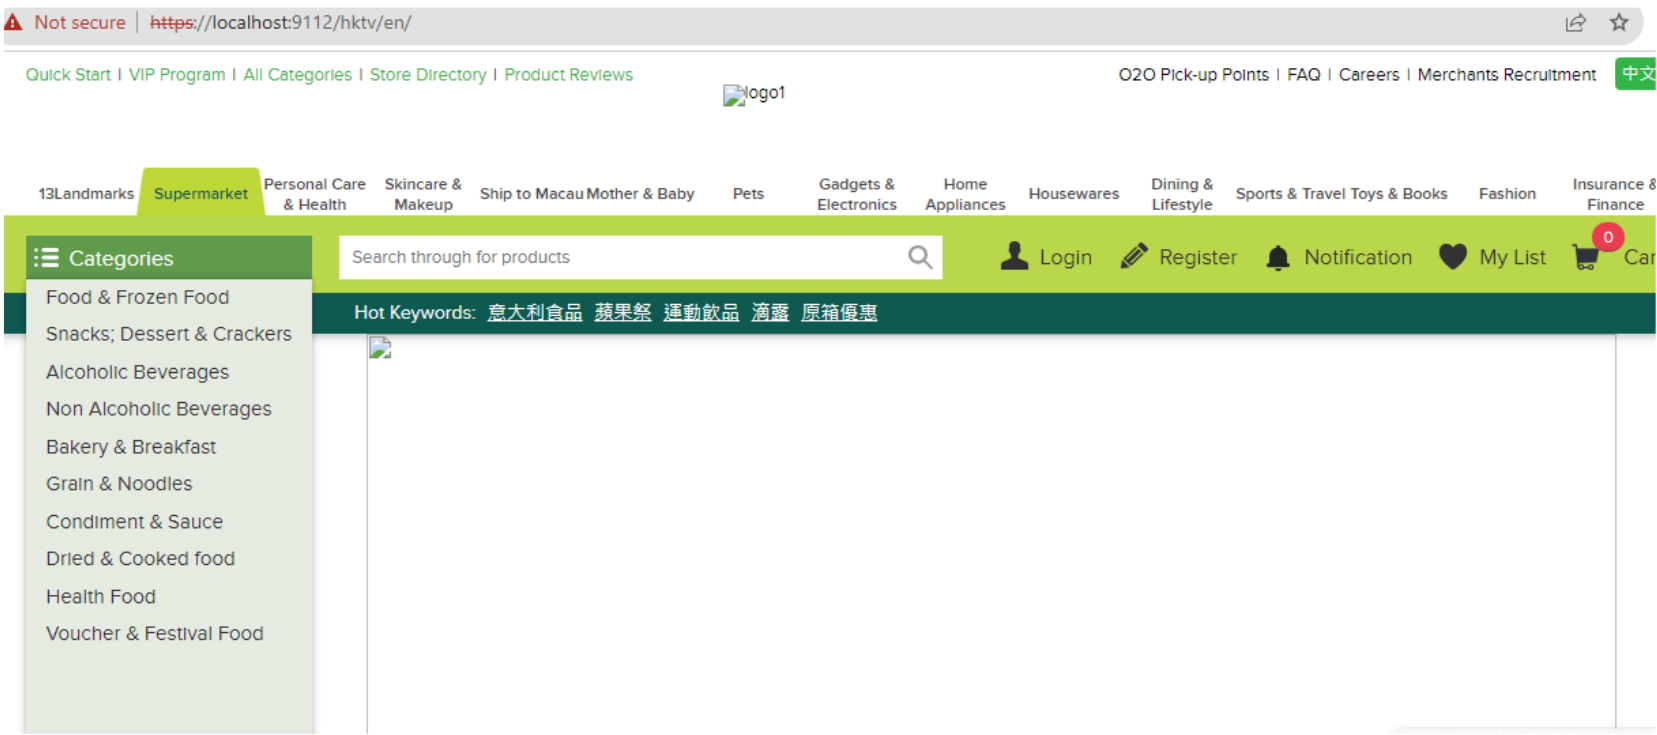


Done

Import other data

- [How to buy a product in local](#)


Other tools you may want

- [Another Redis Desktop Manager](#)

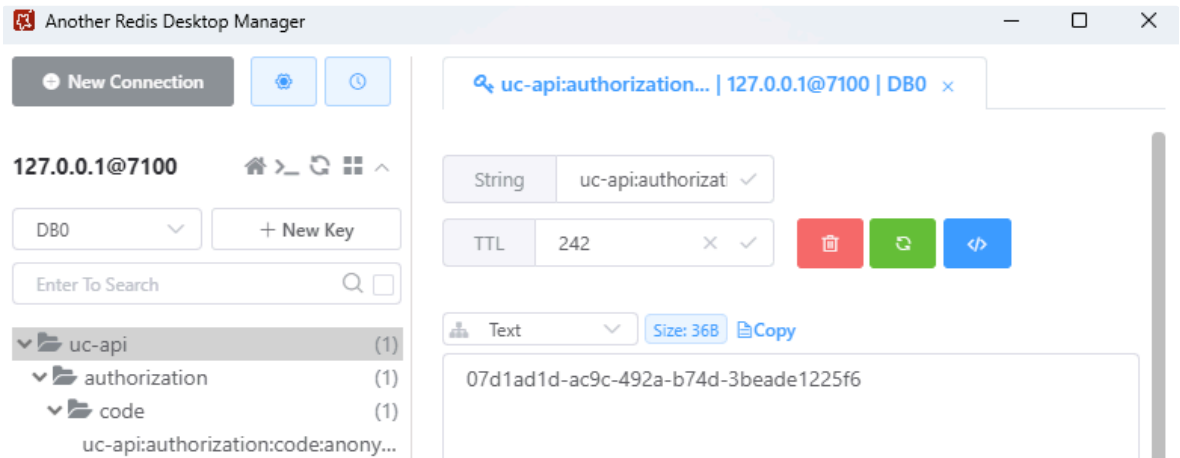

Redis GUI client

- [DockStation](#)

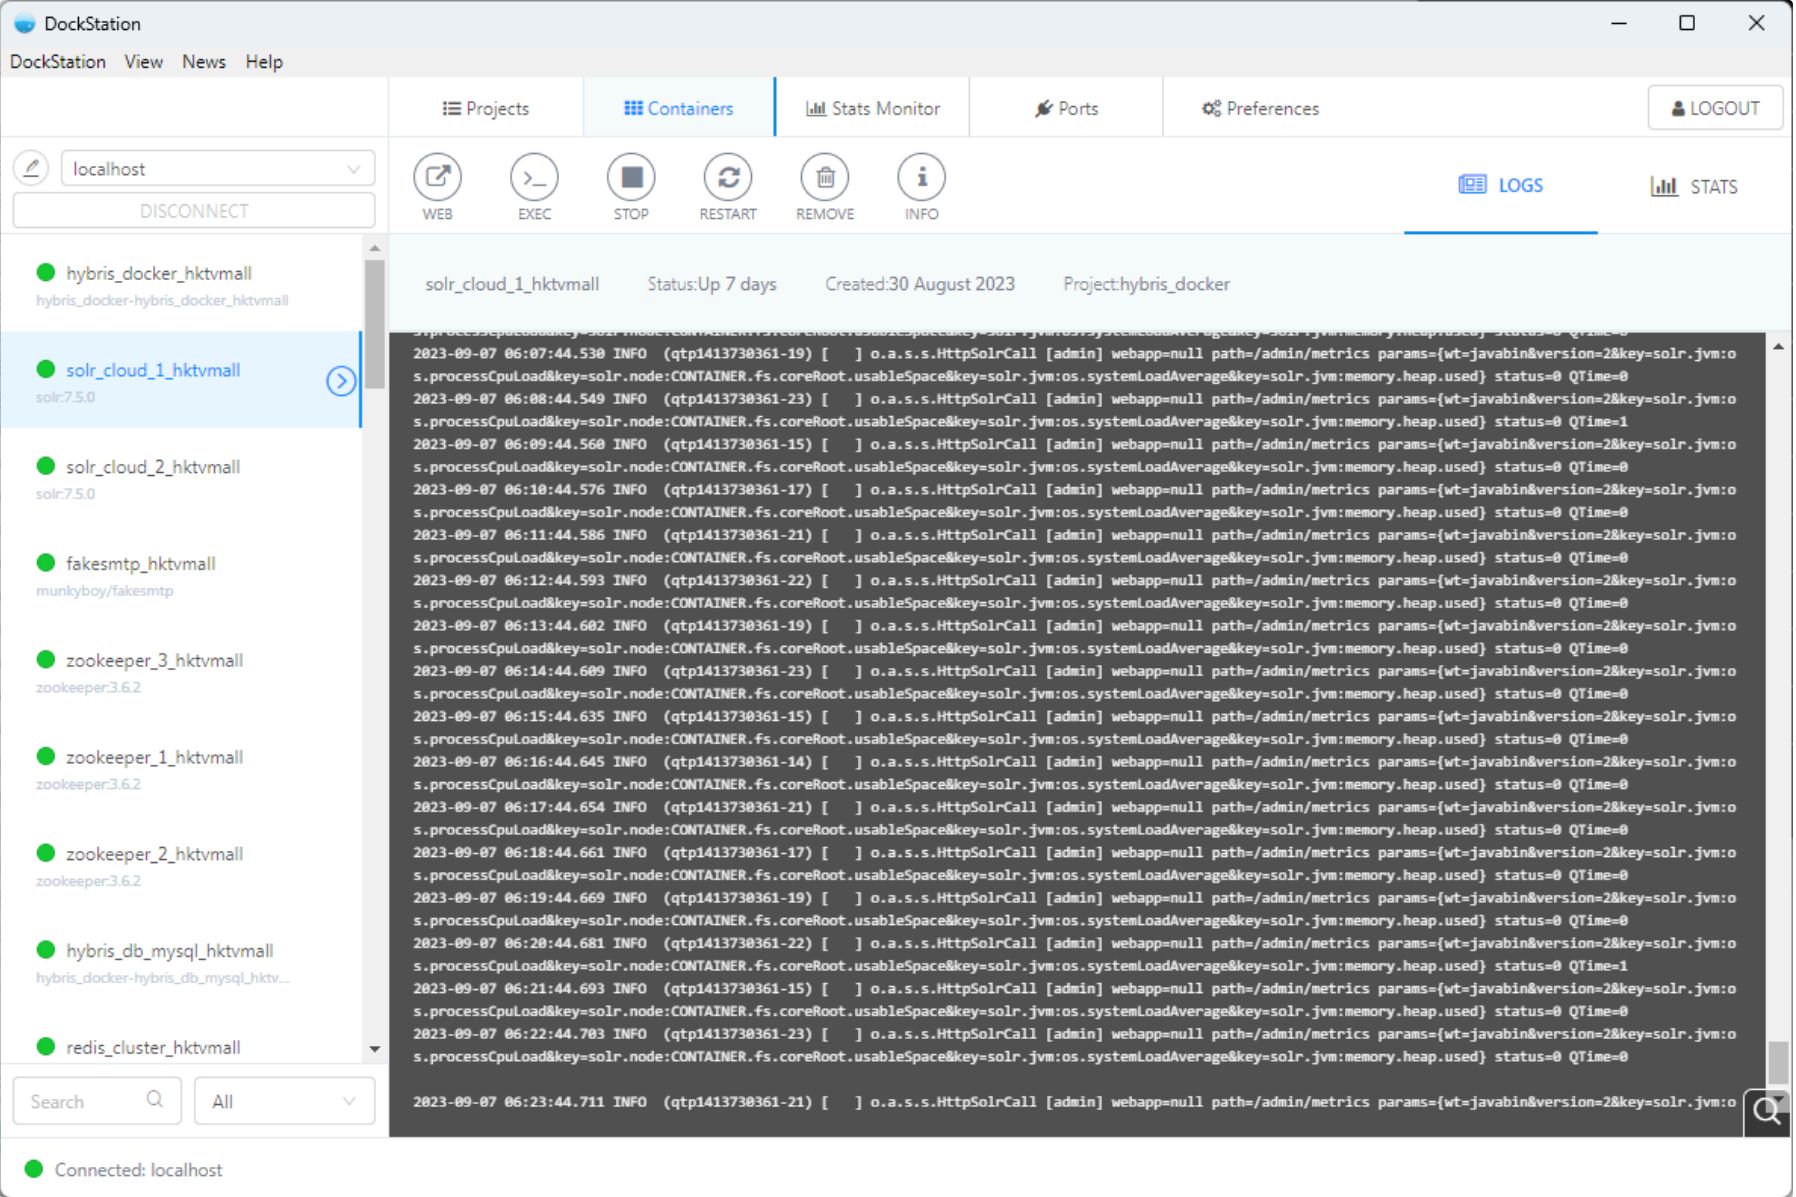

GUI Docker and Docker compose

Common error

Error response from daemon: invalid volume specification:

```
=> [hybris_docker-hybris_docker_hktvmall 23/23] COPY US_export_policy.jar /docker-java-home/jre/lib/security/US_export_policy 0.3s
[+] Running 7/10
- Network hybris_docker_hybris_docker_network_hktvmall Created 0.1s
- Container hybris_docker_hktvmall Creating 30.7s
- Container redis_cluster_hktvmall Created 1.3s
- Container hybris_db_mysql_hktvmall Created 1.1s
- Container zookeeper_2_hktvmall Created 1.4s
- Container fakesmtp_hktvmall Created 1.3s
- Container rabbitmq_hktvmall Created 0.5s
- Container zookeeper_3_hktvmall Creating 30.7s
- Container zookeeper_1_hktvmall Creating 30.7s
- Container hybris_docker-redis-cluster-creator_hktvmall-1 Creating 0.3s
Error response from daemon: invalid volume specification: 'E:\work\db\hybris_docker_hktvmall\zookeeper_3_data:/data:rw'
```

Error response from daemon: invalid volume specification:

Restart wsl. Warning: It will also kill Rancher Desktop / Docker Desktop (WSL version)!

```
1 | wsl --shutdown
```

Then Rancher Desktop / Docker Desktop should also restart automatically. If not, restart them manually.

error during connect: This error may indicate that the docker daemon is not running

unexpected EOF

```
[java] SLF4J: See http://www.slf4j.org/codes.html#multiple_bindings for an explanation.
[java] SLF4J: Actual binding is of type [org.apache.logging.slf4j.Log4jLoggerFactory]
error during connect: This error may indicate that the docker daemon is not running.: Get "http://%2F%2F.%2Fpipe%2Fdocker_engine/v1.41/exec/451aa3a79da93bec7d2f1f2d7997ce476480979393a94dc3159b7eed24b4ffe6/json": open //.pipe/docker_engine: The system cannot find the file specified.
```

error during connect: This error may indicate that the docker daemon is not running.: Get

"http://%2F%2F.%2Fpipe%2Fdocker_engine/v1.41/exec/451aa3a79da93bec7d2f1f2d7997ce476480979393a94dc3159b7eed24b4ffe6/j

son": open //.pipe/docker_engine: The system cannot find the file specified.

```
redis_cluster_node_2
unexpected EOF
```

unexpected EOF

For this kind of error, restart Rancher Desktop.

```
redis-cluster-creator_hktvmall_1 | >>> Sending CLUSTER MEET messages to join the clus
redis-cluster-creator_hktvmall_1 | Waiting for the cluster to join
redis-cluster-creator_hktvmall_1 |
redis-cluster-creator_hktvmall_1 | >>> Performing Cluster Check (using node 182.16.23
redis-cluster-creator_hktvmall_1 | M: 3c15dbf6edce32622fc6bc05bc6c2b56ef2573c2 182.16
redis-cluster-creator_hktvmall_1 | slots:[0-16383] (16384 slots) master
redis-cluster-creator_hktvmall_1 | [OK] All nodes agree about slots configuration.
redis-cluster-creator_hktvmall_1 | >>> Check for open slots...
redis-cluster-creator_hktvmall_1 | >>> Check slots coverage...
redis-cluster-creator_hktvmall_1 | [OK] All 16384 slots covered.
hybris_db_mysql_hktvmall | 2023-06-14T02:02:39.935564Z 0 [Note] InnoDB: File
hybris_db_mysql_hktvmall | 2023-06-14T02:02:39.942296Z 0 [Note] InnoDB: 96 re
edo rollback segment(s) are active.
hybris_db_mysql_hktvmall | 2023-06-14T02:02:39.942317Z 0 [Note] InnoDB: 32 no
ive.
hybris_db_mysql_hktvmall | 2023-06-14T02:02:39.945344Z 0 [Note] InnoDB: Waiti
ERROR: Windows named pipe error: The pipe has been ended. (code: 109)
PS C:\work\hybris_docker\hybris_docker_hktvmall>
```

Uninstall Docker Desktop, and try again.

ERROR: ant clean all fail with random java/frontend errors

The problem is due to the local image sh is not bash, and the rsync remove some node_modules folder in the image.

NullPointerException without trace

Run hybrid Update System

```
1 | ant updatesystem -Dtenant=master
```

Debug: Network inspect: netcat netstat

```
1 | apt update
2 | apt install -y net-tools netcat
```

```
1 | watch netstat -l
```

Manual Rsync

```
1 | rsync -av --update --delete --progress /home/hybris_docker/bin/ext-hktv
/apps/hktv/hybris/bin
```

Manual Update local.properties

```
1 | cp -f /home/hybris_docker/config/local.properties
/apps/hktv/hybris/config/
2 | ant all
3 | ./hybrisserver.sh debug
```

Drop Table

 <https://hktvitlo.slack.com/archives/C0361E0SLJ2/p1694595636221629> [Connect your Slack account](#)

Reference

https://ite-git01.hktv.com.hk/hktv/ite/hktv-learning-material/hybris_docker/-/blob/HKTVmall/setup_hktvmall_hybris.md