

Resume 项目部署实践 (ssh 框架)

1.拿到新服务器通常需要进行一个初始化

代码展示 (部分代码)

```
#!/bin/bash
# 设置要分配的 IP 地址、子网掩码和默认网关
echo '正在关闭防火墙'
systemctl stop firewalld && systemctl disable firewalld
echo '正在关闭 networkmanager'
systemctl stop NetworkManager && systemctl disable NetworkManager
echo '正在关闭 selinux'
setenforce 0 && sed -ri 's/SELINUX=enforcing/SELINUX=disabled/g' /etc/selinux/config
echo '正在配置网卡'
ip_address="192.168.88.130"
subnet_mask="255.255.255.0"
default_gateway="192.168.88.2"
networkfile=/etc/sysconfig/network-scripts/ifcfg-ens32
if [ -f "$networkfile" ]; then
    rm "$networkfile"
```

2.mysql 部署及配置等

正在安装:

```
mysql-community-client
x86_64 5.7.36-1.el7 /mysql-community-client-5.7.36-1.el7.x86_64 102 M
mysql-community-common
x86_64 5.7.36-1.el7 /mysql-community-common-5.7.36-1.el7.x86_64 2.8 M
mysql-community-devel
x86_64 5.7.36-1.el7 /mysql-community-devel-5.7.36-1.el7.x86_64 24 M
mysql-community-libs
x86_64 5.7.36-1.el7 /mysql-community-libs-5.7.36-1.el7.x86_64 9.5 M
替换 mariadb-libs.x86_64 1:5.5.64-1.el7
mysql-community-libs-compat
x86_64 5.7.36-1.el7 /mysql-community-libs-compat-5.7.36-1.el7.x86_64 6.0 M
替换 mariadb-libs.x86_64 1:5.5.64-1.el7
mysql-community-server
x86_64 5.7.36-1.el7 /mysql-community-server-5.7.36-1.el7.x86_64 764 M
```

事务概要

vim /etc/my.cnf

#客户端设置

[client]

#mysql 服务配置

[mysqld]

#服务器监听端口, 默认为 3306

port=3306

#数据存储位置

datadir=/var/lib/mysql


#Unix 套接字文件路径

socket=/var/lib/mysql/mysql.sock

#MySQL 服务唯一标识,开启二进制日志, 做主从时需要

```
server-id=1
log-bin=mysql-bin
#不会跟随符号链接
symbolic-links=0
#日志路径
log-error=/var/log/mysqld.log
#服务进程 pid 文件路径
pid-file=/var/run/mysqld/mysqld.pid
#mysql 字符集设置
character_set_server=utf8mb4
#mysql 比较规则设置
collation_server=utf8mb4_general_ci
```

jdk 以及 tomcat 部署

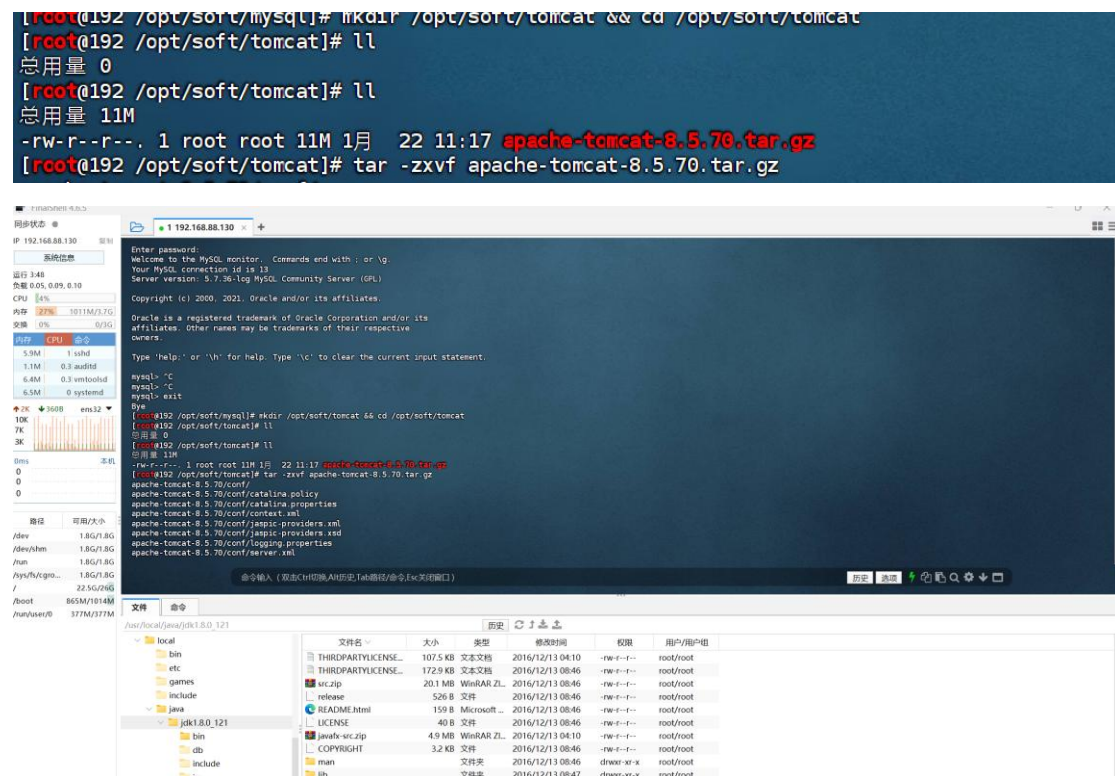

```
[root@192 /opt/soft/mysql]# mkdir /opt/soft/tomcat && cd /opt/soft/tomcat
[root@192 /opt/soft/tomcat]# ll
总用量 0
[root@192 /opt/soft/tomcat]# ll
总用量 11M
-rw-r--r--. 1 root root 11M 1月 22 11:17 apache-tomcat-8.5.70.tar.gz
[root@192 /opt/soft/tomcat]# tar -zxvf apache-tomcat-8.5.70.tar.gz
```

The screenshot shows a terminal window with the following output:

```
Enter password
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 13
Server version: 5.7.36-log MySQL Community Server (GPL)

Copyright (c) 2000, 2021, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> \c
mysql> \c
mysql> exit
Bye
[root@192 /opt/soft/mysql]# mkdir /opt/soft/tomcat && cd /opt/soft/tomcat
[root@192 /opt/soft/tomcat]# ll
总用量 0
[root@192 /opt/soft/tomcat]# ll
总用量 11M
-rw-r--r--. 1 root root 11M 1月 22 11:17 apache-tomcat-8.5.70.tar.gz
[root@192 /opt/soft/tomcat]# tar -zxvf apache-tomcat-8.5.70.tar.gz
apache-tomcat-8.5.70/conf/
apache-tomcat-8.5.70/conf/catalina.policy
apache-tomcat-8.5.70/conf/catalina.properties
apache-tomcat-8.5.70/conf/context.xml
apache-tomcat-8.5.70/conf/jaspic-providers.xml
apache-tomcat-8.5.70/conf/jaspic-providers.xml
apache-tomcat-8.5.70/conf/logging.properties
apache-tomcat-8.5.70/conf/server.xml
```

The terminal window also shows a file manager view of the extracted files, including:

文件名	大小	类型	修改时间	权限	用户/用户组
THIRDPARTYLICENSE...	107.5 KB	文本文件	2016/12/13 04:10	-rw-r--r--	root/root
THIRDPARTYLICENSE...	1729 KB	文本文件	2016/12/13 08:46	-rw-r--r--	root/root
src.zip	20.1 MB	WinRAR ZL...	2016/12/13 08:46	-rw-r--r--	root/root
release	526 B	文件	2016/12/13 08:46	-rw-r--r--	root/root
README.html	159 B	Microsoft...	2016/12/13 08:46	-rw-r--r--	root/root
LICENSE	40 B	文件	2016/12/13 08:46	-rw-r--r--	root/root
java-src.zip	4.9 MB	WinRAR ZL...	2016/12/13 04:10	-rw-r--r--	root/root
COPYRIGHT	3.2 KB	文件	2016/12/13 08:46	-rw-r--r--	root/root
man	文件类	文件类	2016/12/13 08:46	-rw-r--r--	root/root
lib	文件类	文件类	2016/12/13 08:47	-rw-r--r--	root/root

添加权限

```
[root@192 /usr/local/java]# cd /usr/local/java/jdk1.8.0_121/bin/
[root@192 /usr/local/java/jdk1.8.0_121/bin]# ./java
-bash: ./java: 权限不够
[root@192 /usr/local/java/jdk1.8.0_121/bin]# chmod +x /usr/local/java/jdk1.8.0_121/bin/*
[root@192 /usr/local/java/jdk1.8.0_121/bin]# chmod +x /usr/local/java/jdk1.8.0_121/jre/bin/*
[root@192 /usr/local/java/jdk1.8.0_121/bin]# ./java
用法: java [-options] class [args...]
       (执行类)
    或 java [-options] -jar jarfile [args...]
       (执行 jar 文件)
其中选项包括:
  -d32          使用 32 位数据模型 (如果可用)
  -d64          使用 64 位数据模型 (如果可用)
  -server       选择 "server" VM
                默认 VM 是 server,
                因为您是在服务器类计算机上运行。


  -cp <目录和 zip/jar 文件的类搜索路径>
  -classpath <目录和 zip/jar 文件的类搜索路径>
                用 : 分隔的目录, JAR 档案
                和 ZIP 档案列表, 用于搜索类文件。

  -D<名称>=<值>  设置系统属性
  -verbose:[class|gc|jni]
                启用详细输出
  -version       输出产品版本并退出
  -version:<值>  警告: 此功能已过时, 将在
```


配置环境变量以及在 tomcat 中部署 jdk

```
[root@192 /usr/local/java/jdk1.8.0_121/bin]# vim /etc/profile
[root@192 /usr/local/java/jdk1.8.0_121/bin]# cd
[root@192 ~]# source /etc/profile
[root@192 ~]# java -version
java version "1.8.0_121"
Java(TM) SE Runtime Environment (build 1.8.0_121-b13)
Java HotSpot(TM) 64-Bit Server VM (build 25.121-b13, mixed mode)
[root@192 ~]# vim /usr/local/tomcat8/bin/catalina.sh
[root@192 ~]# cd /usr/local/tomcat8/bin/
[root@192 /usr/local/tomcat8/bin]# ll
总用量 872K
-rw-r-----. 1 root root 36K 8月 10 2021 bootstrap.jar
-rw-r-----. 1 root root 17K 8月 10 2021 catalina.bat
-rwxr-x---. 1 root root 25K 1月 22 11:40 catalina.sh
-rw-r-----. 1 root root 1.7K 8月 10 2021 catalina-tasks.xml
-rw-r-----. 1 root root 2.1K 8月 10 2021 ciphers.bat
-rwxr-x---. 1 root root 2.0K 8月 10 2021 ciphers.sh
-rw-r-----. 1 root root 25K 8月 10 2021 commons-daemon.jar
-rw-r-----. 1 root root 203K 8月 10 2021 commons-daemon-native.tar.gz
```

上传 resume 项目并重启 tomcat

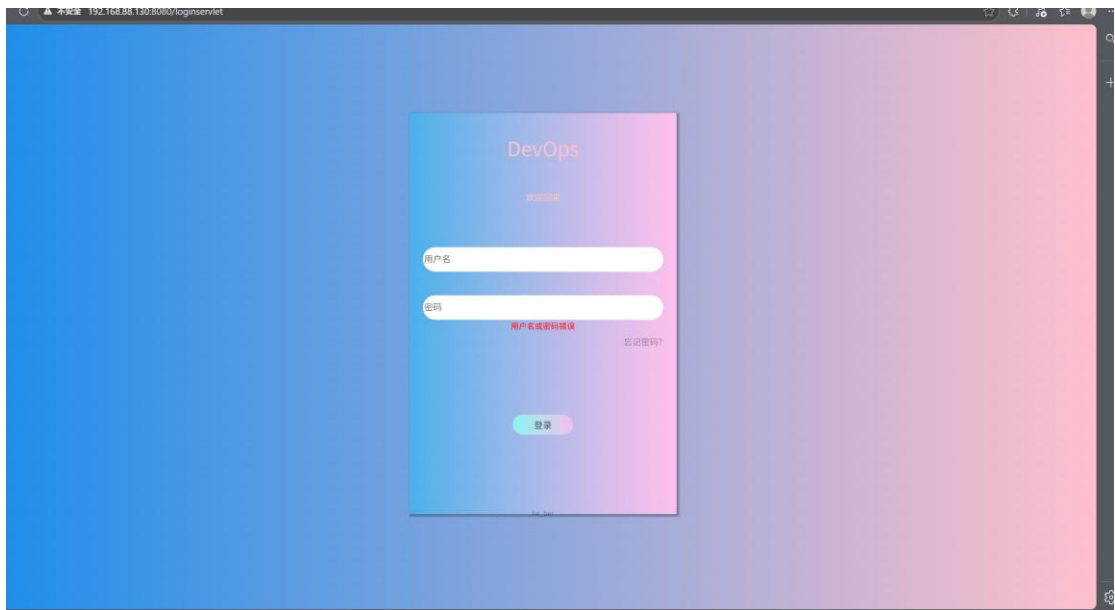

传统部署 blog

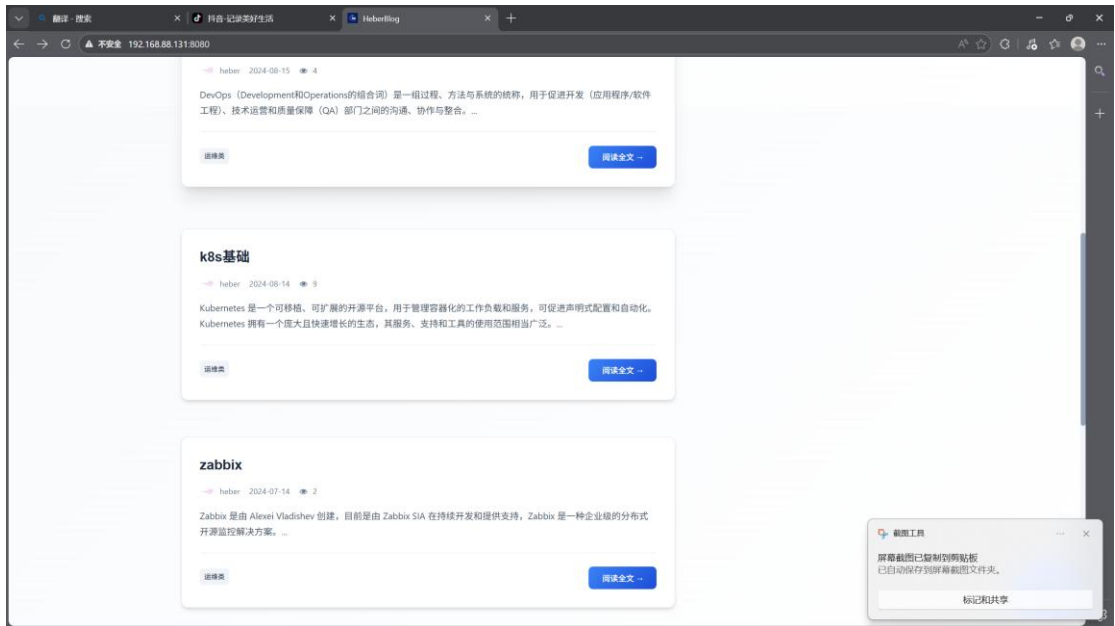

Mysql 数据库备份以及定时任务

1.脚本（优化）配置变量

```
1 #!/bin/bash
2 MYSQL_HOST="192.168.204.186" #要备份数据的IP
3 MYSQL_PORT="3306" #端口
4 MYSQL_USER="root" #用户名
5 MYSQL_PASSWORD="Admin123." #密码
6 MYSQL_DATABASE="blog" #要备份的数据库
7 MYSQL_DIR="/opt/mysql_bak" #备份后的路径
8 # 判断备份目录是否存在，如果不存在则创建
9 if [ ! -d "$MYSQL_DIR" ]; then
10     mkdir -p "$MYSQL_DIR"
11     if [ $? -eq 0 ]; then
12         echo "目录 $MYSQL_DIR 创建成功。"
13     else
14         echo "创建目录 $MYSQL_DIR 失败！" >&2
15         exit 1
16     fi
17 else
18     echo "目录 $MYSQL_DIR 已存在。"
19 fi
20 # 获取当前日期和时间，用于备份文件名
21 DATE=$(date +%F-%H-%M)
22 # 定义备份文件名
23 BACKUP_FILE="$MYSQL_DIR/$DATE-mysql-blog.sql"
24 # 执行备份
25 mysqldump -h "$MYSQL_HOST" -P "$MYSQL_PORT" -u "$MYSQL_USER" -p"$MYSQL_PASSWORD" --databases "$MYSQL_DATABASE" > "$BACKUP_FILE"
26
27 # 检查 mysqldump 命令是否成功
28 if [ $? -eq 0 ]; then
29     echo "备份成功: $BACKUP_FILE"
30 else
31     echo "备份失败！" >&2
32     exit 1
33 fi
```

```
[root@localhost /opt/script/mysql_bak]# crontab -l
59 23 * * 0 /opt/script/mysql_bak/mysql_bak.sh
```

定时每周 23 时 59 分

Redis 配置升级（缓存）（可集群）

安装 redis

```
[root@192.168.88.130 ~]# ll  
总用量 2.0M  
-rw-r--r--. 1 root root 2.0M 1月 25 15:23 redis-5.0.13.tar.gz
```


依赖

```
yum -y install gcc-c++
```

修改配置等

```
263 dir /usr/local/redis/data  
264
```

测试

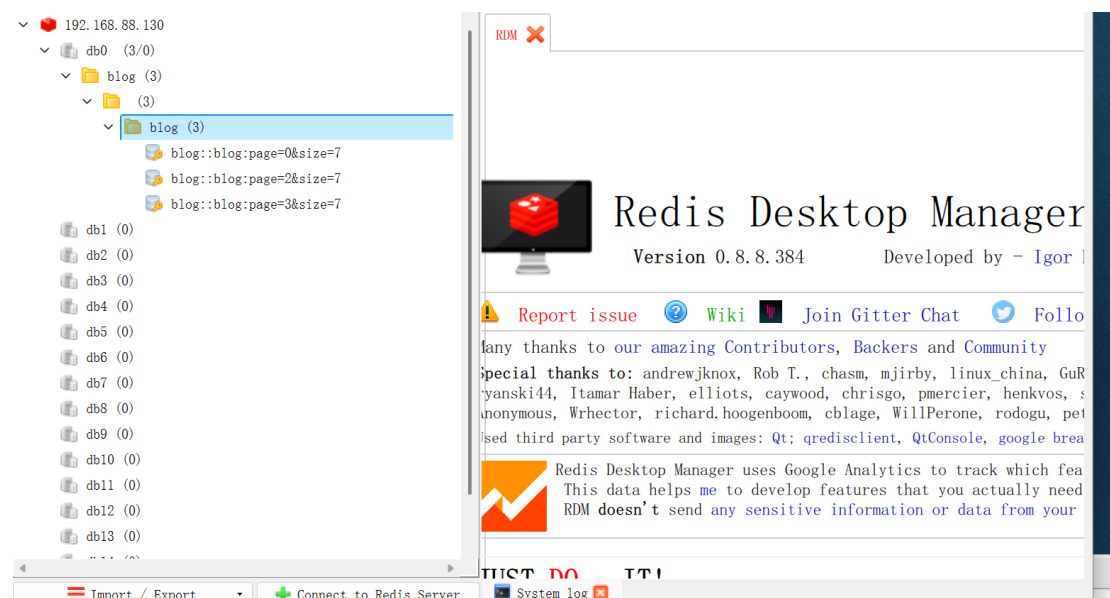

使用 docker 运行项目以及部署数据库


```
[root@192 /etc/docker]# tee /etc/docker/daemon.json <<- 'EOF'
vim /etc/docker/daemon.json
[root@192 /etc/docker]# systemctl start docker && systemctl enable docker
Created symlink from /etc/systemd/system/multi-user.target.wants/docker.service to /usr/lib/systemd/system/docker.service.
[root@192 /etc/docker]# systemctl status docker
● docker.service - Docker Application Container Engine
   Loaded: loaded (/usr/lib/systemd/system/docker.service; enabled; vendor preset: disabled)
   Active: active (running) since 日 2026-01-25 16:49:04 CST; 29s ago
     Docs: https://docs.docker.com
   Main PID: 88968 (dockerd)
```

```
[root@192 /opt/mysql]# docker-compose up -d
[+] Running 1/1
  :: Container mysql Sta... 1.2s
```

编辑 docker-compose 配置文件

```
1 version: "3"
2 services:
3   mysql:
4     image: mysql:5.7
5     container_name: mysql
6     restart: always
7     ports:
8       - "3306:3306"
9     environment:
10      MYSQL_ROOT_PASSWORD: "123456"
11      TZ: Asia/Shanghai
12     volumes:
13       - /opt/mysql/data/mysql:/var/lib/mysql
14       - /opt/mysql/etc/my.cnf:/etc/my.cnf
15     command: --default-authentication-plugin=mysql_native_password #解决外部无法访问
16
```

数据库连接正常

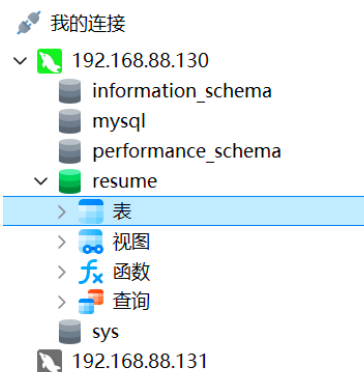

对象		
打开表 设计表 新建表 删除表 导入向导 导出向导		
名称	自动递增	修改日期
user	0	2026-01-26 00:34:26

Docker 容器部署 blog 项目编写配置文件以及查看日志

```
[root@192 /opt/web/blog]# docker-compose up -d
[+] Running 3/3
  :: Container mysql   Running
  :: Container blog    Running
  :: Container nginx   Started
[root@192 /opt/web/blog]# docker ps -a
```


```
[root@192 /opt/web/blog]# docker ps -a
CONTAINER ID   IMAGE          COMMAND                  CREATED        STATUS        PORTS                               NAMES
c69c9bba001e   blog:1.0.1    "java -jar /app/blog..." 29 minutes ago Up 28 minutes 0.0.0.0:8080->8080/tcp, :::8080->8080/tcp   blog
422ac446384e   mysql:5.7     "docker-entrypoint.s..." 29 minutes ago Up 29 minutes 0.0.0.0:3306->3306/tcp, :::3306->3306/tcp   mysql
246c4bb3b3fc   nginx:1.18.0  "/docker-entrypoint..." 29 minutes ago Up About a minute 0.0.0.0:80->80/tcp, :::80->80/tcp, 0.0.0.0:443->443/tcp, :::443->443/tcp   nginx
```

```
[root@192 /opt/web/blog]# docker logs -f blog
:: Spring Boot ::
:: Spring Boot :: (v2.7.0)
2026-01-31 14:15:36.366 INFO 1 --- [main] com.heber.BlogApplication : Starting BlogApplication v0.0.1-SNAPSHOT using Java 1.8.0_212 on c69c9bba001e with PID 1 (
ar started by root in /app)
2026-01-31 14:15:36.370 DEBUG 1 --- [main] com.heber.BlogApplication : Running with Spring Boot v2.7.0, Spring v5.3.20
2026-01-31 14:15:36.397 INFO 1 --- [main] com.heber.BlogApplication : The following 1 profile is active: "dev"
2026-01-31 14:15:39.224 INFO 1 --- [main] .s.d.r.c.RepositoryConfigurationDelegate : Multiple Spring Data modules found, entering strict repository configuration mode!
2026-01-31 14:15:39.240 INFO 1 --- [main] .s.d.r.c.RepositoryConfigurationDelegate : Bootstrapping Spring Data Redis repositories in DEFAULT mode.
2026-01-31 14:15:39.301 INFO 1 --- [main] .s.d.r.c.RepositoryConfigurationDelegate : Finished Spring Data repository scanning in 29 ms. Found 0 Redis repository interfaces.
2026-01-31 14:15:41.817 INFO 1 --- [main] o.s.b.w.embedded.tomcat.TomcatWebServer : Tomcat initialized with port(s): 8080 (http)
2026-01-31 14:15:41.853 INFO 1 --- [main] o.apache.catalina.core.StandardService : Starting service [Tomcat]
2026-01-31 14:15:41.884 INFO 1 --- [main] org.apache.catalina.core.StandardEngine : Starting Servlet engine: [Apache Tomcat/9.0.63]
2026-01-31 14:15:42.081 INFO 1 --- [main] o.a.c.c.C.[Tomcat].[localhost].[/] : Initializing Spring embedded WebApplicationContext
2026-01-31 14:15:42.082 INFO 1 --- [main] w.s.c.ServletWebServerApplicationContext : Root WebApplicationContext: initialization completed in 5439 ms
Logging initialized using 'class org.apache.ibatis.logging.stdout.StdOutImpl' adapter.
Parsed mapper file: 'class path resource [mapper/BlogMapper.xml]'
Parsed mapper file: 'class path resource [mapper/CommentMapper.xml]'
Parsed mapper file: 'class path resource [mapper/TagMapper.xml]'
```

```
blog:
  image: blog:1.0.1
  container_name: blog
  restart: always
  volumes:
    - /opt/mysql/data/mysql:/var/lib/mysql
    - /opt/mysql/etc/my.cnf:/etc/my.cnf
    - /opt/mysql/init:/docker-entrypoint-initdb.d
  networks:
    - blog
  command: --default-authentication-plugin=mysql_native_password #解决外部无法访问
  healthcheck:
    test: ["CMD", "mysql", "-u", "root", "-pAdmin123.", "-e", "SELECT 1"]
    interval: 30s
    timeout: 10s
    retries: 5

nginx:
  image: nginx:1.18.0
  container_name: nginx
  restart: always
  environment:
    TZ: Asia/Shanghai
  ports:
    - "80:80"
    - "443:443"
  volumes:
    - /opt/nginx/etc/nginx.conf:/etc/nginx/nginx.conf
    - /opt/nginx/etc/conf.d:/etc/nginx/conf.d
    - /opt/nginx/logs:/var/log/nginx
  networks:
    - blog


networks:
  blog:
    image: nginx:1.18.0
    container_name: nginx
    restart: always
    environment:
      TZ: Asia/Shanghai
    ports:
      - "80:80"
      - "443:443"
    volumes:
      - /opt/nginx/etc/nginx.conf:/etc/nginx/nginx.conf
      - /opt/nginx/etc/conf.d:/etc/nginx/conf.d
      - /opt/nginx/logs:/var/log/nginx
    networks:
      - blog
```

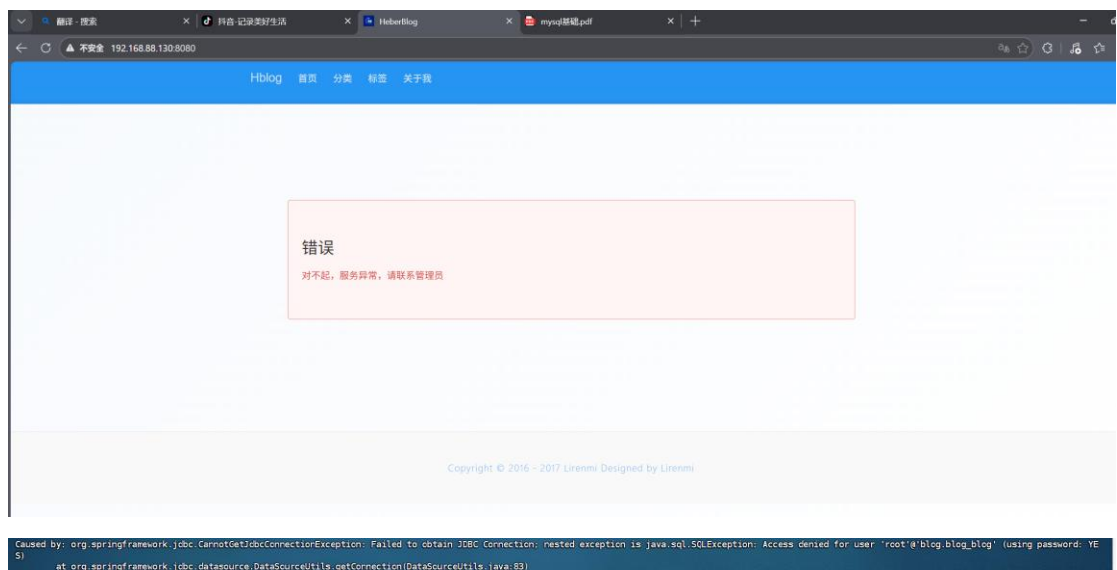



查看日志查找错误
数据库密码错误

Cicd 自动化流水线

Gitlab 搭建

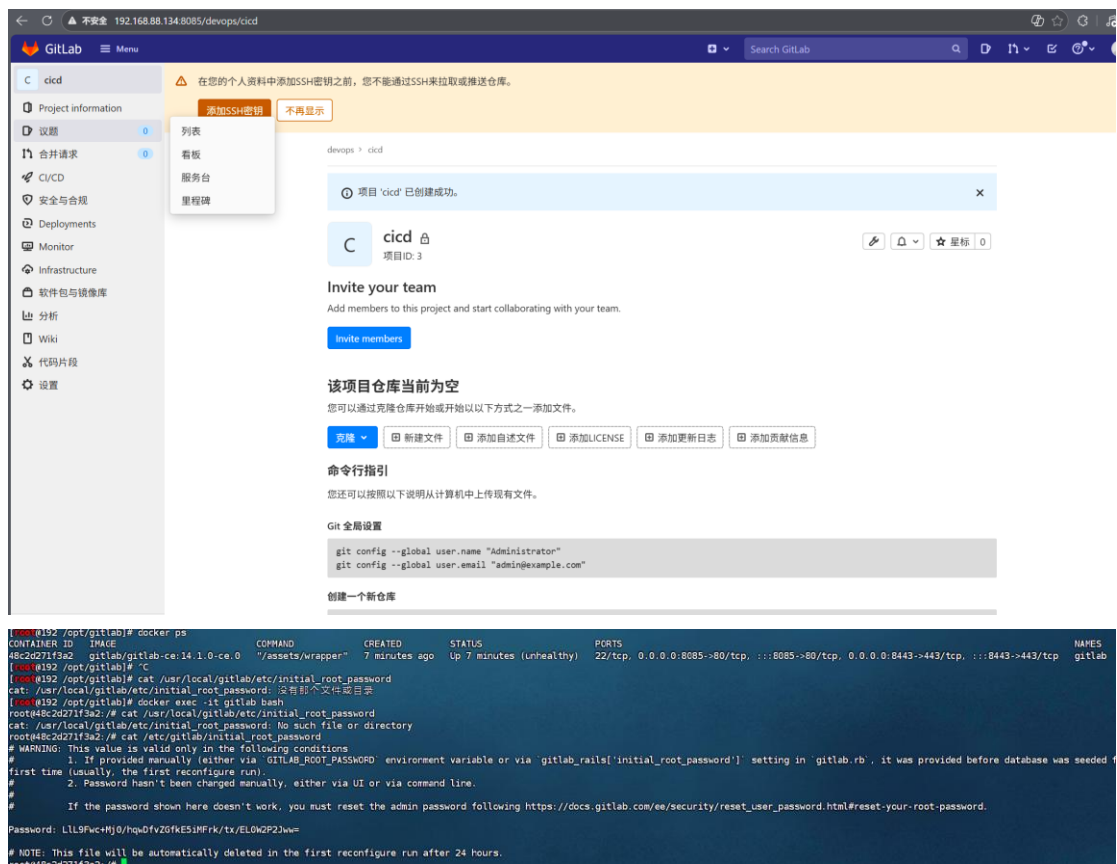


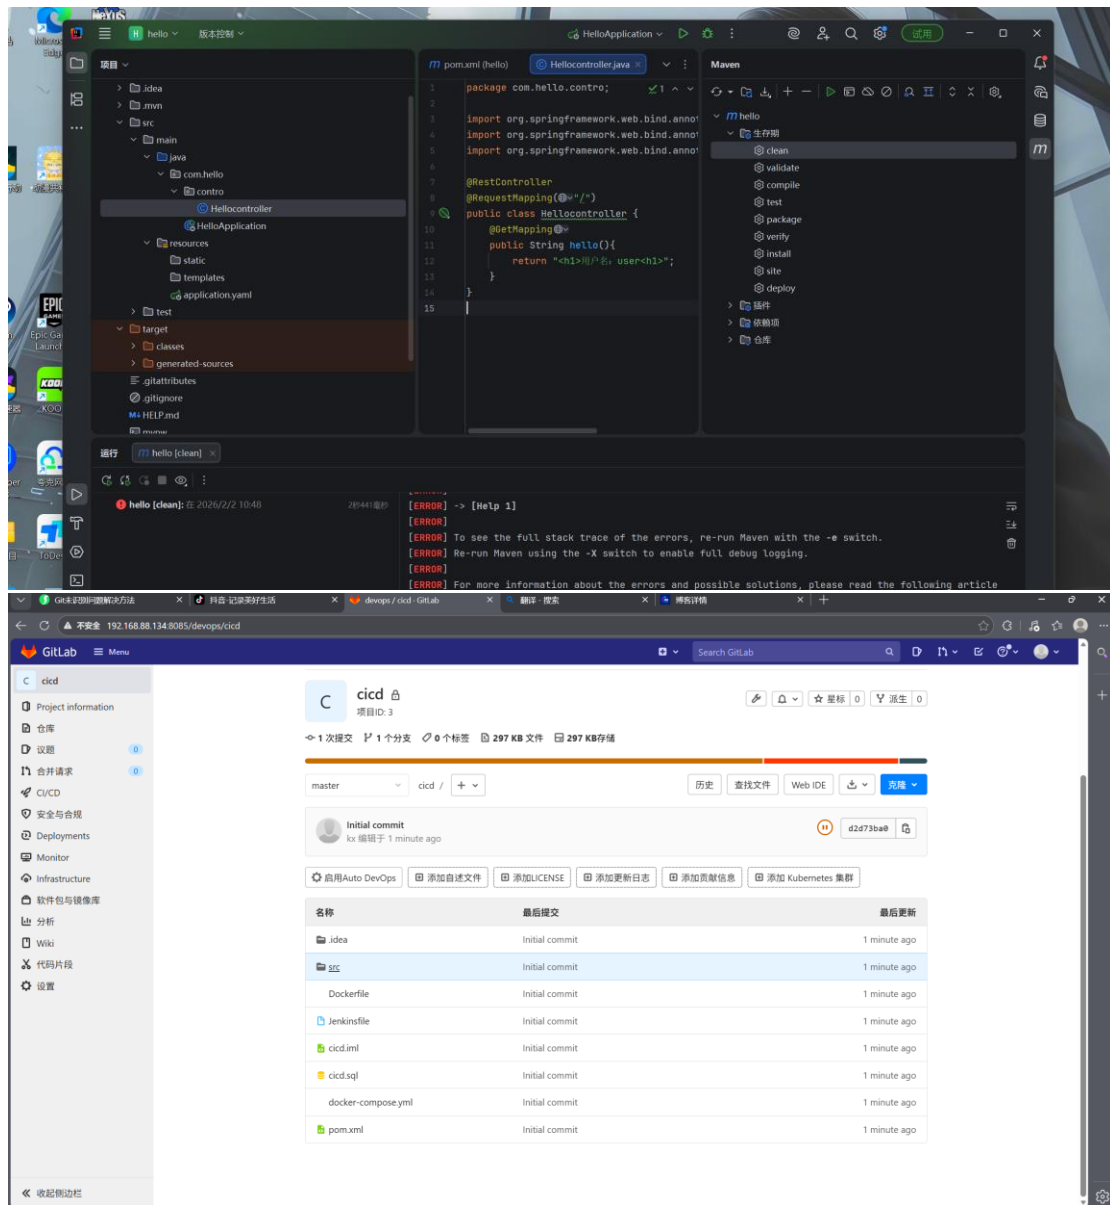


Harbor

```
[root@localhost /opt/harbor/harbor]# docker tag nginx:1.18.0 192.168.88.134:8086/devops/nginx:1.18.0
[root@localhost /opt/harbor/harbor]# docker images
REPOSITORY          TAG                 IMAGE ID           CREATED            SIZE
goharbor/redis-photon      v1.10.10          da80bdf2937       4 years ago       149MB
goharbor/harbor-registryctl v1.10.10          8cfff0f50ad4a     4 years ago       97.3MB
goharbor/registry-photon   v1.10.10          465538cf61bc      4 years ago       81.8MB
goharbor/nginx-photon      v1.10.10          86473ef9ef24      4 years ago       44.9MB
goharbor/harbor-log        v1.10.10          c9cb00a7af3e      4 years ago       108MB
goharbor/harbor-jobservice v1.10.10          d244473b6165      4 years ago       88.8MB
goharbor/harbor-core       v1.10.10          b3be36cace3a      4 years ago       81.5MB
goharbor/harbor-portal     v1.10.10          1980673cc854      4 years ago       53MB
goharbor/harbor-db         v1.10.10          0c6ce792483e      4 years ago       187MB
goharbor/prepare          v1.10.10          475fb37cdd49      4 years ago       200MB
f3fdf88f1cb7: Pushing 50.76MB/63.64MB591b81fd7 4 years ago 2.23GB
f3fdf88f1cb7: Pushed
7e718b9c0c8c: Pushed
1.18.0: digest: sha256:9b0fc8e09ae1abb0144ce57018fc1e13d23abd108540f135dc83c0ed661081cf size: 1362
[root@localhost /opt/harbor/harbor]#
192.168.88.134:8086/devops/nginx:1.18.0
The push refers to repository [192.168.88.134:8086/devops/nginx]
4fa6704c8474: Pushed
4fe7d87c8e14: Pushed
6fcbf7acaafd: Pushed
f3fdf88f1cb7: Pushing 49.68MB/63.64MB
7e718b9c0c8c: Pushing [=====] 37.43MB/69.25MB
```

命令输入（双击Ctrl切换,Alt历史,Tab路径/命令,Esc关闭窗口）


推送下载 harbor 项目

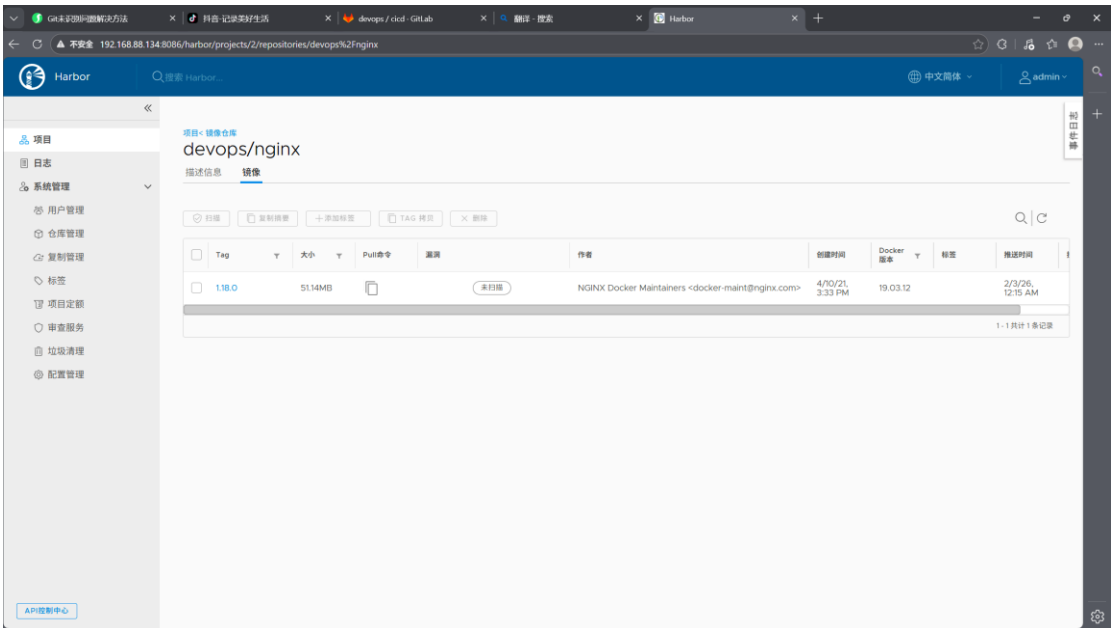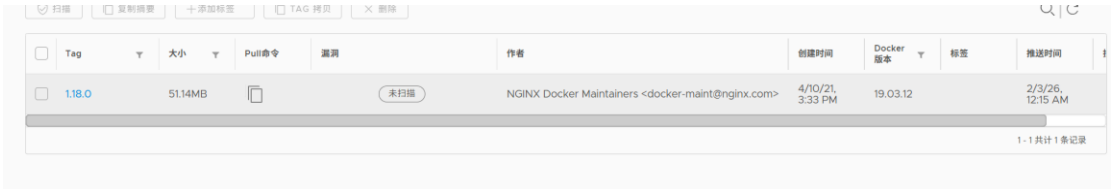


```
1 FROM openjdk:8-jdk-alpine
2
3 ENV TZ=Asia/Shanghai
4 ENV JAVA_OPTS="-Xms256m -Xmx256m"
5
6 WORKDIR /app
7 COPY ./target/*.jar /app/
8
9 ENTRYPOINT ["sh", "-c", "java ${JAVA_OPTS} -jar /app/cicd-0.0.1-SNAPSHOT.jar"]
```

```
version: '1'
services:
  cicd:
    image: REGISTRY/DOCKERHUB_NAMESPACE/APP_NAME:TAG_NAME
    container_name: cicd
    restart: always
    ports:
      - "8080:8080"
```

构建成功

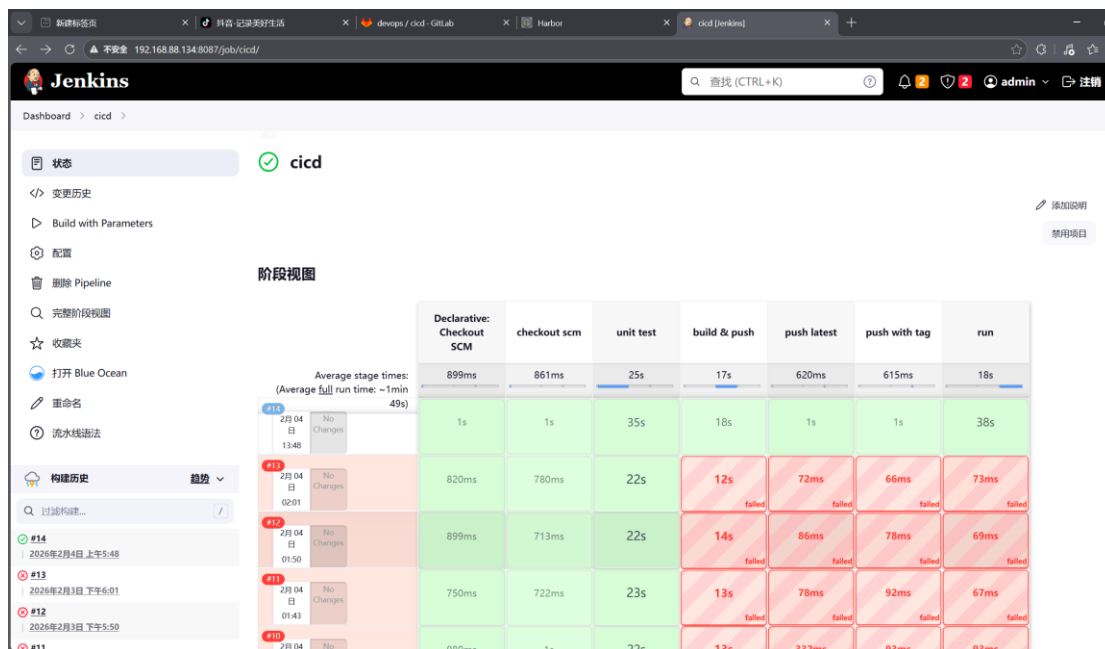

```

Last login: 11 Feb 6 00:12:50 2020 from 192.168.66.1
[root@k8s-master ~]# cd /opt/k8s/nginx/
[root@k8s-master nginx]# ll
总用量 12632
-rw-r--r-- 1 root root 12924654 6月 8 2020 helm-v3.2.3-linux-amd64.tar.gz
drwxr-xr-x 2 3434 3434 38 2月 5 23:24 linux-amd64
-rw-r--r-- 1 root root 540 2月 5 22:46 nginx-deployment.yaml
-rw-r--r-- 1 root root 0 2月 5 22:55 nginx-service.yaml
-rw-r--r-- 1 root root 658 2月 5 23:01 nginx.yaml
[root@k8s-master nginx]#

```

```

root@k8s-master: /# kubectl version
Client Version: version.Info{Major:"1", Minor:"20", GitVersion:"v1.20.10", GitCommit:"81533dc2b63d13e6637e7fb8b65a61bb", GitTreeState:"clean", BuildDate:"2021-08-11T18:06:15Z", GoVersion:"go1.15.15", Compiler:"gc", Platform:"linux/amd64"}
Server Version: version.Info{Major:"1", Minor:"20", GitVersion:"v1.20.10", GitCommit:"af4fc42e95f42c4ad5c8bd1ca46c7b7dd338b", GitTreeState:"clean", BuildDate:"2020-12-08T17:51:19Z", GoVersion:"go1.15.5", Compiler:"gc", Platform:"linux/amd64"}

```

Devops

1.nfs 挂载同步

```
[root@k8s-master k8s-nfs]# mkdir -p /opt/data/k8s-nfs/
[root@k8s-master k8s-nfs]# vim /etc/exports
[root@k8s-master k8s-nfs]# exportfs -f
[root@k8s-master k8s-nfs]# systemctl reload nfs-server
[root@k8s-master k8s-nfs]# cd /opt/data/k8s-nfs/
[root@k8s-master k8s-nfs]# mkdir blog
[root@k8s-master k8s-nfs]# ll
总用量 0
drwxr-xr-x 2 root root 6 2月  9 22:06 blog
[root@k8s-master k8s-nfs]#
```

命令输入 (双击Ctrl切换, Alt历史, Tab路径/命令, Esc)

```
[root@k8s-node1 nfs]# mkdir -p /opt/data/nfs
[root@k8s-node1 nfs]# mount -t nfs 192.168.88.139:/opt/data/k8s-nfs /opt/data/nfs
mount.nfs: /opt/data/nfs is busy or already mounted
[root@k8s-node1 nfs]# ll
总用量 0
[root@k8s-node1 nfs]# cd /opt/data/nfs/
[root@k8s-node1 nfs]# ll
总用量 0
drwxr-xr-x 2 root root 6 2月  9 22:06 blog
```

K8s 增加节点

k8s-master	Ready	control-plane,master	3h40m	v1.20.10
k8s-node1	Ready	<none>	141m	v1.20.10

安装网络插件


```
[root@k8s-master gitlab]# kubectl get pod -n kube-system
```

NAME	READY	STATUS	RESTARTS	AGE
calico-kube-controllers-56c7cdffc6-jxjvm	1/1	Running	1	128m
calico-node-jkpcx	1/1	Running	1	128m
calico-node-vxdzm	1/1	Running	0	128m
coredns-7f89b7bc75-87frc	1/1	Running	2	3h40m
coredns-7f89b7bc75-hh6xs	1/1	Running	1	3h40m
etcd-k8s-master	1/1	Running	0	3h41m
kube-apiserver-k8s-master	1/1	Running	0	3h41m
kube-controller-manager-k8s-master	1/1	Running	0	3h41m
kube-proxy-frvfb	1/1	Running	0	3h40m
kube-proxy-kjchq	1/1	Running	1	142m
kube-scheduler-k8s-master	1/1	Running	0	3h41m


部署 ingress

ingress-nginx-controller-g29dm	1/1	Running	1	106m	192.168.88.140	k8s-node1	<none>	<none>
--------------------------------	-----	---------	---	------	----------------	-----------	--------	--------

Gitlab


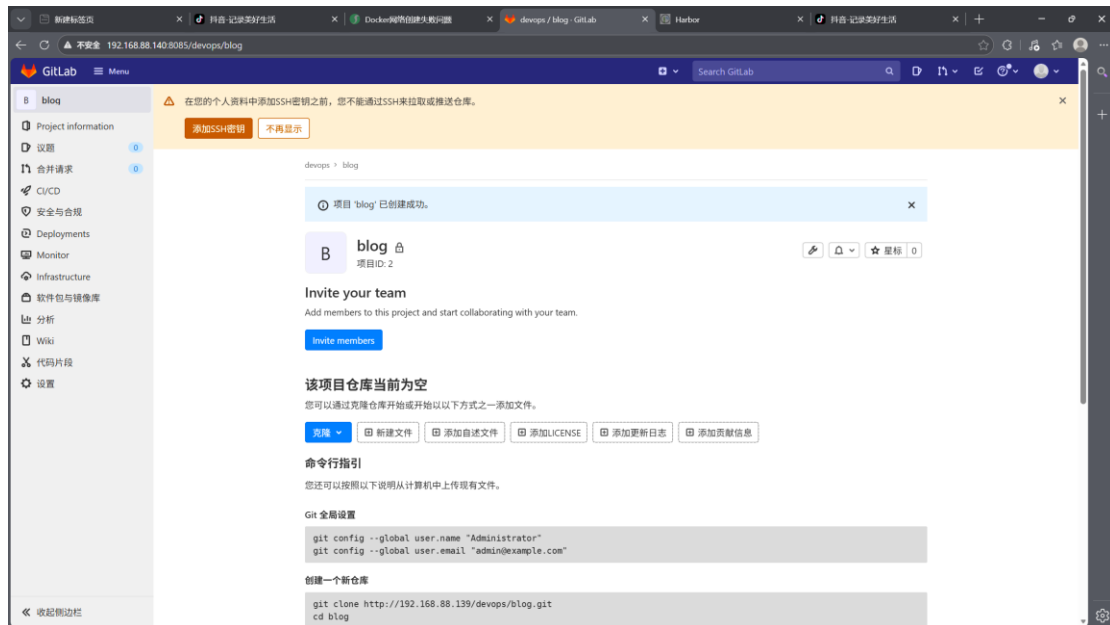



Harbor

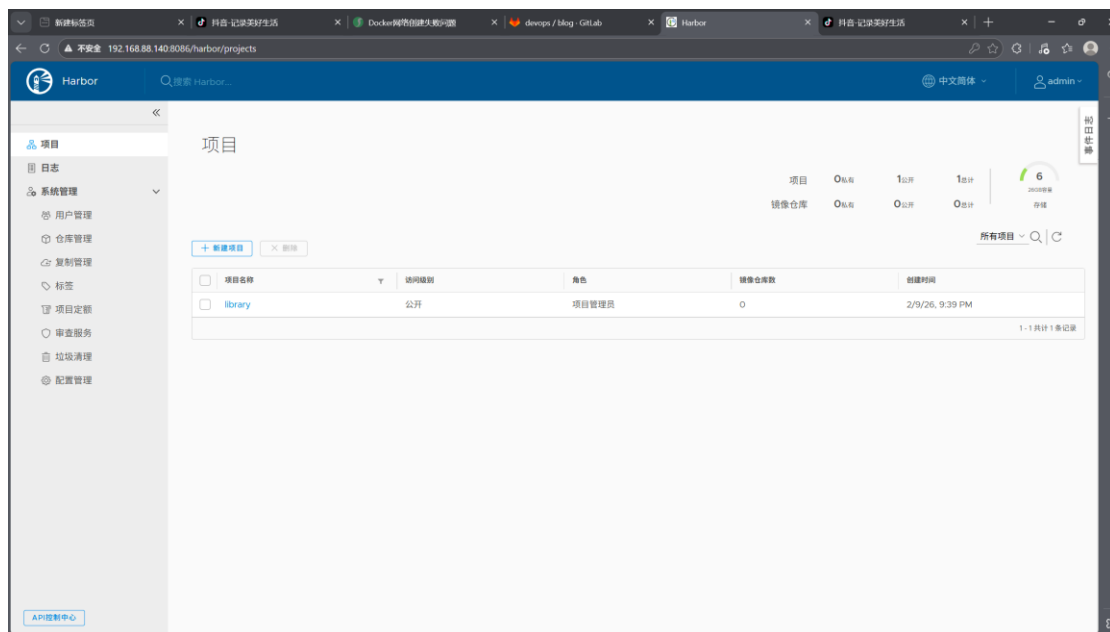


k8s

Rancher 可视化工具

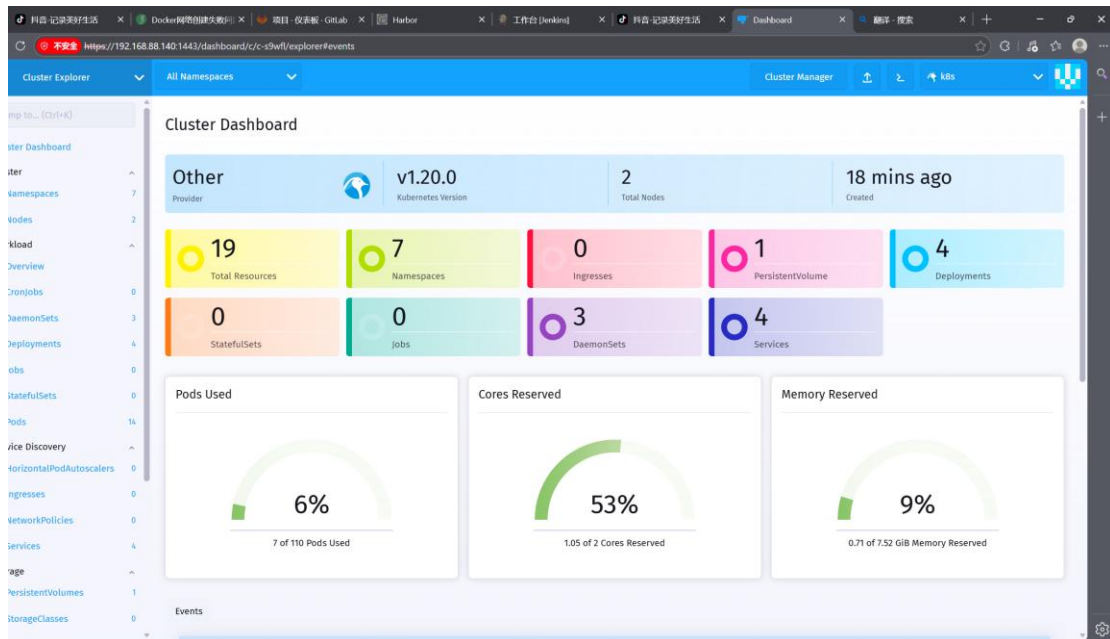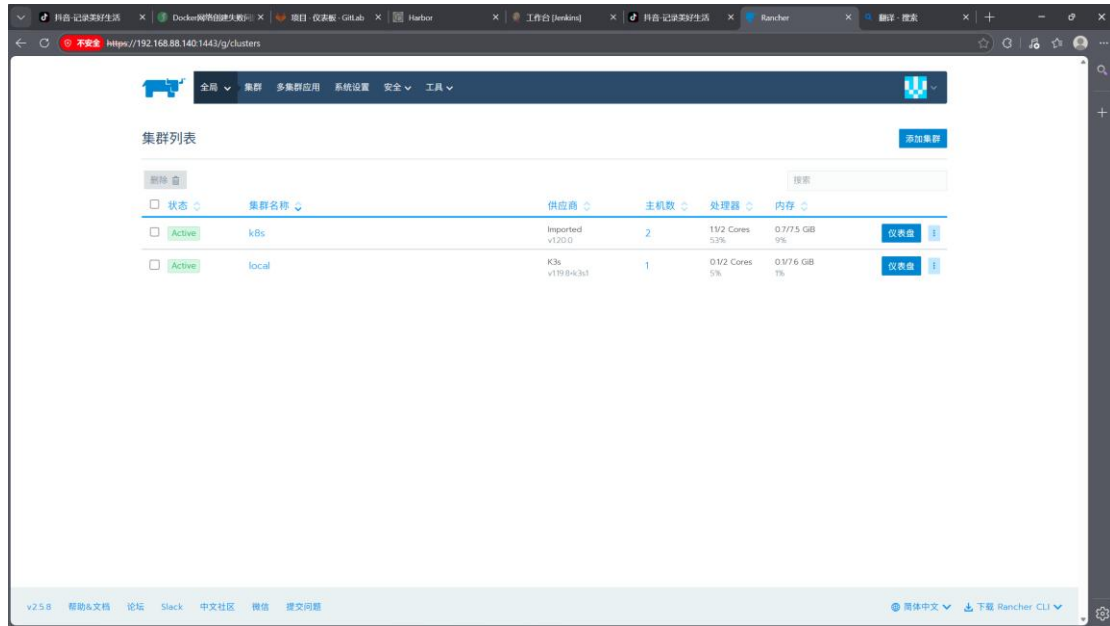


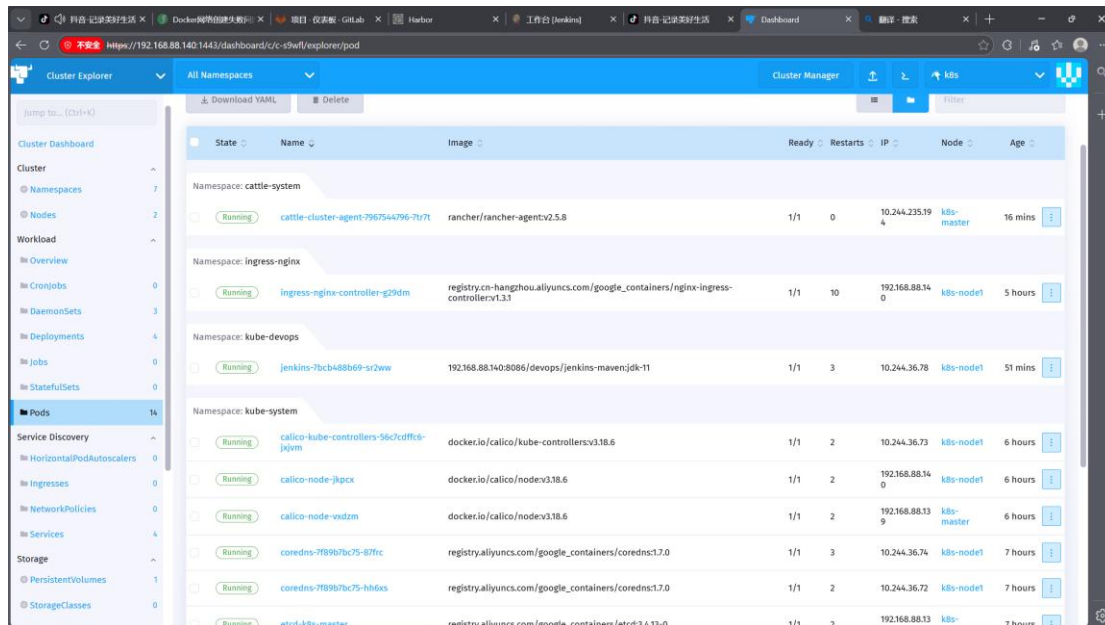

Devops k8s 部署 cicd 流水线

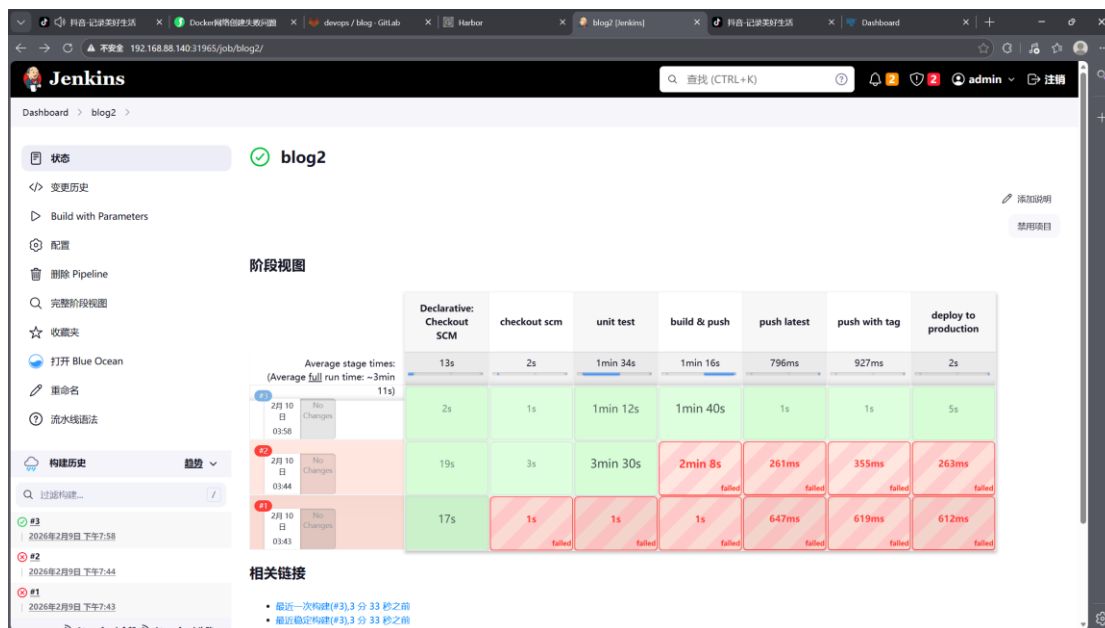


Pods

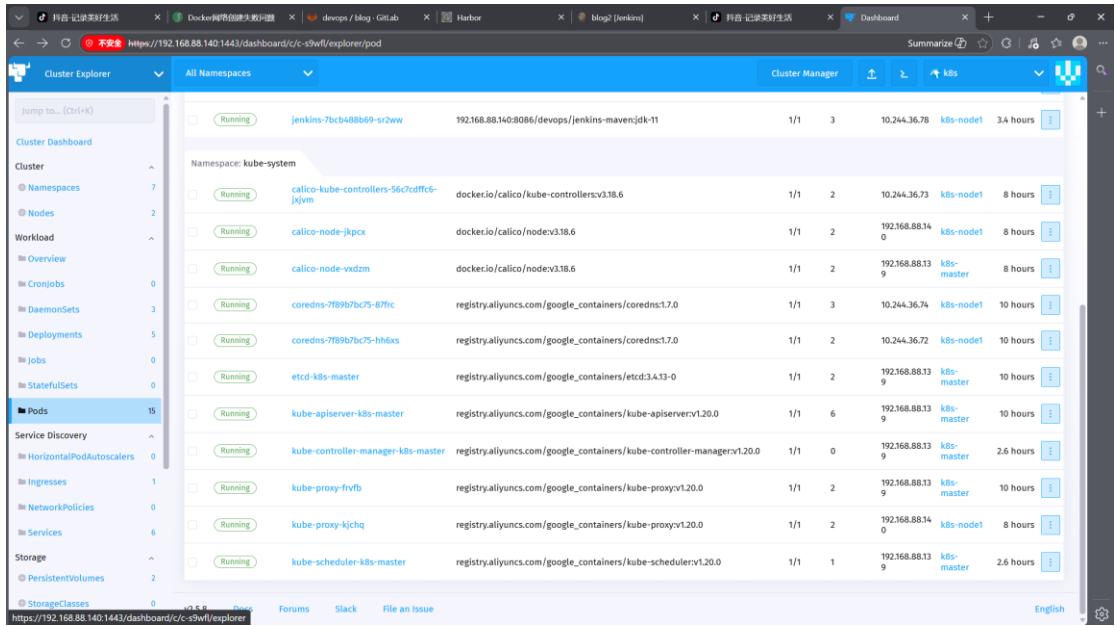

项目 devops 部署 blog 服务成功



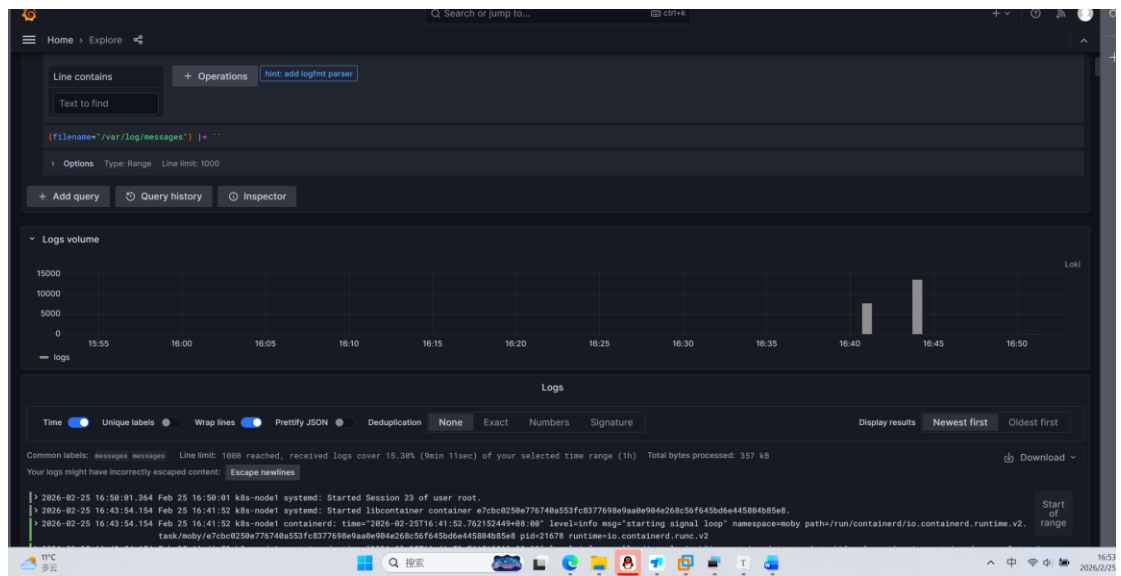

Loki 日志收集

Prometheus 监控工具

The screenshot shows the Prometheus Targets page. It lists two scrape pools: 'kubernetes-nodes' and 'prometheus'. Each pool has a table of targets with columns for Endpoint, State, Labels, Last Scrape, Scrape Duration, and Error.

Endpoint	State	Labels	Last Scrape	Scrape Duration	Error
http://192.168.88.139:9100/metrics	UP	beta.kubernetes.io/arch=amd64 beta.kubernetes.io/os=linux instance=k8s-master job=kubernetes-nodes kubernetes.io/arch=amd64 kubernetes.io/hostname=k8s-master kubernetes.io/os=linux	13.770s ago	108.522ms	
http://192.168.88.140:9100/metrics	UP	beta.kubernetes.io/arch=amd64 beta.kubernetes.io/os=linux instance=k8s-node1 job=kubernetes-nodes kubernetes.io/arch=amd64 kubernetes.io/hostname=k8s-node1 kubernetes.io/os=linux	1.602s ago	155.675ms	

Endpoint	State	Labels	Last Scrape	Scrape Duration	Error
http://localhost:9090/metrics	UP	instance=localhost:9090 job=prometheus	1.456s ago	11.760ms	

