

# Flow Networks versus Bayesian Exploration: A Comparative Study in Delayed-Reward Environments

Valdemar H. Lorenzen \*Melih Kandemir

IMADA, SDU

## Abstract

This thesis presents a comparative analysis of two promising approaches to reinforcement learning in environments with delayed and sparse rewards: Generative Flow Networks (GFlowNets) and Bayesian Exploration Networks (BEN). We hypothesized that BEN's explicit decomposition of uncertainty would lead to more efficient learning compared to GFlowNets, particularly in early training stages. However, our empirical investigation using a modified n-chain environment with varying chain lengths ( $n \in \{3, 5, 7, 9, 11\}$ ) revealed contrary findings. GFlowNet demonstrated superior performance across multiple metrics, including learning stability, reward optimization, and scalability. Notably, GFlowNet achieved consistent convergence with near-zero trajectory balance loss ( $< 0.003$ ) across all chain lengths, while BEN showed increasing instability with longer chains, particularly in its epistemic uncertainty estimation. The results suggest that for environments with deterministic dynamics and delayed rewards, GFlowNet's flow-based approach provides a more effective framework than BEN's sophisticated uncertainty decomposition. This challenges the intuition that explicit uncertainty handling necessarily leads to better exploration in delayed reward scenarios. Our findings contribute to the broader understanding of exploration strategies in reinforcement learning and suggest that the choice of algorithm should be guided by the underlying structure of the environment, particularly its deterministic versus stochastic nature. We conclude by proposing extensions to stochastic environments and more complex reward structures as promising directions for future research.

## 1 Introduction

Many real-world applications present an inherent challenge that current reinforcement learning (RL) methods struggle to address effectively: the problem of delayed and sparse rewards [1], [2].

**Delayed and Sparse Rewards:** Learning scenarios where meaningful feedback signals (rewards) are provided only far after a long sequence of actions, and where most actions yield no immediate feedback.

*Example: In drug discovery, the effectiveness of a designed molecule can only be evaluated after its complete synthesis, with no intermediate feedback during the design process.*

Consider, for instance, the process of drug design, where a reinforcement learning agent must make a series of molecular modifications to create an effective compound. The value of these decisions — the drug's efficacy — can only be assessed once the entire molecule is complete. Similarly, in robotics tasks like assembly or navigation, success often depends on precise sequences of actions where feedback is only available upon having completed the entire task.

Traditional reinforcement learning algorithms face two critical limitations in such environments:

1. **Credit Assignment:** When rewards are delayed, the algorithm struggles to correctly attribute success or failure to specific actions in a long sequence [3]. This is analogous to trying to improve a chess strategy when only knowing the game's outcome, without understanding which moves were actually decisive.
2. **Exploration Efficiency:** With sparse rewards, random exploration becomes highly inefficient [4], [5]. An agent might need to execute precisely the right sequence of actions to receive any feedback at all, making random exploration about as effective as searching for a needle in a haystack.

This thesis investigates a novel approach to addressing these challenges through the comparison of two promising methodologies: **Generative Flow Networks** (GFlowNets) as proposed by [6], and **Bayesian Exploration Networks** (BEN) as proposed by [7]. These approaches represent different perspectives on handling uncertainty and exploration in reinforcement learning.

1. *GFlowNets* frame the learning process as a flow network, potentially offering more robust learning in situations with multiple viable solutions.
2. *BENs* leverages Bayesian uncertainty estimation to guide exploration more efficiently, potentially making better use of limited feedback.

By comparing these approaches, we aim to understand their relative strengths and limitations in environments with delayed and sparse rewards. Our investigation focuses specifically on examining these methods in carefully designed environments that capture the essential characteristics of delayed and sparse reward scenarios while remaining tractable for systematic analysis.

## 1.1 Research Objectives and Contributions

This thesis aims to advance our understanding of efficient learning in sparse reward environments through three primary objectives:

1. **Comparative Analysis:** Conduct a rigorous empirical comparison between GFlowNets and Bayesian Exploration Networks in standardized environments with delayed rewards.
2. **Hypothesis Testing:** Investigate whether BEN's Bayesian exploration strategy leads to more efficient learning compared to GFlowNets in highly delayed reward scenarios, particularly during early training stages.
3. **Algorithmic Understanding:** Analyze the underlying mechanisms that drive performance differences between these approaches, focusing on their handling of uncertainty and exploration.

The contributions of this work include:

- A comprehensive empirical evaluation using the n-chain environment with varying degrees of reward delay.
- Insights into the relative strengths and limitations of Bayesian and flow-based approaches to exploration.
- Implementation and analysis of both algorithms with comparisons.

## 1.2 Thesis and Structure

The remainder of this thesis is structured as follows:

**Section 2: Preliminaries** provides the theoretical foundations of reinforcement learning and explores existing approaches to handling sparse rewards. This chapter establishes the mathematical framework and notation used throughout the thesis.

**Section 3: Theoretical Framework** presents our hypothesis and analytical approach. We develop the mathematical foundations for comparing GFlowNets and BEN.

**Section 4: Experimental Design** details our testing methodology, including environment specifications, evaluation metrics, and implementation details.

**Section 5: Results and Analysis** presents our findings, including both quantitative performance metrics and qualitative analysis of learning behaviors. We examine how each algorithm handles the exploration-exploitation trade-off and adapts to varying levels of reward sparsity.

**Section 6: Conclusion** summarizes our findings, discusses their implications for the field, and suggests directions for future research.

## 2 Preliminaries

### 2.1 Flow Networks

GFlowNets rely on the concept of flow networks. The flow network is represented as a directed acyclic graph  $G = (\mathcal{S}, \mathcal{A})$ , where  $\mathcal{S}$  represents the state space and  $\mathcal{A}$  represents the action space.

**Flow Network:** A directed acyclic graph with a single source node (initial state) and one or more sink nodes (terminal states), where flow is conserved at each intermediate node [6], [8].

*Example: In molecular design, states represent partial molecules and actions represent adding molecular fragments.*

#### 2.1.1 States and Trajectories

We distinguish several types of states:

- An initial state  $s_0 \in \mathcal{S}$  (the source);
- Terminal states  $x \in \mathcal{X} \subset \mathcal{S}$  (sinks);
- Intermediate states that form the pathways from source to sinks.

A trajectory  $\tau$  represents a complete path through the network, starting at  $s_0$  and ending at some terminal state  $x$ . Formally, we write a trajectory as an ordered sequence  $\tau = (s_0 \rightarrow s_1 \rightarrow \dots \rightarrow s_n = x)$ , where each transition  $(s_t \rightarrow s_{t+1})$  corresponds to an action in  $\mathcal{A}$ .

### 2.1.2 Flow Function and Conservation

The *trajectory flow function*  $F : \mathcal{T} \rightarrow \mathbb{R}_{\geq 0}$  assigns a non-negative value to each possible trajectory [8]. From this flow function, two important quantities are derived:

1. **State flow:** For any state  $s$ , its flow is the sum of flows through all trajectories passing through it:

$$F(s) = \sum_{\tau \in \mathcal{T}} F(\tau). \quad (1)$$

2. **Edge flow:** For any action (edge)  $s \rightarrow s'$ , its flow is the sum of flows through all trajectories using that edge:

$$F(s \rightarrow s') = \sum_{\tau = (\dots \rightarrow s \rightarrow s' \rightarrow \dots)} F(\tau). \quad (2)$$

These flows must satisfy a conservation principle known as the *flow matching constraint*:

**Flow Matching:** For any non-terminal state  $s$ , the total incoming flow must equal the total outgoing flow:

$$F(s) = \sum_{(s'' \rightarrow s) \in \mathcal{A}} F(s'' \rightarrow s) = \sum_{(s \rightarrow s') \in \mathcal{A}} F(s \rightarrow s'). \quad (3)$$

### 2.1.3 Markovian Flow

The flow function induces a probability distribution over trajectories. Given a flow function  $F$ , we define  $P(\tau) = \frac{1}{Z} F(\tau)$  [8], where  $Z = F(s_0) = \sum_{\tau \in \mathcal{T}} F(\tau)$  is the *partition function* – i.e., the total flow through the network.

**Markovian Flow:** A flow is *Markovian* when it can be factored into local decisions at each state. This occurs when the following criteria are met [8]:

1. Forward policies  $P_F(\cdot | s)$  over children of each non-terminal state s.t.

$$P(\tau = (s_0 \rightarrow \dots \rightarrow s_n)) = \prod_{t=1}^n P_F(s_t | s_{t-1}). \quad (4)$$

2. Backward policies  $P_B(\cdot | s)$  over parents of each non-initial state s.t.

$$P(\tau = (s_0 \rightarrow \dots \rightarrow s_n) | s_n = x) = \prod_{t=1}^n P_B(s_{t-1} | s_t). \quad (5)$$

The Markovian property allows us to decompose complex trajectory distributions into simple local decisions, making learning tractable while maintaining the global flow constraints.

## 2.2 GFlowNets

GFlowNets are an approach to learning policies that sample from desired probability distributions [6]. They frame the learning process as discovering a flow function that makes the probability of generating any particular object proportional to its reward.

Given a reward function  $R : \mathcal{X} \rightarrow \mathbb{R}_{\geq 0}$  defined over the set of terminal states  $\mathcal{X}$ , GFlowNets aim to approximate a Markovian flow  $F$  on the graph  $G$  s.t.  $F(x) = R(x)$  for all  $x \in \mathcal{X}$ . We will make use of the following definition of a GFlowNet.

**GFlowNet:** [8] defines a GFlowNet as any learning algorithm that discovers flow functions matching terminal state rewards, consisting of:

1. A model that outputs:
  - Initial state flow  $Z = F(s_0)$ ;
  - Forward action distributions  $P_F(\cdot|s)$  for non-terminal states.
2. An objective function that, when globally minimized, guarantees  $F(x) = R(x)$  for all terminal states.

*Example: In molecular design, this ensures that high-reward molecules are generated more frequently, while maintaining diversity through exploration of multiple pathways.*

The power of GFlowNets lies in their ability to handle situations where multiple action sequences can lead to the same terminal state — a common scenario in real-world applications like molecular design or image synthesis. Unlike traditional RL methods that focus on finding a single optimal path, GFlowNets learn a distribution over all possible paths directly proportional to their rewards.

### 2.2.1 Learning Process

The learning process of GFlowNets involves iteratively improving both flow estimates and the policies. The forward policy of a GFlowNet can sample trajectories from the learned Markovian flow  $F$  by sequentially selecting actions according to  $P_F(\cdot|s)$ . When the training converges to a global minimum of the objective function, this sampling process guarantees that  $P(x) \propto R(x)$ . That is, the probability of generating any terminal state  $x$  is proportional to its reward  $R(x)$ . This property makes GFlowNets particularly well-suited for:

1. **Diverse Candidate Generation:** Rather than converging to a single solution, GFlowNets maintain a distribution over solutions weighted by their rewards.
2. **Multi-Modal Exploration:** The flow-based approach naturally handles problems with multiple distinct solutions of similar quality.
3. **Compositional-Structure Learning:** By learning flows over sequences of actions, GFlowNets can capture and generalize compositional patterns in the solution space.

To achieve this, GFlowNets employ various training objectives, with *trajectory balance* [8] being one such particularly effective objective.

### 2.2.2 Trajectory Balance

Trajectory balance focuses on ensuring consistency across entire trajectories, instead of matching flows at every state (which can be computationally expensive).

**Trajectory Balance:** A principle that ensures the probability of generating a trajectory matches its reward by maintaining consistency between forward generation and backward reconstruction probabilities.

Consider a Markovian flow  $F$  that induces a distribution  $P$  over trajectories according to  $P(\tau) = \frac{1}{Z}F(\tau)$ . The forward policy  $P_F$  and backward policy  $P_B$  must satisfy the following *trajectory balance constraint* [8]

$$Z \prod_{t=1}^n P_F(s_t|s_{t-1}) = F(x) \prod_{t=1}^n P_B(s_{t-1}|s_t). \quad (6)$$

That is to say, the probability of constructing a trajectory forward should match the probability of reconstructing it backward, scaled by the appropriate rewards.

### 2.2.3 Trajectory Balance as an Objective

To convert the trajectory balance function into a training objective, we introduce a parametrized model with parameters  $\theta$  that outputs:

1. A forward policy  $P_F(\cdot|s; \theta)$ ;
2. A backward policy  $P_B(\cdot|s; \theta)$ ;
3. A scalar estimate  $Z_\theta$  of the partition function.

For any complete trajectory  $\tau = (s_0 \rightarrow \dots \rightarrow s_n = x)$ , we define the *trajectory balance loss* as

$$\mathcal{L}_{\text{TB}}(\tau) = \left( \log \frac{Z_\theta \prod_{t=1}^n P_F(s_t|s_{t-1}; \theta)}{R(x) \prod_{t=1}^n P_B(s_{t-1}|s_t; \theta)} \right)^2. \quad (7)$$

This loss captures how well our model satisfies the trajectory balance constraint. When the loss approaches zero, our model has learned to generate samples proportional to their rewards. In practice, we compute this loss in the log domain to avoid numerical stability, as suggested by [8]:

$$\mathcal{L}_{\text{TB}}(\tau) = \left( \log Z_\theta + \log \sum_{t=1}^n P_F(s_t|s_{t-1}; \theta) - \log R(x) - \log \sum_{t=1}^n P_B(s_{t-1}|s_t; \theta) \right)^2. \quad (8)$$

[8] also remarks that a simplification of Equation 7 occurs in tree-structured state spaces (when  $G$  is a directed tree), where each state has exactly one parent. In such cases, the backward policy becomes deterministic ( $P_B = 1$ ), reducing the loss function to

$$\mathcal{L}_{\text{TB}}(\tau) = \left( \log \frac{Z_\theta \prod_{t=1}^n P_F(s_t | s_{t-1}; \theta)}{R(x)} \right)^2, \quad (9)$$

which can be exploited for the n-chain environment.

The model is trained by sampling trajectories from a training policy  $\pi_\theta$  — typically a tempered version of  $P_F(\cdot | \cdot; \theta)$  to encourage exploration — and updating parameters using stochastic gradient descent:  $\theta \leftarrow \theta - \alpha \mathbb{E}_{\tau \sim \pi_\theta} \nabla_\theta \mathcal{L}_{\text{TB}}(\tau)$ .

## 2.3 Markov Decision Processes

The concept of the Markov Decision Process (MDP) [9] is fundamental in reinforcement learning and provides a model for sequential decision-making under uncertainty.

**Markov Decision Process [9]:** A tuple  $\mathcal{M} := \langle \mathcal{S}, \mathcal{A}, P_0, P_S, P_R, \gamma \rangle$  where:

- $\mathcal{S}$  is the set of states;
- $\mathcal{A}$  is the set of actions;
- $P_0 \in \mathcal{P}(\mathcal{S})$  is the initial state distribution;
- $P_S : \mathcal{S} \times \mathcal{A} \rightarrow \mathcal{P}(\mathcal{S})$  is the state transition distribution;
- $P_R : \mathcal{S} \times \mathcal{A} \rightarrow \mathcal{P}(\mathbb{R})$  is the reward distribution;
- $\gamma \in [0, 1]$  is the discount factor.

At each timestep  $t$ , an agent observes its current state  $s_t \in \mathcal{S}$  and selects an action  $a_t \in \mathcal{A}$  according to some policy  $\pi : \mathcal{S} \rightarrow \mathcal{P}(\mathcal{A})$ . The environment then transitions to a new state  $s_{t+1}$  according to the transition distribution  $P_S(s_t, a_t)$  and provides a reward  $r_t$  sampled from  $P_R(s_t, a_t)$ . The agent's objective is to find a policy  $\pi$  that maximizes the expected sum of discounted future rewards

$$J^\pi := \mathbb{E}_{\tau \sim P^\pi} \left[ \sum_{t=0}^{\infty} \gamma^t r_t \right], \quad (10)$$

where  $\tau = (s_0, a_0, r_0, s_1, \dots)$  represents a trajectory through the environment and  $P^\pi$  is the distribution over trajectories induced by following policy  $\pi$ . An optimal policy  $\pi^* \in \Pi^* := \arg \max_\pi J^\pi$  can be found through the optimal value function  $V^* : \mathcal{S} \rightarrow \mathbb{R}$  or the optimal action-value function  $Q^* : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$ , which satisfy the Bellman optimality equations [9], [10]

$$V^*(s) = \max_{a \in \mathcal{A}} Q^*(s, a), \quad (11)$$

$$Q^*(s, a) = \mathbb{E}_{r, s' \sim P_{R, S}(s, a)} \left[ r + \gamma \max_{a' \in \mathcal{A}} Q^*(s', a') \right]. \quad (12)$$

This framework serves as the building block for more sophisticated models like Contextual MDPs and Bayesian approaches to reinforcement learning, as described in the following sections.

## 2.4 Contextual Reinforcement Learning

In contextual RL, we use the concept of a Contextual MDP.

**Contextual MDP:** A Markov Decision Process augmented with a context variable that determines the specific dynamics of the environment [11]. This allows us to model uncertainty about the true environment through uncertainty about the context.

In a Contextual Markov Decision Process (CMDP), we work in an infinite-horizon, discounted setting where a context variable  $\varphi \in \Phi \subseteq \mathbb{R}^d$  indexes specific MDPs. Formally, we describe this as

$$\mathcal{M}(\varphi) := \langle \mathcal{S}, \mathcal{A}, P_0, P_S(s, a, \varphi), P_R(s, a, \varphi), \gamma \rangle. \quad (13)$$

where the context  $\varphi$  parametrizes both:

- A transition distribution  $P_S(s, a, \varphi)$  determining how states evolve;
- A reward distribution  $P_R(s, a, \varphi)$  determining the rewards received.

The agent has complete knowledge of the following aspects of the environment:

- The state space  $\mathcal{S} \subset \mathbb{R}^n$ ;
- The action space  $\mathcal{A}$ ;
- The initial state distribution  $P_0$ ;
- The discount factor  $\gamma$ .

However, the agent does not know the true context  $\varphi^*$  that determines the actual dynamics and rewards.

### 2.4.1 Policies and Histories

In contextual RL, an agent follows a *context-conditioned policy*  $\pi : \mathcal{S} \times \Phi \rightarrow \mathcal{P}(\mathcal{A})$ , selecting actions according to  $a_t \sim \pi(s_t, \varphi)$ . As the agent interacts with the environment, it accumulates a history of experiences  $h_t := \{s_0, a_0, r_0, s_1, a_1, r_1, \dots, a_{t-1}, r_{t-1}, s_t\}$ . This history belongs to a state-action-reward product space  $\mathcal{H}_t$  and follows a context-conditioned distribution  $P_t^\pi(\varphi)$  with density

$$p_t^\pi(h_t | \varphi) = p_0(s_0) \prod_{i=0}^t \pi(a_i | s_i, \varphi) p(r_i, s_{i+1} | s_i, a_i, \varphi). \quad (14)$$

### 2.4.2 Optimization Objective

The agent's goal in a CMDP is to find a policy that optimizes the expected discounted return

$$J^\pi(\varphi) = \mathbb{E}_{\tau_\infty \sim P_\infty^\pi(\varphi)} \left[ \sum_{t=0}^{\infty} \gamma^t r_t \right]. \quad (15)$$

An optimal policy  $\pi^*(\cdot, \varphi)$  belongs to the set  $\Pi_\Phi^*(\varphi) := \arg \max_{\pi \in \Pi_\Phi} J^\pi(\varphi)$ . With this, we define the optimal Q-function  $Q^*(h_t, a_t, \varphi)$ .

**Optimal Q-Function:** For an optimal policy  $\pi^*$ , the optimal *Q*-function  $Q^* : \mathcal{S} \times \mathcal{A} \times \Phi \rightarrow \mathbb{R}$  satisfies the Bellman equation

$$\mathcal{B}^*[Q^*](s_t, a_t, \varphi) = Q^*(s_t, a_t, \varphi), \quad (16)$$

where  $\mathcal{B}^*$  is the optimal Bellman operator defined as

$$\mathcal{B}^*[Q^*](s_t, a_t, \varphi) := \mathbb{E}_{r_t, s_{t+1} \sim P_{R,S}(s_t, a_t, \varphi)} \left[ r_t + \max_{a' \in \mathcal{A}} Q^*(s_{t+1}, a', \varphi) \right]. \quad (17)$$

### 2.4.3 The Learning Challenge

When an agent has access to the true MDP  $\mathcal{M}(\varphi^*)$ , finding an optimal policy becomes a *planning problem*. However, in real-world scenarios, agents typically lack access to the true transition dynamics and reward functions. This transforms the task into a *learning problem*, where the agent must balance:

1. *Exploration*: learning about the environment's dynamics through interaction;
2. *Exploitation*: using current knowledge to maximize rewards.

This tension – known as the exploration/exploitation dilemma – remains one of the core challenges in reinforcement learning. As we'll see in the next section, Bayesian approaches offer a principled framework for addressing this challenge.

## 2.5 Bayesian Reinforcement Learning

In the Bayesian approach to RL, rather than viewing uncertainty as a problem to be eliminated, it becomes an integral part of the decision-making process – something to be reasoned about systematically [12].

**Bayesian Epistemology:** A framework that characterizes uncertainty through probability distributions over possible worlds. In reinforcement learning, this means maintaining distributions over possible MDPs, updated as new evidence arrives [12].

### 2.5.1 From Prior to Posterior

The Bayesian learning process starts with a *prior distribution*  $P_\Phi$  representing our initial beliefs about the true context  $\varphi^*$  before any observations. As the agent interacts with the environment, it accumulates a history of experiences  $h_t$  and updates these beliefs through Bayesian inference, forming a *posterior distribution*  $P_\Phi(h_t)$ .

This history-dependent posterior in Bayesian RL differentiates it from traditional RL approaches.

**History-Conditioned Policies:** Unlike traditional RL policies that map states to actions, Bayesian policies operate on entire histories, defining a set of history-conditioned policies  $\Pi_{\mathcal{H}} := \{\pi : \mathcal{H} \rightarrow \mathcal{P}(\mathcal{A})\}$ , where  $\mathcal{H} := \{\mathcal{H}_t | t \geq 0\}$  denotes the set of all histories [12].

Where the prior  $P_\Phi$  represents our initial uncertainty (the special case where  $h_t = \emptyset$ ), the posterior  $P_\Phi(h_t)$  captures our refined beliefs after observing interactions with the environment. This allows us to reason about future outcomes by marginalizing across all possible MDPs according to our current uncertainty.

### 2.5.2 The Bayesian Perspective on Transitions

The power of the Bayesian approach stems from how it handles state transitions. Instead of committing to a single model of the environment, it maintains a distribution over possible transitions through the *Bayesian state-reward transition distribution*

$$P_{R,S}(h_t, a_t) := \mathbb{E}_{\varphi \sim P_\Phi(h_t)} [P_{R,S}(s_t, a_t, \varphi)]. \quad (18)$$

This distribution lets us reason about future trajectories using the *prior predictive distribution*  $P_t^\pi$  with density

$$p_t^\pi(h_t) = p_0(s_0) \prod_{i=0}^t \pi(a_i|h_i) p(r_i, s_{i+1}|h_i, a_i). \quad (19)$$

The belief transition distribution  $P_{\mathcal{H}}(h_t, a_t)$  captures how our beliefs evolve with new observations, with density

$$p_{\mathcal{H}}(h_{t+1}|h_t, a_t) = p(s_{t+1}, r_t|h_t, a_t). \quad (20)$$

This formulation leads to the definition of the Bayes-adaptive MDP (BAMDP) [13]

$$\mathcal{M}_{\text{BAMDP}} := \langle \mathcal{H}, \mathcal{A}, P_0, P_{\mathcal{H}}(h, a), \gamma \rangle. \quad (21)$$

### 2.5.3 Natural Resolution of the Exploration Dilemma

An interesting aspect of the Bayesian framework is how it naturally resolves the exploration-exploitation dilemma [12], [13]. Rather than treating exploration as a separate mechanism, it emerges naturally from the optimization of expected returns under uncertainty

$$J_{\text{Bayes}}^\pi := \mathbb{E}_{h_\infty \sim P_\infty^\pi} \left[ \sum_{i=0}^{\infty} \gamma^i r_i \right]. \quad (22)$$

A Bayes-optimal policy achieves perfect balance between exploration and exploitation because:

1. It accounts for uncertainty through the posterior at each timestep;
2. It considers how this uncertainty will evolve in the future;
3. It weights future information gain by the discount factor  $\gamma$ .

### 2.5.4 The Optimal Bayesian Q-Function

For a Bayes-optimal policy  $\pi^*$ , we can define the optimal Bayesian Q-function as  $Q^*(h_t, a_t) := Q^{\pi_{\text{Bayes}}^*}(h_t, a_t)$ . This Q-function satisfies the optimal Bayesian Bellman equation

$$Q^*(h_t, a_t) = \mathcal{B}^*[Q^*](h_t, a_t), \quad (23)$$

where  $\mathcal{B}^*[Q^*]$  is the optimal Bayesian Bellman operator

$$\mathcal{B}^*[Q^*](h_t, a_t) := \mathbb{E}_{h_{t+1} \sim P_{\mathcal{H}}(h_t, a_t)} \left[ r_t + \gamma \max_{a'} Q^*(h_{t+1}, a') \right]. \quad (24)$$

## 2.6 Bayesian Exploration Networks

Model-free reinforcement learning takes a different approach to learning optimal behaviors compared to model-based methods. Rather than explicitly modeling the environment's dynamics, model-free approaches attempt to learn optimal policies from experience. Bayesian Exploration Networks (BENs) extend this idea into the Bayesian realm by characterizing uncertainty in the Bellman operator itself, instead of in the environment's transition dynamics [7].

**Model-Free vs Model-Based:** While model-based approaches maintain explicit probabilistic models of the environment's dynamics, model-free methods like BEN directly learn mappings from states to values or actions [14]. This can be more computationally efficient but requires careful handling of uncertainty.

### 2.6.1 The Bootstrapping Perspective

Instead of modeling the full complexity of state transitions, we can use bootstrapping to estimate the optimal Bayesian Bellman operator directly. Given samples from the true reward-state distribution  $r_t, s_{t+1} \sim P_{R,S}^*(s_t, a_t)$ , we estimate  $b_t = \beta_\omega(h_{t+1}) := r_t + \gamma \max_{a'} Q_\omega(h_{t+1}, a')$ .

This bootstrapping process can be viewed as a transformation of variables — mapping from the space of rewards and next states to a single scalar value. This significantly reduces the dimensionality of the problem while preserving the essential information needed for learning optimal policies [7].

**Bootstrapped Distribution:** The samples  $b_t$  follow what we call the Bellman distribution  $P_B^*(h_t, a_t; \omega)$ , which captures the distribution of possible Q-value updates [7]. This distribution encapsulates both the environment's inherent randomness and our uncertainty about its true nature.

### 2.6.2 Sources of Uncertainty

When predicting future Q-values, BEN distinguishes between two types of uncertainty.

1. **Aleatoric Uncertainty:** The inherent randomness in the environment's dynamics that persists even with perfect knowledge.

*Example: Rolling a fair die — this uncertainty cannot be reduced with more data.*

2. **Epistemic Uncertainty:** Our uncertainty about the true Bellman distribution itself. This represents our lack of knowledge about the environment and can be reduced through exploration and learning.

*Example: Determining whether a die is fair – this uncertainty is can be reduced with more data.*

This separation of uncertainties allows BEN to distinguish between what is fundamentally unpredictable (aleatoric) and what can be learned through exploration (epistemic), leading to more efficient learning strategies [7].

### 2.6.3 Network Architecture

BEN implements this uncertainty handling through three neural networks [7]:

#### 1. Recurrent Q-Network:

At its core, BEN uses a recurrent neural network (RNN) to approximate the optimal Bayesian Q-function. The Q-network processes the entire history of interactions. We denote the output at timestep  $t$  as  $q_t = Q_\omega(h_t, a_t) = Q_\omega(\hat{h}_{t-1}, o_t)$ , where  $h_t$  represents the history up to time  $t$ ,  $a_t$  is the action,  $\hat{h}_{t-1}$  is the recurrent encoding of previous history, and  $o_t$  contains the current observation tuple  $\{r_{t-1}, s_t, a_t\}$ . By conditioning on history rather than just current state, BENs can capture how uncertainty evolves over time, making it capable of learning Bayes-optimal policies [7].

#### 2. Aleatoric Network:

The aleatoric network models the inherent randomness in the environment. It uses normalizing flows to transform a simple base distribution (such as a standard Gaussian) into a more complex distribution  $P_B(h_t, a_t, \varphi; \omega)$  over possible next-state Q-values, representing the aleatoric uncertainty in the Bellman operator, by applying the transformation  $b_t = B(z_{\text{al}}, q_t, \varphi)$  [7], where

- $z_{\text{al}} \in \mathbb{R} \sim P_{\text{al}}$  is a base variable with a zero-mean, unit variance Gaussian  $P_{\text{al}}$ ;
- $q_t$  is the Q-value from the recurrent network;
- and  $\varphi$  and  $\omega$  represent the network parameters.

We optimize the parameters  $\omega$  of the recurrent Q-network and the aleatoric network using the Mean Squared Bayesian Bellman Error (MSBBE), which satisfies the optimal Bayesian Bellman equation for our Q-function approximator.

#### 3. Epistemic Network:

The epistemic network captures our uncertainty about the environment itself. The network maintains a dataset of bootstrapped samples  $\mathcal{D}_\omega(h_t) := \{(b_i, h_i, a_i)\}_{i=0}^{t-1}$  collected from interactions with the environment. Each tuple in this dataset consists of

- a bootstrapped value estimate  $b_i$ ;
- the history at that timestep  $h_i$ ;
- the action taken  $a_i$ .

Given this dataset, we would ideally compute the posterior distribution  $P_\Phi(\mathcal{D}_\omega(h_t))$  representing our refined beliefs about the environment after observing these samples. However, computing this posterior directly is typically intractable for complex environments [7]. Instead, BEN employs normalizing flows for variational inference.

The epistemic network learns a tractable approximation  $P_\psi$  parametrized by  $\psi \in \Psi$  that aims to capture the essential characteristics of the true posterior. We optimize this approximation by minimizing the KL-divergence between our approximation and the true posterior:

$$\text{KL}(P_\psi \| P_\Phi(\mathcal{D}_\omega(h_t))). \quad (25)$$

This optimization is performed indirectly by maximizing the Evidence Lower Bound (ELBO)  $\text{ELBO}(\psi; h, \omega)$ , which is equivalent as proved by [7].

#### 2.6.4 Training Process

The network is trained through a dual optimization process:

1. **MSBBE Optimization:** The Mean Squared Bayesian Bellman Error (MSBBE) is computed as the difference between the predictive optimal Bellman operator  $B^+[Q_\omega]$  and  $Q_\omega$  [7]:

$$\text{MSBBE}(\omega; h_t, \psi) := \|B^+[Q_\omega](h_t, a_t) - Q_\omega(h_t, a_t)\|_\rho^2, \quad (26)$$

which is minimized to learn the parametrisation  $\omega^*$ , satisfying the optimal Bayesian Bellman equation for our  $Q$ -function approximator, with  $\rho$  being an arbitrary sampling distribution with support over  $\mathcal{A}$ .

The predictive optimal Bellman operator can be obtained by taking expectations over variable  $b_t$  using the predictive optimal Bellman distribution  $P_B(h_t, a_t; \omega)$ :

$$B^+[Q_\omega](h_t, a_t) := \mathbb{E}_{b_t \sim P_B(h_t, a_t; \omega)}[b_t], \quad (27)$$

where  $P_B(h_t, a_t; \omega) = \mathbb{E}_{\varphi \sim P_\Phi(\mathcal{D}_\omega(h_t))}[P_B(h_t, a_t, \varphi; \omega)]$ .

This gives rise to a nested optimisation problem, as is common in model-free RL [7], which can be solved using two-timescale stochastic approximation [15]. In the case of BEN, we update the epistemic network parameters  $\psi$  using gradient descent on an asymptotically faster timescale than the function approximator parameters  $\omega$  to ensure convergence to a fixed point, as proposed by [7].

2. **ELBO Optimization:** The Evidence Lower BOund (ELBO) serves as the optimization objective for training BEN's epistemic network. While minimizing the KL-divergence  $\text{KL}(P_\psi \| P_\Phi(\mathcal{D}_\omega(h_t)))$  directly would give us the most accurate approximation of the true posterior, computing this divergence is typically intractable. Instead, we can derive and optimize the ELBO, which provides a tractable lower bound on the model evidence [7].

By applying Baye's rule on this KL-divergence, [7] derives

$$\begin{aligned} \text{ELBO}(\psi; h_t, \omega) \\ := \mathbb{E}_{z_{\text{ep}} \sim P_{\text{ep}}} \left[ \sum_{i=0}^{t-1} \left( B^{-1}(b_i, q_i, \varphi)^2 - \log |\partial_b B^{-1}(b_i, q_i, \varphi)| \right) - \log p_\Phi(\varphi) \right], \end{aligned} \quad (28)$$

where  $\varphi = t_\psi(z_{\text{ep}})$  and:

- $z_{\text{ep}}$  is drawn from the base distribution  $P_{\text{ep}}$  (a standard Gaussian  $\mathcal{N}(0, I^d)$ );
- $B^{-1}$  is the inverse of the aleatoric network's transformation;
- $\partial_b B^{-1}$  is the Jacobian of this inverse transformation;
- $t_\psi$  represents the epistemic network's transformation.

**Jacobian Term:** The term  $\partial_b B^{-1}$  accounts for how the epistemic network's transformation changes the volume of probability space. This is important for maintaining proper probability distributions when using normalizing flows [16].

The ELBO objective breaks down into three key components:

1. A reconstruction term  $B^{-1}(b_i, q_i, \varphi)^2$  that measures how well our model can explain the observed Q-values;
2. A volume correction term  $\log|\partial_b B^{-1}(b_i, q_i, \varphi)|$  that accounts for the change in probability space;
3. A prior regularization term  $\log p_\Phi(\varphi)$  that encourages the approximated posterior to stay close to our prior beliefs.

By minimizing the ELBO, we obtain an approximate posterior that balances accuracy with computational tractability, allowing BEN to maintain and update its uncertainty estimates efficiently during learning [7].

**Training Dynamics:** The two optimization processes occur at different timescales, with epistemic updates happening more frequently than the Q-network updates. This separation ensures stable convergence while maintaining the ability to adapt to new information [15].

With this architecture, BEN can learn truly Bayes-optimal policies while maintaining the computational efficiency of model-free methods [7]. This makes it particularly well-suited for environments with sparse, delayed rewards where efficient exploration is important.

### 3 Theoretical Framework

In this section, we develop a theoretical framework for comparing GFlowNets and Bayesian Exploration Networks (BENs) in environments with delayed and sparse rewards. Our goal is to establish precise criteria for evaluating these different approaches to exploration and uncertainty handling.

#### 3.1 Problem Formulation

Consider an environment with delayed rewards characterized by

- **Reward Delay:** The temporal gap  $T_{\text{reward}}$  between an action and its corresponding reward signal . We formally define this as

$$T_{\text{reward}} := \min\{t \mid s_t \in \mathcal{X}, r_t \neq 0\}. \quad (29)$$

In our n-chain environment,  $T_{\text{reward}}$  corresponds to the chain length.

- **Reward Sparsity:** The proportion  $\rho$  of state-action pairs that yield non-zero rewards:

$$\rho := \frac{|\{(s, a) \in \mathcal{S} \times \mathcal{A} : \mathbb{E}[R(s, a)] \neq 0\}|}{|\mathcal{S} \times \mathcal{A}|}, \quad (30)$$

where  $R(\cdot)$  is some reward distribution.

These characteristics create distinct challenges, as discussed, for reinforcement learning algorithms.

1. The *temporal credit assignment problem* becomes more severe with increasing  $T_{\text{reward}}$ .
2. The *exploration efficiency* becomes critical as  $\rho$  decreases.
3. The *signal-to-noise ratio* in value estimation deteriorates with both  $T_{\text{reward}}$  and  $\rho$ .

### 3.1.1 Value Propagation Mechanisms

The algorithms differ in how they handle value propagation. GFlowNet value propagation maintains consistency between forward and backward flows through the trajectory balance constraint  $Z \prod_{t=1}^n P_F(s_t|s_{t-1}) = F(x) \prod_{t=1}^n P_B(s_{t-1}|s_t)$ .

BEN value propagation directly models the distribution of bootstrapped values through the estimated Bellman operator  $b_t = r_t + \gamma \max_{a'} Q_\omega(h_{t+1}, a')$ .

### 3.1.2 Uncertainty Representation

Both approaches maintain uncertainty estimates but through different mechanisms:

- GFlowNets implicitly capture uncertainty through the learned flow distribution;
- BENs explicitly separate aleatoric and epistemic uncertainty.

This leads to our central hypothesis.

**Hypothesis:** In environments with highly delayed rewards (large  $T_{\text{reward}}$ ), BEN's explicit uncertainty decomposition leads to more efficient learning compared to GFlowNets, particularly in early training stages.

However, this advantage diminishes as  $T_{\text{reward}}$  decreases. This hypothesis is supported by the following three observations.

1. BEN's direct modeling of the Bellman operator allows for faster value propagation.
2. The explicit separation of uncertainty types enables more targeted exploration.
3. GFlowNets must learn complete trajectories before gaining signal about reward structure.

### 3.1.3 Analytical Framework

To evaluate our hypothesis about the relative performance of GFlowNets and BENs in delayed reward environments, we establish three metrics that capture different aspects of learning and exploration efficiency.

1. **Sample Efficiency:** Measures how quickly each algorithm converges to optimal behavior through their respective loss functions.

For GFlowNets, we track the trajectory balance loss  $\mathcal{L}_{\text{TB}}(\tau) = (\log Z_\theta + \log \sum_{t=1}^n P_F(s_t|s_{t-1}; \theta) - \log R(x) - \log \sum_{t=1}^n P_B(s_{t-1}|s_t; \theta))^2$ .

While for BEN, we monitor the Mean Squared Bayesian Bellman Error MSBBE( $\omega; h_t, \psi$ ) =  $\|B^+[Q_\omega](h_t, a_t) - Q_\omega(h_t, a_t)\|_\rho^2$ .

These metrics allow us to quantify learning progress and compare convergence rates between algorithms as a function of reward delay  $T_{\text{reward}}$ .

2. **Distribution Matching:** Evaluates how well the learned policy matches the true underlying reward structure.

In our n-chain environment, where terminal states are guaranteed to be reached, we measure the KL-divergence between the true terminal state distribution  $P$  (determined by rewards) and the empirical distribution  $Q$  generated by each algorithm  $\text{KL}(P \parallel Q)$ . This metric is particularly relevant for GFlowNets, as they explicitly aim to learn a sampling distribution proportional to the reward function.

3. **Exploration Efficiency:** Captures how effectively each algorithm explores the state space before converging to optimal behavior.

We introduce two complementary metrics.

- **State Coverage Ratio:** Measures the proportion of the state space explored over time as

$$E(t) := \frac{|S_{\text{visited}}(t)|}{|S|}, \quad (31)$$

where  $S_{\text{visited}}(t)$  represents the set of unique states visited up to time  $t$ .

- **Time-to-First-Success:** Quantifies initial exploration effectiveness as

$$T_{\text{success}} := \min\{t \mid s_t \in \mathcal{X}, r_t > 0\}. \quad (32)$$

This metric becomes increasingly important as reward delay  $T_{\text{reward}}$  grows, as it indicates how quickly each algorithm can discover successful trajectories in sparse reward settings.

Combining these metrics, we construct a evaluation framework that addresses three important aspects of performance:

1. Learning efficiency through loss convergence analysis;
2. Policy quality through distribution matching;
3. Exploration effectiveness through coverage and discovery time.

This framework allows us to investigate how the advantage of BEN's explicit uncertainty decomposition versus GFlowNet's flow-based approach vary with reward delay  $T_{\text{reward}}$  and sparsity  $\rho$ . In particular, we can test our hypothesis that BEN's advantages become more pronounced as  $T_{\text{reward}}$  increases by examining the correlation between reward delay and relative performance across the mentioned metrics.

## 4 Experimental Design

We implement a modified n-chain environment that serves as a testbed for studying delayed rewards. This environment presents properties that make it particularly suitable for our analysis.

**N-Chain Environment:** A sequential decision-making environment with a branching structure, where rewards are only received at terminal states.

Parameters of the n-chain environment include a chain length  $n$ , controlling reward delay  $T_{\text{reward}}$ , a branching factor  $b$ , affecting exploration complexity, and terminal state rewards, determining optimal distributions. Adjusting the chain length  $n$  and branching factor  $b$  also allow us to control the reward sparsity  $\rho$  by proxy, as a longer chain involves more states, increasing sparsity. Similarly, increasing the branching factor  $b$  introduces more branches, again increasing the number of states and, thus, the sparsity  $\rho$  as well.

The environment consists of three main components:

1. **State Space:** A chain of length  $n$  with a branching point at the middle ( $\lfloor \frac{n}{2} \rfloor$ ), creating multiple possible trajectories. This results in a total of  $\lfloor \frac{n}{2} \rfloor + b(n - \lfloor \frac{n}{2} \rfloor)$  possible states, and exactly  $b$  terminal states.
2. **Action Space:** At each state, an agent can move forward with the FORWARD action, or stay in terminal states with the TERMINAL\_STAY action. At the split point, the agent must choose a branch using the BRANCH $_i$  action, where  $i \in \{1, \dots, b\}$ . This results in a total of  $2 + b$  actions.
3. **Reward Structure:** Generally, a reward function  $R : \mathcal{X} \rightarrow \mathbb{R}$  is defined over terminal states  $x \in \mathcal{X}$ , creating a natural target distribution for sampling and clear optimal policies. For GFlowNets, the reward function is further constrained to the domain  $\mathbb{R}_{>0}$ , yielding a reward function  $R : \mathcal{X} \rightarrow \mathbb{R}_{>0}$ .

This design creates a sparse reward landscape – agents must execute sequences of  $\lfloor \frac{n}{2} \rfloor - 1$  actions before reaching the branch point, where the chosen branch determines the final reward, followed by another  $\lfloor \frac{n}{2} \rfloor$  actions to reach any terminal state. This structure allows us to precisely control both reward delay  $T_{\text{reward}}$  and sparsity  $\rho$ .

### 4.1 Evaluation Protocol

We evaluate each algorithm through the following experiment.

- **Base Configuration:**
  - Three terminal states with fixed rewards;
  - GFlowNet:
    - Rewards:  $\{10, 20, 70\}$ ;
    - Exploration factor  $\varepsilon = 0.1$ ;
  - BEN:
    - Rewards:  $\{-500, 10, 200\}$ ;
    - Discount factor  $\gamma = 0.9$ .

- **Delay Variation Studies:**

- Chain lengths  $n \in \{3, 5, 7, 9, 11\}$ ;
- Keeping terminal rewards fixed;
- Measuring performance vs. delay  $T_{\text{reward}}$ .

For each configuration, we conduct 10 independent trials with different random seeds to minimize the impact of statistical variance. We then apply the framework discussed in Section 3.1.3 on the results of these three configurations for analysis.

## 4.2 Implementation Details

### 4.2.1 Environment Setup

Our implementation of the n-chain environment creates a decision space that enables precise control over reward delay and sparsity. The environment is implemented as a deterministic MDP, where each state is encoded as a composite tensor of shape  $[n*3 + 4]$ , consisting of a one-hot position encoding of length  $3n$  to account for all three branches, as well as a one-hot branch encoding of length 4 (pre-split + 3 possible branches).

The state space is managed through a `NChainState` class that tracks three attributes:

1. *Position*: An integer in  $[0, n-1]$  indicating location in the chain;
2. *Branch*: An integer flag (-1 for pre-split,  $\{0,1,2\}$  for branch selection);
3. *Chain Length*: The parameter  $n$  that determines the delay between actions and rewards.

The action space is managed through a `NChainAction` enum and consists of the following five distinct actions:

- `TERMINAL_STAY`: Available only in terminal states;
- `FORWARD`: For progression along the chosen path;
- `BRANCH_0`, `BRANCH_1`, `BRANCH_2`: Available only at the split point.

The environment enforces strict action masking through a `get_valid_actions` method that returns only legitimate actions for each state. This creates three distinct decision phases:

1. Pre-split: Only `FORWARD` actions are valid;
2. Split-point: Only `BRANCH_i` actions are valid, for  $i \in \{0, 1, 2\}$ ;
3. Post-split: `FORWARD` until terminal, then `TERMINAL_STAY`.

For interaction with the environment, the implementation provides methods like `step`, `reset`, as well as utility methods like state-to-tensor conversions. This approach allows for systematic variation of both reward delay through the chain length  $n$ , and reward sparsity through the ratio of rewarding states to total states.

### 4.2.2 Network Architectures

The GFlowNet implementation consists of three primary components working in concert to learn flow-matching policies:

1. *State Encoder*: A multi-layer perceptron that processes state tensors of shape [batch\_size, state\_dim] into a learned encoding of shape [batch\_size, hidden\_dim]. This encoding captures the essential features of each state necessary for policy decisions.
2. *Forward Policy Network*: A single dense layer that transforms the state encoding into a forward policy distribution over actions, outputting tensors of shape [batch\_size, num\_actions]. This network determines the probabilities of taking each possible action from the current state.
3. *Backward Policy Network*: For the n-chain environment, this component is simplified due to the tree structure of the state space. Since each non-initial state has exactly one parent, the backward policy becomes deterministic, requiring only a lightweight network layer to maintain architectural symmetry.

Additionally, we maintain a scalar parameter representing  $\log Z$  (the partition function), which is important for our flow matching approach and is learned alongside the network parameters.

The BEN implementation is heavily based on the implementation provided by [7], but is adapted for the n-chain environment. It comprises three interacting networks:

1. *Q-Bayes Network*: A recurrent neural network that processes observation tuples (state, action, reward) to generate Q-values and maintain a history encoding. The network accepts inputs of shape [batch\_size, state\_dim + action\_dim + reward\_dim] and outputs both Q-values [batch\_size, num\_actions] and a RNN hidden state [batch\_size, rnn\_hidden\_dim] for further processing.
2. *Aleatoric Network*: Implements a normalizing flow to model the inherent randomness in Bellman updates through:
  - A conditioning network (ConditionerMLP) [7] that generates parameters for the flow based on Q-values and RNN state;
  - An inverse autoregressive flow that transforms a base distribution into the desired Bellman distribution.
3. *Epistemic Network*: Another normalizing flow that captures uncertainty about the environment itself, transforming a base variable  $z_{ep} \in \mathbb{R}^d$  into the parameter space that defines our beliefs about the environment.

#### 4.2.3 Training Procedures

Training of the GFlowNet follows a tempered exploration strategy where:

1. The forward policy is “softened” during training using an  $\varepsilon$ -greedy approach with  $\varepsilon = 0.1$ , allowing for off-policy exploration while maintaining flow-matching properties:

```
(1 - self.epsilon) * policy + self.epsilon * random_policy.
```

2. The trajectory balance loss is minimized using stochastic gradient descent with the Adam optimizer [17]:

```
L_TB(tau) = (log_Z + sum_log_pf - log_R - sum_log_pb).pow(2),
```

where  $\tau$  represents a trajectory,  $\text{sum\_log\_pf}$  represents the sum of log forward probabilities over  $\tau$ , and  $\text{sum\_log\_pb}$  similarly represents the sum of log backward probabilities over  $\tau$ .

BEN employs a two-timescale optimization process:

1. *Fast Timescale*: Updates to the epistemic network parameters  $\psi$  through ELBO minimization:

```
ELBO(psi; h, omega) = -log_p - torch.mean(log_q) - 1 / (time_period + 1) * prior,
```

where  $\log_p$  represents the base variable  $z_{\text{al}}$  obtained from  $B^{-1}(b_i, q_i, \varphi)^2$ ,  $\text{torch.mean}(\log_q)$  represents the log Jacobian of this base variable  $\log|\partial_b B^{-1}(b_i, q_i, \varphi)|$ , and  $1 / (\text{time\_period} + 1) * \text{prior}$  represents the log prior  $\log p_\Phi(\varphi)$ .

2. *Slow Timescale*: Updates to the Q-network parameters  $\omega$  through MSBSE minimization:

```
MSBSE(omega; h_t, psi) = torch.abs((b1 - q) * (b2 - q)),
```

where  $b_1$  and  $b_2$  represent two samples from the predictive Bellman operator  $B^+[Q_\omega](h_t, a_t)$ , and  $q$  represents the Q-value obtained from  $Q_\omega(h_t, a_t)$ . This operation is similar to a simple squared error, with the only difference being the use of two different samples, minimizing statistical variance.

This separation of timescales ensures stable convergence while maintaining the ability to adapt to new information, controlled by the discount factor  $\gamma$ . For details about hyperparameter selection, we refer to Appendix A.

## 5 Results and Analysis

### 5.1 GFlowNet

TODO

FACT CHECK!

- Run the statistical significance tests and calculate difference in  $\mu$ 's of terminal rewards
- Find out what Cohen's d is (effect sizes)

#### 5.1.1 Training Stability and Loss Dynamics

The trajectory balance loss follows a consistent pattern of reduction across all chain lengths, with three distinct phases:

- *Early Stage*: High loss values ( $\mu \approx 6.8\text{-}7.4$ ) with substantial variance;
- *Mid Stage*: Significant reduction ( $\mu \approx 1.2\text{-}1.7$ ) with moderate variance;
- *Late Stage*: Near-zero loss ( $\mu < 0.003$ ) with minimal variance.

This progression is statistically significant across all transitions ( $p < 0.001$ ), with particularly large effect sizes (Cohen's  $d > 2.0$ ) between early and late stages, indicating robust convergence regardless of chain length, as seen in Figure 1.

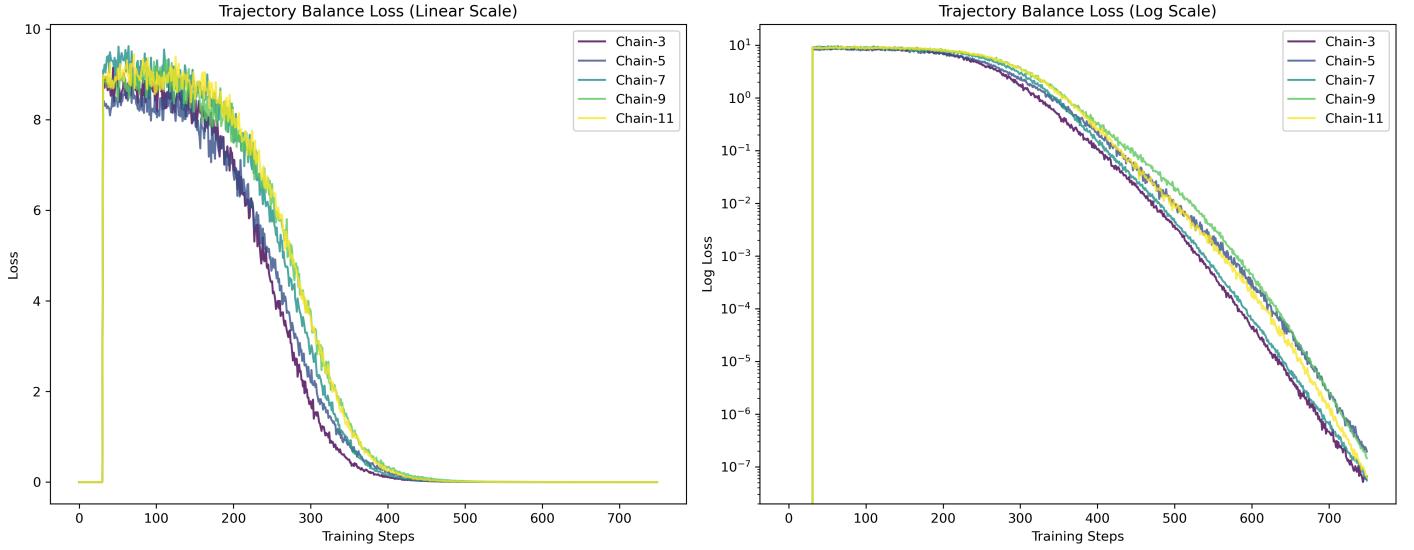


Figure 1: Mean GFlowNet trajectory balance loss across chain lengths.

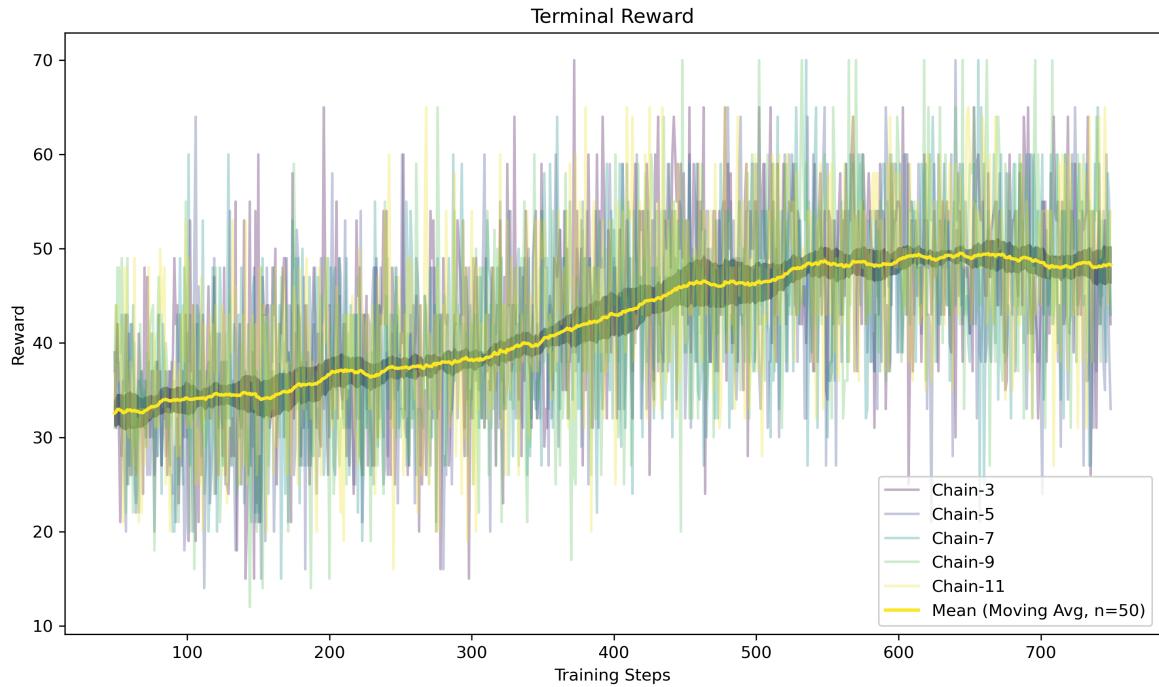


Figure 2: Mean GFlowNet terminal rewards across chain lengths with a moving average (window size: 50).

### 5.1.2 Solution Quality Evolution

Terminal rewards show a monotonic improvement pattern, as seen in Figure 2. The improvement in terminal rewards shows a consistent “two-step” enhancement, with moderate-to-large effect sizes (0.75-1.0) between consecutive stages and large effect sizes (1.4-1.9) between early and late stages.

Notably, longer chains ( $n \geq 9$ ) demonstrate larger improvements in terminal rewards, with  $n = 9$  showing the most substantial gain ( $\Delta\mu \approx 16$  between early and late stages). This suggests that the algorithm becomes especially effective at optimizing longer sequences as training progresses.

The time-to-first-success is trivial for the n-chain environment: since the agent must always move forward, it is simply the chain length  $n$ .

### ***Policy Quality Assessment***

As GFlowNets aim to learn policies proportional to their reward distributions, we use the KL-divergence between the true reward distribution  $R_i$  and the learned policy  $P_i$  to assess the quality of the learned policy for  $i \in \{3, 5, 7, 9, 11\}$  corresponding to the different chain lengths. The KL-divergence measurements look as follows:

- *Chain length 3:*  $\text{KL}(P_3 | R_3) = 0.00401$ ;
- *Chain length 5:*  $\text{KL}(P_5 | R_5) = 0.02062$ ;
- *Chain length 7:*  $\text{KL}(P_7 | R_7) = 0.01696$ ;
- *Chain length 9:*  $\text{KL}(P_9 | R_9) = 0.00385$ ;
- *Chain length 11:*  $\text{KL}(P_{11} | R_{11}) = 0.00701$ ;
- *Mean chain length:*  $\overline{\text{KL}(P | R)} = 0.01049$ .

Looking at these measurements, the relationship between chain length and distributional accuracy does not seem follow a simple monotonic pattern. We conjecture that this is a consequence of the small sample size of 10 training runs per chain length, and as such, the KL values should converge given enough runs.

Looking at the average KL-divergence across all chain lengths, we conclude that the learned policy is very close to the true reward distribution.

#### **5.1.3 Exploration-Exploitation Balance**

The state coverage ratio exhibits rapid convergence to optimal exploration (1.0) by mid-stage of only 15 iterations, as seen in Figure 3, as well as:

- Statistically significant transition ( $p < 0.005$ ) from early to mid stage;
- Perfect maintenance of exploration in late stage ( $\sigma = 0$ ).

This indicates that GFlowNet quickly learns to fully explore the solution space and maintains this behavior throughout training. This also suggests that the state space is too small to pose a serious challenge for the model, which could be accommodated by increasing the number of critical decision points (by increasing the number branches in the environment).

#### **5.1.4 Information Theoretic Measures**

Both forward and backward entropy demonstrate reduction across training, as seen in Figure 4.

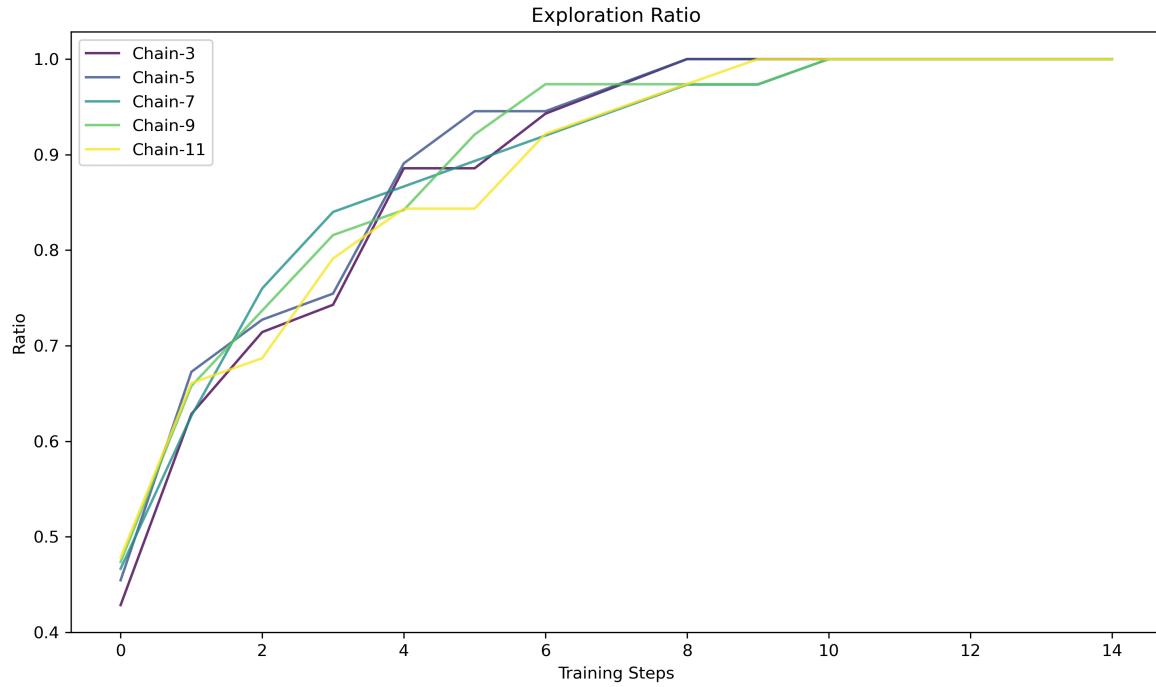


Figure 3: Mean GFlowNet forward and backward entropy across chain lengths.

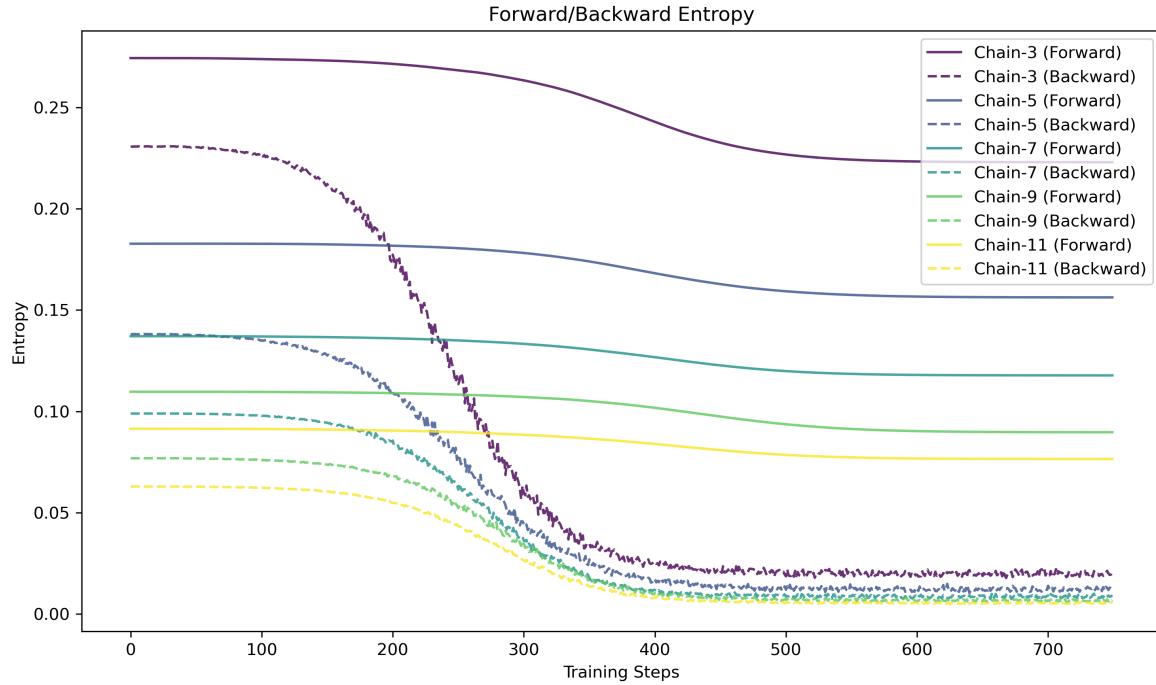


Figure 4: Mean GFlowNet forward and backward entropy across chain lengths.

- *Forward Entropy*: Shows consistent, statistically significant decreases ( $p < 10^{-82}$ ) across all stages, with effect sizes growing with chain length;

- *Backward Entropy*: Exhibits the most dramatic reductions among all metrics, with effect sizes ranging from 8.5 to 16.3 between early and late stages.

The relative magnitude of entropy reduction remains notably consistent across chain lengths, suggesting a scale-invariant learning process.

### 5.1.5 Chain Length Sensitivity

The analysis reveals some chain length-dependent effects:

- Longer chains ( $n \geq 9$ ) show higher terminal rewards in late stages;
- Convergence stability (measured by loss variance) remains consistent across chain lengths;
- Information theoretic measures scale proportionally with chain length while maintaining similar convergence patterns.

This suggests that the algorithm's learning dynamics remain robust across different problem scales.

In short, the statistical analysis reveals structured convergence patterns that combine rapid initial improvement with stable late-stage optimization. The consistent statistical significance ( $p < 0.001$ ) across multiple metrics and stages suggests that GFlowNet's learning process is both reliable and scalable across different chain lengths.

## 5.2 BEN

### 5.2.1 Training Stability and Loss Dynamics

- **Q-Learning Loss**: The Q-Learning loss demonstrates a consistent and statistically significant reduction across all chain lengths, as seen in Figure 5, with three notable characteristics.
  - *Early Stage Volatility*: High variance in early training ( $\sigma$  ranging from 610 to 2948);
  - *Mid Stage Stabilization*: Sharp reduction in both mean and variance;
  - *Late Stage Refinement*: Convergence to stable, low values.

Particularly noteworthy is the scale-dependent convergence rate — longer chains ( $n \geq 7$ ) show more gradual convergence, while shorter chains achieve stability more quickly.

The magnitude of improvement (effect size) between early and late stages increases with chain length, suggesting that longer chains require more substantial transformations in the learning process.

- **Epistemic Loss**: The epistemic uncertainty shows a more complex pattern than the Q-learning loss, as seen in Figure 6.
  - For  $n = 3$ : Monotonic decrease (-2257.74 mean difference,  $p < 0.001$ );
  - For  $n = 5$ : Sharp initial drop followed by gradual decline;
  - For  $n \in \{7, 9, 11\}$ : Non-monotonic behavior with occasional increases.

This suggests that uncertainty management becomes more challenging with longer chains, possibly due to the expanded state space.

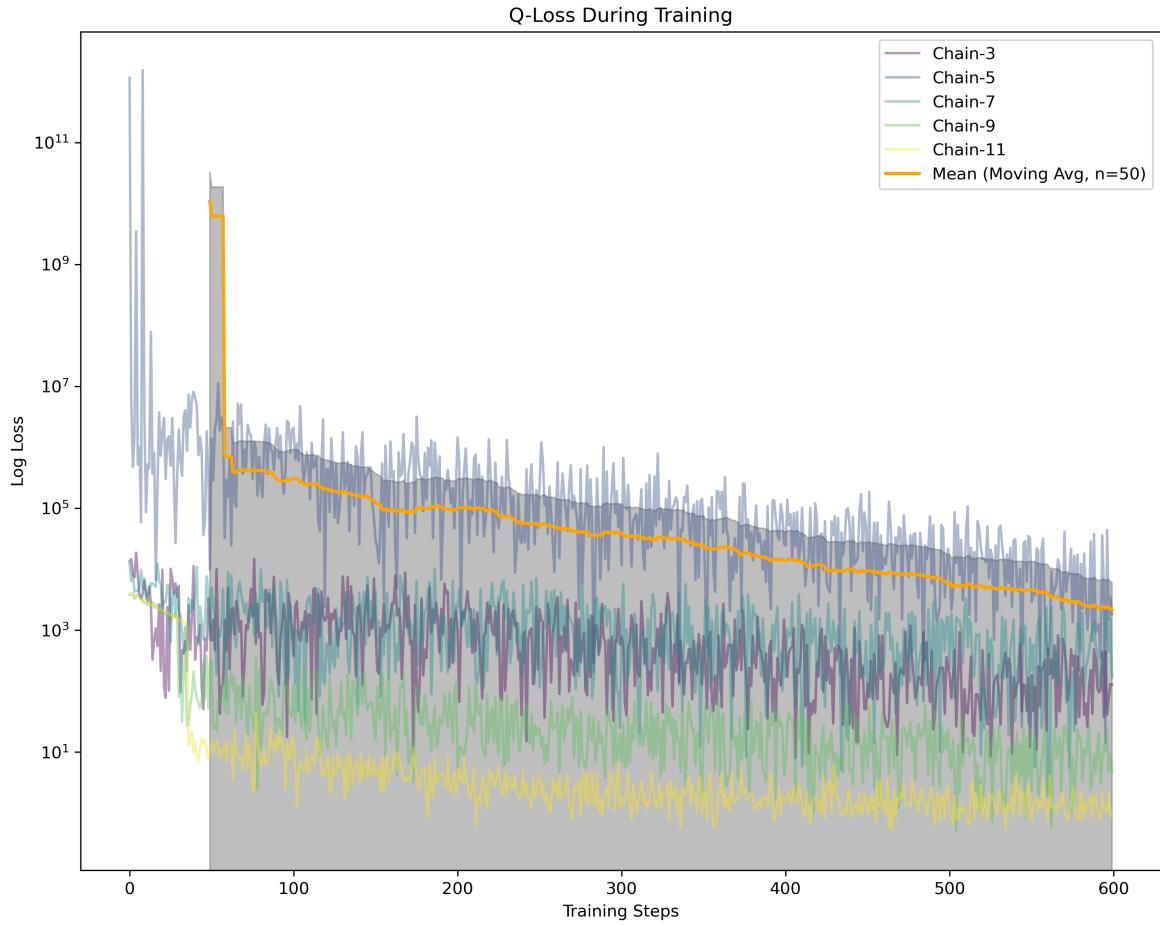


Figure 5: Mean BEN Q-learning (MSBBE) loss across chain lengths.

### 5.2.2 Reward Dynamics

The reward patterns exhibit rather unpromising behavior as seen in Figure 7. The statistical tests yield the following results:

- *Short Chains* ( $n \in \{3, 5\}$ ): No statistically significant changes between stages;
- *Medium Chains* ( $n \in \{7, 9\}$ ): Temporary dip in mid-stage performance;
- *Long Chains* ( $n = 11$ ): Significant improvement in late stage ( $p < 0.05$ ).

The statistical significance of stage-wise improvements increases with chain length, suggesting that longer chains benefit more from extended training. These statistical results, however, do not seem to capture the apparent “trend” of the rewards (which is seemingly random) — the analysis would benefit from further investigation on this part.

### 5.2.3 Cumulative Returns

The cumulative returns, probably the most definitive metric with regards to the quality of the learned policy, can be seen in Figure 8. They show:

- Monotonic decrease across all chain lengths;

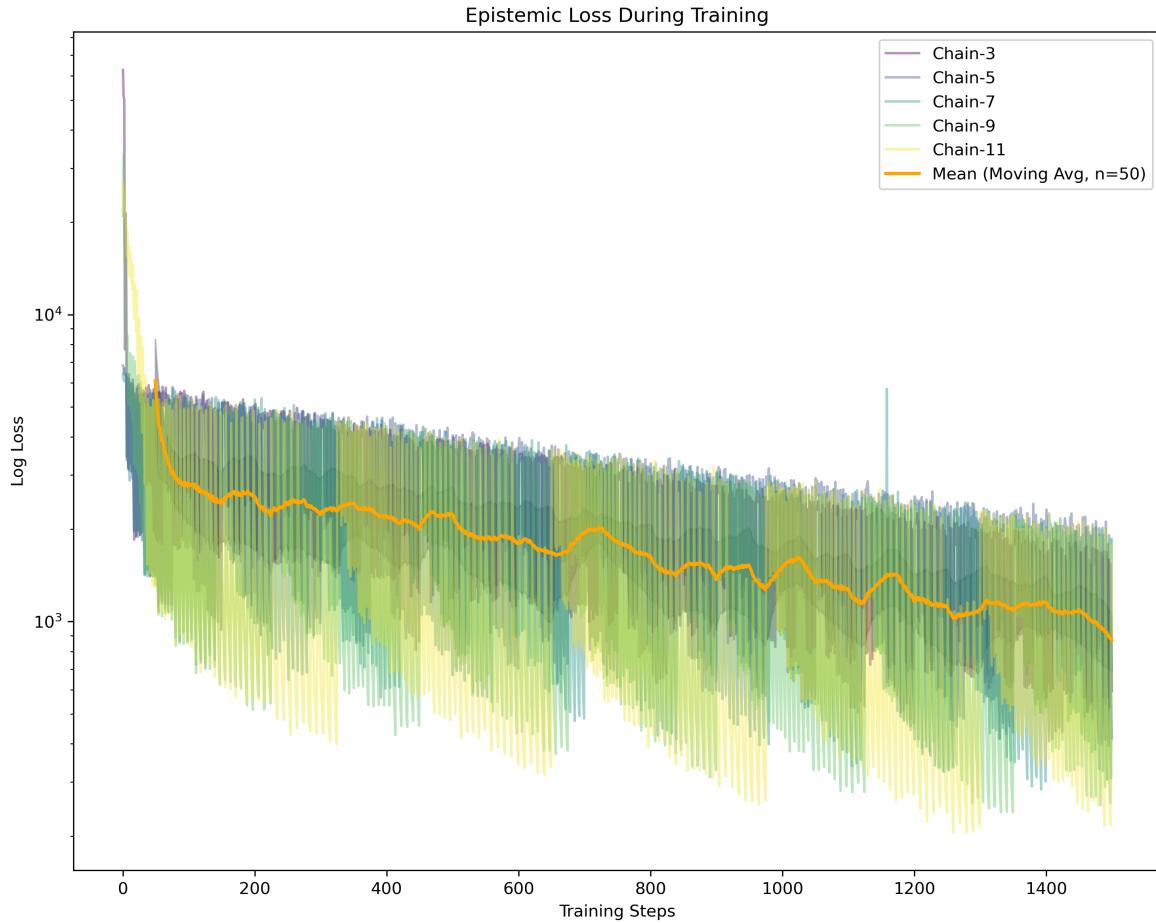


Figure 6: Mean BEN epistemic (ELBO) loss across chain lengths.

- Larger effect sizes (-7.13 to -8.59) for longer chains;
- *Statistical Significance:*  $p < 10^{-10}$  for all chain lengths.

The relative magnitude of stage-wise change remains consistent across chain lengths. *This is critical as it indicates that the model is not learning optimal policies.*

#### 5.2.4 Exploration-Exploitation Balance

Due to unfortunate events and time constraints, we only have access to the final state coverage ratio across all chain lengths for BEN. For all chain lengths, these final state coverage ratios were all 1, by which we can only conclude that BEN has effectively explored the entire state space. Increasing the state space beyond what the models (both GFlowNet and BEN) are capable of exploring to completion before finishing their training would be more interesting, as this would better showcase the exploration-exploitation capabilities of the models and the trade-offs they have to make.

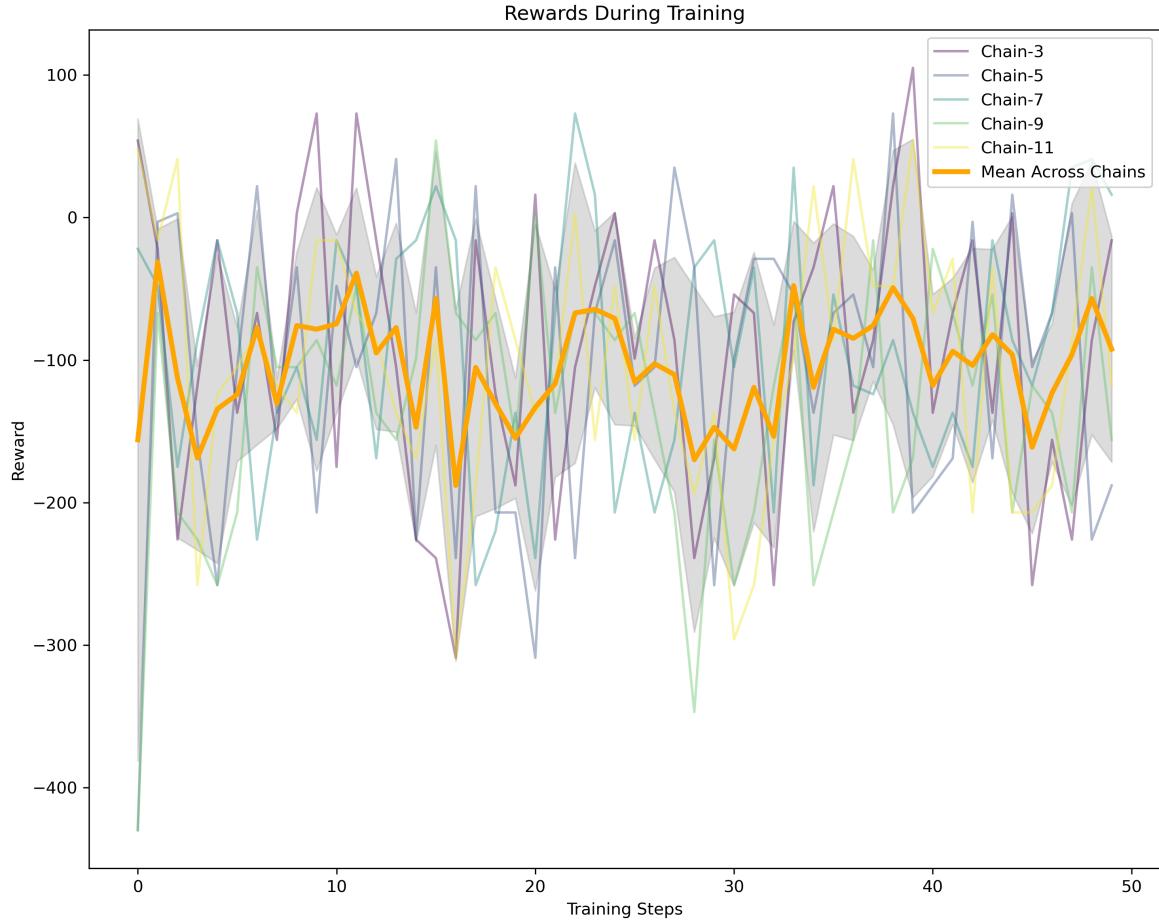


Figure 7: Mean BEN terminal rewards across chain lengths.

### 5.3 Comparison Between GFlowNet and BEN

#### 5.3.1 Learning Stability and Convergence

GFlowNet demonstrates stable convergence properties across all chain lengths, with its trajectory balance loss consistently decreasing through well defined phases. In contrast, BEN's learning trajectory shows more volatile behavior, especially in its epistemic loss patterns. This difference becomes more pronounced with increasing chain length, indicating that GFlowNet maintains consistent learning dynamics across problem scales, while BEN's stability deteriorates with increasing chain length. The most striking difference appears in their convergence behaviors.

- GFlowNet achieves near-zero loss values ( $< 0.003$ ) in its late stages across all chain lengths;
- BEN's Q-learning loss shows persistent fluctuations, particularly in longer chains;
- BEN's epistemic loss exhibits non-monotonic behavior for  $n \geq 7$ , indicating challenges in uncertainty estimation at larger scales.

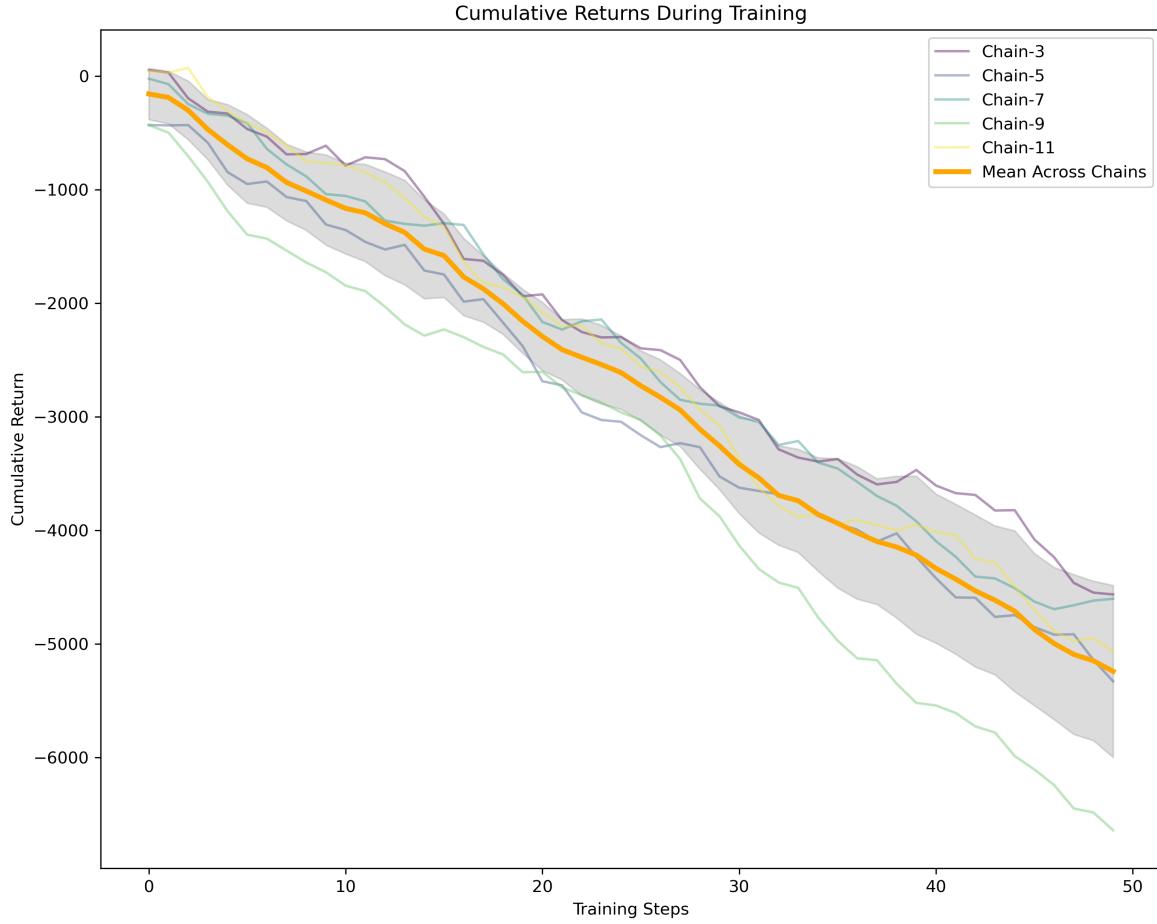


Figure 8: Mean BEN cumulative returns across chain lengths.

### 5.3.2 Reward Optimization

The contrast in reward optimization capabilities is noteworthy:

- GFlowNet shows consistent improvement in terminal rewards, with larger gains in longer chains ( $n \geq 9$ );
- BEN displays concerning patterns in both terminal rewards and cumulative returns, with monotonic decreases across all chain lengths.

The statistical significance of these differences ( $p < 10^{-10}$  for BEN's declining returns) strongly suggests that GFlowNet's flow-based approach is better suited to this environment's reward structure.

### 5.3.3 Exploration Efficiency

Due to the unfortunately missing exploration data for BEN, a fair comparison between the two cannot be made, except for the fact they both managed to completely explore the state space.

### 5.3.4 Scale Sensitivity

The algorithms show markedly different responses to increasing chain length. GFlowNet maintains consistent convergence patterns, shows improved reward optimization with longer chains, and exhibits stable entropy reduction across scales. BEN shows degrading stability with longer chains, demonstrates increasingly volatile epistemic uncertainty, and experiences more severe performance degradation at larger scales.

## 5.4 Hypothesis Evaluation

Revisiting our original hypothesis that “BEN’s explicit uncertainty decomposition leads to more efficient learning compared to GFlowNets, particularly in early training stages,” our results suggest we must reject this hypothesis for the n-chain environment. The data instead supports a contrary conclusion:

**Our Finding:** GFlowNet’s flow-based approach appears fundamentally better suited to environments with deterministic dynamics and delayed rewards, while BEN’s explicit uncertainty decomposition may be introducing unnecessary complexity for this particular class of problems.

This finding hints on an interesting nuance: while BEN’s sophisticated uncertainty handling might be valuable in stochastic environments, it may be disadvantageous in deterministic scenarios where simpler flow-matching approaches suffice.

### 5.4.1 Architectural Implications

GFlowNet’s success suggests that for environments with deterministic transitions and delayed rewards, explicitly modeling flow distributions might be more effective than maintaining separate aleatoric and epistemic uncertainty estimates. This insight could inform algorithm design, especially for scenarios where reward delay is a primary challenge. This comparative analysis suggests that the choice between these approaches should be guided by the specific characteristics of the target environment, with GFlowNet showing clear advantages in deterministic, delayed-reward scenarios.

## 6 Conclusion

Contrary to our initial hypothesis, GFlowNet’s flow-based approach demonstrated superior performance and stability compared to BEN’s explicit uncertainty decomposition, particularly in environments with deterministic dynamics and delayed rewards. This finding manifested across multiple dimensions:

- *Learning Stability:* GFlowNets exhibited consistent convergence across all chain lengths, with trajectory balance loss reaching near-zero values ( $< 0.003$ ) in late stages. In contrast, BEN showed increasingly volatile behavior, particularly in its epistemic uncertainty estimation for longer chains.

- *Reward Optimization:* GFlowNets achieved monotonic improvement in terminal rewards, with particularly strong performance in longer chains ( $n \geq 9$ ). BEN, however, displayed concerning patterns with monotonic decreases in cumulative returns across all chain lengths.
- *Scalability:* Perhaps most importantly, GFlowNets maintained consistent performance characteristics across different chain lengths, while BEN’s stability degraded significantly with increasing chain length.

Furthermore, the explicit separation of aleatoric and epistemic uncertainty seemingly introduce unnecessary complexity in deterministic environments with delayed rewards. In environments with deterministic transitions, simpler flow-matching approaches may be more effective than sophisticated uncertainty decomposition. This suggests that the choice of exploration strategy should be influenced by the underlying structure of the environment, particularly its deterministic versus stochastic nature.

## 6.1 Limitations and Future Work

While our study served as an interesting preliminary comparison of GFlowNets and BENs, it leaves much to be desired and would benefit from extended stochastic investigations, as our focus was narrowly fixed on the deterministic n-chain environment. A natural extension would be to introduce stochastic elements through:

- More variability (of greater magnitude) in chain lengths;
- Terminal state rewards following normal distributions (e.g.,  $R_x \sim \mathcal{N}(\mu_x, \sigma^2)$  for  $x \in \mathcal{X}$ );
- Including other environments (e.g., grid-world).
- Transition probability variations;
- Testing robustness to uncertainty;

Further investigation is needed into the impact of hyperparameter sensitivity, in particular:

- Exploration factor  $\varepsilon$  in GFlowNets;
- Discount factor  $\gamma$  in BEN;
- Branching factor  $b$  for the n-chain environment (increasing the number of impactful decision);
- The interaction between these parameters and chain length.

Lastly, our current difficulties with training suggest the need for more extensive computational resources to explore longer chain lengths, increase the number of training iterations, and investigate more complex branching structures.

## Bibliography

- [1] R. S. Sutton and Barto, *Reinforcement learning : an introduction /*, Second edition. in Adaptive computation and machine learning. Cambridge, Massachusetts ;: The MIT Press, 2020.
- [2] R. Houthooft, X. Chen, Y. Duan, J. Schulman, F. D. Turck, and P. Abbeel, “VIME: Variational Information Maximizing Exploration.” [Online]. Available: <https://arxiv.org/abs/1605.09674>

- [3] A. Harutyunyan *et al.*, “Hindsight Credit Assignment.” [Online]. Available: <https://arxiv.org/abs/1912.02503>
- [4] I. Osband, C. Blundell, A. Pritzel, and B. V. Roy, “Deep Exploration via Bootstrapped DQN” [Online]. Available: <https://arxiv.org/abs/1602.04621>
- [5] D. Pathak, P. Agrawal, A. A. Efros, and T. Darrell, “Curiosity-driven Exploration by Self-supervised Prediction.” [Online]. Available: <https://arxiv.org/abs/1705.05363>
- [6] E. Bengio, M. Jain, M. Korablyov, D. Precup, and Y. Bengio, “Flow Network based Generative Models for Non-Iterative Diverse Candidate Generation.” [Online]. Available: <https://arxiv.org/abs/2106.04399>
- [7] M. Fellows, B. Kaplowitz, C. S. de Witt, and S. Whiteson, “Bayesian Exploration Networks.” [Online]. Available: <https://arxiv.org/abs/2308.13049>
- [8] N. Malkin, M. Jain, E. Bengio, C. Sun, and Y. Bengio, “Trajectory balance: Improved credit assignment in GFlowNets.” [Online]. Available: <https://arxiv.org/abs/2201.13259>
- [9] M. L. Puterman, *Markov decision processes : Discrete stochastic dynamic programming*. in Wiley series in probability and mathematical statistics. Applied probability and statistics section. New York: Wiley, 1994.
- [10] R. Bellman, *Dynamic programming* /. in A Rand corporation research study. Princeton,N.J: Princeton univer.press, 1962.
- [11] A. Hallak, D. D. Castro, and S. Mannor, “Contextual Markov Decision Processes.” [Online]. Available: <https://arxiv.org/abs/1502.02259>
- [12] M. Ghavamzadeh, S. Mannor, J. Pineau, and A. Tamar, “Convex Optimization: Algorithms and Complexity,” *Foundations and Trends® in Machine Learning*, vol. 8, no. 5–6, pp. 359–483, 2015, doi: 10.1561/2200000049.
- [13] M. O. Duff and A. G. Barto, “Optimal learning: computational procedures for bayes-adaptive markov decision processes,” 2002. [Online]. Available: <https://api.semanticscholar.org/CorpusID:118819159>
- [14] P. Dayan and Y. Niv, “Reinforcement learning: The Good, The Bad and The Ugly,” *Current opinion in neurobiology*, vol. 18, no. 2, pp. 185–196, 2008.
- [15] V. S. Borkar, *Stochastic Approximation : A Dynamical Systems Viewpoint*, 1st ed. 2008. in Texts and Readings in Mathematics ; 48. Gurgaon: Hindustan Book Agency, 2008.
- [16] D. Rezende and S. Mohamed, “Variational Inference with Normalizing Flows,” in *Proceedings of the 32nd International Conference on Machine Learning*, F. Bach and D. Blei, Eds., in Proceedings of Machine Learning Research, vol. 37. Lille, France: PMLR, 2015, pp. 1530–1538. [Online]. Available: <https://proceedings.mlr.press/v37/rezende15.html>
- [17] D. P. Kingma and J. Ba, “Adam: A Method for Stochastic Optimization.” [Online]. Available: <https://arxiv.org/abs/1412.6980>

# Appendix

## A Hyperparameter selection

*GFlowNet Hyperparameters:*

- Hidden dimension: 64;
- Learning rate: 1e-4;
- Exploration  $\varepsilon$ : 0.1;
- Batch size: 32.

*BEN Hyperparameters:*

- RNN hidden dimension: 64;
- Learning rate (Q-network): 1e-4;
- Learning rate (Epistemic network): 1e-4;
- Base dimension ( $z_{ep}$ ): 8;
- Discount factor  $\gamma$ : 0.9;
- Batch size: 32.

## B Policy Quality Assessment Results

### B.1 GFlowNet

```
Chain length 3, KL divergence: 0.00401
Chain length 5, KL divergence: 0.02062
Chain length 7, KL divergence: 0.01696
Chain length 9, KL divergence: 0.00385
Chain length 11, KL divergence: 0.00701
Mean KL divergence across all files: 0.01049
```

Listing 1: Quality assessment by KL divergence between true and observed reward distributions.

## C Statistical Significance Tests

### C.1 GFlowNet

```
=====
Analysis for trajectory_balance_loss
=====

Summary Statistics:

Early stage:
Mean    : 6.82581
Std     : 2.81166
```

Median : 8.15058

Mid stage:

Mean : 0.931558  
Std : 1.26559  
Median : 0.262708

Late stage:

Mean : 0.000422112  
Std : 0.000892446  
Median : 1.66286e-05

Statistical Tests:

EARLY-MID:

Test used : Mann-Whitney U  
P-value : 3.9726e-47  
Significant : Yes  
Effect size : -2.70345  
Mean diff : -5.89425  
Median diff : -7.88788

MID-LATE:

Test used : Mann-Whitney U  
P-value : 7.59106e-84  
Significant : Yes  
Effect size : -1.04048  
Mean diff : -0.931136  
Median diff : -0.262691

EARLY-LATE:

Test used : Mann-Whitney U  
P-value : 9.29597e-48  
Significant : Yes  
Effect size : -3.43304  
Mean diff : -6.82538  
Median diff : -8.15057

---

Analysis for terminal\_reward

---

Summary Statistics:

Early stage:

Mean : 35.3644  
Std : 9.19597  
Median : 36

Mid stage:

```
Mean    : 44.1653
Std     : 9.85363
Median  : 43
```

```
Late stage:
Mean    : 49.2667
Std     : 7.42465
Median  : 49
```

```
Statistical Tests:
```

```
EARLY-MID:
```

```
Test used    : Mann-Whitney U
P-value      : 4.4844e-21
Significant : Yes
Effect size  : 0.923453
Mean diff    : 8.80095
Median diff  : 7
```

```
MID-LATE:
```

```
Test used    : Mann-Whitney U
P-value      : 4.06779e-10
Significant : Yes
Effect size  : 0.584742
Mean diff    : 5.10134
Median diff  : 6
```

```
EARLY-LATE:
```

```
Test used    : Mann-Whitney U
P-value      : 6.93379e-48
Significant : Yes
Effect size  : 1.66348
Mean diff    : 13.9023
Median diff  : 13
```

```
=====
Analysis for exploration_ratio
=====
```

```
Summary Statistics:
```

```
Early stage:
Mean    : 0.992713
Std     : 0.0505792
Median  : 1
```

```
Mid stage:
Mean    : 1
Std     : 0
Median  : 1
```

Late stage:

Mean : 1  
Std : 0  
Median : 1

Statistical Tests:

EARLY-MID:

Test used : Mann-Whitney U (due to uniform data)  
P-value : 0.00433248  
Significant : Yes  
Effect size : 0.20376  
Mean diff : 0.00728745  
Median diff : 0

MID-LATE:

Test used : Mann-Whitney U (due to uniform data)  
P-value : 1  
Significant : No  
Effect size : 0  
Mean diff : 0  
Median diff : 0

EARLY-LATE:

Test used : Mann-Whitney U (due to uniform data)  
P-value : 0.00382047  
Significant : Yes  
Effect size : 0.20376  
Mean diff : 0.00728745  
Median diff : 0

=====  
Analysis for forward\_entropy  
=====

Summary Statistics:

Early stage:

Mean : 0.272931  
Std : 0.00158218  
Median : 0.27355

Mid stage:

Mean : 0.248951  
Std : 0.0136987  
Median : 0.24999

Late stage:

Mean : 0.223683

Std : 0.00105377  
Median : 0.223144

Statistical Tests:

EARLY-MID:

Test used : Mann-Whitney U  
P-value : 1.39375e-82  
Significant : Yes  
Effect size : -2.45926  
Mean diff : -0.0239799  
Median diff : -0.0235602

MID-LATE:

Test used : Mann-Whitney U  
P-value : 7.50099e-84  
Significant : Yes  
Effect size : -2.60084  
Mean diff : -0.0252673  
Median diff : -0.0268458

EARLY-LATE:

Test used : Mann-Whitney U  
P-value : 1.05232e-83  
Significant : Yes  
Effect size : -36.6358  
Mean diff : -0.0492472  
Median diff : -0.0504061

=====  
Analysis for backward\_entropy  
=====

Summary Statistics:

Early stage:

Mean : 0.20616  
Std : 0.0309031  
Median : 0.221136

Mid stage:

Mean : 0.0424959  
Std : 0.0271554  
Median : 0.0293473

Late stage:

Mean : 0.0199545  
Std : 0.00105893  
Median : 0.0197963

**Statistical Tests:****EARLY-MID:**

Test used : Mann-Whitney U  
 P-value : 1.46542e-82  
 Significant : Yes  
 Effect size : -5.62619  
 Mean diff : -0.163664  
 Median diff : -0.191789

**MID-LATE:**

Test used : Mann-Whitney U  
 P-value : 1.65605e-67  
 Significant : Yes  
 Effect size : -1.17304  
 Mean diff : -0.0225415  
 Median diff : -0.00955104

**EARLY-LATE:**

Test used : Mann-Whitney U  
 P-value : 1.10488e-83  
 Significant : Yes  
 Effect size : -8.5163  
 Mean diff : -0.186205  
 Median diff : -0.20134

Listing 2: GFlowNet, Chain Length  $n = 3$ .**=====**  
**Analysis for trajectory\_balance\_loss**  
**=====****Summary Statistics:****Early stage:**

Mean : 6.69499  
 Std : 2.70338  
 Median : 7.97144

**Mid stage:**

Mean : 1.19563  
 Std : 1.44005  
 Median : 0.473378

**Late stage:**

Mean : 0.00140177  
 Std : 0.00252725  
 Median : 0.000115058

**Statistical Tests:**

**EARLY-MID:**

Test used : Mann-Whitney U  
P-value : 3.9726e-47  
Significant : Yes  
Effect size : -2.5391  
Mean diff : -5.49935  
Median diff : -7.49807

**MID-LATE:**

Test used : Mann-Whitney U  
P-value : 7.68221e-84  
Significant : Yes  
Effect size : -1.1728  
Mean diff : -1.19423  
Median diff : -0.473263

**EARLY-LATE:**

Test used : Mann-Whitney U  
P-value : 9.29597e-48  
Significant : Yes  
Effect size : -3.5016  
Mean diff : -6.69358  
Median diff : -7.97133

---

**Analysis for terminal\_reward**

---

**Summary Statistics:****Early stage:**

Mean : 33.2955  
Std : 8.32213  
Median : 33

**Mid stage:**

Mean : 41.8629  
Std : 8.77181  
Median : 42

**Late stage:**

Mean : 46.7922  
Std : 8.57252  
Median : 48

**Statistical Tests:****EARLY-MID:**

Test used : Mann-Whitney U

```
P-value      : 6.02021e-25
Significant : Yes
Effect size  : 1.00204
Mean diff    : 8.56736
Median diff   : 9

MID-LATE:
Test used    : Mann-Whitney U
P-value       : 4.86562e-10
Significant  : Yes
Effect size   : 0.568362
Mean diff     : 4.92925
Median diff   : 6
```

```
EARLY-LATE:
Test used    : Mann-Whitney U
P-value       : 2.30758e-47
Significant  : Yes
Effect size   : 1.59756
Mean diff     : 13.4966
Median diff   : 15
```

```
=====
Analysis for exploration_ratio
=====
```

#### Summary Statistics:

```
Early stage:
Mean      : 0.993375
Std       : 0.0471553
Median    : 1
```

```
Mid stage:
Mean      : 1
Std       : 0
Median    : 1
```

```
Late stage:
Mean      : 1
Std       : 0
Median    : 1
```

#### Statistical Tests:

```
EARLY-MID:
Test used    : Mann-Whitney U (due to uniform data)
P-value       : 0.00433248
Significant  : Yes
Effect size   : 0.198686
```

```
Mean diff      : 0.00662495
Median diff   : 0

MID-LATE:
Test used     : Mann-Whitney U (due to uniform data)
P-value       : 1
Significant  : No
Effect size   : 0
Mean diff     : 0
Median diff   : 0

EARLY-LATE:
Test used     : Mann-Whitney U (due to uniform data)
P-value       : 0.00382047
Significant  : Yes
Effect size   : 0.198686
Mean diff     : 0.00662495
Median diff   : 0
```

```
=====
Analysis for forward_entropy
=====
```

#### Summary Statistics:

Early stage:  
Mean : 0.182292  
Std : 0.000582602  
Median : 0.182608

Mid stage:  
Mean : 0.17099  
Std : 0.00687163  
Median : 0.171686

Late stage:  
Mean : 0.156909  
Std : 0.000865732  
Median : 0.156479

#### Statistical Tests:

EARLY-MID:
Test used : Mann-Whitney U
P-value : 1.39375e-82
Significant : Yes
Effect size : -2.3177
Mean diff : -0.0113021
Median diff : -0.010922

MID-LATE:

Test used : Mann-Whitney U  
P-value : 7.50099e-84  
Significant : Yes  
Effect size : -2.87511  
Mean diff : -0.0140806  
Median diff : -0.0152075

EARLY-LATE:

Test used : Mann-Whitney U  
P-value : 1.05232e-83  
Significant : Yes  
Effect size : -34.3965  
Mean diff : -0.0253826  
Median diff : -0.0261295

=====

Analysis for backward\_entropy

=====

Summary Statistics:

Early stage:  
Mean : 0.124858  
Std : 0.0162292  
Median : 0.13268

Mid stage:  
Mean : 0.0295478  
Std : 0.0190841  
Median : 0.0201874

Late stage:  
Mean : 0.0123233  
Std : 0.000816268  
Median : 0.0122581

Statistical Tests:

EARLY-MID:

Test used : Mann-Whitney U  
P-value : 1.53827e-82  
Significant : Yes  
Effect size : -5.38039  
Mean diff : -0.0953099  
Median diff : -0.112493

MID-LATE:

Test used : Mann-Whitney U  
P-value : 6.52618e-68

```

Significant : Yes
Effect size : -1.27524
Mean diff   : -0.0172245
Median diff  : -0.00792933

```

```

EARLY-LATE:
Test used    : Mann-Whitney U
P-value      : 1.10488e-83
Significant : Yes
Effect size  : -9.79385
Mean diff    : -0.112534
Median diff  : -0.120422

```

Listing 3: GFlowNet, Chain Length  $n = 5$ .

```
=====
Analysis for trajectory_balance_loss
=====
```

Summary Statistics:

Early stage:

```

Mean   : 7.40181
Std    : 2.92816
Median : 8.63355

```

Mid stage:

```

Mean   : 1.42542
Std    : 1.80647
Median : 0.42669

```

Late stage:

```

Mean   : 0.000556402
Std    : 0.00114077
Median : 2.25787e-05

```

Statistical Tests:

EARLY-MID:

```

Test used    : Mann-Whitney U
P-value      : 4.00893e-47
Significant : Yes
Effect size  : -2.45655
Mean diff    : -5.9764
Median diff  : -8.20686

```

MID-LATE:

```

Test used    : Mann-Whitney U
P-value      : 7.68221e-84
Significant : Yes

```

Effect size : -1.11547  
Mean diff : -1.42486  
Median diff : -0.426668

**EARLY-LATE:**

Test used : Mann-Whitney U  
P-value : 9.29597e-48  
Significant : Yes  
Effect size : -3.57458  
Mean diff : -7.40126  
Median diff : -8.63353

=====  
Analysis for terminal\_reward  
=====

**Summary Statistics:****Early stage:**

Mean : 36.0729  
Std : 8.40941  
Median : 37

**Mid stage:**

Mean : 42.4153  
Std : 8.48486  
Median : 43

**Late stage:**

Mean : 47.9686  
Std : 8.64655  
Median : 48

**Statistical Tests:****EARLY-MID:**

Test used : Mann-Whitney U  
P-value : 2.84163e-14  
Significant : Yes  
Effect size : 0.750833  
Mean diff : 6.34245  
Median diff : 6

**MID-LATE:**

Test used : Mann-Whitney U  
P-value : 6.5447e-12  
Significant : Yes  
Effect size : 0.64829  
Mean diff : 5.5533  
Median diff : 5

**EARLY-LATE:**

Test used : Mann-Whitney U  
P-value : 2.47514e-39  
Significant : Yes  
Effect size : 1.39477  
Mean diff : 11.8958  
Median diff : 11

---

**Analysis for exploration\_ratio**

---

**Summary Statistics:****Early stage:**

Mean : 0.992982  
Std : 0.0466208  
Median : 1

**Mid stage:**

Mean : 1  
Std : 0  
Median : 1

**Late stage:**

Mean : 1  
Std : 0  
Median : 1

**Statistical Tests:****EARLY-MID:**

Test used : Mann-Whitney U (due to uniform data)  
P-value : 0.0013914  
Significant : Yes  
Effect size : 0.212873  
Mean diff : 0.00701754  
Median diff : 0

**MID-LATE:**

Test used : Mann-Whitney U (due to uniform data)  
P-value : 1  
Significant : No  
Effect size : 0  
Mean diff : 0  
Median diff : 0

**EARLY-LATE:**

Test used : Mann-Whitney U (due to uniform data)

```
P-value      : 0.00119174
Significant : Yes
Effect size  : 0.212873
Mean diff    : 0.00701754
Median diff   : 0
```

```
=====
Analysis for forward_entropy
=====
```

```
Summary Statistics:
```

```
Early stage:
```

```
Mean      : 0.136599
Std       : 0.000559334
Median   : 0.136826
```

```
Mid stage:
```

```
Mean      : 0.128432
Std       : 0.00478987
Median   : 0.129055
```

```
Late stage:
```

```
Mean      : 0.118183
Std       : 0.000587664
Median   : 0.117886
```

```
Statistical Tests:
```

```
EARLY-MID:
```

```
Test used    : Mann-Whitney U
P-value      : 1.39375e-82
Significant : Yes
Effect size  : -2.39501
Mean diff    : -0.00816694
Median diff   : -0.00777107
```

```
MID-LATE:
```

```
Test used    : Mann-Whitney U
P-value      : 7.50099e-84
Significant : Yes
Effect size  : -3.00352
Mean diff    : -0.0102491
Median diff   : -0.0111686
```

```
EARLY-LATE:
```

```
Test used    : Mann-Whitney U
P-value      : 1.05232e-83
Significant : Yes
Effect size  : -32.097
```

```
Mean diff      : -0.018416
Median diff   : -0.0189397
```

```
=====
Analysis for backward_entropy
=====
```

```
Summary Statistics:
```

```
Early stage:
```

```
Mean      : 0.0920691
Std       : 0.0091185
Median    : 0.0966924
```

```
Mid stage:
```

```
Mean      : 0.0228588
Std       : 0.0165806
Median    : 0.0144034
```

```
Late stage:
```

```
Mean      : 0.0086946
Std       : 0.000577371
Median    : 0.00869202
```

```
Statistical Tests:
```

```
EARLY-MID:
```

```
Test used     : Mann-Whitney U
P-value       : 1.5014e-82
Significant  : Yes
Effect size   : -5.17256
Mean diff     : -0.0692103
Median diff   : -0.082289
```

```
MID-LATE:
```

```
Test used     : Mann-Whitney U
P-value       : 4.52767e-70
Significant  : Yes
Effect size   : -1.20738
Mean diff     : -0.0141642
Median diff   : -0.00571134
```

```
EARLY-LATE:
```

```
Test used     : Mann-Whitney U
P-value       : 1.10488e-83
Significant  : Yes
Effect size   : -12.9049
Mean diff     : -0.0833745
Median diff   : -0.0880003
```

Listing 4: GFlowNet, Chain Length  $n = 7$ .

```
=====
Analysis for trajectory_balance_loss
=====

Summary Statistics:

Early stage:
Mean    : 7.27744
Std     : 2.84408
Median  : 8.48092

Mid stage:
Mean    : 1.74531
Std     : 1.98533
Median  : 0.719583

Late stage:
Mean    : 0.00267701
Std     : 0.00513376
Median  : 0.000157041

Statistical Tests:

EARLY-MID:
Test used    : Mann-Whitney U
P-value      : 4.59541e-47
Significant : Yes
Effect size  : -2.25563
Mean diff    : -5.53212
Median diff  : -7.76134

MID-LATE:
Test used    : Mann-Whitney U
P-value      : 8.15457e-84
Significant : Yes
Effect size  : -1.24133
Mean diff    : -1.74264
Median diff  : -0.719426

EARLY-LATE:
Test used    : Mann-Whitney U
P-value      : 9.29597e-48
Significant : Yes
Effect size  : -3.61736
Mean diff    : -7.27476
Median diff  : -8.48077
```

---

---

Analysis for terminal\_reward

---

---

## Summary Statistics:

## Early stage:

Mean : 34.081  
Std : 8.16854  
Median : 33

## Mid stage:

Mean : 41.0726  
Std : 9.20453  
Median : 42

## Late stage:

Mean : 50.0353  
Std : 8.54646  
Median : 49

## Statistical Tests:

## EARLY-MID:

Test used : t-test  
P-value : 8.03004e-18  
Significant : Yes  
Effect size : 0.803451  
Mean diff : 6.99161  
Median diff : 9

## MID-LATE:

Test used : Mann-Whitney U  
P-value : 2.01281e-24  
Significant : Yes  
Effect size : 1.00913  
Mean diff : 8.96271  
Median diff : 7

## EARLY-LATE:

Test used : Mann-Whitney U  
P-value : 1.2424e-57  
Significant : Yes  
Effect size : 1.90849  
Mean diff : 15.9543  
Median diff : 16

---

---

Analysis for exploration\_ratio

---

---

**Summary Statistics:****Early stage:**

Mean : 0.993288  
Std : 0.0459779  
Median : 1

**Mid stage:**

Mean : 1  
Std : 0  
Median : 1

**Late stage:**

Mean : 1  
Std : 0  
Median : 1

**Statistical Tests:****EARLY-MID:**

Test used : Mann-Whitney U (due to uniform data)  
P-value : 0.00139134  
Significant : Yes  
Effect size : 0.206455  
Mean diff : 0.00671212  
Median diff : 0

**MID-LATE:**

Test used : Mann-Whitney U (due to uniform data)  
P-value : 1  
Significant : No  
Effect size : 0  
Mean diff : 0  
Median diff : 0

**EARLY-LATE:**

Test used : Mann-Whitney U (due to uniform data)  
P-value : 0.0011917  
Significant : Yes  
Effect size : 0.206455  
Mean diff : 0.00671212  
Median diff : 0

=====  
Analysis for forward\_entropy  
=====

**Summary Statistics:**

Early stage:  
Mean : 0.109361  
Std : 0.000378315  
Median : 0.109516

Mid stage:  
Mean : 0.102774  
Std : 0.00446085  
Median : 0.103877

Late stage:  
Mean : 0.0905926  
Std : 0.00113378  
Median : 0.0900322

#### Statistical Tests:

##### EARLY-MID:

Test used : Mann-Whitney U  
P-value : 1.39375e-82  
Significant : Yes  
Effect size : -2.08054  
Mean diff : -0.00658623  
Median diff : -0.00563877

##### MID-LATE:

Test used : Mann-Whitney U  
P-value : 7.50099e-84  
Significant : Yes  
Effect size : -3.74293  
Mean diff : -0.0121817  
Median diff : -0.0138448

##### EARLY-LATE:

Test used : Mann-Whitney U  
P-value : 1.05232e-83  
Significant : Yes  
Effect size : -22.2049  
Mean diff : -0.018768  
Median diff : -0.0194836

=====

Analysis for backward\_entropy

=====

#### Summary Statistics:

Early stage:  
Mean : 0.072528  
Std : 0.00566449

```
Median : 0.0752685
```

**Mid stage:**

```
Mean   : 0.0205243
Std    : 0.0146301
Median : 0.0136152
```

**Late stage:**

```
Mean   : 0.00679753
Std    : 0.000457729
Median : 0.00675402
```

**Statistical Tests:**
**EARLY-MID:**

```
Test used   : Mann-Whitney U
P-value     : 1.53827e-82
Significant : Yes
Effect size : -4.6878
Mean diff   : -0.0520037
Median diff  : -0.0616532
```

**MID-LATE:**

```
Test used   : Mann-Whitney U
P-value     : 2.35375e-77
Significant : Yes
Effect size : -1.32624
Mean diff   : -0.0137268
Median diff  : -0.00686123
```

**EARLY-LATE:**

```
Test used   : Mann-Whitney U
P-value     : 1.10488e-83
Significant : Yes
Effect size : -16.3571
Mean diff   : -0.0657304
Median diff  : -0.0685144
```

Listing 5: GFlowNet, Chain Length  $n = 9$ .

```
=====
Analysis for trajectory_balance_loss
=====
```

**Summary Statistics:**
**Early stage:**

```
Mean   : 7.43026
Std    : 2.89578
Median : 8.67855
```

**Mid stage:**

Mean : 1.72514  
Std : 2.01813  
Median : 0.67939

**Late stage:**

Mean : 0.00124271  
Std : 0.002363  
Median : 8.49505e-05

**Statistical Tests:****EARLY-MID:**

Test used : Mann-Whitney U  
P-value : 4.11994e-47  
Significant : Yes  
Effect size : -2.28586  
Mean diff : -5.70512  
Median diff : -7.99916

**MID-LATE:**

Test used : Mann-Whitney U  
P-value : 7.77444e-84  
Significant : Yes  
Effect size : -1.20803  
Mean diff : -1.7239  
Median diff : -0.679305

**EARLY-LATE:**

Test used : Mann-Whitney U  
P-value : 9.29597e-48  
Significant : Yes  
Effect size : -3.62812  
Mean diff : -7.42902  
Median diff : -8.67846

---

**Analysis for terminal\_reward**

---

**Summary Statistics:****Early stage:**

Mean : 35.9231  
Std : 8.40188  
Median : 36

**Mid stage:**

Mean : 43.5121

Std : 9.622  
Median : 43

Late stage:  
Mean : 49.098  
Std : 7.93491  
Median : 49

Statistical Tests:

EARLY-MID:

Test used : Mann-Whitney U  
P-value : 5.72986e-18  
Significant : Yes  
Effect size : 0.840184  
Mean diff : 7.58902  
Median diff : 7

MID-LATE:

Test used : Mann-Whitney U  
P-value : 8.90974e-12  
Significant : Yes  
Effect size : 0.633407  
Mean diff : 5.58594  
Median diff : 6

EARLY-LATE:

Test used : Mann-Whitney U  
P-value : 1.10968e-46  
Significant : Yes  
Effect size : 1.61226  
Mean diff : 13.175  
Median diff : 13

=====

Analysis for exploration\_ratio

=====

Summary Statistics:

Early stage:  
Mean : 0.992501  
Std : 0.0482797  
Median : 1

Mid stage:  
Mean : 1  
Std : 0  
Median : 1

Late stage:

Mean : 1  
Std : 0  
Median : 1

Statistical Tests:

EARLY-MID:

Test used : Mann-Whitney U (due to uniform data)  
P-value : 0.00245216  
Significant : Yes  
Effect size : 0.219652  
Mean diff : 0.00749868  
Median diff : 0

MID-LATE:

Test used : Mann-Whitney U (due to uniform data)  
P-value : 1  
Significant : No  
Effect size : 0  
Mean diff : 0  
Median diff : 0

EARLY-LATE:

Test used : Mann-Whitney U (due to uniform data)  
P-value : 0.00213111  
Significant : Yes  
Effect size : 0.219652  
Mean diff : 0.00749868  
Median diff : 0

=====

Analysis for forward\_entropy

=====

Summary Statistics:

Early stage:

Mean : 0.0910028  
Std : 0.000460817  
Median : 0.0911968

Mid stage:

Mean : 0.0850012  
Std : 0.00345056  
Median : 0.0855755

Late stage:

Mean : 0.0769377  
Std : 0.000574968

Median : 0.0766502

Statistical Tests:

EARLY-MID:

Test used : Mann-Whitney U  
P-value : 1.39375e-82  
Significant : Yes  
Effect size : -2.4381  
Mean diff : -0.00600162  
Median diff : -0.00562132

MID-LATE:

Test used : Mann-Whitney U  
P-value : 7.50099e-84  
Significant : Yes  
Effect size : -3.25985  
Mean diff : -0.00806349  
Median diff : -0.00892528

EARLY-LATE:

Test used : Mann-Whitney U  
P-value : 1.05232e-83  
Significant : Yes  
Effect size : -26.9899  
Mean diff : -0.0140651  
Median diff : -0.0145466

=====

Analysis for backward\_entropy

=====

Summary Statistics:

Early stage:

Mean : 0.0592377  
Std : 0.00487484  
Median : 0.0616291

Mid stage:

Mean : 0.0163421  
Std : 0.0117586  
Median : 0.0109835

Late stage:

Mean : 0.00542834  
Std : 0.000253375  
Median : 0.00539537

Statistical Tests:

**EARLY-MID:**

Test used : Mann-Whitney U  
 P-value : 1.46542e-82  
 Significant : Yes  
 Effect size : -4.76574  
 Mean diff : -0.0428955  
 Median diff : -0.0506456

**MID-LATE:**

Test used : Mann-Whitney U  
 P-value : 3.26299e-78  
 Significant : Yes  
 Effect size : -1.3123  
 Mean diff : -0.0109138  
 Median diff : -0.00558811

**EARLY-LATE:**

Test used : Mann-Whitney U  
 P-value : 1.10488e-83  
 Significant : Yes  
 Effect size : -15.5892  
 Mean diff : -0.0538093  
 Median diff : -0.0562337

Listing 6: GFlowNet, Chain Length  $n = 11$ .

## C.2 BEN

```
=====
Analysis for Q-Learning Loss
=====
```

### Summary Statistics:

#### Early stage:

Mean : 2418.4  
 Std : 2948.42  
 Median : 1382.44

#### Mid stage:

Mean : 850.307  
 Std : 865.315  
 Median : 548.499

#### Late stage:

Mean : 249.975  
 Std : 267.485  
 Median : 164.514

**Statistical Tests:****EARLY-MID:**

Test used : Mann-Whitney U  
P-value : 2.75096e-12  
Significant : Yes  
Effect size : -0.721698  
Mean diff : -1568.09  
Median diff : -833.938

**MID-LATE:**

Test used : t-test  
P-value : 3.35826e-19  
Significant : Yes  
Effect size : -0.937378  
Mean diff : -600.332  
Median diff : -383.985

**EARLY-LATE:**

Test used : Mann-Whitney U  
P-value : 2.16325e-39  
Significant : Yes  
Effect size : -1.03583  
Mean diff : -2168.42  
Median diff : -1217.92

---

**Analysis for Epistemic Loss**

---

**Summary Statistics:****Early stage:**

Mean : 3738.12  
Std : 4340.37  
Median : 3595.12

**Mid stage:**

Mean : 2224.3  
Std : 926.447  
Median : 1906.22

**Late stage:**

Mean : 1480.38  
Std : 614.314  
Median : 1450.01

**Statistical Tests:****EARLY-MID:**

Test used : Mann-Whitney U  
P-value : 1.87536e-39  
Significant : Yes  
Effect size : -0.482378  
Mean diff : -1513.82  
Median diff : -1688.89

**MID-LATE:**

Test used : t-test  
P-value : 3.41227e-46  
Significant : Yes  
Effect size : -0.946429  
Mean diff : -743.922  
Median diff : -456.211

**EARLY-LATE:**

Test used : Mann-Whitney U  
P-value : 1.97483e-98  
Significant : Yes  
Effect size : -0.728375  
Mean diff : -2257.74  
Median diff : -2145.11

---

**Analysis for Rewards**

---

**Summary Statistics:****Early stage:**

Mean : -81.25  
Std : 103.5  
Median : -86

**Mid stage:**

Mean : -116.765  
Std : 95.9329  
Median : -99

**Late stage:**

Mean : -75.1765  
Std : 90.9287  
Median : -73

**Statistical Tests:****EARLY-MID:**

Test used : t-test  
P-value : 0.329132  
Significant : No

Effect size : -0.355901  
Mean diff : -35.5147  
Median diff : -13

## MID-LATE:

Test used : t-test  
P-value : 0.217299  
Significant : No  
Effect size : 0.444964  
Mean diff : 41.5882  
Median diff : 26

## EARLY-LATE:

Test used : t-test  
P-value : 0.863135  
Significant : No  
Effect size : 0.0623456  
Mean diff : 6.07353  
Median diff : 13

## =====Analysis for Cumulative Returns=====

## Summary Statistics:

## Early stage:

Mean : -572.312  
Std : 353.307  
Median : -648.5

## Mid stage:

Mean : -2356.35  
Std : 487.332  
Median : -2300

## Late stage:

Mean : -3809.12  
Std : 401.997  
Median : -3671

## Statistical Tests:

## EARLY-MID:

Test used : t-test  
P-value : 8.10375e-13  
Significant : Yes  
Effect size : -4.19155  
Mean diff : -1784.04  
Median diff : -1651.5

**MID-LATE:**

Test used : t-test  
 P-value : 1.68029e-10  
 Significant : Yes  
 Effect size : -3.25217  
 Mean diff : -1452.76  
 Median diff : -1371

**EARLY-LATE:**

Test used : t-test  
 P-value : 1.87071e-21  
 Significant : Yes  
 Effect size : -8.55312  
 Mean diff : -3236.81  
 Median diff : -3022.5

Listing 7: BEN, Chain Length  $n = 3$ .

```
=====
Analysis for Q-Learning Loss
=====
```

**Summary Statistics:****Early stage:**

Mean : 9.0621e+09  
 Std : 1.11129e+11  
 Median : 359028

**Mid stage:**

Mean : 51210.2  
 Std : 82246.9  
 Median : 24168.2

**Late stage:**

Mean : 3529.9  
 Std : 5630.64  
 Median : 1565.3

**Statistical Tests:****EARLY-MID:**

Test used : Mann-Whitney U  
 P-value : 1.61872e-55  
 Significant : Yes  
 Effect size : -0.115322  
 Mean diff : -9.06205e+09  
 Median diff : -334860

**MID-LATE:**

Test used : Mann-Whitney U  
P-value : 1.27667e-59  
Significant : Yes  
Effect size : -0.817936  
Mean diff : -47680.3  
Median diff : -22602.9

**EARLY-LATE:**

Test used : Mann-Whitney U  
P-value : 1.30966e-94  
Significant : Yes  
Effect size : -0.115323  
Mean diff : -9.0621e+09  
Median diff : -357463

---

**Analysis for Epistemic Loss**

---

**Summary Statistics:****Early stage:**

Mean : 2214.01  
Std : 1351.49  
Median : 1759.53

**Mid stage:**

Mean : 915.499  
Std : 561.958  
Median : 724.881

**Late stage:**

Mean : 605.353  
Std : 3316.38  
Median : 288.135

**Statistical Tests:****EARLY-MID:**

Test used : t-test  
P-value : 1.72322e-180  
Significant : Yes  
Effect size : -1.25464  
Mean diff : -1298.51  
Median diff : -1034.65

**MID-LATE:**

Test used : Mann-Whitney U  
P-value : 2.25913e-191

Significant : Yes  
Effect size : -0.130398  
Mean diff : -310.147  
Median diff : -436.746

**EARLY-LATE:**

Test used : Mann-Whitney U  
P-value : 0  
Significant : Yes  
Effect size : -0.635261  
Mean diff : -1608.66  
Median diff : -1471.4

---

**Analysis for Rewards**

---

**Summary Statistics:****Early stage:**

Mean : -109.125  
Std : 120.27  
Median : -86

**Mid stage:**

Mean : -113.824  
Std : 104.901  
Median : -99

**Late stage:**

Mean : -96.8824  
Std : 85.1993  
Median : -105

**Statistical Tests:****EARLY-MID:**

Test used : t-test  
P-value : 0.908325  
Significant : No  
Effect size : -0.0416361  
Mean diff : -4.69853  
Median diff : -13

**MID-LATE:**

Test used : t-test  
P-value : 0.619497  
Significant : No  
Effect size : 0.177284  
Mean diff : 16.9412

```
Median diff   : -6

EARLY-LATE:
Test used      : t-test
P-value        : 0.744724
Significant   : No
Effect size    : 0.117469
Mean diff      : 12.2426
Median diff    : -19
```

```
=====
Analysis for Cumulative Returns
=====
```

Summary Statistics:

Early stage:

```
Mean      : -1084.31
Std       : 438.654
Median    : -1081.5
```

Mid stage:

```
Mean      : -2960.94
Std       : 548.241
Median    : -3043
```

Late stage:

```
Mean      : -4479.41
Std       : 467.605
Median    : -4589
```

Statistical Tests:

EARLY-MID:

```
Test used      : t-test
P-value        : 1.02639e-11
Significant   : Yes
Effect size    : -3.77986
Mean diff      : -1876.63
Median diff    : -1961.5
```

MID-LATE:

```
Test used      : t-test
P-value        : 1.24336e-09
Significant   : Yes
Effect size    : -2.98019
Mean diff      : -1518.47
Median diff    : -1546
```

EARLY-LATE:

```

Test used      : t-test
P-value       : 8.83529e-20
Significant   : Yes
Effect size   : -7.48874
Mean diff     : -3395.1
Median diff   : -3507.5

```

Listing 8: BEN, Chain Length  $n = 5$ .

```
=====
Analysis for Q-Learning Loss
=====
```

## Summary Statistics:

## Early stage:

```

Mean      : 2085.95
Std       : 2162.4
Median    : 1373.73

```

## Mid stage:

```

Mean      : 576.122
Std       : 649.869
Median    : 338.179

```

## Late stage:

```

Mean      : 156.021
Std       : 191.834
Median    : 67.8597

```

## Statistical Tests:

## EARLY-MID:

```

Test used      : t-test
P-value       : 1.61151e-36
Significant   : Yes
Effect size   : -0.94565
Mean diff     : -1509.83
Median diff   : -1035.55

```

## MID-LATE:

```

Test used      : t-test
P-value       : 7.51887e-33
Significant   : Yes
Effect size   : -0.876801
Mean diff     : -420.101
Median diff   : -270.319

```

## EARLY-LATE:

```

Test used      : t-test

```

P-value : 1.0056e-60  
Significant : Yes  
Effect size : -1.25724  
Mean diff : -1929.93  
Median diff : -1305.87

=====  
Analysis for Epistemic Loss  
=====

Summary Statistics:

Early stage:

Mean : 1376.98  
Std : 1241.08  
Median : 988.406

Mid stage:

Mean : 1258.87  
Std : 31145.6  
Median : 161.888

Late stage:

Mean : 2677.52  
Std : 60170.7  
Median : 5.31501

Statistical Tests:

EARLY-MID:

Test used : Mann-Whitney U  
P-value : 0  
Significant : Yes  
Effect size : -0.00535891  
Mean diff : -118.114  
Median diff : -826.518

MID-LATE:

Test used : Mann-Whitney U  
P-value : 0  
Significant : Yes  
Effect size : 0.0296113  
Mean diff : 1418.65  
Median diff : -156.573

EARLY-LATE:

Test used : Mann-Whitney U  
P-value : 0  
Significant : Yes  
Effect size : 0.0305605

```
Mean diff      : 1300.54
Median diff    : -983.091
```

```
=====
Analysis for Rewards
=====
```

```
Summary Statistics:
```

```
Early stage:
```

```
Mean      : -80.875
Std       : 70.1827
Median    : -57.5
```

```
Mid stage:
```

```
Mean      : -114.882
Std       : 97.6795
Median    : -137
```

```
Late stage:
```

```
Mean      : -79.6471
Std       : 75.2853
Median    : -86
```

```
Statistical Tests:
```

```
EARLY-MID:
```

```
Test used     : t-test
P-value       : 0.276686
Significant   : No
Effect size   : -0.399853
Mean diff     : -34.0074
Median diff   : -79.5
```

```
MID-LATE:
```

```
Test used     : t-test
P-value       : 0.261584
Significant   : No
Effect size   : 0.404055
Mean diff     : 35.2353
Median diff   : 51
```

```
EARLY-LATE:
```

```
Test used     : t-test
P-value       : 0.962895
Significant   : No
Effect size   : 0.0168723
Mean diff     : 1.22794
Median diff   : -28.5
```

---

 Analysis for Cumulative Returns
 

---

## Summary Statistics:

## Early stage:

Mean : -756.438  
 Std : 448.425  
 Median : -829.5

## Mid stage:

Mean : -2396.41  
 Std : 540.392  
 Median : -2349

## Late stage:

Mean : -4111.24  
 Std : 491.61  
 Median : -4231

## Statistical Tests:

## EARLY-MID:

Test used : t-test  
 P-value : 2.4656e-10  
 Significant : Yes  
 Effect size : -3.30279  
 Mean diff : -1639.97  
 Median diff : -1519.5

## MID-LATE:

Test used : t-test  
 P-value : 1.03534e-10  
 Significant : Yes  
 Effect size : -3.31959  
 Mean diff : -1714.82  
 Median diff : -1882

## EARLY-LATE:

Test used : t-test  
 P-value : 3.69339e-19  
 Significant : Yes  
 Effect size : -7.13008  
 Mean diff : -3354.8  
 Median diff : -3401.5

Listing 9: BEN, Chain Length  $n = 7$ .

---

---

Analysis for Q-Learning Loss

---

---

## Summary Statistics:

## Early stage:

Mean : 201.363  
Std : 646.288  
Median : 28.6683

## Mid stage:

Mean : 7.60222  
Std : 6.14727  
Median : 6.00191

## Late stage:

Mean : 3.53114  
Std : 2.27404  
Median : 2.88227

## Statistical Tests:

## EARLY-MID:

Test used : Mann-Whitney U  
P-value : 3.91253e-87  
Significant : Yes  
Effect size : -0.423969  
Mean diff : -193.76  
Median diff : -22.6664

## MID-LATE:

Test used : t-test  
P-value : 9.57251e-41  
Significant : Yes  
Effect size : -0.878398  
Mean diff : -4.07108  
Median diff : -3.11963

## EARLY-LATE:

Test used : Mann-Whitney U  
P-value : 7.90234e-134  
Significant : Yes  
Effect size : -0.432894  
Mean diff : -197.831  
Median diff : -25.7861

---

---

Analysis for Epistemic Loss

---

---

**Summary Statistics:****Early stage:**

Mean : 854.156  
Std : 1244.76  
Median : 476.503

**Mid stage:**

Mean : 2051.78  
Std : 109092  
Median : 9.81774

**Late stage:**

Mean : -21.3259  
Std : 417.914  
Median : -29.5177

**Statistical Tests:****EARLY-MID:**

Test used : Mann-Whitney U  
P-value : 0  
Significant : Yes  
Effect size : 0.0155244  
Mean diff : 1197.62  
Median diff : -466.685

**MID-LATE:**

Test used : Mann-Whitney U  
P-value : 0  
Significant : Yes  
Effect size : -0.0268745  
Mean diff : -2073.1  
Median diff : -39.3355

**EARLY-LATE:**

Test used : Mann-Whitney U  
P-value : 0  
Significant : Yes  
Effect size : -0.942936  
Mean diff : -875.482  
Median diff : -506.021

---

**Analysis for Rewards**

---

**Summary Statistics:**

Early stage:  
Mean : -139.375  
Std : 107.425  
Median : -111.5

Mid stage:  
Mean : -131  
Std : 83.4245  
Median : -118

Late stage:  
Mean : -128.353  
Std : 74.1294  
Median : -137

#### Statistical Tests:

##### EARLY-MID:

Test used : t-test  
P-value : 0.809435  
Significant : No  
Effect size : 0.0870797  
Mean diff : 8.375  
Median diff : -6.5

##### MID-LATE:

Test used : t-test  
P-value : 0.925005  
Significant : No  
Effect size : 0.0335436  
Mean diff : 2.64706  
Median diff : -19

##### EARLY-LATE:

Test used : t-test  
P-value : 0.740539  
Significant : No  
Effect size : 0.119427  
Mean diff : 11.0221  
Median diff : -25.5

---

#### Analysis for Cumulative Returns

---

#### Summary Statistics:

Early stage:  
Mean : -1496.19  
Std : 584.326

```
Median      : -1587.5

Mid stage:
Mean       : -3164.82
Std        : 677.043
Median     : -2960

Late stage:
Mean       : -5642.65
Std        : 604.554
Median     : -5607

Statistical Tests:

EARLY-MID:
Test used    : t-test
P-value      : 3.02444e-08
Significant  : Yes
Effect size   : -2.63863
Mean diff     : -1668.64
Median diff   : -1372.5

MID-LATE:
Test used    : t-test
P-value      : 2.52487e-12
Significant  : Yes
Effect size   : -3.8606
Mean diff     : -2477.82
Median diff   : -2647

EARLY-LATE:
Test used    : t-test
P-value      : 6.79593e-19
Significant  : Yes
Effect size   : -6.97439
Mean diff     : -4146.46
Median diff   : -4019.5
```

Listing 10: BEN, Chain Length  $n = 9$ .

```
=====
Analysis for Q-Learning Loss
=====
```

Summary Statistics:

```
Early stage:
Mean       : 150.151
Std        : 610.171
Median     : 2.32373
```

**Mid stage:**

Mean : 1.27351  
Std : 0.58875  
Median : 1.13778

**Late stage:**

Mean : 1.09848  
Std : 0.48181  
Median : 1.00344

**Statistical Tests:****EARLY-MID:**

Test used : Mann-Whitney U  
P-value : 7.15432e-75  
Significant : Yes  
Effect size : -0.345059  
Mean diff : -148.878  
Median diff : -1.18596

**MID-LATE:**

Test used : t-test  
P-value : 1.97005e-08  
Significant : Yes  
Effect size : -0.325374  
Mean diff : -0.175033  
Median diff : -0.134332

**EARLY-LATE:**

Test used : Mann-Whitney U  
P-value : 4.34471e-101  
Significant : Yes  
Effect size : -0.345464  
Mean diff : -149.053  
Median diff : -1.32029

---

**Analysis for Epistemic Loss**

---

**Summary Statistics:****Early stage:**

Mean : 9005.47  
Std : 424831  
Median : 230.341

**Mid stage:**

Mean : 1946.32

Std : 53466.3  
Median : -11.3205

Late stage:

Mean : 295.921  
Std : 9372.83  
Median : -38.3282

Statistical Tests:

EARLY-MID:

Test used : Mann-Whitney U  
P-value : 0  
Significant : Yes  
Effect size : -0.0233152  
Mean diff : -7059.15  
Median diff : -241.661

MID-LATE:

Test used : Mann-Whitney U  
P-value : 0  
Significant : Yes  
Effect size : -0.0429982  
Mean diff : -1650.4  
Median diff : -27.0076

EARLY-LATE:

Test used : Mann-Whitney U  
P-value : 0  
Significant : Yes  
Effect size : -0.028986  
Mean diff : -8709.55  
Median diff : -268.669

=====

Analysis for Rewards

=====

Summary Statistics:

Early stage:

Mean : -82.875  
Std : 76.4566  
Median : -86

Mid stage:

Mean : -144.471  
Std : 85.5083  
Median : -137

Late stage:  
Mean : -75.6471  
Std : 84.6633  
Median : -67

## Statistical Tests:

EARLY-MID:  
Test used : t-test  
P-value : 0.0430657  
Significant : Yes  
Effect size : -0.759419  
Mean diff : -61.5956  
Median diff : -51

MID-LATE:  
Test used : t-test  
P-value : 0.0289021  
Significant : Yes  
Effect size : 0.808862  
Mean diff : 68.8235  
Median diff : 70

EARLY-LATE:  
Test used : t-test  
P-value : 0.80504  
Significant : No  
Effect size : 0.0896051  
Mean diff : 7.22794  
Median diff : 19

=====  
Analysis for Cumulative Returns  
=====

## Summary Statistics:

Early stage:  
Mean : -598.438  
Std : 432.208  
Median : -680.5

Mid stage:  
Mean : -2539.53  
Std : 620.485  
Median : -2400

Late stage:  
Mean : -4302.35  
Std : 429.992

Median : -4042

Statistical Tests:

EARLY-MID:

Test used : t-test  
P-value : 2.8519e-11  
Significant : Yes  
Effect size : -3.63025  
Mean diff : -1941.09  
Median diff : -1719.5

MID-LATE:

Test used : t-test  
P-value : 1.17108e-10  
Significant : Yes  
Effect size : -3.30237  
Mean diff : -1762.82  
Median diff : -1642

EARLY-LATE:

Test used : t-test  
P-value : 1.54372e-21  
Significant : Yes  
Effect size : -8.59174  
Mean diff : -3703.92  
Median diff : -3361.5

Listing 11: BEN, Chain Length  $n = 11$ .