

1.1

1.1

The screenshot shows the DBeaver 26.0.5 interface. The left sidebar displays the database structure for 'ecommerce_db', including schemas, event triggers, extensions, storage, system info, roles, and a 'public' schema containing 'test_db3' and 'Administrator'. The main SQL editor window, titled '<postgres> Script-16', contains the following SQL code:

```
create table products(  
  id serial primary key,  
  name varchar(100) not null,  
  price integer not null ,  
  stock_quantity integer not null  
)
```

Below the SQL editor, the 'Statistics 1' window is open, showing the following data:

Name	Value
Updated Rows	0
Execute time	0.312s
Start time	Fri May 29 12:49:27 MMT 2026
Finish time	Fri May 29 12:49:27 MMT 2026
Query	create table products(id serial primary key, name varchar(100) not null, price integer not null , stock_quantity integer not null)

1.2

The screenshot shows the DBeaver 26.0.5 interface. The left sidebar displays the database structure for 'ecommerce_db', including schemas, event triggers, extensions, storage, system info, roles, and a 'public' schema containing 'test_db3' and 'Administrator'. The main SQL editor window, titled '<postgres> Script-17', contains the following SQL code:

```
create table orders(  
  id serial primary key,  
  product_id integer not null,  
  quantity_ordered integer not null ,  
  order_date timestamp default now()  
)
```

Below the SQL editor, the 'Statistics 1' window is open, showing the following data:

Name	Value
Updated Rows	0
Execute time	0.063s
Start time	Fri May 29 12:54:40 MMT 2026
Finish time	Fri May 29 12:54:41 MMT 2026
Query	create table orders(id serial primary key, product_id integer not null, quantity_ordered integer not null , order_date timestamp default now())

1.1

2.1(1)

DBeaver 26.0.5 - <postgres> Script-18

File Edit Navigate Search SQL Editor Database Window Help

Filter connections by name

postgres localhost:5432

ecommerce_db

- Schemas
- Event Triggers
- Extensions
- Storage
- System Info
- Roles
- postgres
- test_db
- test_db3
- Administer
- System Info

```
insert into products (name,price,stock_quantity)
values ('Wireless Mouse','35000','50');
```

Statistics 1

Name	Value
Updated Rows	1
Execute time	0.012s
Start time	Fri May 29 12:57:32 MMT 2026
Finish time	Fri May 29 12:57:32 MMT 2026
Query	insert into products (name,price,stock_quantity) values ('Wireless Mouse','35000','50')

Files

Name DataSource

- Bookmarks
- Dashboards
- Diagrams
- Scripts

2.1(2)

DBeaver 26.0.5 - <postgres> Script-19

File Edit Navigate Search SQL Editor Database Window Help

Filter connections by name

postgres localhost:5432

ecommerce_db

- Schemas
- Event Triggers
- Extensions
- Storage
- System Info
- Roles
- postgres
- test_db
- test_db3
- Administer
- System Info

```
insert into products (name,price,stock_quantity)
values('Mechanical Keyboard','120000','20'),
('HDMI Cable','8000','100');
```

Statistics 1

Name	Value
Updated Rows	2
Execute time	0.008s
Start time	Fri May 29 13:00:14 MMT 2026
Finish time	Fri May 29 13:00:14 MMT 2026
Query	insert into products (name,price,stock_quantity) values('Mechanical Keyboard','120000','20'), ('HDMI Cable','8000','100')

Files

Name DataSource

- Bookmarks
- Dashboards
- Diagrams
- Scripts

1.1

2.1(3)

DBeaver 26.0.5 - <postgres> Script-20

File Edit Navigate Search SQL Editor Database Window Help

Auto

postgres public@ecommerce_db

Filter connections by name

postgres localhost:5432

Databases

- ecommerce_db
 - Schemas
 - Event Triggers
 - Extensions
 - Storage
 - System Info
 - Roles
- postgres
- test_db
- test_db3
- Administrator
- System Info

insert into orders (product_id,quantity_ordered)
values (1,2),(2,1),(3,5);

Statistics 1

Name	Value
Updated Rows	3
Execute time	0.009s
Start time	Fri May 29 13:05:31 MMT 2026
Finish time	Fri May 29 13:05:31 MMT 2026
Query	insert into orders (product_id,quantity_ordered) values (1,2),(2,1),(3,5)

Files

Name

- Bookmarks
- Dashboards
- Diagrams
- Scripts

DataSource

DBeaver 26.0.5 - <postgres> Script-21

File Edit Navigate Search SQL Editor Database Window Help

Auto

postgres public@ecommerce_db

Filter connections by name

postgres localhost:5432

Databases

- ecommerce_db
 - Schemas
 - Event Triggers
 - Extensions
 - Storage
 - System Info
 - Roles
- postgres
- test_db
- test_db3
- Administrator
- System Info

select * from orders;

orders 1

id	product_id	quantity_ordered	order_date
1	1	2	2026-05-29 13:05:31.166
2	2	1	2026-05-29 13:05:31.166
3	3	5	2026-05-29 13:05:31.166

Files

Name

- Bookmarks
- Dashboards
- Diagrams
- Scripts

DataSource

2.2(1)

DBeaver 26.0.5 - <postgres> Script-21

File Edit Navigate Search SQL Editor Database Window Help

Auto

postgres public@ecommerce_db

Filter connections by name

postgres localhost:5432

Databases

- ecommerce_db
 - Schemas
 - Event Triggers
 - Extensions
 - Storage
 - System Info
 - Roles
- postgres
- test_db
- test_db3
- Administrator
- System Info

select * from products;

products 1

id	name	price	stock_quantity
1	HDMI Cable	8,000	100
2	Wireless Mouse	38,000	50
3	Mechanical Keyboard	120,000	35

Files


Name

- Bookmarks
- Dashboards
- Diagrams
- Scripts

DataSource

1.1


2.2(2)

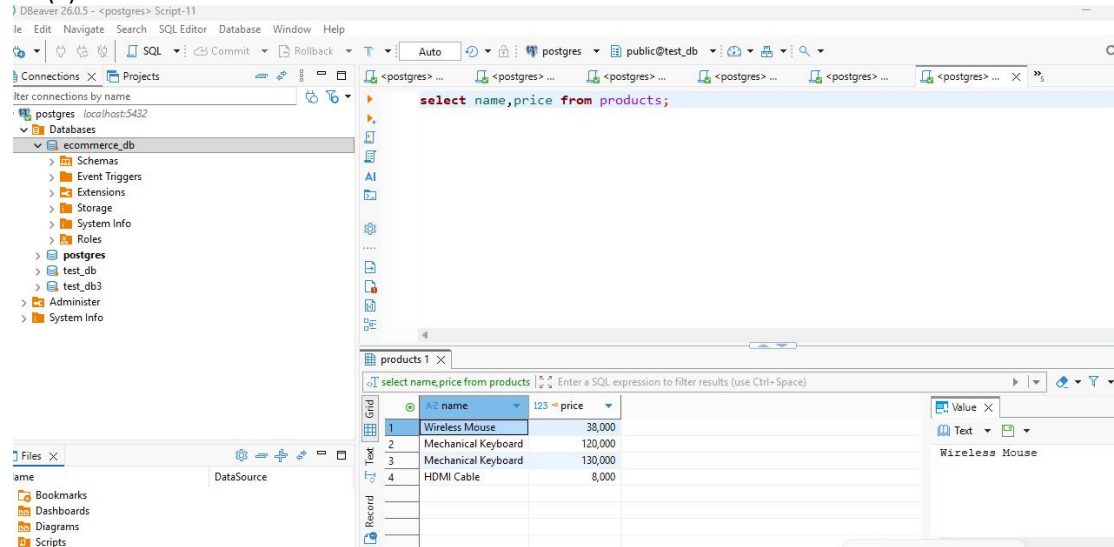

The screenshot shows the DBeaver 26.0.5 interface. The left sidebar displays the database structure for 'ecommerce_db', including Schemas, Event Triggers, Extensions, Storage, System Info, Roles, and PostgreSQL. The main SQL editor window shows the query: `select name,price from products;`. The results are displayed in a table with columns 'name' and 'price'.

	name	price
1	Wireless Mouse	38,000
2	Mechanical Keyboard	120,000
3	Mechanical Keyboard	130,000
4	HDMI Cable	8,000


2.2(3)

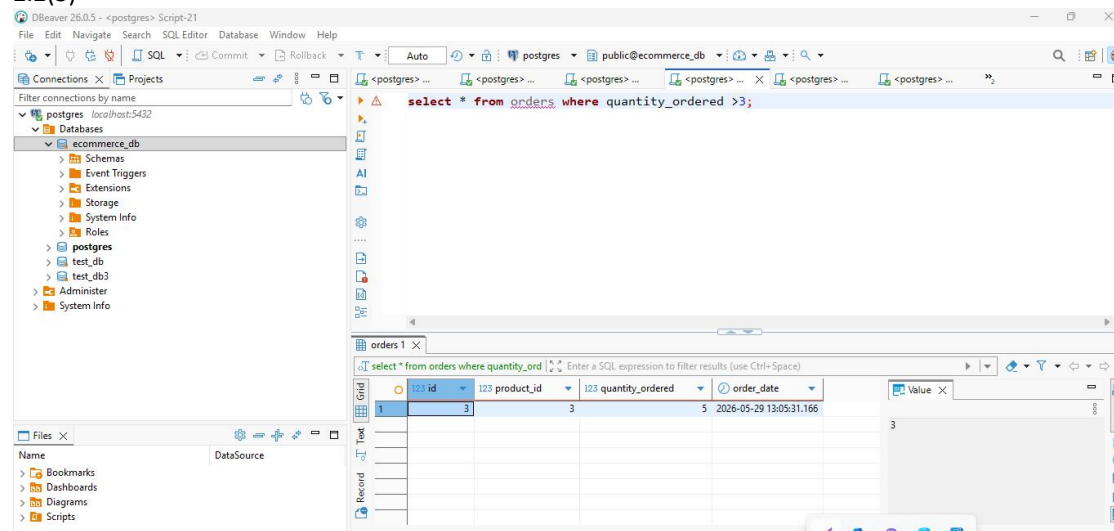

The screenshot shows the DBeaver 26.0.5 interface. The left sidebar displays the database structure for 'ecommerce_db'. The main SQL editor window shows the query: `select * from orders where quantity_ordered > 3;`. The results are displayed in a table with columns 'id', 'product_id', 'quantity_ordered', and 'order_date'.

	id	product_id	quantity_ordered	order_date
1	123	123	3	2026-05-29 13:05:31.166


2.3(1)

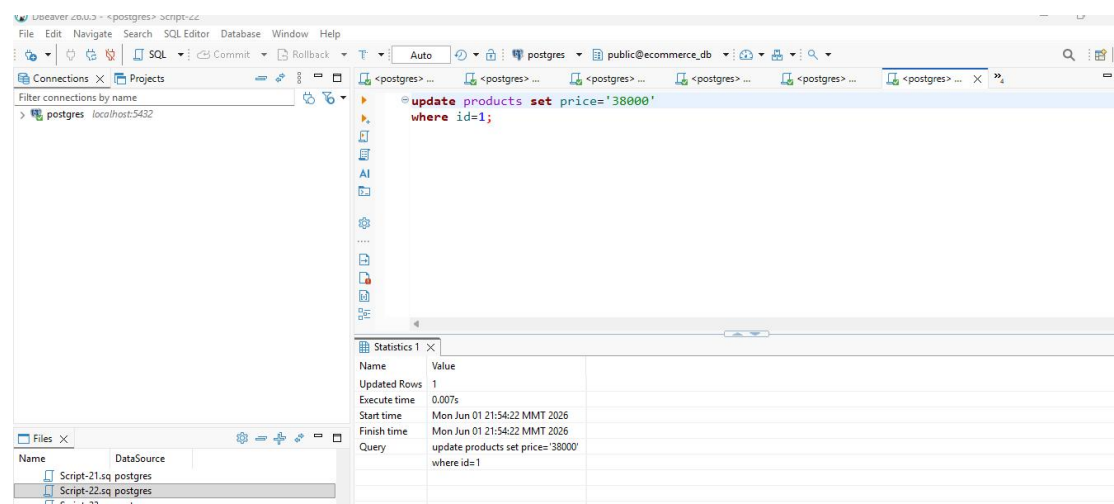



The screenshot shows the DBeaver 26.0.5 interface. The left sidebar displays the database structure for 'ecommerce_db'. The main SQL editor window shows the query: `update products set price='38000' where id=1;`. The results are displayed in a table with columns 'Name' and 'Value'.

Name	Value
Updated Rows	1
Execute time	0.007s
Start time	Mon Jun 01 21:54:22 MMT 2026
Finish time	Mon Jun 01 21:54:22 MMT 2026
Query	update products set price='38000' where id=1

2.3(2)

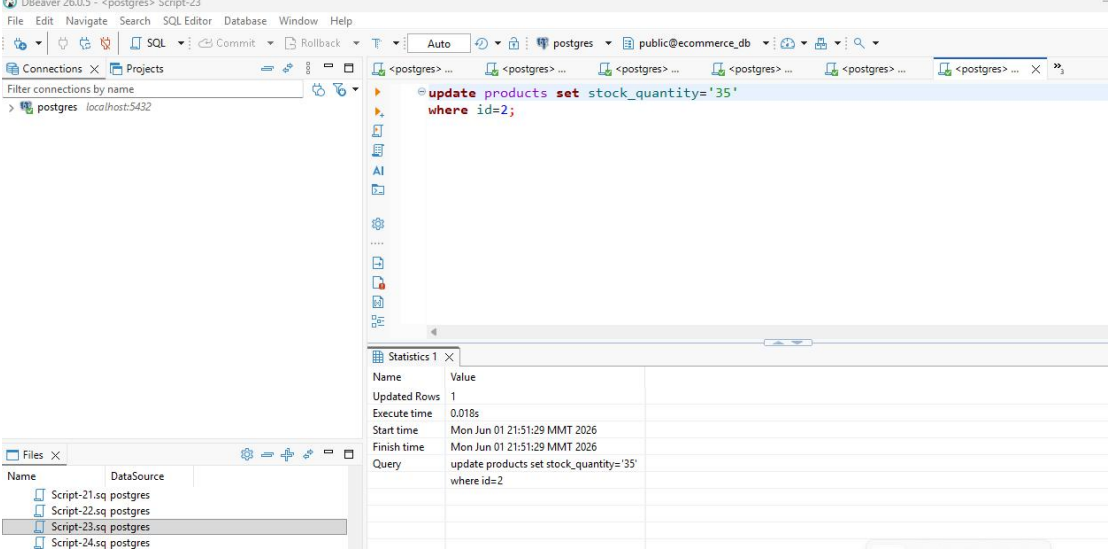

2.4

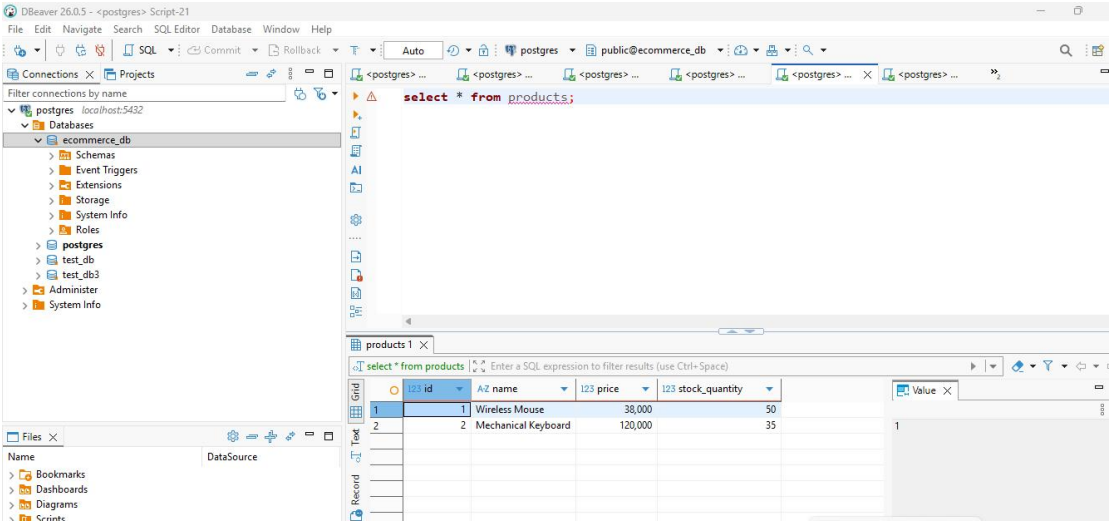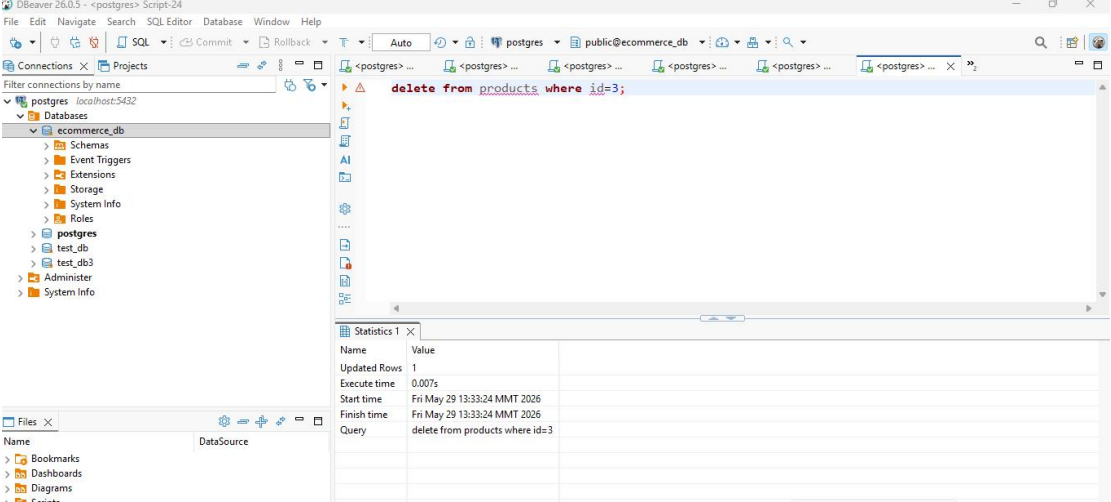

1.1

3(1)

The screenshot shows the DBeaver 26.0.5 interface. The SQL Editor contains the following query:

```
insert into products (name,price,stock_quantity)
values('Mouse',-10000,'10');
```

The query has been executed successfully. The Statistics window shows the following details:

Name	Value
Updated Rows	1
Execute time	0.008s
Start time	Fri May 29 13:38:59 MMT 2026
Finish time	Fri May 29 13:38:59 MMT 2026
Query	insert into products (name,price,stock_quantity) values('Mouse',-10000,'10')

3(2)

The screenshot shows the DBeaver 26.0.5 interface. The SQL Editor contains the following query:

```
insert into orders (id,quantity_ordered,order_date)
values('5','7','31.5.2026');
```

The query has failed with the following error message:

```
SQL Error [22008]: ERROR: date/time field value out of range: "31.5.2026"
Hint: Perhaps you need a different "DateStyle" setting.
Position: 69
```

The error message is displayed in the Results window. The SQL Editor shows the query with the date '31.5.2026' highlighted in red, indicating the error location.