Text Analysis in R

Lecture 1: Introduction

Helge Liebert

Basics

Which programming language to choose?

- It depends. Choice is use-case- and taste-specific.
- Anything can be done in any language. Convenience varies.
- Concepts and toolkits transfer easily most of the time.
- Prior knowledge vs. task suitability.
- Ease of exploratory analysis vs. ease of deployment in production.

Possible options

- Specialized languages: R, Julia, MATLAB/Octave, Stata, Gauss, ...
- General-purpose languages: Python, Perl, Ruby, C, ...
- Choose a high-level, dynamic, interpreted language unless you are sure you require the extra speed of a compiled language.
- Ideally free and open source. Popular is typically better.
- Research ex ante which libraries are mature and best for solving your specific problem.

- R is the major statistical programming language.
- It is free, used in many sciences and in industry. Good documentation.
- New models are frequently published and implemented first in R.
- Having data processing and analysis in the same language is nice.
- Good library support for common tools (e.g. databases, regular expressions).
- Specific tasks for which high-level wrapper functions are not available may be very cumbersome.
- In recent years, R development has been very active and libraries exist for almost anything.

Python

- General-purpose programming language, supports object-oriented programming.
- Reads like english. Explicit and clear. Whitespace matters, no braces. ("There should be one obvious way to do it".)
- Used extensively in industry and sciences. Good documentation.
- Libraries for almost anything.
- Many science-related libraries exist for other languages, but rarely are they as mature.
- Good and growing support for statistical modeling.
- A bit less suited for interactive data work (but more so for deployment in production).

This lecture

- The lab sessions utilize R.
- Any task covered by this lecture can be accomplished using R or Python (augmented by shell programs).
- R, Python, SQL and knowing your way around a terminal are highly valued skills on the job market.
- Rule-of-thumb recommendation:
 - Simple data analysis/small text corpora: Stick with R. Augment with other tools where required.
 - More involved data processing/larger text corpora: Go with Python. You can still analyze data in R.
 - ... and whatever program your colleagues are using.


Why not Stata, Matlab, Gauss or similar?

- Advantage: Many domain-specific models supported.
- Less support for almost anything else (including text processing).
- Much less flexible for anything not to do with data analysis or numerics.
- Difficult to deploy on a server. Often tied to a GUI.
- Less popular, smaller userbase. Proprietary and expensive.


A note on text editing

- A script is a set of *plain text* instructions, fed to an interpreter.
- Editing is independent from running code.
- R scripts usually have the suffix .r, Python .py, Shell .sh.
- Proficiency in a text editor makes working with text easier and faster.
- Text editors allow you to integrate your work and edit text efficiently.
- VS Code, Atom, Sublime Text, Vim, Emacs, ...

A possible setup

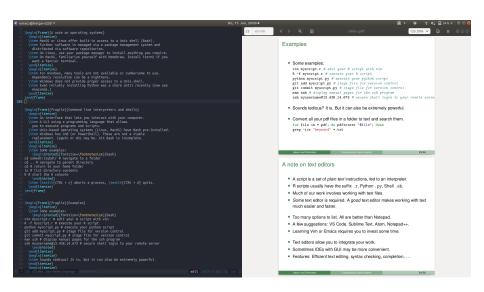

... that is universal

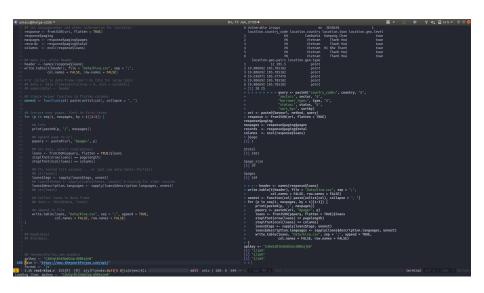

... that is universal

each school-track, classroom formation is conditionally improable with respect to 5M status, as students from different prisary school districts are sixed and their 5M status secondary schools are status of the status secondary schools in Soutzerland, viate(incarantizizati) shows that track-by-school friend effects render peer group composition conditionally uncertained with a large set of students' characteristics, while track friend effects and school lixed effects on the school school friend the school school from the school school from the school school from the Soutzerland with schools with schools and the Soutzerland with secondary schools for equally

5 & NEU REU bitte lesen

The Sevent associated evidence, we formally test the validity of the identification. The Beyond this amendmail evidence, we formally test the validity of the identification. Appeals 2. First, we accompanied the properties of 30 years products individual baseline characteristics (pender, native speaker, and spel. The aim of this test is to detect patential selection into classrooms. We also conduct this test separately for a secondary consistency of the properties of the secondary of the properties of the secondary of the second

178 or identification relies on variation between classes within school-tree/years.
Although tendings on pertentially choose these identical relievance and thereby
influence schooling options for their children, possible selection into schools does not
confound our results. Videntical fringenous class of formation could still occur if perents
this potential threat, an acquired the efficial education statistics from the Subsefectors instituted office GSS, Netwiti(Statist der Lermodon) in German) for the
years 2012-2015. Importantly, the 50t has a classroom 10 which allows us to reconstruct

Subsectors (Sandand Sandand different education tracks, and classes are strictly separated between tracks. Within a cenh schol-track, classroom formation is conditionally imporable with respect to SN status, as students from different primary school districts are mixed and their SN status is not observed by secondary school administrators, infoomteeding 195A data from secondary schools in Switzerland, Ncitet(Wordrandottiz085) shows that track-by-school fried effects conder peer group composition conditionally uncorrelated with a large set. New York of the SN shows that track-by-school fried effects conder peer group composition conditionally uncorrelated with a large set. New York of the SN shows that the school of the SN shows the

172

173 * NBU: 180 bitte less


178 byond this amondotal evidence, we formally test the validity of the identification strategy with four balancing tests, which are presented and discussed extensively in strategy with four balancing tests, which are presented and discussed extensively in backline characteristics [sopen, anxive speaker, and aga, the aim of this test is to direct potential selection into classrooms. We also conduct this test separately for 9M and non-9M students. None of the baseline characteristics are statistically significant at conventional levels, either considered individually or jointly. Second, we repress the indicator for 9M status on class state fresher, which should be jointly insignificant if assignment to 2Baseroom is approved but the spect to 9M status video/clerytalvoll. We teachers. We find no evidence for systematic assignment of 9M status is classed from the conduct a simulation exercise in the spirit of victor (restrict for 180 for 9M status classes, and making assign 9M status to classes, and

**Cite*(carrell200). We re-sample classes, randomly assign ON students to Classes, and the six whether the observed distribution of 3N students offers from the simulated one. In addition, we simulate random classroom assignment within Enbody, compare the same control of the control of th


176 Our identification relies on variation between classes within school-frack-years.
Although smalles can potentially choose their district of residence and thereof so influence schooling options for their children, possible selection into school does not require to transfer their children to a class state lawer SF fraction. To investigate this potential threat, we acquired the official education statistics from the Swiss Federal Statistical Office (SM, twestiffstrift of reference) in cernal for the transfer their classification of the state of

Type ? for help

Rstudio

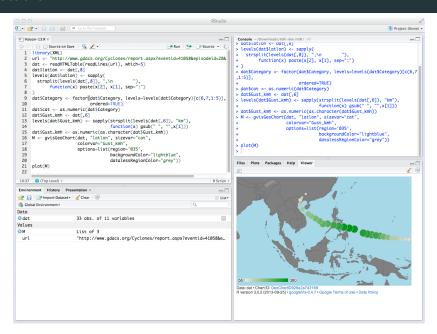

Spyder

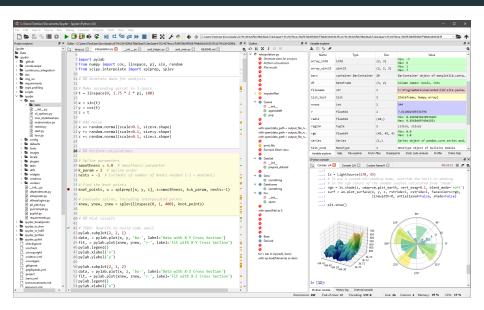

A note on text editing

- Text editors allow you to integrate your work and edit text efficiently.
- Sometimes IDEs with GUI may be more convenient.
- Features: Regex search and replace, diff, syntax checking, formatting, completion, documentation lookup, version control support, ...
- Features: Regex search and replace, diff, syntax checking, formatting, completion, version control support, persistent undo, documentation lookup ...
- Consider using version control. Git is the predominant version control software used today. ProGit is a good and free resource.

Regular expressions

Introduction

- Text data is now commonly used as a modeling input in both research and industry.
- Often involves substantial amounts of data preparation.
- Text processing is a common task in IT many helpful tools available.
- Working with text requires understanding regular expressions.
- Language-independent concept.


Regular expressions

- A regular expression is a character sequence that describes a set of strings.
- Regular expressions are constructed analogously to arithmetic expressions, by using various operators to combine smaller expressions.
- Usually used for find/replace operations on strings, or for validation.
- Pervasive in Unix text processing programs (grep was originally written by Ken Thompson).
- grep: globally search a regular expression and print.
- Not limited to command line search tools.

Regular expressions

- Pattern matching: Find one of a specified set of strings in text.
- Examples:
 - Diagnoses in medical records.
 - Addresses or zip codes in concatenated admin records.
 - Sequences within a genome, e.g. a virus signature.
 - Validate data-entry fields (URL, date, email, credit card #).
 - Example using a regex tester.

Obligatory xkcd

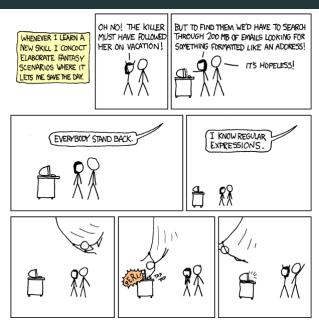

Examples

AHVN 13: 756\.[0-9]{4}\.[0-9]{4}\.[0-9]{4}\.[0-9]{2}

Matches: 756.1234.5678.90 Does not match: 123.45.678.675

US-SSN: $[0-9]{3}-[0-9]{2}-[0-9]{4}$

Matches: 166-11-4433

Does not match: 11-55555555

Email addresses: $[a-z]+\mathfrak{d}([a-z]+\.)+(ch|edu|com)$

Matches: someone@unibas.ch

Does not match: someone@invalid.domain

Screening job candidates

- ' [First name]! and pre/2 [last name] w/7
 bush or gore or republican! or democrat! or charg!
 or accus! or criticiz! or blam! or defend! or iran contra
 or clinton or spotted owl or florida recount or sex!
 or controvers! or fraud! or investigat! or bankrupt!
 or layoff! or downsiz! or PNTR or NAFTA or outsourc!
 or indict! or enron or kerry or iraq or wmd! or arrest!
 or intox! or fired or racis! or intox! or slur!
 or controvers! or abortion! or gay! or homosexual!
 or gun! or firearm! "
 - LexisNexis search string used by Monica Goodling to illegally screen candidates for DOJ positions





http://www.iustice.gov/oig/special/s0807/final.pdf

Regular expressions

- Characters in a regular expression are either regular characters (literal meaning) or metacharacters (special meaning).
- Generally, letters and numbers match themselves.
- Normally case sensitive, but can be set to ignore case.
- Careful with puntuation, most of it has special meanings.
- To match metacharacters literally, they need to be escaped, i.e. preceded by a backslash \.

Matching string literals

Regular expression	Input string
input	This input string is short.
15	The due date is 15.12.

Matching string literals

Regular expression	Input string
input	This input string is short.
15	The due date is 15.12.
15.12	The due date is 15.12.

Matching string literals

Regular expression	Input string
input	This input string is short.
15	The due date is 15.12.
15.12	The due date is 15.12.
but:	
15.12	The due date is <mark>15712</mark> .
match . literal:	
15\.12	The due date is 15712.
15\.12	The due date is 15.12.

Regex basics

Operation	Regular expression	Input string
concatenation	foobar	Matches foobar but not foo or bar.
disjunction	this that	Matches this or that.
closure (repetition)	like.* apples	I like apples, Peter likes apples. Mary also <mark>likesALKFHEDL</mark> apples.
	like. apples	Mary also likesALKFHEDL apples.
grouping	(He She) likes (He She).*(very)*much\.	She likes apples. He likes apples. She likes apples very very much.

- More complicated patterns can be expressed via concatenation, disjunction, repetition and scope.
- Precedence in descending order.

Quantifiers

Character	Matches
*	0 or more instances of preceding char
+	1 or more instances of preceding char
?	0 or one instance of preceding char
{m}	exactly m instances of preceding char
{m , n}	m through n instances of preceding char
{m,}	m or more instances of preceding char
{,n}	up to n instances of preceding char
?	add to a quantifier to match ungreedy

• Quantifiers match greedily by default (i.e. the longest string possible).

Ex: ^begin.*end will match 'begin bla bla end bla end'.

^begin.*?end will match 'begin bla bla end bla end'.

Groups, ranges and character classes

Character	Matches	Example RE	Matches
•	Any character, except \n	like.	likes like! like like
(a b)	a or b	(you me)	you or me
[ab]	Character range	202[01]	2019 2020 2021 2022
[a-z]	Character range	[A-Z][a-z]*	Capitalized words
[0-9]	Digit range	20[0-9]{2}	Years in the 21st century
[^ab]	Any character but (negation)	20[^0][01]	2000 2010 2020 2025 2031

- Quantifiers, ranges and other shortcuts improve expressiveness.
 - Ex: [A-E]+ is shorthand for (A|B|C|D|E)(A|B|C|D|E)*.
- More character classes (sometimes) available.
 - Ex: \w for words ([A-Za-z0-9_]), or \d for digits ([0-9]), \a , \s , ...

Anchors and other special characters

Character	Matches	Example RE	Matches
٨	Beginning of a string	^New	New research in this field
\$	End of a string	[A-Za-z]+!\$	A breakthrough! Finally!
\n	Newline		
\t	Tab		
•••			

- Strings can stretch multiple lines.
- Character encodings can sometimes cause problems. Stick to UTF-8.

Regex syntaxes

- More elaborate regex syntaxes also support positive and negative lookahead/lookbehind, conditionals and group references.
 - Ex: ^(?!.*word).*\$ matches lines not containing a word.
- Different syntaxes (basic, extended, perl, vim, ...) mostly similar with regard to basic features.
- Perl-compatible regular expressions (PCRE) is the de-facto standard.
- Most regex implementations feature switches to invert the search pattern, to ignore case, and more.

Example: Valid RFC-822 email addresses



Remarks

- Writing a regular expression is like writing a program.
- Requires understanding the programming model.
- Can be easier to write than read.
- Can be difficult to debug.
- ➡ Break up problems into smaller pieces. Try not to do everything in one large regex. Comment liberally.

Resources

- Pin a cheat sheet to your office wall.
- Regular expression tools help (e.g. regex101.com).
- Simple interactive tutorial: regexone.com. Also learn regex the easy way.
- For regular expression syntax specific to R, look up this short tutorial.
- This guide also provides a more detailed overview of working with strings in R.

Remarks

- Regexes are a powerful tool.
- Easy to grasp, complex to master.
- Using them in applications can be complex and error-prone.
- Regular expressions are not parsers.

"Some people, when confronted with a problem, think 'I know, I'll use regular expressions.' Now they have two problems."

Emacs newsgroup

Next lecture: Representing text as data

References

References

- Chacon, S. and B. Straub (2014). *Pro Git*. Apress.
- Fitzgerald, M. (2012). Introducing Regular Expressions: Unraveling Regular Expressions, Step-by-Step. 1. ed. Beijing: O'Reilly.
- Matloff, N. (2011). The Art of R Programming: A Tour of Statistical Software Design. No Starch Press.
- Shotts, W. E. (2019). *The Linux Command Line: A Complete Introduction*. Second edition. San Francisco: No Starch Press.