

Common Platform Civil Interface External API Specification

- [Introduction](#)
 - [Background](#)
 - [Purpose](#)
 - [Scope](#)
- [OAuth 2.0 Authentication \(Client Credentials\)](#)
- [API Overview](#)
- [SubmitCase - Submit New Prosecution request](#)
- [SubmitDocument - Add Prosecution material](#)
- [GetSubmissionStatus - Get Submission status](#)
- [ResultsAPI - Get shared results](#)
- [Data Content](#)
- [Submit Case - Field Definitions](#)
 - [Case/Prosecution Related Fields](#)
 - [Defendant Related Fields](#)
 - [Alias Array](#)
 - [Parent Guardian](#)
 - [Offence Related Fields](#)
 - [Example Request Body](#)
 - [Example Response Body](#)
- [Create Material - Field Definitions](#)
 - [Material Types:](#)
 - [Example Response Body](#)
- [Get Submission Status - Field Definitions](#)
 - [Example Response Body](#)
- [Error Messages](#)
 - [HTTP Errors](#)
- [Business Validation Errors and Warnings](#)
 - [Warnings](#)
 - [Submission Bad Request Error codes](#)
 - [Error Message Format example:](#)
- [CPCI API Specifications](#)

Document Date:	13 May 2026
Author:	Michael Rossi Shaik Hasan Matthew Rich Abdul Rahim Hussain
Owner:	HMCTS
Status:	Draft
Document version:	1.3
This document describes API version:	1.0
Contributor	Rajkumar Meena
Reviewer	Robert Matthews

Synopsis:	This document provides a specification for integration between civil authorities and HMCTS case management systems for initiating new (civil authority) applications and prosecutions. This specification describes the context for the CPCI API v1
-----------	---

Document History:

The following provides a log of changes to this document:

Version	Date	Author	Notes
---------	------	--------	-------

0.1	23/04 /2021	Michael Rossi	First draft
0.2	25/01 /2022	Michael Rossi	Second draft
0.3	09/06 /2022	Michael Rossi	Changed new attribute 'businessType' to hearingType within Prosecution data fields
0.4	20/09 /2022	Michael Rossi	- Incorporated CDES Section changes as part of CCT-1509. <i>Material Types</i> (3.3.4) updated accordingly.
0.5	20/09 /2022	Michael Rossi	Updated typos in version 0.4
1.0	19/09 /2024	Shaik Hasan	Introduces clearer hearing allocation logic, allowing use of date ranges (start/end) for auto-listing instead of a fixed hearing date, which is especially relevant for enforcement cases.
1.1	22/04 /2026	Matthew Rich	Initial Civils release changes: - CAD-1127 - Added new 'OFFENCE_CODE_NOT_SUPPORTED' error code in status API - CAD-1215 - Amended the case submission (for summons) summonsCode allowed values to 'A' only. Any other value will receive an error. - CCT-1222 - Update API endpoint URI/Content-types naming conventions (removing enforcement content type and renaming charge to other-cases, merging the 2 content type schemas and renamed relatedURN attribute to relatedReferenceNumber)
1.2	13/05 /2026	Abdul Rahim Hussain	CCT-1222 - Replace authentication mechanism from shared secret/mTLS with OAuth2.0
1.3	04 Jun 2026	Matthew Rich	CAD-1253 - Amending some Business Validation Errors and Warnings that are not valid for civil cases
1.4	03 Jul 2026	Matthew Rich Sachin Dangui	- Renamed defendantId to prosecutorDefendantId in the Create Material field definitions - Removed the OFFENCE_CODE_IS_INVALID rejection code (no longer required)

References:	[1] Standard Prosecutor Interface Specification (SPI) v.7 1 March 2016 [2] CJS Data Standards Catalogue CJSDataStandardsCatalogue [3] CPPI Protocol Agreement [4] Service Level Agreement [5] CPPI Code of Connection [6] CPPI External API Specification Release 2.0 Version 3.9
--------------------	--

Terminology

API	Application Programming Interface
CJSE	Criminal Justice System Exchange
HMCTS	Her Majesty's Courts and Tribunal Service
NPP	Non-Police Prosecutor
REST	Representational State Transfer
CPCI	Common platform civil interface

Introduction

Background

The commencement of civil proceedings (case) is laying the information or complaint before a court with jurisdiction to determine the outcome. Civil authorities commence a case by charge, summons, or means of enquiry. The civil authorities must create, maintain, and manage records of all details about the proceedings, e.g., civil offences, respondent/defendant's name and address, and pass this information to the determining magistrates' court. Civil authorities are supported in this function by dedicated computer systems generically referred to as Case Management applications.

The courts are also required to create, maintain and manage records of all civil offence prosecutions initiated through each particular court and to pass any case result information back to the originating applicant/prosecutor. The magistrates' and Crown courts are supported in this function with a new national standard case management application, the Common Platform.

The agreement for, and the overall principles governing, the exchange of data between the civil authorities and the Common Platform will be documented through protocols between HMCTS and civil authorities. The protocol will set out the framework for this data exchange, the scope, the Service Level Agreements etc. This Interface Specification *and* the protocols are closely related and any change to this Interface Specification can only be made if it remains consistent with those protocols.

Purpose

This document is primarily intended to support the development, testing and support of the solutions necessary for the automated exchange of data between civil authorities and the HMCTS Common Platform via RESTful APIs. The Interface Specification defines the data attributes and data structures required to meet the business needs. For each attribute, it defines the business definition and associated business rules for the data that will be held.

Scope

This API specification document is only concerned with the API from the API consumer point of view. It does not provide details on items that are common across other HMCTS applications but are required for go-live. The documentation that covers these other areas is:

[3] Protocol Agreement

[4] Service Level Agreement

[5] Code of Connection

These documents will provide details on the processes and procedures that need to be in place before external systems connect to the HMCTS Common Platform to exchange information via the CPCI API. This includes the operational security requirement for external systems to authenticate using Mutual Transport Layer Security (TLS) before consuming the CPCI API.

Civil Authorities

The interface described in this specification is intended for use by any Civil Authority. However, due to the wide range in scale of such prosecuting organisations, alternative channels are supported (e.g. web channels for authorised prosecutor staff to manually create cases and access results).

Non-Police Prosecutors

This document does not cover the Non-Police Prosecutor API. The Common Platform Prosecutor interface (CPPI) describes the interface between the Non-Police Prosecutors and the Common Platform.

Police Prosecutors

This document does not cover the Police Prosecutor API. The Standard Prosecution Interface Specification (SPI) describes the interface between the Police and the Libra Magistrates Court system. The proposed mechanism for the exchange of new case and result data between Police Force Case Management Applications and HMCTS Case Management is for the police to continue to use the existing Criminal Justice System Exchange (CJSE) and SPI specification without any changes on their part.

OAuth 2.0 Authentication (Client Credentials)

The Common Platform Civil Interface supports **OAuth 2.0 client_credentials** authentication over **standard server-side HTTPS**. No networklayer mutual TLS (mTLS) is required.

The consumer obtains a **shortlived JWT access token (~1 hour)** from an OAuth 2.0 authorisation server (Microsoft Entra ID within the HMCTS Azure tenant) using its `client_id` and `client_secret`. The token is presented on every API request using the standard HTTP Authorization header.

Azure API Management (APIM) validates the JWT (signature, issuer, audience, expiry), extracts the calling application identifier (`client_id` / `appid` / `azp`), and uses it to retrieve the prosecutor's **OU code** and **CJSCPPUID** from Azure Key Vault.

APIM enforces an **impersonation guard** by asserting that the OU returned from Key Vault matches `prosecutionSubmissionDetails.prosecutingAuthority` in the request body. On success, the corresponding **CJSCPPUID** is treated as the authenticated system-user identity.

Tokens are short-lived and should be automatically refreshed by the consumer. Onboarding a new consumer requires only OAuth app registration and Key Vault provisioning; no PKI, client certificates, or custom token claims are required.

API Overview

This section states the URL and the suffix for the version e.g. in the format

`https://<root>/<APIname>/<version>`

Base External URL: <https://apigw.cjscp.org.uk/CPCI>

NOTE: where path is provided throughout this document the base url precedes the path

e.g. <https://apigw.cjsdp.org.uk/CPCI/v1/cases>

Available Operations

Base internal URI : <http://<STE/DEV/SIT>/stagingprosecutorscivil-command-api/command/api/rest/stagingprosecutors-civil>

Name	HTTP Method	Path
SubmitCase	POST	/cases
SubmitDocument	POST	/cases/{case-urn}/materials
GetSubmissionStatus	GET	/submissions/{submission-id}
ResultsAPI	GET	/results/{startdate}/{enddate}

	External URL's	Content-Type
1	https://apigw.cjsdp.org.uk/CPCI/v1/cases	application/vnd.hmcts.cjs.cpci-summons.v1+json application/vnd.hmcts.cjs.cpci-other-cases.v1+json
2	https://apigw.cjsdp.org.uk/CPCI/v1/cases/{case-urn}/materials	multipart/form-data
3	https://apigw.cjsdp.org.uk/CPCI/v1/submissions/{submission-id}	application/vnd.hmcts.cjs.cpci-submission-details+json
4	https://apigw.cjsdp.org.uk/CPCI/v1/results/{startdate}/{enddate}	application/vnd.hmcts.results.v1+json

SubmitCase - Submit New Prosecution request

This REST API can be used by civil authorities to create a new prosecution on the common platform.

Item	Description
Path	/cases
HTTP Method	POST
HTTP Version	1.1
Idempotent	No
HTTP Request Header	<i>Authorisation: OAuth2.0 Client Credentials Flow</i> <i>Content-Type: One of</i> <i>application/vnd.hmcts.cjs.cpci-summons.v1+json</i> <i>application/vnd.hmcts.cjs.cpci-other-cases.v1+json</i>
HTTP Request Body	JSON message
HTTP Response	On success returns the location (URI) and submission Id which is required to check the status of the request.
HTTP Success Code(s)	202 – The API is asynchronous. A 202 response means that the request was accepted pending further validation.
HTTP Failure Code(s)	4xx, 5xx.


Prosecution Types

The Content-Type specified in the client request identifies the type of prosecution to be created. The following are supported:

Prosecution Type	Content-Type
------------------	--------------

Summons Cases	application/vnd.hmcts.cjs.cpci-summons.v1+json
Other Cases (including Enforcement)	application/vnd.hmcts.cjs.cpci-other-cases.v1+json

Figure 1: Submit New Prosecution Request Sequence Diagram

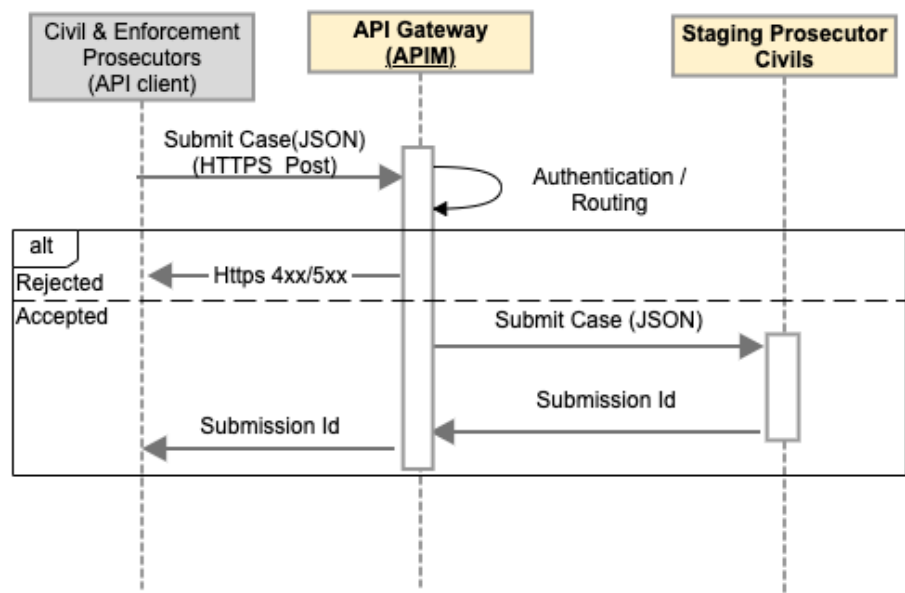


SubmitDocument - Add Prosecution material

This REST API can be used by civil authorities to add material (a document) to a prosecution on the common platform.

Item	Description
Path	/cases/{case-id}/materials
HTTP Method	POST
HTTP Version	1.1
Idempotent	No
HTTP Request Header	<i>Authorisation: OAuth2.0 Client Credentials Flow</i> <i>Content-Type: multipart/form-data; boundary=<Unique-Id></i>
HTTP Request Body	multipart/form-data.
HTTP Response	On success returns the location (URI) and submission Id which is required to check the status of the request.
HTTP Success Code(s)	202 – The API is asynchronous. A 202 response means that the request was accepted pending further validation.
HTTP Failure Code(s)	4xx, 5xx.

Figure 2: Submit New Material Request Sequence Diagram

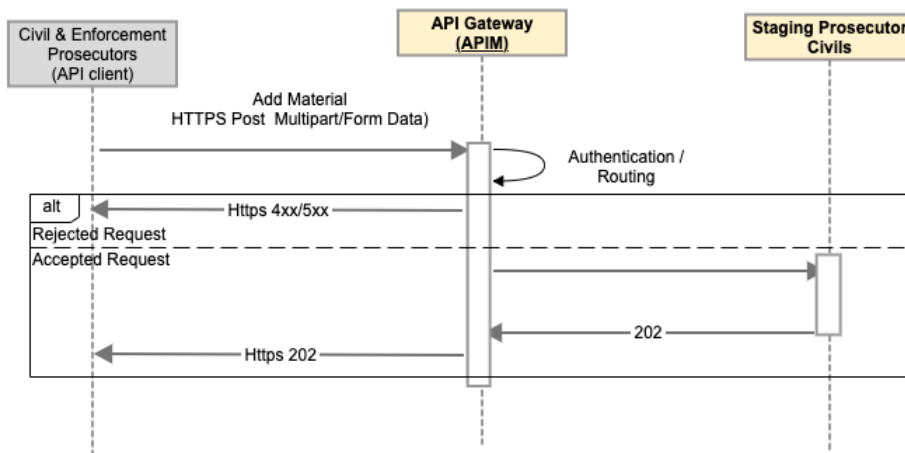


GetSubmissionStatus - Get Submission status

This REST API can be used by civil authorities to check the status of a previous submission request.

Item	Description
URI	/submissions/{submission-id}
HTTP Method	GET
HTTP Version	1.1
Idempotent	Yes
	<i>Authorisation: OAuth2.0 Client Credentials Flow</i> <i>Accept: application/vnd.hmcts.cjs.cpci-submission-details+json</i>
HTTP Response	On success returns details of the status of the request for this submission ids required to check the status of the request. JSON message
HTTP Success Code (s)	200
HTTP Failure Code (s)	4xx, 5xx.

Figure 3: Get Submission Status Sequence Diagram

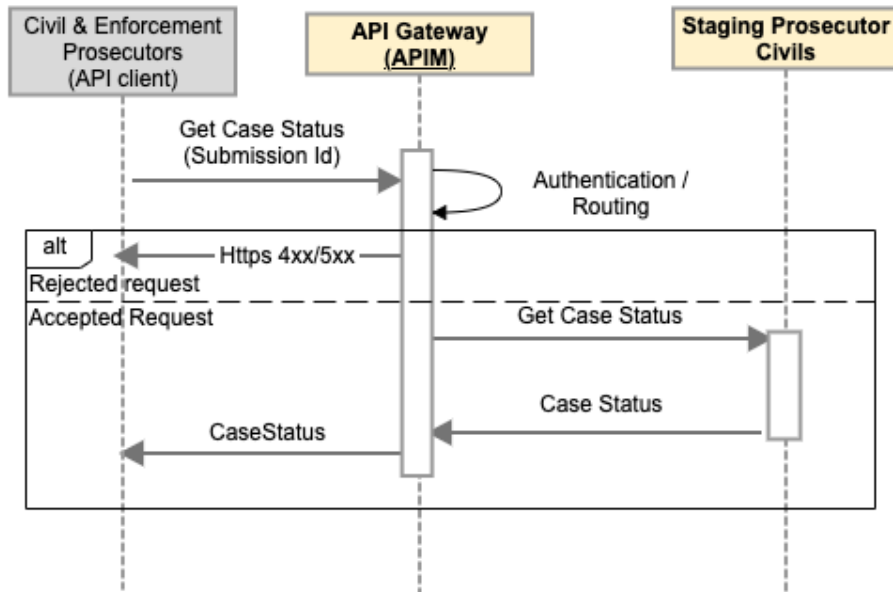

ResultsAPI - Get shared results

This REST API can be used by civil authorities to check the result(s) of a prosecution case.

Item	Description
URI	/results/{startdate}/{enddate}
HTTP Method	GET
HTTP Version	1.1
Idempotent	Yes
	<i>Authorisation: OAuth2.0 Client Credentials Flow</i> <i>Accept: application/vnd.hmcts.results.v1+json</i>
HTTP Response	On success returns details of the status of the request for this submission ids required to check the status of the request.
HTTP Success Code(s)	200
HTTP Failure Code (s)	4xx, 5xx.
internal Curl	<pre>curl --location 'http://localhost:8080/stagingprosecutors-query-api/query/api/rest/stagingprosecutors/v1/results//SURRPF?startDate=2024-08-29' \ --header 'Accept: application/vnd.hmcts.results.v1+json' \ --header 'CJSCPPUID: <>'</pre>

Data Content

This section describes the data to be transferred between the civil authority and HMCTS.

The **Field Name** column defines the field name.

The **Description** column provides a description of the field.

The **Format** column defines the format of the field. It can be one of:

An = alphanumeric (any character in the agreed character set) of maximum length n characters.

Nn = numeric (characters 0-9) of maximum length n characters.

D10 = a valid calendar date in the format CCYY-MM-DD, e.g., 2000-01-01 for 1st Jan 2000.

T8 = a valid 24-hour clock time in the format hh:mm:ss, e.g., 13:45:56 for fifty- six seconds after 1.45pm.

(+)N16.2 = a monetary value in GBP currency with a leading sign (positive) indicator followed by an amount in pounds and pence, e.g. +0.00

DT29 = a valid date and time in a round-trip datetime pattern in the format CCYY-MM-DD'T'HH':'mm':'ss'.fff'Z'K, e.g. 2012-09-27T08:51:40.014Z[UTC] for 27th September 2012 at 08:51:40 in the morning where 014 is the time to the milliseconds, Z signifies "Zulu" time denoting a UTC time zone

Array = an array value containing nested records

The **M / CM / O** column indicates:

M – Mandatory - a value is required

CM - Conditional Mandatory – The field may or may not exist. The business rules define the conditions under which a value must appear in the field.

O - Optional - the field / data item may or may not be present

The **Business Rules** column defines the rules that apply to the data item

The **Comments** column is used to provide any additional relevant information.

Example

```
{
  "hearingVenues": [
    {
      "courtHouse": "Lavender Hill Magistrates' Court",
      "courtSessions": [
        {
          "courtRoom": "N/A",
          "defendants": [
            {
              "address1": "FLAT - 25A",
              "address2": "Constable Street",
              "address3": "Bristol",
              "address4": "England",
              "address5": "UK",
              "dateOfBirth": "2000-01-01",
              "firstName": "Melissa",
              "lastName": "McKenzie",
              "name": "Melissa McKenzie",
              "postCode": "SW11 3TQ",
              "prosecutionCasesOrApplications": [
                {
                  "caseOrApplicationReference": "SJ811286023",
                  "offences": [
                    {
                      "offenceCode": "CT99070",
                      "offenceResults": [
                        {
                          "cjsResultCode": "1015",
                          "resultData": {
                            "amount": "£147.00"
                          }
                        }
                      ]
                    }
                  ]
                }
              ]
            }
          ]
        }
      ]
    }
  ]
}
```



```

        "resultText": "Fine\nAmount of fine £147.00"
      },
      {
        "cjsResultCode": "3012",
        "resultData": {
          "amount": "£8.91"
        },
        "resultText": "Compensation\nAmount of compensation £8.91\nMajor creditor
organisation name Transport for London"
      }
    ],
    "offenceTitle": "Fail to hand over for inspection a ticket for the Croydon Tramlink
system",
    "orderIndex": 1,
    "originatingCaseUrn": "SJ811286023",
    "pleaValue": "GUILTY"
  }
],
"results": [
  {
    "cjsResultCode": "3011",
    "resultData": {
      "amount": "£320.10"
    },
    "resultText": "Costs\nAmount of costs £320.10\nMajor creditor organisation name Transport
for London"
  }
]
},
"results": [
  {
    "resultText": "Collection order\nCollection order type Make payments as ordered\nReason for
not making an attachment of earnings order or deduction from benefit application No information from defendant"
  },
  {
    "cjsResultCode": "3117",
    "resultData": {
      "amount": "£59.00"
    },
    "resultText": "Surcharge\nAmount of surcharge £59.00"
  },
  {
    "resultText": "Pay by date\nDate to pay in full by 12/09/2024"
  }
],
"title": "Mr"
}
],
"hearingStartTime": "2024-08-29T09:42:13Z"
}
],
"ljaName": "Lavender Hill Magistrates' Court"
}
],
"prosecutionAuthorityCode": "TFL",
"prosecutionAuthorityId": "31af405e-7b60-4dd8-a244-c24c2d3fa595",
"prosecutionAuthorityName": "Transport for London",
"startDate": "2024-08-29"
}

```

Submit Case - Field Definitions

Case/Prosecution Related Fields

Field Name	Description	Format	Business Rules	Comment	Summons	Other Cases	Notes
prosecutingAuthority	Identifies the Civil Authority responsible for initiating the case.	A7	Valid CJS OU Code – See CJS Data Standards [2] Section 2.4	Prosecutors that do not have a CJS OU Code should ask to be assigned one.	M	M	Verified
informant	Name of the person to be named as the informant in this case.	A92			M	M	Currently Optional
urn	Civil Authority reference for the case	A36	A case reference unique to the Civil Authority.	Limited to the alphanumeric (letters, numbers) and hyphens ["A"-“Z”, “a”-“z”, “0”-“9”, “-”]	M	M	Verified
relatedReferenceNumber	Civil Authority reference for a case or account to be linked	A36			O	O	New attribute
summonsCode		S1	Valid value is A only (Application).	Mandatory for summons-prosecution (Initiation Code is S internally), otherwise not used	CM	O	Currently Optional
caseMarker	To be populated if a CJS-agreed Case Marker applies. Multiple values to be separated by a space	A10			O	O	Verified
hearingType	Hearing types map to court session types. Business types will be used for auto-listing criteria if an exact match for a session type. Used only for listing requests based on hearing date range.	A10	Session/business types may differ from court to court. Ensure the court schedule includes the relevant business type, otherwise, it will not be used.		O	O	New attribute
courthearinglocation	The OU code of the court house followed by	A7			M	M	Verified
dateOfHearing	Date of the Court Hearing	D10		ISO Date CCYY-MM-DD Conditional mandatory: Either date of hearing and time of hearing should be present or Start/End date range should be present.	M	CM	Verified
timeOfHearing	The actual start time of the Court Hearing	T8	a valid 24-hour clock time in the format hh:mm:ss 13:11:11	hh:mm:ss Conditional mandatory: Either date of hearing and time of hearing should be present or Start/End date range should be present.	M	CM	Verified
startDateRangeOfHearing	The date range (start) of the Court Hearing is to be auto-allocated	D10		ISO Date CCYY-MM-DD Conditional mandatory: Either date of hearing and time of hearing should be present or Start/End date range should be present.	NA	CM	New attribute
endDateRangeOfHearing	The date range (end) of the Court Hearing is to be auto-allocated	D10		ISO Date CCYY-MM-DD Conditional mandatory: Either date of hearing and time of hearing should be present or Start/End date range should be present.	NA	CM	New attribute
paymentReference	The applicant's reference number indicates the fee is paid.	A37			O	O	Verified

Defendant Related Fields

Field Name	Description	Format	Business Rules	Comment	Summons	Other Cases
prosecutorDefendantId	A unique reference to a defendant /respondent within civil proceedings.	A36		Limited to the alphanumeric (letters, numbers) and hyphens ["A"-“Z”, “a”-“z”, “0”-“9”, “-”]. Default to 1.	M	M
asn	Arrest Summons Number	A20		Extradition may have this	O	O
pncIdentifier	Person/organisation PNC identifier. CJS standard format for Police National Computer Identifier. E.g. 2020 /1234567L	A13	See CJS Data Standard [2] section 3.107 for details	Extradition may have this	O	O

croNumber	National Identification Service (formerly Criminal Records Office) Number CJS standard format for National Identification Service (formerly Criminal Records Office) Number (fingerprint number). E.g. 123456/20L, SF20/123456M	A12	Used for previous offenders See CJS Data Standard [2] section 3.24 for details	Extradition may have this	O	O
title	Title by which a person is addressed	A35	See CJS Data Standard [2] section 3.104 for details	Alphanumeric The full available range of generally recognised titles is permitted. Guidance based on CJS standards is below: · Mr · Mrs · Ms · Dr · Rev · Sir · Lady · Lord · Dame	O	O
forename	The first given name of a person, e.g., John	A35	See CJS Data Standard [2] section 3.50 for details.	Mandatory if the defendant /respondent is a person. Alphanumeric no consecutive spaces (i.e. a space cannot appear adjacent to another space). If the name exceeds the field size, only the first 35 characters are to be used from the source. The name defined in this field will be used for the case	CM	CM
forename2	The second given name of a person, e.g., Ian	A35	See CJS Data Standard [2] section 3.50 for details.	Alphanumeric no consecutive spaces (i.e. a space cannot appear adjacent to another space). If the name exceeds the field size, only the first 35 characters are to be used from the source.	O	O
forename3	The third given name of a person, e.g., Barry.	A35	See CJS Data Standard [2] section 3.50 for details.	Alphanumeric no consecutive spaces (i.e. a space cannot appear adjacent to another space). If the name exceeds the field size, only the first 35 characters are to be used from the source.	O	O
surname	Surname or Family name, e.g., Brown.	A35	See CJS Standards [2] section 3.39	Mandatory if defendant /respondent is a person otherwise field must be null. Alphanumeric no consecutive spaces (i.e. a space cannot appear adjacent to another space). If the name exceeds the field size, only the first 35 characters are to be used from the source. The name defined in this field will be used for the case.	CM	CM
organisationTelephoneNumber	Organisation Telephone number where the defendant is an organisation				⊖	

nationality	Country of origin as stated by the defendant	A3	See CJS Standards [2] section 3.103	Needs to conform to ISO 3166-1 alpha-3. Example value GBR.	O	O
additionalNationality	Additional country of origin as stated by the defendant	A3	See CJS Standards [2] section 3.103	Needs to conform to ISO 3166-1 alpha-3. Example value GBR.	O	O
workTelephoneNumber	A business telephone number, including any exchange of location code, at which a person or organisation can be contacted in the UK by telephonic means.	A35	Must match Regex <code> /^[0-9+\\-]{10,}\$/ </code> 10 or more characters, where each character must be either numerical, a plus character, a minus character, or a space character	Replaced E-GIF standard and CJS standard with Common Platform standard.	O	O
homeTelephoneNumber	A home telephone number, including any exchange of location code, at which a person or organisation can be contacted in the UK by telephonic means.	A35	Must match Regex <code> /^[0-9+\\-]{10,}\$/ </code> 10 or more characters, where each character must be either numerical, a plus character, a minus character, or a space character	Replaced E-GIF standard and CJS standard with Common Platform standard.	O	O
mobileTelephoneNumber	A mobile number, including any exchange of location code, at which a person or organisation can be contacted in the UK by telephonic means.	A35	Must match Regex <code> /^[0-9+\\-]{10,}\$/ </code> 10 or more characters, where each character must be either numerical, a plus character, a minus character, or a space character	Replaced E-GIF standard and CJS standard with Common Platform standard.	O	O
primaryEmail	The identification of the first e-mail address.	A255		from 1 to 127 characters from 0-9, A-Z, a-z or ' . - _ followed by @ followed by another 1 to 127 characters from the same set	O	O
secondaryEmail	The identification of the second e-mail address.	A255		from 1 to 127 characters from 0-9, A-Z, a-z or ' . - _ followed by @ followed by another 1 to 127 characters from the same set	O	O
dateOfBirth	The date when a person was born.	D10	The date must not be in the future.		O	O
gender	Identifies the gender of a person.	N1	See CJS Standards [2] section 3.45 Mandatory if the defendant is a person. Otherwise, field must be null, e.g., organisation.	0=Not Known 1=Male 2=Female 9=Not specified	CM	CM
occupation	The description of an occupation.	A54	See CJS Standards [2] section 3.77	Description related to value in the occupation code field	O	O
defendantOccupationCode	An occupation code	N5	See CJS Standards [2] section 3.77	Value in the occupation code field	O	
driverNumber	A driver's licence number	A16		Not currently supported in API v2.0	O	O
documentationLanguage	Identifies the language to be used in documents	A1	See CJS Standard [2] section 3.5.1 - default E	Values E = English W =Welsh	M	M
hearingLanguage	Identifies the language to be used during hearings	A1	See CJS Standard [2] section 3.5.1 - default E	Values E = English W = Welsh	M	M
languageRequirement	Notes about the defendant's language needs, e.g. interpreter details	A150		Not currently supported in API v2.0	O	O

specificRequirements	Notes about any help that the defendant may need when attending court – e.g. wheelchair access.	A150		Not currently supported in API v2.0	O	O
custodyStatus	Identifies if the defendant has been granted bail by the police or held in custody pending a hearing at court	A1	B = Conditional Bail U = Unconditional Bail C = Custody R = Re-arrested after release on bail	Extradition may have this	O	O
address1	Address Line 1 for the defendant /respondent	A35	If the defendant's address is not known by the prosecutor populate this field with the standard 3-character code for no fixed address	Also used where the defendant is a company	M	M
address2	Address Line 2 for the defendant /respondent	A35			O	O
address3	Address Line 3 for the defendant /respondent	A35			O	O
address4	Address Line 4 for the defendant /respondent	A35			O	O
address5	Address Line 5 for the defendant /respondent	A35			O	O
postcode	Postcode for the defendant /respondent	A8			M	M
nationalInsuranceNumber	National Insurance Number	A9			O	O
organisationName	Name of an organisation, e.g. Marks and Spencer.				CM	CM
companyTelephoneNumber	A business telephone number, including any exchange of location code, at which a person or organisation can be contacted in the UK by telephonic means.	A35	Must match Regex /^[0-9+\\-]{10,}\$/ 10 or more characters, where each character must be either numerical, a plus character, a minus character, or a space character	Replaced E-GIF standard and CJS standard with Common Platform standard.	O	O
prosecutorCosts	Costs claimed by the civil authority	(+)N16.2		Following CJS Standards for money format and complies with e-GIF "Amount Sterling" hence the inclusion of the + or – sign e.g. +0.01 to +999999999999.99	O	O

Alias Array

Field Name	Description	Format	Business Rules	Comment	Summons	Other Cases
Alias—Forename	The first given name of a person, e.g., John	A35	See CJS Data Standard (2) section 3.50 for details.	Mandatory if the defendant is a person. Alphanumeric no consecutive spaces (i.e. a space cannot appear adjacent to another space). If name exceeds field size, only the first 35 characters are to be used from the source. The name defined in this field will be used for the case	⊖	⊖
Alias—Forename2	The second given name of a person, e.g., Ian	A35	See CJS Data Standard (2) section 3.50 for details.	Alphanumeric no consecutive spaces (i.e. a space cannot appear adjacent to another space). If name exceeds field size, only the first 35 characters are to be used from the source.	⊖	⊖
Alias—Forename3	The third given name of a person, e.g., Barry	A35	See CJS Data Standard (2) section 3.50 for details.	Alphanumeric no consecutive spaces (i.e. a space cannot appear adjacent to another space). If name exceeds field size, only the first 35 characters are to be used from the source.	⊖	⊖

Alias— Surname	Surname or Family name, e.g., Brown.	A35	See CJS Standards [2] section 3.39	Mandatory if defendant is a person otherwise field must be null. Alphanumeric no consecutive spaces (i.e. a space cannot appear adjacent to another space). If name exceeds the field size, only the first 35 characters are to be used from the source. The name defined in this field will be used for the case.	⊖	⊖
-------------------	--------------------------------------	-----	------------------------------------	--	---	---

Parent Guardian

Field Name	Description	Format	Business Rules	Comment	Summons	Other Cases
Parent Guardian - organisationName	Name of an organisation, e.g. Marks and Spencer.				O	O
Parent Guardian - compantTelephoneNumber	A business telephone number, including any exchange of location code, at which a person or organisation can be contacted in the UK by telephonic means.	A35	Must match Regex /^[0-9+\ -]{10,}\$/ 10 or more characters, where each character must be either numerical, a plus character, a minus character, or a space character	Replaced E-GIF standard and CJS standard with Common Platform standard.	O	O
Parent Guardian - Forename	The first given name of a person, e.g., John	A35	See CJS Data Standard [2] section 3.50 for details.	Mandatory if the defendant is a person. Alphanumeric no consecutive spaces (i.e. a space cannot appear adjacent to another space). If the name exceeds the field size, only the first 35 characters are to be used from the source. The name defined in this field will be used for the case	O	O
Parent Guardian – Forename2	The second given name of a person, e.g., Ian	A35	See CJS Data Standard [2] section 3.50 for details.	Alphanumeric no consecutive spaces (i.e. a space cannot appear adjacent to another space). If the name exceeds the field size, only the first 35 characters are to be used from the source.	O	O
Parent Guardian – Forename3	The third given name of a person, e.g., Barry.	A35	See CJS Data Standard [2] section 3.50 for details.	Alphanumeric no consecutive spaces (i.e. a space cannot appear adjacent to another space). If the name exceeds the field size, only the first 35 characters are to be used from the source.	O	O
Parent Guardian - Surname	Surname or Family name, e.g., Brown.	A35	See CJS Standards [2] section 3.39	Mandatory if defendant is a person otherwise field must be null. Alphanumeric no consecutive spaces (i.e. a space cannot appear adjacent to another space). If the name exceeds the field size, only the first 35 characters are to be used from the source. The name defined in this field will be used for the case.	O	O
Parent Guardian - workTelephoneNumber	A business telephone number, including any exchange of location code, at which a person or organisation can be contacted in the UK by telephonic means.	A35	Must match Regex /^[0-9+\ -]{10,}\$/ 10 or more characters, where each character must be either numerical, a plus character, a minus character, or a space character	Replaced E-GIF standard and CJS standard with Common Platform standard.	O	O

Parent Guardian - homeTelephoneNumber	A home telephone number, including any exchange of location code, at which a person or organisation can be contacted in the UK by telephonic means.	A35	Must match Regex /^[0-9+\ -]{10,}\$/ 10 or more characters, where each character must be either numerical, a plus character, a minus character, or a space character	Replaced E-GIF standard and CJS standard with Common Platform standard.	O	O
Parent Guardian - mobileTelephoneNumber	A mobile number, including any exchange of location code, at which a person or organisation can be contacted in the UK by telephonic means.	A35	Must match Regex /^[0-9+\ -]{10,}\$/ 10 or more characters, where each character must be either numerical, a plus character, a minus character, or a space character	Replaced E-GIF standard and CJS standard with Common Platform standard.	O	O
Parent Guardian – primaryEmail	The identification of the first e-mail address.	A255		from 1 to 127 characters from 0-9, A-Z, a-z or ' . - _ followed by @ followed by another 1 to 127 characters from the same set	O	O
Parent Guardian - secondaryEmail	The identification of the second e-mail address.	A255		from 1 to 127 characters from 0-9, A-Z, a-z or ' . - _ followed by @ followed by another 1 to 127 characters from the same set	O	O
Parent Guardian - dateofbirth	The date when a person was born.	D10	The date must not be in the future.		O	O
Parent Guardian - gender	Identifies the gender of a person.	N1	See CJS Standards [2] section 3.45 Mandatory if the defendant is a person. Otherwise, the field must be null, e.g., organisation.	0=Not Known 1=Male 2=Female 9=Not specified	O	O
Parent Guardian - observedEthnicity	Ethnicity Self-Defined Code				O	O
Parent Guardian - selfDefinedEthnicity	Person's ethnic self-assessment	A2	The constrained list of values for this field is the "16+1" list as first used in the 2001 census. See CJS Data Standards [2] section 3.37		O	O
Parent Guardian – address1	Address Line 1 for the parent /guardian	A35	If the defendant's address is not known by the prosecutor populate this field with the standard 3-character code for no fixed address	Also used where the defendant is a company	O	O
Parent Guardian – address2	Address Line 2 for the parent /guardian	A35			O	O
Parent Guardian – address3	Address Line 3 for the parent /guardian	A35			O	O
Parent Guardian – address4	Address Line 4 for the parent /guardian	A35			O	O
Parent Guardian – address5	Address Line 5 for the parent /guardian	A35			O	O
Parent Guardian - postcode	Post code for the parent/guardian	A8			O	O

Offence Related Fields

Field Name	Description	Format	Business Rules	Comment	Summons	Other Cases
------------	-------------	--------	----------------	---------	---------	-------------

cjsOffenceCode	Identifies the CJS code applicable to the offence.	A8	See CJS Standard [2] section 3.11	PSS offence code	M	M
offenceSequenceNo	Allows for multiple offences	N3	Number starting at 1	Allows for multiple offences	M	M
offenceCommittedDate	Date offence committed, Or start date for the period in which the offence committed	D10	See CJS Standard [2] section 3.46 for the date format The date must not be in the future.	CCYY-MM-DD	O	O
arrestDate	Date Arrested		See CJS Standard [2] section 3.46 for the date format The date must not be in the future.	CCYY-MM-DD Extradition Or warrants for enforcement may have this	O	O
offenceCommittedEndDate	End date for period in which offence committed	D10	See standard [2] section 3.46 for date format Mandatory if Offence Date Code = 4. Otherwise, the field must be blank. Day Number or both Day and Month Number in the date may be zero. The date must be after the Offence Start Date and must not be in the future.		O	O
offenceLocation	Free text description of the location where the offence was committed	A80	Must be included where the CJS Offence Code full offence wording includes a location element.		O	O
offenceWording	Details of Information or Charge to be laid before the court	A2500	See CJS Data Standards [2] section 3.134. Does not include the legislative element of the offence.		M	M
offenceWordingWelsh	Details of Information or Charge to be laid before the court in Welsh	A2500	See CJS Data Standards [2] section 3.134. Does not include the legislative element of the offence. If the document language is Welsh then the correct format is English wording and Welsh wording (optional).		O	O
statementOfFacts	Statement of facts	A4000			O	O
statementOfFactsWelsh	Statement of Facts in Welsh	A4000	Where a Statement of Facts is supplied, and the documentation language is W Welsh, then a Welsh statement of facts should be supplied		O	O
prosecutorCompensation	Compensation claimed by the prosecutor.	(+)N16.2			O	O
laidDate	Information Laid Date	D10	Date must be in past	CCYY-MM-DD	M	M

Example Request Body

Example

Content-Type: "application/vnd.hmcts.cjs.cpci-charge-prosecution.v1+json"

```
{
  "prosecutionSubmissionDetails": {
    "urn": "TVL12345",
    "prosecutingAuthority": "GAEEA01",
    "informant": "Adam",
  },

  "defendant": {
    "prosecutorDefendantId": "123",
    "asn": "???",
    "prosecutorCosts": "20.10",
    "defendantPerson": {
      "title": "Mr",
      "forename": "John",
      "forename2": "Adam",
      "forename3": "Theodore",
      "surname": "SMITH",
      "contactDetails": {
        "workTelephoneNumber": "02012345678",
        "homeTelephoneNumber": "02087654321",
        "mobileTelephoneNumber": "0789123456",
        "primaryEmail": "aer@af.com",
        "secondaryEmail": "aer@af.com"
      },
      "dateOfBirth": "1970-02-03",
      "selfDefinedInformation": {
        "gender": 1,
        "ethnicity": "W1",
        "nationality": "W1",
        "additionalNationality": "W2"
      },
      "occupation": "TA",
      "occupationCode": 666,
      "driverNumber": "AS",
      "address": {
        "address1": "Line 1",
        "address2": "Line 2",
        "address3": "Line 3",
        "address4": "Line 4",
        "address5": "Line 5",
        "postcode": "CR0 1XG"
      },
      "nationalInsuranceNumber": "AA123456C"
    },
    "documentationLanguage": "E",
    "hearingLanguage": "E",
    "languageRequirement": "no special language needs",
    "specificRequirements": "no special needs",
    "offences": [
      {
        "cjsOffenceCode": "CA03010",
        "offenceSequenceNo": 1,
        "offenceCommittedDate": "2018-06-20",
        "offenceLocation": "Croydon",
        "vehicleMake": "Ford",
        "vehicleRegistrationMark": "FG59 4FD",
        "offenceWording": "Prosecution charge wording",
        "offenceWordingWelsh": "Prosecution charge wording in Welsh",
        "statementOfFacts": "Prosecution statements of facts",
        "prosecutorCompensation": "15.30"
      }
    ]
  }
}
```

Example Response Body

Response
<pre>{ "statusURL": "https://www.dummy.gov.uk/foo/bar/8191c165-e9e4-4fd7-ac6d-5bfd04690f77", "submissionId": "8191c165-e9e4-4fd7-ac6d-5bfd04690f77" }</pre>

Create Material - Field Definitions

Note: The prosecution (case) URN related to the material is part of the API URI.

Field Name	Description	Format	Business Rules	Comment	Mandatory /Optional
material	Contains details on the file to be uploaded.	Binary			M
materialType	Defines the type of material being uploaded	A40		Example: See available values in 3.3.1	M
prosecutorDefendantId	An optional reference to identify the defendant /respondent within this civil prosecution case if the document is a defendant level document.	A36			CM
prosecutingAuthority	The civil authority's CJS Organisation Code.	A7	Valid CJS OU Code – See CJS Data Standards [2] Section 2.4 Must be the same OU code supplied in the JSON message used to create the prosecution.	Prosecutors that do not have a CJS OU Code should ask to be assigned one.	M

Material Types:

The following material (document) types are supported:

Document Category	Document Type
Defendant level	Magistrate's Sending sheet
Case level	Indictment
Defendant level	Basis of Plea
Defendant level	Defence Statement
Defendant level	Charges
Case level	Case Summary
Case level	Key witness Statements
Case level	Witness Statements
Case level	Key Exhibits
Case level	Exhibits
Case level	Transcripts ABE interviews
Defendant level	Streamlined Forensic reports
Defendant level	Expert Reports
Defendant level	Pre Cons

Case level	Trial Documents
Case level	Jury material
Applications	Applications
Case level	Witness Information
Defendant level	PTPH Form
Defendant level	Sentence
Defendant level	Representation
Defendant level	Bail and Custody
Defendant level	Court Final orders
Defendant level	Judge's order/ Directions
Defendant level	Transcripts (Court Rulings)
Case level	Private section - Jury notes
Case level	Private section - Court logs
Defendant level	Private section - NG appeals
Case level	SJPN
Case Level	CITN

Example Response Body

```
{
  "statusURL": "https://www.dummy.gov.uk/foo/bar/8191c165-e9e4-4fd7-ac6d-5bfd04690f77",
  "submissionId": "8191c165-e9e4-4fd7-ac6d-5bfd04690f77"
}
```

Get Submission Status - Field Definitions

Note: The id is a path variable on the url.

Field Name	Description	Format	M / O	Business Rules	Comment
id	Submission ID	A36	M		Validation pattern: <i>^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$</i>
type	The type of submission	A11	M	One of: PROSECUTION, MATERIAL	
status	Status of the submission	A21	M	One of: PENDING, FAILED, REJECTED, SUCCESS, SUCCESS_WITH_WARNINGS	
warnings	An optional reference to identify the defendant /respondent within this prosecution case	Array	M		An empty array will be returned if the submission has no warning

errors	Error code of the submission if errors are found in the submission	Array	M		An empty array will be returned if the submission has no error Example: name="errors" code="DEFENDANT_NATIONALITY_INVALID" values= key="nationality", "urn" value="GQR"
receivedAt	The time the submission was received	DT29	M		Example: 2018-09-27T08:51:41.118Z[UTC]
completedAt	The time the submission completed processing	DT29	M		Example: 2018-09-27T08:51:40.014Z[UTC]

Example Response Body

```
Content-Type: "application/vnd.hmcts.cjs.cpci-charge.submission.v1+json"
{
  "id": "cedb215e-9297-4799-9a4d-5c608eaa4131",
  "status": "REJECTED",
  "warnings": [],
  "errors": [
    {
      "code": "DEFENDANT_DOB_IN_FUTURE",
      "values": [
        {
          "key": "dateOfBirth", "case12345678"
          "value": "2050-01-01"
        }
      ]
    }
  ]
}
```

Error Messages

- HTTP 4xx Errors - These errors indicate an issue at the client end of the API and therefore will normally need to be resolved on the client side.
- HTTP 5xx Errors - These errors indicate an issue at the server side of the API and therefore will normally need to be resolved on the server side.
- Business Validation Errors – These errors are returned in the response body of the Get Submission Status API. These errors are used to report business validation failures of the data submitted.

HTTP Errors

HTTP Error codes and a description of the error.

Error Code	Description
400	Bad Request. The client made a bad request to the server. The request was not understood.
401	Unauthorised. The client request was not authorised.

404	Not Found. The resource was not found. Valid CPPI APIs resources are as follows: POST https://apigw.cjscp.org.uk/CPCI/prosecutions POST https://apigw.cjscp.org.uk/CPCI/prosecutions/{case-id}/materials GET
405	Method Not Allowed. The only HTTP request methods supported by the CPCI API are POST and GET. See 404 above.
415	Unsupported media type. The media type defined by the Content-Type in the HTTP header was is not supported.
429	Too Many Requests. Too many requests are being received from the client and the server is rate limiting the client.
500	Internal Server Error. An unexpected condition was detected by the server.
502	Bad Gateway. A downstream gateway or proxy returned an invalid response.
503	Service Unavailable. The CPCI API service is temporarily unavailable.
504	Gateway Timeout. The API Service did not respond in time.

Business Validation Errors and Warnings

Business validation error and warning codes and a description of the error or warning. These errors and warning are returned as part of the response to the Get Submission Status endpoint.

Rejection Errors

Error code	Description
DEFENDANT_DOB_IN_FUTURE	Returned when the defendant's date of birth is in the future
DUPLICATED_PROSECUTION	Returned when attempting to create a prosecution that already exists on CPP
OFFENCE_CODE_NOT_SUPPORTED	Returned when the offence code is not supported by this civil API (i.e. is a Criminal CJS offence code or blacklisted civils code)
OFFENCE_REQUIRES_A_LOCATION	Returned when an offence location is not provided when the CJS Offence Code full offence wording includes a location element.
DEFENDANT_NATIONALITY_INVALID	Returned if an invalid value is received for Nationality
DEFENDANT_ADDITIONAL_NATIONALITY_INVALID	Returned if an invalid value is received for Additional Nationality
INVALID_FILE_TYPE	Returned if the file is not a pdf or word document
INVALID_DOCUMENT_TYPE	Returned if the document type is not a valid document type or not SJPN or CITN (for SJP cases)
CASE_REFERRED_TO_OPEN_COURT	Returned when attempting to submit a document for a case that has been referred to open court
MATERIAL_EXPIRED	Returned when the matching case for the submitted document cannot be found after 10 days from the date of receipt of the request
COURT_HEARING_LOCATION_OUCODE_INVALID	Returned when the supplied OUCODE for the court hearing location is not recognised
DATE_OF_HEARING_EARLIER_THAN_OFFENCE_COMMITTED_DATE	Returned when the date of hearing is earlier than the date the offence was committed
STATEMENT_OF_FACTS_REQUIRED	Returned when the statement of facts is not provided when it is required
PROSECUTOR_OUCODE_NOT_RECOGNISED	Returned when an OUCODE that is not recognised by CPP is received in the case submission
DEFENDANT_ID_REQUIRED	Returned when a defendant is not provided when it is required
CHARGE_DATE_IN_FUTURE	Returned when the charge date is in the future

DATE_OF_HEARING_IN_THE_PAST	Returned when the date of hearing is in the past
SUMMONS_CODE_INVALID	Returned when the summons code is not recognised
DEFENDANT_PARENT_GUARDIAN_DATE_OF_BIRTH_IN_FUTURE	Returned when the date of birth of the parent/guardian is in the future
CASE_MARKER_IS_INVALID	Returned when the case marker is not recognised
DEFENDANT_SELF_DEFINED_ETHNICITY_INVALID	Returned when the defendant's self defined ethnicity is not recognised
DEFENDANT_OBSERVED_ETHNICITY_INVALID	Returned when the defendant's observed ethnicity is not recognised
DEFENDANT_PARENT_GUARDIAN_SELF_DEFINED_ETHNICITY_INVALID	Returned when the defendant's parent/guardian self defined ethnicity is not recognised
DEFENDANT_PARENT_GUARDIAN_OBSERVED_ETHNICITY_INVALID	Returned when the defendant's parent/guardian observed ethnicity is not recognised
STATEMENT_OF_FACTS_WELSH_REQUIRED	Returned when the document language is Welsh and Summons type is M and statement of facts Welsh is not provided
DEFENDANT_ID_INVALID	Returned when the supplied defendant id in Submit Material API does not match a defendant id on the case
MORE_THAN_ONE_DEFENDANT_PER_PROSECUTION_CASE	Returned when an civil case has more than one defendant

Warnings

Warning code	Description	Attributes
DEFENDANT_UNDER_18_YEARS_AT_CHARGE_DATE	Returned when the defendant was under 18 at the time of charge	dateOfBirth - defendant dob chargeDate - offence charge date
OFFENCE_NOT_IN_EFFECT_ON_OFFENCE_COMMITTED_DATE	Returned when the offence was not in effect at the time the offence was committed	offenceCode - the offence code offenceCommittedDate - the date the offence was committed offenceStartDate - the date the offence was effective from offenceEndDate - the date the offence ceased to be an offence

Submission Bad Request Error codes

The following validation error codes can be returned when the response to the POST submission results in a 400 bad request response code.

Code	Code Type	Description
defendant.defendantPerson.selfDefinedInformation.gender	Validation Error	Gender of the defendant should have one of the values 0, 1, 2 or 9
defendant.defendantPerson.contactDetails.mobileTelephoneNumber	Validation Error	Cannot enter an invalid mobile phone number length
defendant.defendantPerson.contactDetails.homeTelephoneNumber	Validation Error	Cannot enter an invalid home phone number length
defendant.defendantPerson.contactDetails.workTelephoneNumber	Validation Error	Cannot enter an invalid work phone number length

defendant.offences.offenceSequenceNo	Validation Error	The offences %s have same offence sequence numbers. Offence sequence numbers must be unique. Cannot enter empty or invalid offence committed date when offence date code is 1, 2, 3, 5 or 6 Cannot enter empty or invalid offence committed date and offence committed end date when offence date code is 4
--------------------------------------	------------------	--

Error Message Format example:

The below snippet provides an example of a 400 bad request response if submission to the API is invalid

```
{
  "error": {
    "defendant.defendantPerson.selfDefinedInformation.gender": [
      "Gender of the defendant should have one of the values 0, 1, 2 or 9"
    ]
  }
}
```

CPCI API Specifications