

3.2.1.1 CTAM JO Schema

- [JO - CTAM integration](#)
 - [Conventions](#)
 - [Naming clash — note](#)
 - [Sync metadata](#)
 - [ER Diagram — Transactional + Reference \(full\)](#)
 - [ER diagram — transactional core only](#)

JO - CTAM integration

Source system: **Judicial Office eLinks** (backed by JHR — Judicial HR). All CTAM tables that hold a replicated copy of eLinks data and use the *jo_* prefix.

The full column-level sourceCTAM mapping is in the companion page [3.2.1.2 CTAM Schema and Source Mapping](#)

References considered: [eLinks Data Model](#), [eLinks Data Dictionary](#), [Locations](#)

Conventions

- **Transactional** tables: person and the things owned by a person (appointments, judiciary role assignments, authorisations).
- **Reference** tables: lookup data refreshed from the `/reference_data/*` endpoints.
- All reference and many transactional rows carry the source's own integer `id` — CTAM preserves that as the key so the data can be refreshed reliable (the source guarantees these `ids` are stable across releases and environments).
- *CTAM introduces its own uuid for each row - whether it is reference data or transactional data, and uses that within CTAM system - to protect CTAM from any upstream issues. The uuid is internal to CTAM and is not exposed externally. The foreign keys within CTAM system use CTAM specific UUIDs. The unique keys from JO are used for refresh purposes.*
- `jo_people` is keyed by `personal_code` — the only attribute the source guarantees is unique and never reused (do **not** key on `id`, `email` or `per_id`).
- Deprecated source attributes (`per_id`, `sex`, the old flat `authorisations` array) are excluded.

Naming clash — note

The source has a transactional `judiciary_roles[]` array on `/people` **and** a reference endpoint `/reference_data/judiciary_roles`. To avoid a table-name clash in CTAM:

Source	CTAM table
<code>people.judiciary_roles[]</code> (transactional assignment)	<code>jo_judiciary_role_assignments</code>
<code>/reference_data/judiciary_roles</code> (lookup)	<code>jo_judiciary_roles</code>


This is the only deviation from a strict 1:1 sourceCTAM name mapping.

Sync metadata

The refresh-status columns (`last_synced_at`, page cursor, last error, etc.) live in a **single side table** `jo_sync_status` keyed by source endpoint. Source-provided `created_at` / `updated_at` are kept on the tables that the source exposes them on, because they describe the source row.

ER Diagram — Transactional + Reference (full)

JO (eLinks) Integration — RAM Schema (Full)

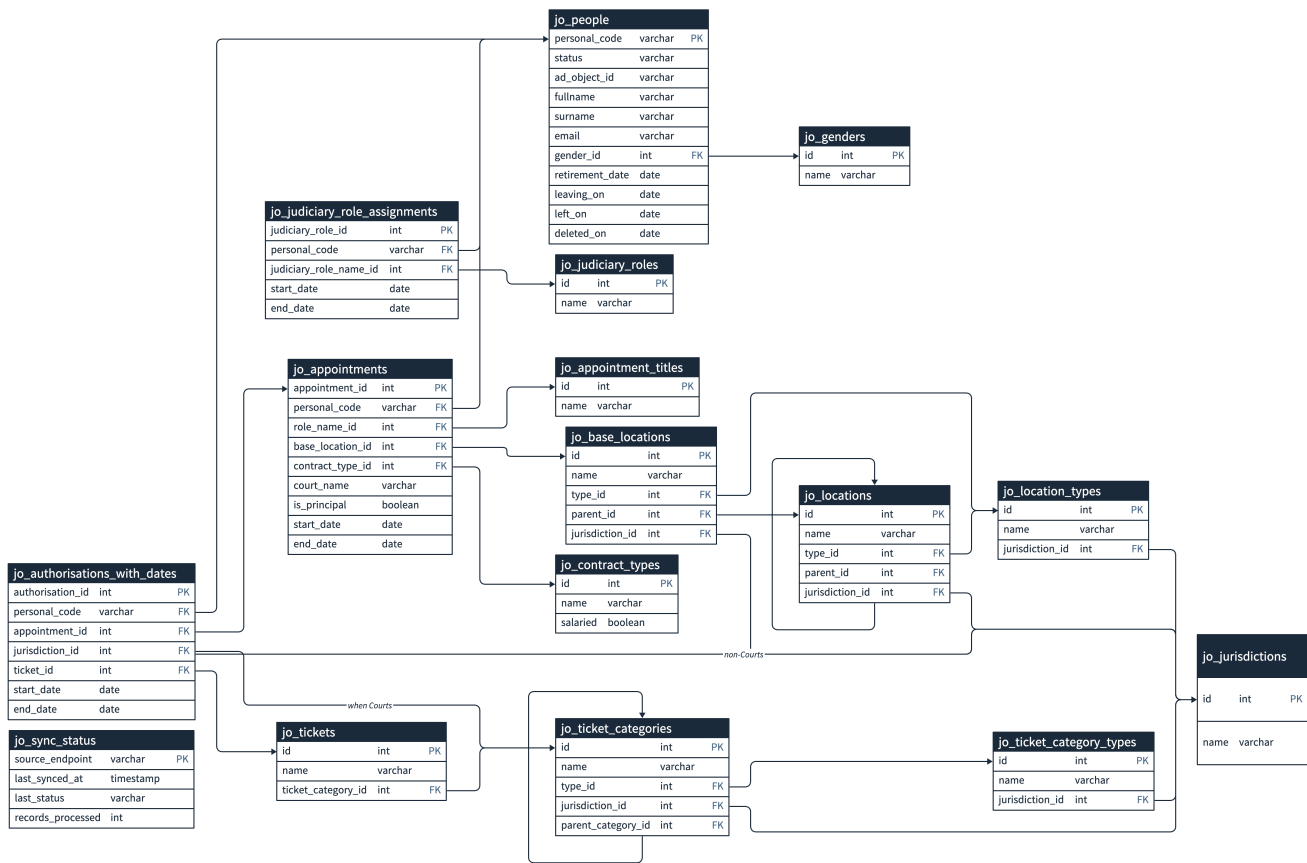

ER diagram — transactional core only

