

eLinks Data Dictionary

- 1. eLinks
 - 2. Data Model
 - 3.1 Endpoint /people and /people/{id}
 - 3.1.1 Actions to be taken
 - 3.1.2 Current Office Holder Entity
 - 3.1.2.1 Appointment Entity
 - 3.1.2.2 Judiciary Role Entity
 - 3.1.2.3 Authorisation Entity DEPRECATED
 - 3.1.2.4 Authorisations_Current Entity
 - 3.1.2.5 Authorisations_With_Dates Entity
 - 3.2 Endpoint /leavers
 - 3.2.1 Leaver Entity
 - 3.3 Endpoint /deleted
 - 3.3.1 Deleted Entity
 - 3.4 Endpoint /reference_data/appointment_titles
 - 3.4.1 Reference Data Item (Appointment Titles)
 - 3.5 Endpoint /reference_data/base_locations
 - 3.5.1 Reference Data Item (Base Location)
 - 3.6 Endpoint /reference_data/contract_types
 - 3.6.1 Reference Data Item (Contract Type)
 - 3.7 Endpoint /reference_data/genders
 - 3.7.1 Reference Data Item (Gender)
 - 3.8 Endpoint /reference_data/judiciary_roles
 - 3.8.1 Reference Data Item (Judiciary Role)
 - 3.9 Endpoint /reference_data/jurisdictions
 - 3.9.1 Reference Data Item (Jurisdiction)
 - 3.10 Endpoint /reference_data/locations
 - 3.10.1 Reference Data Item (Location)
 - 3.11 Endpoint /reference_data/location_types
 - 3.11.1 Reference Data Item (Location Type)
 - 3.12 Endpoint /reference_data/tickets
 - 3.12.1 Reference Data Item (Ticket)
 - 3.13 Endpoint /reference_data/ticket_categories
 - 3.13.1 Reference Data Item (Ticket Category)
 - 3.14 Endpoint /reference_data/ticket_category_types
 - 3.14.1 Reference Data Item (Ticket Category Type)
 -

1. eLinks

This document is a listing and description of the data points for eLinks. Please note that the latest copy of this document can be retrieved from the following location: [eLinks Data Dictionary](#).


The data requirements are primarily held in the [Swagger](#) documentation for eLinks which is a "living document", and therefore is subject to a level of ongoing update and clarification. Therefore, the data points and salient details from this document have been extracted and presented below in a clearer format, although the original document is available.

Each entity is presented below in its own table as a headline entity (the "thing" under discussion, which could be considered similar to a table in a traditional database), with the attributes that belong to it underneath. Attributes are properties that describe an entity (similar to the columns in a table in a traditional database), in other words that a car could be blue or green, or a person male or female.

In this document, the entities are ordered in logically-related areas – in other words, the entities usually related to Appointments are in the same area of the document. However, since some attributes reference multiple entities (such as Jurisdiction and Group), it may be necessary to jump around amongst the tables below to achieve a more detailed understanding. All entities are included; indications are included in the entity header table if the entity is planned as a Backlog item to be implemented in the future, and whether the data is "Transactional" (frequently changing) , "Reference" (infrequently changing, and referred to from other entities) or "System" (present only for technical reasons).

This list is not exhaustive; there may be additional technical data points required depending on the details of the technical implementation, but the points presented cover the Judicial Office's requirements.

2. Data Model

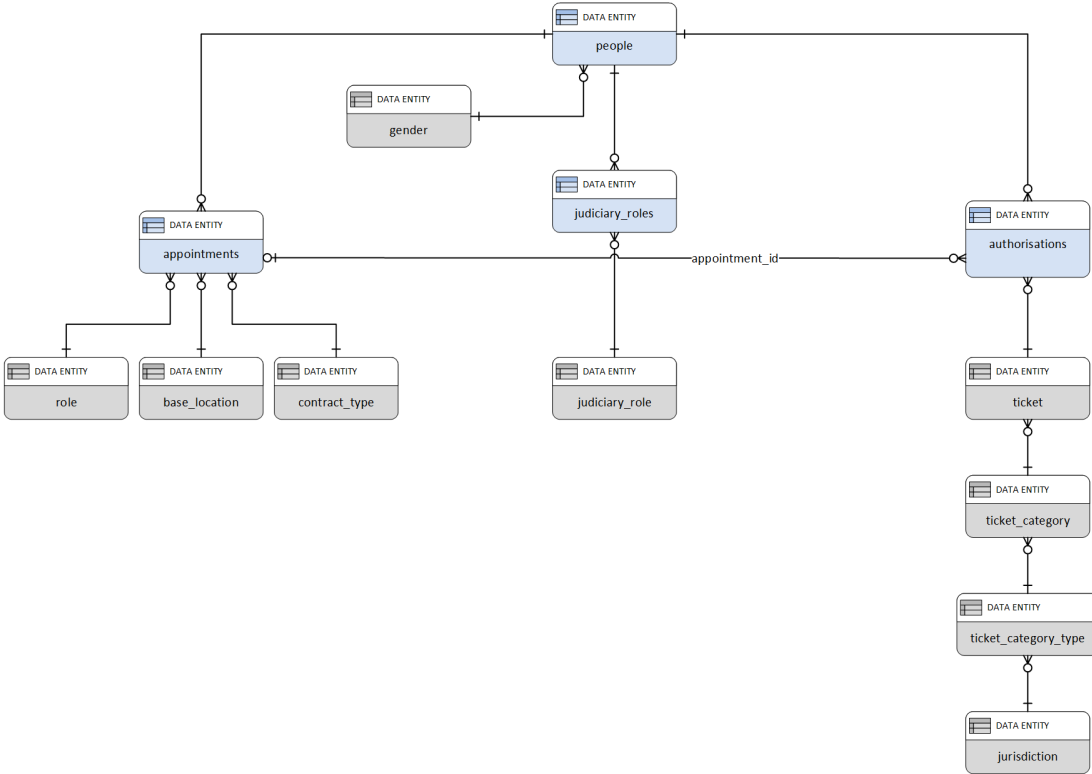

Key:  Transactional Data  Reference Data

3.

Data Dictionary

Presented below are the items in the Data Dictionary and descriptions of their attributes. Where the Backlog indicator is set to Y, this identifies the item as not yet having been implemented in Judicial HR.

3.1 Endpoint /people and /people/{id}

Endpoint	/people, /people/{id}
Returns Entities	Current Office Holder Leaver Deleted
Parameters	updated_since* (/people only) - date in past in format 1900-01-01; returns only JOH records changed since the date include_previous_appointments - true/false, default false; includes Inactive appointments per_page - integer < 200, default 50; number of JOHs returned per page of data page - integer; page number to return (based on per_page)
Paginated	Yes
Notes	/people is the plural endpoint of /people{id}, and returns an array rather than a single JOH. Three types of JOH are returned in a single recordset - Current Office Holder, Leaver and Deleted If specified, id can be the personal_code or Active Directory object id.

3.1.1 Actions to be taken

The action to be taken on receiving a record from eLinks by a data-consuming system, depends on the type of record received:

Record	Action
--------	--------

Current Office Holder	The record contains the current state of an Active JOH. Validate whether the data in the data-consuming system matches the data received. If so, take no further action. If not, update the data in the data-consuming system in line with the data received.
Leaver	The record indicates that the JOH is a Leaver . Validate whether the account in the data-consuming system is suspended. If so, take no further action. If not, suspend the account in the data-consuming system, and remove all data for that JOH except the data in the Leaver entity .
Deleted	The record indicates that the JOH is Deleted , will no longer be updated, and should be removed from all systems. Validate whether the account in the data-consuming system exists. If so, delete the account in the data-consuming system; ensure no JO data for that JOH remains. If not, take no further action.



Matching

Note that `personal_code` is the only guaranteed unique key which is only ever assigned to one JOH.

Do NOT use email or id to identify a JOH for action (update, delete or suspend), as emails and ids can potentially be reused.

3.1.2 Current Office Holder Entity

Entity	Current Office Holder
Category	Transactional
Description	The Current Office Holder entity represents a physical person of interest in eLinks who still has Active Appointments . Each physical person should only appear once in a listing in eLinks and can be uniquely identified by their <code>personal_code</code> .
Notes	A Person can have Appointments , Judiciary Roles , Authorisations current , Authorisations with Dates (each appearing as a child array of the Current Office Holder).

Attribute Name	Source	Description	Example
id	Master:eJ JHR:active_directory_id	String. Holds the Entra Object Id from eJ for this JOH, populated when the JOH's eJ account is created by eLinks automation (usually on ingestion).	"e4d80a89-0e4d-4966-9cb8-25cd482368b0", null
per_id	JHR:CIPHR	Integer. Deprecated.	69364, null
personal_code*	JHR:judicial_office_holders. personal_code	String. Unique identifier for a JOH; a physical JOH should only appear once in eLinks. Personal code is assigned at or before the point of entry into JHR. Personal code is never reused for another JOH.	"49728416", "A3447", "2974"
title*	JHR:judicial_office_holders. judicial_title JHR:judicial_office_holders. civil_title_id	String. Holds the title to address the JOH.	"His Honour Judge", "Mrs"
known_as*	JHR:judicial_office_holders. known_as	String. The nickname, shortened form or middlename that the JOH is known by; otherwise first name.	"Nick", "Halima"
surname*	JHR:judicial_office_holders. last_name	String. The surname of the JOH.	"Simpson", "Khan"
fullname*	JHR:calculated	String. The correct full name of the JOH, optionally including Postnominals.	"His Honour Judge Nicholas Simpson"

initials*	JHR:calculated	String. The initials of the JOH.	"NPS", "HK"
post_nominals	JHR:judicial_office_holders. post_nominals	String. The postnominals of the JOH (e.g. JP, KC).	"JP", "JP OBE", "KC", null
email	Master:eJ JHR: ejudiciary_email_address	String. Holds the email address created in eJudiciary for this JOH, populated when eJ creates the account through eLinks automation.  WARNING The Judicial Office changes email addresses from time to time. It is important that this attribute is not treated as a unique key as there are several circumstances in which duplicates can arise, or its value can change.	"HHJ.Nicholas.Simpson@ejudiciary.net", null
email_personal	JHR: personal_email_address	String. Holds the personal email address for this JOH.  WARNING This attribute is not fully populated. As of 20241021, 3724 current JOHs have no populated email_personal value.	"nicholas_simpson@gmail.com", null
sex* DEPRECATED	JHR	String. The sex of the JOH.	"male", "female", "sex_unknown"
gender*	JHR: equal_opportunities_records. gender_id	String. The gender of the JOH. Aligned to /reference_data/gender .	"Male", "Female", "Other", "Prefer not to say"
gender_id*	JHR: equal_opportunities_records. gender_id	Integer. The unique identifier for the gender for the JOH. Foreign key to /reference_data/gender data.	9, 10, 11, 12
work_phone	JHR:contact_methods.value	String. The work telephone number. This will be selected from whichever is not null of the following (in the following order): Work Phone Number, Work Mobile Number. If neither are supplied, this will be null.	"0207 373 2198", null
disability*	JHR:diversity_records. disability_answer_id	Boolean. Indicates whether the JOH is disabled.	true, false
retirement_date	JHR:judicial_office_holders. compulsory_retirement_date	String (Date). The date of compulsory retirement for the JOH; leaving_on indicates their intended date of retirement.	"2024-01-01", null
leaving_on	JHR:judicial_office_holders. leaving_on_date	String (Date). The date on which the JOH plans to leave. This will be automatically set to latest appointment.end_date.	"2024-01-10", null
appointments[]	JHR	Array of Objects. An array of Appointments belonging to the JOH. Can be empty or include inactive appointments (if include_previous_appointments is true).	
judiciary_roles[]	JHR	Array of Objects. An array of Judiciary Roles associated with the JOH. Can be empty.	
authorisations[] DEPRECATED	JHR	Array of Objects. An array of Authorisations associated with the JOH. Can be empty.	
authorisations_current[]	JHR	Array of Objects. An array of Authorisations_Current associated with the JOH, only including those for which the following are true: start_date null or <= today() end_date null or >= today() Can be empty.	
authorisations_with_dates[]	JHR	Array of Objects. An array of Authorisations_With_Dates associated with the JOH. Can be empty.	

3.1.2.1 Appointment Entity

Entity	Appointment
Category	Transactional
Description	Describes an instance of a person having been appointed to a role. Roles denote the broadly defined responsibilities of that Appointment. The Roles available will be the list of "Appointment" items in the e-hr-naming-conventions document. An Appointment additionally has a Contract Type and Location.

Notes	
-------	--

Attribute Name	Source	Description	Example
appointment_id*	JHR:appointment.id	Integer. Unique identifier for an Appointment. Appointment id is automatically assigned at the point of entry into JHR.	145094
role_name*	JHR: appointment_histories. appointment_title_id	String. The name for the Role of the Appointment; not guaranteed unique.	"Circuit Judge", "Magistrate", "Chamber President"
role_name_id*	JHR: appointment_histories. appointment_title_id	Integer. The unique identifier for the Role to which the Appointment has been assigned (NOT the assignment). Foreign key to /reference_data/appointment_title data.	62
type*	JHR: appointment_histories. location_id	String. The type of base location this Appointment is assigned to.	"Tribunal", "Advisory Committee", "LJA", "Courts", "Mags Court", "Coroners"
court_name	JHR: appointment_histories. location_id	String. Mapping dependent on type. Mapping details in Locations technical note.	null, per technical note.
court_type	JHR: appointment_histories. location_id	String. Mapping dependent on type. Mapping details in Locations technical note.	null, per technical note.
circuit	JHR: appointment_histories. location_id	String. Mapping dependent on type. Mapping details in Locations technical note.	null, per technical note.
bench	JHR: appointment_histories. location_id	String. Mapping dependent on type. Mapping details in Locations technical note.	null, per technical note.
advisory_committee_area	JHR: appointment_histories. location_id	String. Mapping dependent on type. Mapping details in Locations technical note.	null, per technical note.
location	JHR: appointment_histories. location_id	String. Mapping dependent on type; always indicates a location, region or national. Mapping details in Locations technical note.	null, per technical note.
base_location	JHR: appointment_histories. location_id	String. The base location this Appointment is assigned to.	"North Northumbria LJA", "Social Entitlement Chamber - North West", "Birmingham Civil & Family Justice Centre - County", "Reading Magistrates Court",
base_location_id	JHR: appointment_histories. location_id	Integer. The base location this Appointment is associated with; it will be at the lowest level of the location hierarchy. Foreign key to /reference_data/base_location data.	1161, 2794
is_principal	JHR:appointmnet. primary	Boolean. Whether the Appointment is identified as the principal Appointment for the JOH it is associated with. Should be carefully monitored, as it may change dependent on new Appointments or expiring Appointments. Exactly one Appointment for a Current Office Holder should be designated with is_principal = true.	true, false
start_date	JHR: appointment_histories. start_date	String (Date). The date this Appointment started.	"2023-09-01"
end_date	JHR: appointment_histories. end_date	String (Date). The date this Appointment ends/ended. Note this will be future-dated unless include_previous_appointments = true.	"2025-09-01", null
contract_type	JHR: appointment_histories. contract_type_id	String. The Contract Type of the Appointment.	"Fee-paid", "SPTW-90%", "Voluntary", "Salaried"
contract_type_id	JHR: appointment_histories. contract_type_id	Integer. The Contract Type this Appointment is associated with. Foreign key to /reference_data/contract_type data.	2, 7

3.1.2.2 Judiciary Role Entity

Entity	Judiciary Role
Category	Transactional
Description	A Judiciary Role denotes that the Current Office Holder has been designated with a specific role within the Judicial organisation. The Judiciary Role entity manages the assignment of Judiciary Roles to individuals. They are applied to a Current Office Holder, rather than an Appointment, and a Current Office Holder may have 0, 1 or more Judiciary Roles, each with their own Start and End date.
Notes	

Attribute Name	Source	Description	Example
name	JHR	String. The name of the Judiciary Role to which the Current Office Holder has been assigned. This will be in the list of "Roles" in the e-hr-naming-conventions document	"Diversity Mentors", "Bench Chair", "Chairman of Judicial College"
judiciary_role_name_id	JHR	Integer. The unique identifier for the Judiciary Role to which the Current Office Holder has been assigned (NOT the assignment). Foreign key to /reference_data/judiciary_role data.	163, 82
judiciary_role_id*	JHR	Integer. Unique identifier for a Judiciary Role assignment. Judiciary Role Id is automatically assigned at the point of entry into JHR.	145094
start_date	JHR	String (Date). The date this Judiciary Role started.	"2023-09-01"
end_date	JHR	String (Date). The date this Judiciary Role ends/ended.	"2025-09-01", null

3.1.2.3 ~~Authorisation Entity~~ DEPRECATED

Entity	Authorisation
Category	Transactional
Description	Authorisation is the association of a Current Office Holder with a Ticket, within a Jurisdiction; the Current Office Holder may have 0, 1 or more Authorisations. Tickets denote the competency of the Authorisation. The Tickets available will be the list of "Authorisation" items in the e-hr-naming-conventions document. Authorisations belong to a Current Office Holder (through the parentage of the Current Office Holder.authorisations_current[] array). All Authorisations are collated by Jurisdiction; in other words, all the tickets assigned to a Current Office Holder in the Civil Jurisdiction will be included in the Tickets array for that Jurisdiction.
Notes	Authorisations contain the same data as presented in Authorisations With Dates, but with less detail.

Attribute Name	Source	Description	Example
jurisdiction	JHR	String. The name of Jurisdiction to which the Authorisation set belongs.	"Tribunals", "Civil"
tickets[]	JHR	Array of Strings. An array of strings containing the names of the Tickets for which the Current Office Holder is Authorised which belong to the Jurisdiction identified by the jurisdiction attribute.	["Social Security and Child Support", "03 - Disability Living Allowance"], ["Civil Authorisation"]

3.1.2.4 Authorisations_Current Entity

Entity	Authorisations_Current
Category	Transactional

Description	Authorisations_Current is the association of a Current Office Holder with a Ticket, within a Jurisdiction; the Current Office Holder may have 0, 1 or more Authorisations_Current. Tickets denote the competency of the Authorisation_Current. The Tickets available will be the list of "Authorisation" items in the e-hr-naming-conventions document. Authorisations_Current belong to a Current Office Holder (through the parentage of the Current Office Holder.authorisations_current[] array). All Authorisations_Current are collated by Jurisdiction; in other words, all the tickets assigned to a Current Office Holder in the Civil Jurisdiction will be included in the Tickets array for that Jurisdiction. This entity only contains current authorisations (i.e. those with a null start date or start date before today, and null end date or end date after today).
Notes	Authorisations_Current contains the same data as presented in Authorisations_With_Dates, but with less detail.

Attribute Name	Source	Description	Example
jurisdiction	JHR	String. The name of Jurisdiction to which the Authorisations_Current group belongs. NOTE: If the Jurisdiction is "Courts", the ticket category name is returned in this attribute instead (in other words, "Civil", "Family" or "Tribunals")	"Tribunals", "Civil"
tickets[]	JHR	Array of Strings. An array of strings containing the names of the Tickets for which the Current Office Holder is Authorised which belong to the Jurisdiction identified by the jurisdiction attribute.	["Social Security and Child Support", "03 - Disability Living Allowance"], ["Civil Authorisation"]

3.1.2.5 Authorisations_With_Dates Entity

Entity	Authorisations_With_Dates
Category	Transactional
Description	Authorisations_With_Dates is the association of a Ticket to the Current Office Holder; the Current Office Holder may have 0, 1 or more Authorisations_With_Dates. Start and End dates can be configured for Authorisations_With_Dates, to implement expiry. Tickets denote the competency of the Authorisations_With_Dates. The Tickets available will be the list of "Authorisation" items in the e-hr-naming-conventions document. Authorisations_With_Dates belong to a Current Office Holder (through the parentage of the Current Office Holder.authorisations_with_dates[] array), but may be optionally associated with an Appointment, through the Authorisations_With_Dates.appointment_id attribute.
Notes	Authorisations_With_Dates contain the same data as presented in Authorisations_Current, but with a greater level of detail (e.g. dates, appointment_id etc.).

Attribute Name	Source	Description	Example
authorisation_id *	JHR	Integer. Unique identifier for this Authorisation (Ticket Assignment). Authorisation Id is automatically assigned at the point of entry into JHR.	135337, 12923
appointment_id(*)	JHR	Integer. Identifies the Authorisation as being associated with a single specific Appointment belonging to this Current Office Holder. Foreign key to the appointment_id attribute of an Appointment belonging to this Current Office Holder. Not enforced at by the data layer, but after August 2025 enforced by the JHR UI; may result in it being unpopulated for older records.	145094
jurisdiction	JHR	String. The Jurisdiction to which the Ticket for this Authorisation belongs. NOTE: If the Jurisdiction is "Courts", the ticket category name is returned in this attribute instead (in other words, "Civil", "Family" or "Tribunals")	"Tribunals", "Civil"
jurisdiction_id	JHR	Integer. The unique identifier for the Jurisdiction to which the Ticket for this Authorisation belongs (NOT the assignment). Foreign key to /reference_data/jurisdiction data unless Jurisdiction is "Courts", in which case foreign key to /reference_data/ticket_category data. NOTE: If the Jurisdiction is "Courts", the ticket category id is returned in this attribute instead (in other words, "Civil", "Family" or "Tribunals")	31, 42

ticket	JHR	String. The name of the Ticket for which the Current Office Holder is Authorised .	"03 - Disability Living Allowance", "Civil Authorisation"
ticket_id	JHR	Integer. The unique identifier for the Ticket for this Authorisation belongs (NOT the assignment). Foreign key to /reference_data/ticket data.	162, 83
start_date	JHR	String (Date). The date this Authorisation started.	"2023-01-01", null
end_date	JHR	String (Date). The date this Authorisation ends/ended.	"2025-01-01", null

3.2 Endpoint /leavers

Endpoint	/leavers
Returns Entities	Leaver
Parameters	left_since* - date in past in format 1900-01-01; returns only Leaver records changed since the date per_page - integer < 200, default 50; number of JOHs returned per page of data page - integer; page number to return (based on per_page)
Paginated	Yes
Notes	

3.2.1 Leaver Entity

Entity	Leaver
Category	Transactional
Description	The Leaver entity represents a physical person of interest in eLinks who has no Active Appointments; their contract with the Judicial Office has ended. Every Leaver can be uniquely identified by their personal_code.
Notes	A Leaver has very restricted information available in eLinks, and no PII.

Attribute Name	Source	Description	Example
id	eJ	String. Holds the Active Directory Object Id from eJ for this JOH, populated when the JOH's eJ account is created by eLinks automation (usually on ingestion).	"e4d80a89-0e4d-4966-9cb8-25cd482368b0", null
per_id	JHR /CIPHR	Integer. Deprecated.	69364, null
personal_code*	JHR	String. Unique identifier for a JOH; a physical JOH should only appear once in eLinks. Personal Code is assigned at or before the point of entry into JHR.	"49728416", "A3447", "2974"
leaver*	JHR	Boolean. Defines the JOH as a leaver.	true
left_on*	JHR	String (Date). The date on which the JOH left.	"2023-08-31"

3.3 Endpoint /deleted

Endpoint	/deleted
Returns Entities	Deleted
Parameters	deleted_since* - date in past in format 1900-01-01; returns only Deleted records changed since the date per_page - integer < 200, default 50; number of Deleted returned per page of data page - integer; page number to return (based on per_page)
Paginated	Yes

Notes	This endpoint should be reviewed before each synchronisation. Any record which appears in this endpoint will no longer be updated by the Judicial Office, and should also be deleted from data-consuming system. This differs from a Leaver, which should be suspended (if necessary after a grace period).
--------------	---

3.3.1 Deleted Entity

Entity	Deleted
Category	Transactional
Description	The Deleted entity represents a physical person which is no longer present in eLinks or JHR. The record should be removed from any data-consuming systems. Every Deleted person can be uniquely identified by their <code>personal_code</code> . The <code>personal_code</code> is never reused.
Notes	A Leaver has very restricted information available in eLinks, and no PII.

Attribute Name	Source	Description	Example
<code>personal_code*</code>	JHR	String. Unique identifier for a JOH; a physical JOH should only appear once in eLinks. Personal Code is assigned at or before the point of entry into JHR.	"49728416", "A3447", "2974"
<code>deleted*</code>	JHR	Boolean. Defines the JOH as a Deleted record.	true
<code>deleted_on*</code>	JHR	String (Date). The date on which the JOH was Deleted.	"2023-08-31"

3.4 Endpoint /reference_data/appointment_titles

Endpoint	/reference_data/appointment_titles
Category	Reference Data
Returns Entities	Reference Data Item (Appointment Title)
Parameters	None
Paginated	No
Notes	Referenced as a foreign key from Appointment.role_name_id . Appointment.role_name maps to Reference Data Item (Appointment Title).name.

3.4.1 Reference Data Item (Appointment Titles)

Attribute Name	Source	Description	Example
<code>id*</code>	JHR	Integer. Unique identifier for this reference data item. Note that Id is JHR's <code>integration_id</code> attribute in order to maintain consistency of Ids both between releases of JHR and between Staging and Production. This is referenced to as a foreign key from Appointment.role_name_id .	24, 15
<code>name*</code>	JHR	String. The display name of this reference data item This is denormalised in the Appointment.role_name attribute.	"Magistrate", "Deputy District Judge- Fee-paid"
<code>start_date</code>	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2021-01-01", null
<code>end_date</code>	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2025-08-31", null
<code>created_at*</code>	JHR	String (Date). The UTC timestamp of the creation of this reference data item.	"2023-05-19T11:18:44Z"
<code>updated_at*</code>	JHR	String (Date). The UTC timestamp of the last update of this reference data item.	"2023-05-26T11:23:21Z"

3.5 Endpoint /reference_data/base_locations

Endpoint	/reference_data/base_locations
Returns Entities	Reference Data Item (Base Location)
Parameters	None
Paginated	No
Notes	Referenced as a foreign key from Appointment.base_location_id. Appointment.base_location maps to Reference Data Item (Base Location).name EXCEPT for Tribunals (see Locations technical note). Base Locations only includes locations that an Appointment can be attached to, whereas Locations includes all locations (the whole hierarchy).

3.5.1 Reference Data Item (Base Location)

Attribute Name	Source	Description	Example
id*	JHR	Integer. Unique identifier for this reference data item. Note that Id is JHR's integration_id attribute in order to maintain consistency of Ids both between releases of JHR and between Staging and Production. This is referenced to as a foreign key from Appointment .base_location_id.	1023, 203, 1762
name*	JHR	String. The display name of this reference data item. This is denormalised in the Appointment .base_location attribute EXCEPT for Tribunals (see Locations technical note).	"Manchester Civil Justice Centre", "Unassigned", "South Wales", "Lowestoft Family Court"
type_id*	JHR	Integer. Determines the type Foreign key to /reference_data/location_types data.	8, 2
parent_id*	JHR	Integer. Foreign key to /reference_data/locations data.	1781, 1635
jurisdiction_id*	JHR	Integer. Foreign key to hard-coded jurisdiction data.	1 (Courts), 2 (Tribunals), 3 (Magistrates), 4 (Coroners)
start_date	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2021-01-01", null
end_date	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2025-08-31", null
created_at*	JHR	String (Date). The UTC timestamp of the creation of this reference data item.	"2022-04-20T13:22:44Z"
updated_at*	JHR	String (Date). The UTC timestamp of the last update of this reference data item.	"2022-10-30T17:15:22Z"

3.6 Endpoint /reference_data/contract_types

Endpoint	/reference_data/contract_types
Returns Entities	Reference Data Item (Contract Type)
Parameters	None
Paginated	No
Notes	Referenced as a foreign key from Appointment.contract_type_id. Appointment.contract_type maps to Reference Data Item (Contract Type).name.

3.6.1 Reference Data Item (Contract Type)

Attribute Name	Source	Description	Example
id*	JHR	Integer. Unique identifier for this reference data item. Note that Id is JHR's integration_id attribute in order to maintain consistency of Ids both between releases of JHR and between Staging and Production. This is referenced to as a foreign key from Appointment .contract_type_id.	1, 4
name*	JHR	String. The display name of this reference data item. This is denormalised in the Appointment .contract_type attribute.	"Salaried", "Fee-paid", "Voluntary", "Unknown", "SPTW-50%"
salaried*	JHR	Boolean. Determines whether this is a Salaried contract type.	true, false
start_date	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2021-01-01", null
end_date	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2025-08-31", null
created_at*	JHR	String (Date). The UTC timestamp of the creation of this reference data item.	"2022-04-20T13:22:44Z"
updated_at*	JHR	String (Date). The UTC timestamp of the last update of this reference data item.	"2022-10-30T17:15:22Z"

3.7 Endpoint /reference_data/genders

Endpoint	/reference_data/genders
Returns Entities	Reference Data Item (Gender)
Parameters	None
Paginated	No
Notes	

3.7.1 Reference Data Item (Gender)

Attribute Name	Source	Description	Example
id*	JHR	Integer. Unique identifier for this reference data item. Note that Id is JHR's integration_id attribute in order to maintain consistency of Ids both between releases of JHR and between Staging and Production.	1, 4
name*	JHR	String. The display name of this reference data item.	"Male", "Female", "Other", "Prefer not to say"
start_date	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2021-01-01", null
end_date	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2025-08-31", null
created_at*	JHR	String (Date). The UTC timestamp of the creation of this reference data item.	"2022-04-20T13:22:44Z"
updated_at*	JHR	String (Date). The UTC timestamp of the last update of this reference data item.	"2022-10-30T17:15:22Z"

3.8 Endpoint /reference_data/judiciary_roles

Endpoint	/reference_data/judiciary_roles
Returns Entities	Reference Data Item (Judiciary Role)
Parameters	None
Paginated	No

Notes	Referenced as a foreign key from Judiciary Role .judiciary_role_name_id. Judiciary Role .name maps to Reference Data Item (Judiciary Role).name.
-------	---

3.8.1 Reference Data Item (Judiciary Role)

Attribute Name	Source	Description	Example
id*	JHR	Integer. Unique identifier for this reference data item. Note that Id is JHR's integration_id attribute in order to maintain consistency of Ids both between releases of JHR and between Staging and Production. This is referenced to as a foreign key from Judiciary Role .judiciary_role_name_id.	5, 137
name*	JHR	String. The display name of this reference data item.	"International Committee Member", "Sentencing Council", "Appraisal Judge"
start_date	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2021-01-01", null
end_date	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2025-08-31", null
created_at*	JHR	String (Date). The UTC timestamp of the creation of this reference data item.	"2022-04-20T13:22:44Z"
updated_at*	JHR	String (Date). The UTC timestamp of the last update of this reference data item.	"2022-10-30T17:15:22Z"

3.9 Endpoint /reference_data/jurisdictions

Endpoint	/reference_data/jurisdictions
Returns Entities	Reference Data Item (Jurisdiction)
Parameters	None
Paginated	No
Notes	Referenced as a foreign key from Ticket Category .jurisdiction_id.

3.9.1 Reference Data Item (Jurisdiction)

Attribute Name	Source	Description	Example
id*	JHR	Integer. Unique identifier for this reference data item. Note that Id is JHR's integration_id attribute in order to maintain consistency of Ids both between releases of JHR and between Staging and Production. This is referenced to as a foreign key from Ticket Category .judiciary_role_name_id.	30, 86
name*	JHR	String. The display name of this reference data item.	"Courts", "Tribunals", "Magistrates", "Coroners", "Skills"
start_date	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2021-01-01", null
end_date	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2025-08-31", null
created_at*	JHR	String (Date). The UTC timestamp of the creation of this reference data item.	"2022-04-20T13:22:44Z"
updated_at*	JHR	String (Date). The UTC timestamp of the last update of this reference data item.	"2022-10-30T17:15:22Z"

3.10 Endpoint /reference_data/locations

Endpoint	/reference_data/locations
Returns Entities	Reference Data Item (Location)
Parameters	None
Paginated	No
Notes	Referenced as a foreign key from Base Location .parent_id and Location .parent_id. For mappings see Locations technical note. Locations includes all locations (the whole hierarchy) where Base Locations only includes locations that an Appointment can be attached to. The presentation is identical.

3.10.1 Reference Data Item (Location)

Attribute Name	Source	Description	Example
id*	JHR	Integer. Unique identifier for this reference data item. Note that Id is JHR's integration_id attribute in order to maintain consistency of Ids both between releases of JHR and between Staging and Production. This is referenced to as a foreign key from Base Location .parent_id and Location .parent_id.	139, 106, 1732
name*	JHR	String. The display name of this reference data item.	"Manchester Civil Justice Centre", "Wiltshire LJA", "Other Tribunal", "National"
type_id*	JHR	Integer. Determines the type Foreign key to /reference_data/location_types data.	8, 2
parent_id*	JHR	Integer. Foreign key to /reference_data/locations data.	1781, 1635
jurisdiction_id*	JHR	Integer. Foreign key to hard-coded jurisdiction data.	1 (Courts), 2 (Tribunals), 3 (Magistrates), 4 (Coroners)
start_date	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2021-01-01", null
end_date	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2025-08-31", null
created_at*	JHR	String (Date). The UTC timestamp of the creation of this reference data item.	"2022-04-20T13:22:44Z"
updated_at*	JHR	String (Date). The UTC timestamp of the last update of this reference data item.	"2022-10-30T17:15:22Z"

3.11 Endpoint /reference_data/location_types

Endpoint	/reference_data/location_types
Returns Entities	Reference Data Item (Location Type)
Parameters	None
Paginated	No
Notes	Referenced as a foreign key from Base Location .parent_id and Location .parent_id. For mappings see Locations technical note. Locations includes all locations (the whole hierarchy) where Base Locations only includes locations that an Appointment can be attached to. The presentation is identical.

3.11.1 Reference Data Item (Location Type)

Attribute Name	Source	Description	Example
----------------	--------	-------------	---------

id*	JHR	Integer. Unique identifier for this reference data item. Note that Id is JHR's integration_id attribute in order to maintain consistency of Ids both between releases of JHR and between Staging and Production. This is referenced to as a foreign key from Base Location.parent_id and Location.parent_id .	1, 7, 12
name*	JHR	String. The display name of this reference data item.	"Court", "Area or Parent AC", "Chamber"
jurisdiction_id*	JHR	Integer. Foreign key to hard-coded jurisdiction data.	1 (Courts), 2 (Tribunals), 3 (Magistrates), 4 (Coroners)
integration_code*	JHR	String. The text code that identifies the type of location, received from JHR.	"MAGS_AREA_OR_PARENT_AC", "COURTS_COURT_NAME"
start_date	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2021-01-01", null
end_date	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2025-08-31", null
created_at*	JHR	String (Date). The UTC timestamp of the creation of this reference data item.	"2022-04-20T13:22:44Z"
updated_at*	JHR	String (Date). The UTC timestamp of the last update of this reference data item.	"2022-10-30T17:15:22Z"

3.12 Endpoint /reference_data/tickets

Endpoint	/reference_data/tickets
Returns Entities	Reference Data Item (Ticket)
Parameters	None
Paginated	No
Notes	Referenced as a foreign key from Authorisation With Dates.ticket_id . Authorisation.tickets[] maps to Reference Data Item (Ticket).name Authorisation With Dates.ticket maps to Reference Data Item (Ticket).name

3.12.1 Reference Data Item (Ticket)

Attribute Name	Source	Description	Example
id*	JHR	Integer. Unique identifier for this reference data item. Note that Id is JHR's integration_id attribute in order to maintain consistency of Ids both between releases of JHR and between Staging and Production. This is referenced to as a foreign key from Authorisation With Dates.ticket_id .	30, 86
name*	JHR	String. The display name of this reference data item.	"Welsh Language", "Chancery", "Attempted Murder"
ticket_category_id*	JHR	Integer. Indicates the category that this ticket falls into Foreign key to /reference_data/ticket_categories data.	32, 55
start_date	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2021-01-01", null
end_date	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2025-08-31", null
created_at*	JHR	String (Date). The UTC timestamp of the creation of this reference data item.	"2022-04-20T13:22:44Z"
updated_at*	JHR	String (Date). The UTC timestamp of the last update of this reference data item.	"2022-10-30T17:15:22Z"

3.13 Endpoint /reference_data/ticket_categories

Endpoint	/reference_data/ticket_categories
Returns Entities	Reference Data Item (Ticket Category)

Parameters	None
Paginated	No
Notes	Referenced as a foreign key from Reference Data Item (Ticket) .ticket_category_id.

3.13.1 Reference Data Item (Ticket Category)

Attribute Name	Source	Description	Example
id*	JHR	Integer. Unique identifier for this reference data item. Note that Id is JHR's integration_id attribute in order to maintain consistency of Ids both between releases of JHR and between Staging and Production. This is referenced to as a foreign key from Reference Data Item (Ticket) .ticket_category_id.	39, 21
name*	JHR	String. The display name of this reference data item.	"Environment", "Direct and Indirect Taxation", "Appeals in Crown Court"
type_id*	JHR	Integer. Indicates the type of the ticket category(Courts, Tribs , Skills etc.) Foreign key to /reference_data/ticket_category_types data.	4, 6
jurisdiction_id*	JHR	Integer. The jurisdiction that this ticket category falls into. Foreign key to hard-coded jurisdiction data.	1 (Courts), 2 (Tribunals), 3 (Magistrates), 4 (Coroners)
parent_category_id	JHR	Integer. Indicates the parent category that ticket category falls into Foreign key to /reference_data/ticket_categories data.	32, 55
start_date	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2021-01-01", null
end_date	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2025-08-31", null
created_at*	JHR	String (Date). The UTC timestamp of the creation of this reference data item.	"2022-04-20T13:22:44Z"
updated_at*	JHR	String (Date). The UTC timestamp of the last update of this reference data item.	"2022-10-30T17:15:22Z"

3.14 Endpoint /reference_data/ticket_category_types

Endpoint	/reference_data/ticket_category_types
Returns Entities	Reference Data Item (Ticket Category Type)
Parameters	None
Paginated	No
Notes	Referenced as a foreign key from Reference Data Item (Ticket Category) .ticket_category_type_id.

3.14.1 Reference Data Item (Ticket Category Type)

Attribute Name	Source	Description	Example
id*	JHR	Integer. Unique identifier for this reference data item. Note that Id is JHR's integration_id attribute in order to maintain consistency of Ids both between releases of JHR and between Staging and Production. This is referenced to as a foreign key from Reference Data Item (Ticket Type) .ticket_category_type_id.	2, 6
name*	JHR	String. The display name of this reference data item.	"Court Type", "Skills Category", "Tribunal Name"
jurisdiction_id*	JHR	Integer. The jurisdiction that this ticket category falls into. Foreign key to hard-coded jurisdiction data.	1 (Courts), 2 (Tribunals), 3 (Magistrates), 4 (Coroners)

integration_code*	JHR	String. The text code that identifies the type of location, received from JHR.	"COURTS_COURT_TYPE", "SKILLS_CATEGORY", "TRIBS_NAME"
start_date	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2021-01-01", null
end_date	JHR	String (Date). The date from which which reference data item becomes available for selection. If null, the item is available for selection without limitation regarding its start.	"2025-08-31", null
created_at*	JHR	String (Date). The UTC timestamp of the creation of this reference data item.	"2022-04-20T13:22:44Z"
updated_at*	JHR	String (Date). The UTC timestamp of the last update of this reference data item.	"2022-10-30T17:15:22Z"