#### CGI UK

# postgres\_app\_v72\_8\_sec\_v25\_ret\_v21\_osr\_v1 3@localhost Data Dictionary

25/04/2025

## Table of contents

postgres@localhost	9
1. darts courtroom_omitted	10
2. dart_security	11
3. darts_retention	
4. darts_annotation	14
5. darts_court_case	15
6. darts_courthouse	
7. darts_media	
8. darts_transcription	18
9. darts_tables_only	19
10. darts_obj_state_record	20
11. darts_arm_rpo	21
12. Other	22
12.1. Tables	22
12.1.1. Table: darts.annotation	22
12.1.2. Table: darts.annotation_document	24
12.1.3. Table: darts.arm_automated_task	26
12.1.4. Table: darts.arm_rpo_execution_detail	27
12.1.5. Table: darts.arm_rpo_state	28
12.1.6. Table: darts.arm_rpo_status	29
12.1.7. Table: darts.audit	30
12.1.8. Table: darts.audit_activity	31
12.1.9. Table: darts.audit_heritage	32
12.1.10. Table: darts.automated_task	34
12.1.11. Table: darts.case_document	35
12.1.12. Table: darts.case_judge_ae	36
12.1.13. Table: darts.case_management_retention	37
12.1.14. Table: darts.case_overflow	38
12.1.15. Table: darts.case_retention	40
12.1.16. Table: darts.case_retention_audit_heritage	41
12.1.17. Table: darts.case_retention_extra	43
12.1.18. Table: darts.case_transcription_ae	45
12.1.19. Table: darts.court_case	46
12.1.20. Table: darts.courthouse	49
12.1.21. Table: darts.courthouse_region_ae	50
12.1.22. Table: darts.courtroom	51
12.1.23. Table: darts.daily_list	52
12.1.24. Table: darts.data_anonymisation	54
12.1.25. Table: darts.defence	55
12.1.26. Table: darts.defendant	56
12.1.27. Table: darts.event	57
12.1.28. Table: darts.event_handler	59
12.1.29. Table: darts.event_linked_case	60
12.1.30. Table: darts.external_location_type	61
12.1.31. Table: darts.external_object_directory	62

12.1.32.	Table: darts.external_service_auth_token	64
12.1.33.	Table: darts.extobjdir_process_detail	65
12.1.34.	Table: darts.hearing	66
12.1.35.	Table: darts.hearing_annotation_ae	68
12.1.36.	Table: darts.hearing_event_ae	69
12.1.37.	Table: darts.hearing_judge_ae	70
12.1.38.	Table: darts.hearing_media_ae	71
12.1.39.	Table: darts.hearing_transcription_ae	72
12.1.40.	Table: darts.judge	73
12.1.41.	Table: darts.media	74
12.1.42.	Table: darts.media_linked_case	76
12.1.43.	Table: darts.media_request	77
12.1.44.	Table: darts.node_register	78
12.1.45.	Table: darts.notification	79
12.1.46.	Table: darts.object_admin_action	80
12.1.47.	Table: darts.object_hidden_reason	81
12.1.48.	Table: darts.object_record_status	82
12.1.49.	Table: darts.object_retrieval_queue	83
12.1.50.	Table: darts.object_state_record	84
12.1.51.	Table: darts.prosecutor	86
12.1.52.	Table: darts.region	87
12.1.53.	Table: darts.report	88
12.1.54.	Table: darts.retention_confidence_category_mapper	89
12.1.55.	Table: darts.retention_policy_type	90
	Table: darts.retention_policy_type_heritage_mapping	
12.1.57.	Table: darts.revinfo	92
12.1.58.	Table: darts.rps_retainer	93
12.1.59.	Table: darts.security_group	95
12.1.60.	Table: darts.security_group_courthouse_ae	96
12.1.61.	Table: darts.security_group_user_account_ae	97
12.1.62.	Table: darts.security_permission	98
12.1.63.	Table: darts.security_role	99
12.1.64.	Table: darts.security_role_permission_ae	100
12.1.65.	Table: darts.transcription	101
12.1.66.	Table: darts.transcription_comment	103
12.1.67.	Table: darts.transcription_document	104
12.1.68.	Table: darts.transcription_linked_case	106
12.1.69.	Table: darts.transcription_status	107
12.1.70.	Table: darts.transcription_type	108
12.1.71.	Table: darts.transcription_urgency	109
12.1.72.	Table: darts.transcription_workflow	
12.1.73.	Table: darts.transformed_media	111
12.1.74.	Table: darts.transient_object_directory	112
12.1.75.	Table: darts.user_account	113
12.2. Pro	cedures	
12.2.1.	Procedure: dbms metadata.set transform param	119

12.2.2.	Procedure: public.sum_n_product	120
12.3. Fun	ctions	121
12.3.1.	Function: darts.gin_extract_query_trgm	121
12.3.2.	Function: darts.gin_extract_value_trgm	122
12.3.3.	Function: darts.gin_trgm_consistent	123
12.3.4.	Function: darts.gin_trgm_triconsistent	124
12.3.5.	Function: darts.gtrgm_compress	125
12.3.6.	Function: darts.gtrgm_consistent	126
12.3.7.	Function: darts.gtrgm_decompress	127
12.3.8.	Function: darts.gtrgm_distance	
12.3.9.	Function: darts.gtrgm_in	129
12.3.10.	Function: darts.gtrgm_options	
12.3.11.	Function: darts.gtrgm_out	131
12.3.12.	Function: darts.gtrgm_penalty	132
12.3.13.	Function: darts.gtrgm_picksplit	
12.3.14.	Function: darts.gtrgm_same	134
12.3.15.	Function: darts.gtrgm_union	135
12.3.16.	Function: darts.set_limit	136
12.3.17.	Function: darts.show_limit	
12.3.18.	Function: darts.show_trgm	138
12.3.19.	Function: darts.similarity	
12.3.20.	Function: darts.similarity_dist	
12.3.21.	Function: darts.similarity_op	
12.3.22.	Function: darts.strict_word_similarity	142
12.3.23.	Function: darts.strict_word_similarity_commutator_op	143
12.3.24.	Function: darts.strict_word_similarity_dist_commutator_op	144
12.3.25.	Function: darts.strict_word_similarity_dist_op	145
12.3.26.	Function: darts.strict_word_similarity_op	146
12.3.27.	Function: darts.tra_trw_sync_fnc	147
12.3.28.	Function: darts.word_similarity	
12.3.29.	Function: darts.word_similarity_commutator_op	149
12.3.30.	Function: darts.word_similarity_dist_commutator_op	150
12.3.31.	Function: darts.word_similarity_dist_op	151
12.3.32.	Function: darts.word_similarity_op	
12.3.33.	Function: dbms_metadata.get_check_constraint_ddl	
12.3.34.	Function: dbms_metadata.get_constraint_ddl	154
12.3.35.	Function: dbms_metadata.get_constraints_ddl_of_table	155
12.3.36.	Function: dbms_metadata.get_ddl	156
12.3.37.	Function: dbms_metadata.get_dependent_ddl	157
12.3.38.	Function: dbms_metadata.get_granted_ddl	
	Function: dbms_metadata.get_granted_roles_ddl	
12.3.40.	Function: dbms_metadata.get_index_ddl	160
	Function: dbms_metadata.get_indexes_ddl_of_table	
12.3.42.	Function: dbms_metadata.get_object_oid	162
	Function: dbms_metadata.get_ref_constraint_ddl	
12.3.44.	Function: dbms_metadata.get_ref_constraints_ddl_of_table	164


12.3.45.	Function: dbms_metadata.get_routine_ddl	. 165
12.3.46.	Function: dbms_metadata.get_schema_oid	. 166
12.3.47.	Function: dbms_metadata.get_sequence_ddl	167
	Function: dbms_metadata.get_sequence_ddl_of_table	
12.3.49.	Function: dbms_metadata.get_table_ddl	. 169
12.3.50.	Function: dbms_metadata.get_trigger_ddl	. 170
12.3.51.	Function: dbms_metadata.get_triggers_ddl_of_table	171
12.3.52.	Function: dbms_metadata.get_type_ddl	172
12.3.53.	Function: dbms_metadata.get_view_ddl	. 173
12.3.54.	Function: dbms_metadata.init_transform_params	. 174
12.3.55.	Function: dbms_metadata.set_default_transform_params	175

#### Legend


- **?** Primary key
- Primary key disabled
- **1** User-defined primary key
- **?** Unique key
- Unique key disabled
- **%** User-defined unique key
- Active trigger
- Disabled trigger
- → Many to one relation
- → User-defined many to one relation
- → One to many relation
- → Many to many relation
- ₩ User-defined many to many relation
- One to one relation
- User-defined one to one relation
- Input
- Output
- Input/Output
- Uses dependency
- User-defined uses dependency
- Used by dependency
- Tuser-defined used by dependency

postgres@localhost


### 1. darts courtroom omitted

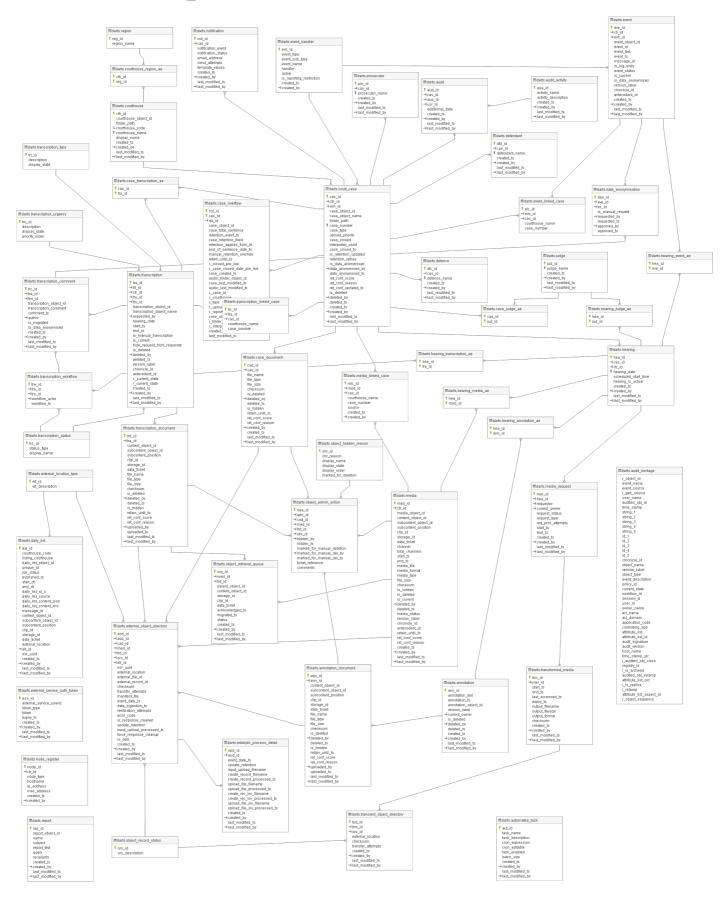


## 2. dart\_security

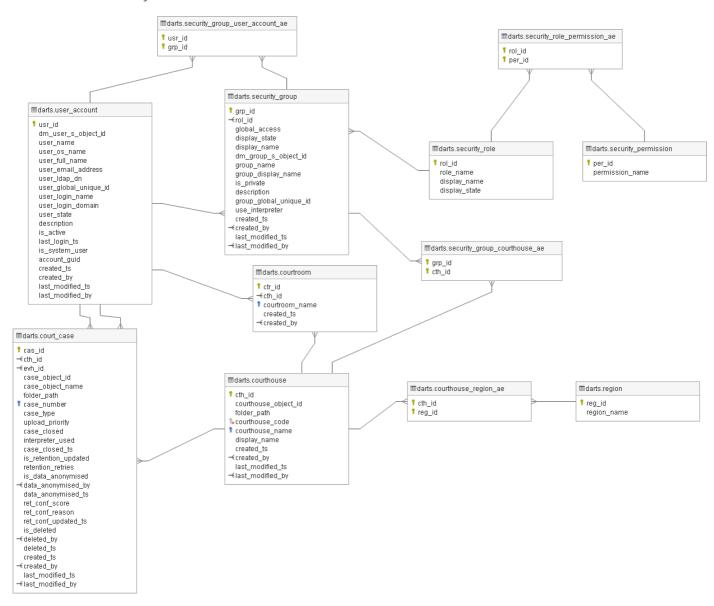


3. darts\_retention

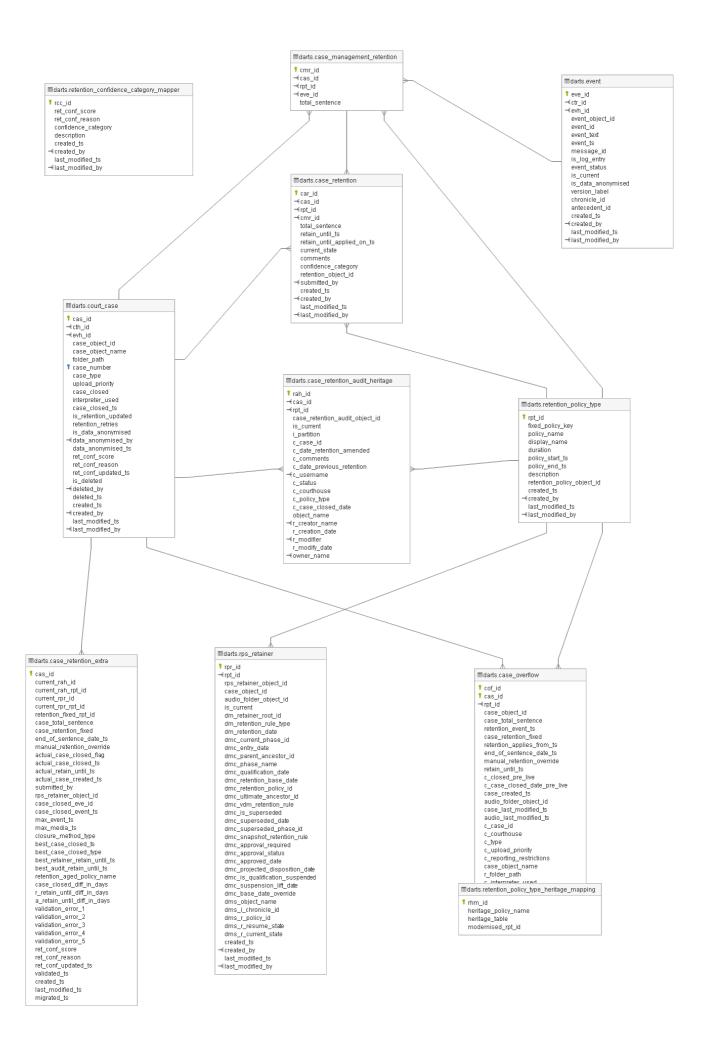


## 4. darts\_annotation

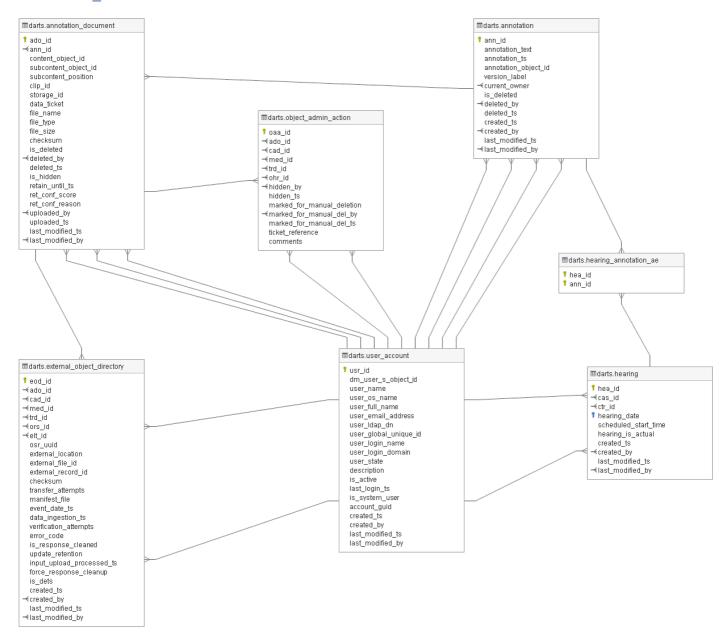


# 5. darts\_court\_case

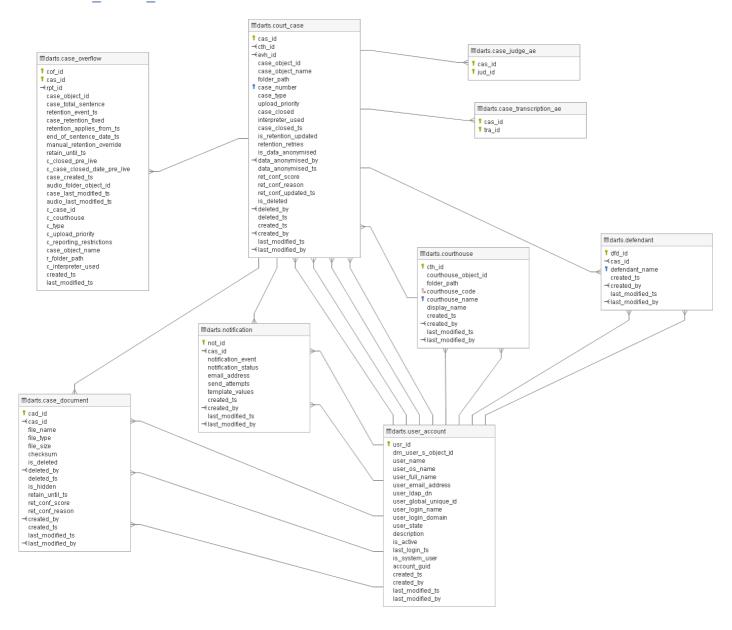


## 6. darts\_courthouse

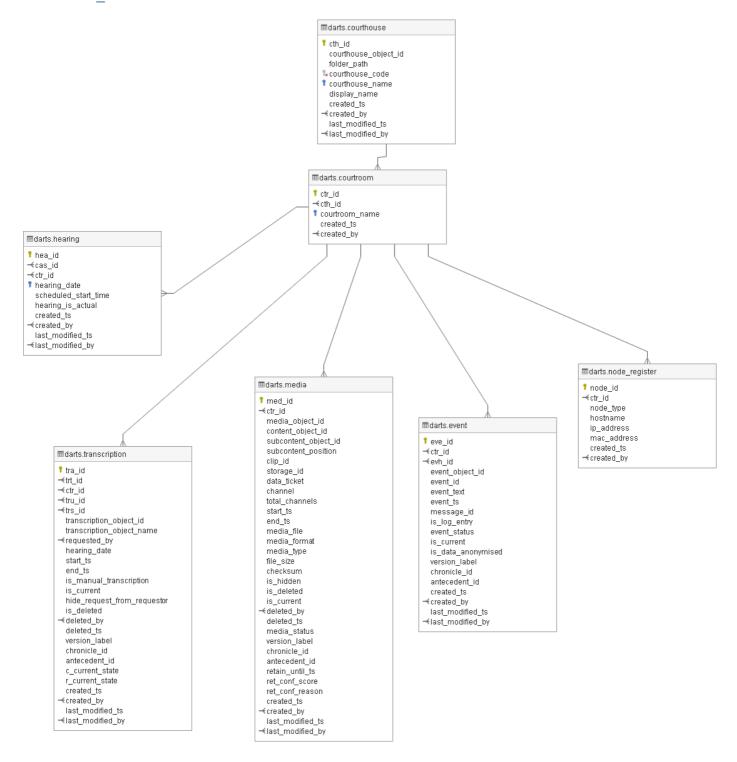


#### 7. darts media

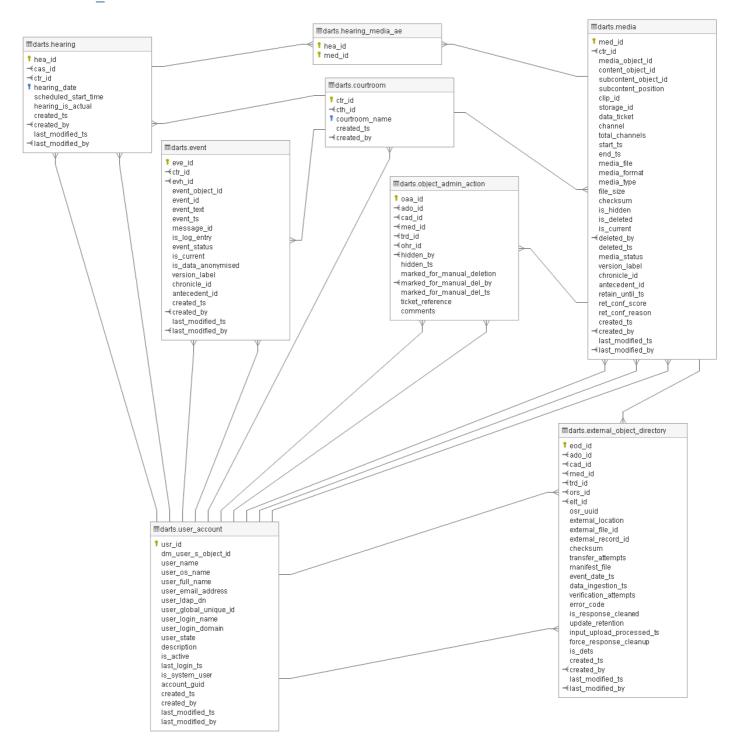

## 8. darts\_transcription

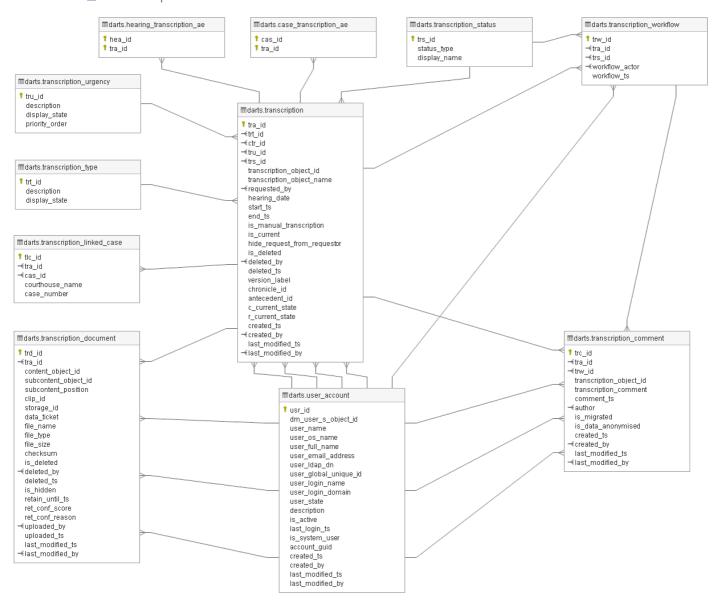

# 9. darts\_tables\_only

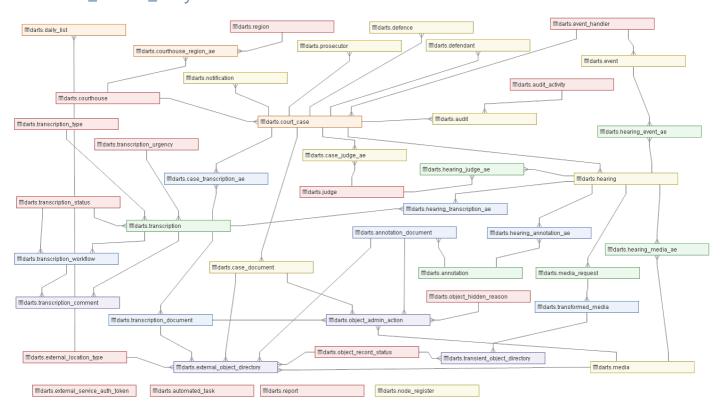



## 10. darts\_obj\_state\_record

#### ■darts.object\_state\_record 🔋 osr\_uuid eod\_id arm\_eod\_id dal\_id parent\_object\_id content\_object\_id id\_clip dets\_location flag\_file\_transfer\_to\_dets date\_file\_transfer\_to\_dets md5\_doc\_transfer\_to\_dets file\_size\_bytes\_centera file\_size\_bytes\_dets flag\_file\_av\_scan\_pass date\_file\_av\_scan\_pass flag\_file\_transf\_toarml date\_file\_transf\_toarml md5\_file\_transf\_arml file\_size\_bytes\_arml flag\_file\_mfst\_created date\_file\_mfst\_created id\_manifest\_file flag\_mfst\_transf\_to\_arml date\_mfst\_transf\_to\_arml flag\_rspn\_recvd\_from\_arml date\_rspn\_recvd\_from\_arml flag\_file\_ingest\_status date\_file\_ingest\_to\_arm md5\_file\_ingest\_to\_arm file\_size\_ingest\_to\_arm id\_response\_file id\_response\_cr\_file id\_response\_uf\_file flag\_file\_dets\_cleanup\_status date\_file\_dets\_cleanup object\_status storage\_id data\_ticket



# 11. darts\_arm\_rpo

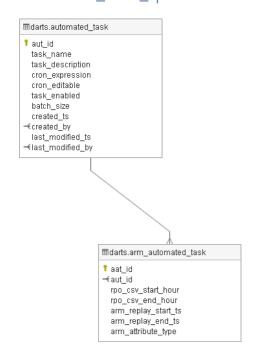

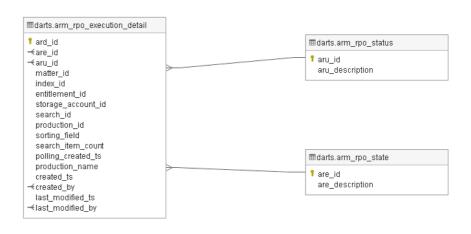

# 12. Other

# 12.1. Tables

#### 12.1.1. Table: darts.annotation

#### Columns

		Name	Data type	Description / Attributes
目	1	ann_id	integer	primary key of annotation
		annotation_text	character varying	directly sourced from moj_annotation_s.c_text Nullable
		annotation_ts	timestamp with time zone	directly sourced from moj_annotation_s Nullable
■		annotation_object_id	character varying(16)	internal Documentum primary key from moj_annotation_s Nullable
		version_label	character varying(32)	inherited from dm_sysobject_r, for r_object_type of moj_annotation Nullable
■		current_owner	integer	References: darts.user_account
■		is_deleted	boolean	Default: false
■		deleted_by	integer	Nullable References: darts.user_account
■		deleted_ts	timestamp with time zone	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
$\rightarrow$	darts.user_account	darts.annotationcurrent_owner = darts.user_accountusr_id	annotation_current_owner_fk
<b>&gt;</b>	darts.user_account	darts.annotationcreated_by = darts.user_accountusr_id	annotation_created_by_fk
<b>—</b>	darts.user_account	darts.annotationlast_modified_by = darts.user_accountusr_id	annotation_modified_by_fk
<b>—</b>	darts.user_account	darts.annotationdeleted_by = darts.user_accountusr_id	annotation_deleted_by_fk

## Linked from

Table		Join	Title / Name / Description
$\rightarrow$	darts.annotation_document	darts.annotationann_id = darts.annotation_documentann_id	annotation_document_annotation_fk
$\rightarrow$	darts.hearing_annotation_ae	darts.annotationann_id = darts.hearing_annotation_aeann_id	hearing_annotation_ae_annotation_fk

	Columns	Name / Description
9	ann_id	annotation_pk

## 12.1.2. Table: darts.annotation\_document

#### Columns

		Name	Data type	Description / Attributes
■	1	ado_id	integer	primary key of annotation_document
B		ann_id	integer	foreign key from annotation <b>References</b> : darts.annotation
B		content_object_id	character varying(16)	Nullable
B		subcontent_object_id	character varying(16)	Nullable
B		subcontent_position	integer	Nullable
B		clip_id	character varying(54)	Nullable
■		storage_id	character varying(16)	Nullable
B		data_ticket	integer	Nullable
■		file_name	character varying	
■		file_type	character varying	
		file_size	integer	
B		checksum	character varying	Nullable
B		is_deleted	boolean	<b>Default</b> : false
B		deleted_by	integer	Nullable References: darts.user_account
B		deleted_ts	timestamp with time zone	Nullable
■		is_hidden	boolean	<b>Default</b> : false
■		retain_until_ts	timestamp with time zone	Nullable
■		ret_conf_score	integer	Nullable
B		ret_conf_reason	character varying	Nullable
B		uploaded_by	integer	References: darts.user_account
B		uploaded_ts	timestamp with time zone	
B		last_modified_ts	timestamp with time zone	
B		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
<b>-</b>	darts.annotation	darts.annotation_documentann_id = darts.annotationann_id	annotation_document_annotation_fk
<b>&gt;</b>	darts.user_account	darts.annotation_documentdeleted_by = darts.user_accountusr_id	annotation_document_deleted_by_fk
$\rightarrow$	darts.user_account	darts.annotation_documentuploaded_ by = darts.user_accountusr_id	annotation_document_uploaded_by_fk
<b>&gt;</b>	darts.user_account	darts.annotation_documentlast_modified_by = darts.user_accountusr_id	annotation_document_last_modified_by_fk

## Linked from

Table		Join	Title / Name / Description
$\rightarrow$	darts.external_object_directory	darts.annotation_documentado_id = darts.external_object_directoryado_id	eod_annotation_document_fk
<b>→</b>	darts.object_admin_action	darts.annotation_documentado_id = darts.object_admin_actionado_id	oaa_annotation_document_fk

	Columns	Name / Description
P	ado_id	annotation_document_pk

# 12.1.3. Table: darts.arm\_automated\_task

#### Columns

		Name	Data type	Description / Attributes
■	1	aat_id	integer	primary key of arm_automated_task
■		aut_id	integer	foreign key to automated_task  References: darts.automated_task
■		rpo_csv_start_hour	integer	Nullable
■		rpo_csv_end_hour	integer	Nullable
■		arm_replay_start_ts	timestamp with time zone	Nullable
■		arm_replay_end_ts	timestamp with time zone	Nullable
■		arm_attribute_type	character varying	Nullable

#### Links to

		Table	Join	Title / Name / Description
>	_	darts.automated_task	<pre>darts.arm_automated_taskaut_id = darts.automated_taskaut_id</pre>	arm_automated_task_automated_task_fk

	Columns	Name / Description
P	aat_id	arm_automated_task_pk

## 12.1.4. Table: darts.arm\_rpo\_execution\_detail

#### Columns

		Name	Data type	Description / Attributes
▤	1	ard_id	integer	primary key of arm_rpo_execution_detail
		are_id	integer	foreign key to arm_rpo_state Nullable References: darts.arm_rpo_state
■		aru_id	integer	foreign key to arm_rpo_status Nullable References: darts.arm_rpo_status
▤		matter_id	character varying	Nullable
▤		index_id	character varying	Nullable
▤		entitlement_id	character varying	Nullable
▤		storage_account_id	character varying	Nullable
■		search_id	character varying	Nullable
■		production_id	character varying	Nullable
■		sorting_field	character varying	Nullable
■		search_item_count	integer	Nullable
■		polling_created_ts	timestamp with time zone	Nullable
■		production_name	character varying	Nullable
■		created_ts	timestamp with time zone	
		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
$\rightarrow$	darts.arm_rpo_state	darts.arm_rpo_execution_detailare_id = darts.arm_rpo_stateare_id	arm_rpo_execution_detail_arm_state_fk
$\rightarrow$	darts.arm_rpo_status	darts.arm_rpo_execution_detailaru_id = darts.arm_rpo_statusaru_id	arm_rpo_execution_detail_arm_status_fk
<b>&gt;</b>	darts.user_account	darts.arm_rpo_execution_detailcreated _by = darts.user_accountusr_id	arm_rpo_execution_detail_created_by_fk
<b>&gt;</b>	darts.user_account	darts.arm_rpo_execution_detaillast_mo dified_by = darts.user_accountusr_id	arm_rpo_execution_detail_last_modified_by_fk

	Columns	Name / Description
Ŷ	ard_id	arm_rpo_execution_detail_pk

## 12.1.5. Table: darts.arm\_rpo\_state

#### Columns

		Name	Data type	Description / Attributes
■	1	are_id	integer	primary key of arm_rpo_state
■		are_description	character varying	

#### Linked from

	Table	Join	Title / Name / Description
_	darts.arm_rpo_execution_detail	darts.arm_rpo_stateare_id = darts.arm_rpo_execution_detailare_id	arm_rpo_execution_detail_arm_state_fk

	Columns	Name / Description
9	are_id	arm_rpo_state_pk

## 12.1.6. Table: darts.arm\_rpo\_status

#### Columns

		Name	Data type	Description / Attributes
■	1	aru_id	integer	primary key of arm_rpo_status
目		aru_description	character varying	

## Linked from

Table	Join	Title / Name / Description
→ Lidarts arm indicate a secution detail	darts.arm_rpo_statusaru_id = darts.arm_rpo_execution_detailaru_id	arm_rpo_execution_detail_arm_status_fk

	Columns	Name / Description
?	aru_id	arm_rpo_status_pk

## 12.1.7. Table: darts.audit

## Columns

		Name	Data type	Description / Attributes
■	1	aud_id	bigint	primary key of audit
■		cas_id	integer	foreign key from case Nullable References: darts.court_case
■		aua_id	integer	primary key of audit_activity References: darts.audit_activity
■		usr_id	integer	foreign key from user_account  References: darts.user_account
■		additional_data	character varying	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
$\rightarrow$	darts.audit_activity	darts.auditaua_id = darts.audit_activityaua_id	audit_audit_activity_fk
<b>-</b>	darts.court_case	darts.auditcas_id = darts.court_casecas_id	audit_case_fk
<b>&gt;</b>	darts.user_account	darts.auditusr_id = darts.user_accountusr_id	audit_user_account_fk
<b>&gt;</b> —	darts.user_account	darts.auditcreated_by = darts.user_accountusr_id	audit_created_by_fk
<b>&gt;</b>	darts.user_account	darts.auditlast_modified_by = darts.user_accountusr_id	audit_modified_by_fk

	Columns	Name / Description
9	aud_id	audit_pk

# 12.1.8. Table: darts.audit\_activity

#### Columns

		Name	Data type	Description / Attributes
■	1	aua_id	integer	
■		activity_name	character varying	
■		activity_description	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
<b>—</b>	darts.user_account	<pre>darts.audit_activitycreated_by = darts.user_accountusr_id</pre>	audit_activity_created_by_fk
<b>—</b>	darts.user_account	<pre>darts.audit_activity ast_modified_by = darts.user_accountusr_id</pre>	audit_activity_modified_by_fk

## Linked from

	Table	Join	Title / Name / Description
-		darts.audit_activityaua_id = darts.auditaua_id	audit_audit_activity_fk

	Columns	Name / Description
P	aua_id	audit_activity_pk

## 12.1.9. Table: darts.audit\_heritage

#### Columns

	Name	Data type	Description / Attributes
▤	r_object_id	character varying	Nullable
■	event_name	character varying	Nullable
■	event_source	character varying	Nullable
■	r_gen_source	integer	Nullable
■	user_name	character varying	Nullable
■	audited_obj_id	character varying	Nullable
■	time_stamp	timestamp with time zone	Nullable
■	string_1	character varying	Nullable
■	string_2	character varying	Nullable
■	string_3	character varying	Nullable
■	string_4	character varying	Nullable
■	string_5	character varying	Nullable
▤	id_1	character varying	Nullable
▤	id_2	character varying	Nullable
■	id_3	character varying	Nullable
■	id_4	character varying	Nullable
▤	id_5	character varying	Nullable
■	chronicle_id	character varying	Nullable
■	object_name	character varying	Nullable
▤	version_label	character varying	Nullable
▤	object_type	character varying	Nullable
▤	event_description	character varying	Nullable
▤	policy_id	character varying	Nullable
■	current_state	character varying	Nullable
▤	workflow_id	character varying	Nullable
▤	session_id	character varying	Nullable
▤	user_id	character varying	Nullable
■	owner_name	character varying	Nullable
▤	acl_name	character varying	Nullable
▤	acl_domain	character varying	Nullable
▤	application_code	character varying	Nullable
■	controlling_app	character varying	Nullable
B	attribute_list	character varying	Nullable
■	attribute_list_id	character varying	Nullable
■	audit_signature	character varying	Nullable
_			

	Name	Data type	Description / Attributes
■	audit_version	integer	Nullable
▤	host_name	character varying	Nullable
▤	time_stamp_utc	timestamp with time zone	Nullable
■	i_audited_obj_class	integer	Nullable
■	registry_id	character varying	Nullable
目	i_is_archived	integer	Nullable
▤	audited_obj_vstamp	integer	Nullable
▤	attribute_list_old	character varying	Nullable
▤	i_is_replica	integer	Nullable
▤	i_vstamp	integer	Nullable
■	attribute_list_aspect_id	character varying	Nullable
■	r_object_sequence	integer	Nullable

## 12.1.10. Table: darts.automated\_task

#### Columns

		Name	Data type	Description / Attributes
■	1	aut_id	integer	primary key of automated_task
■		task_name	character varying	
■		task_description	character varying	
■		cron_expression	character varying	
■		cron_editable	boolean	
■		task_enabled	boolean	Default: true
■		batch_size	integer	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
<b>—</b>	darts.user_account	<pre>darts.automated_taskcreated_by = darts.user_accountusr_id</pre>	automated_task_created_by_fk
<b>—</b>	darts.user_account	darts.automated_tasklast_modified_by = darts.user_accountusr_id	automated_task_modified_by_fk

## Linked from

	Table	Join	Title / Name / Description
$\rightarrow$	darts.arm_automated_task	<pre>darts.automated_taskaut_id = darts.arm_automated_taskaut_id</pre>	arm_automated_task_automated_task_fk

Columns		Name / Description
Ŷ	aut_id	automated_task_pk

# 12.1.11. Table: darts.case\_document

#### Columns

		Name	Data type	Description / Attributes
目	1	cad_id	integer	
▤		cas_id	integer	References: darts.court_case
▤		file_name	character varying	
▤		file_type	character varying	
▤		file_size	integer	
▤		checksum	character varying	Nullable
▤		is_deleted	boolean	Default: false
■		deleted_by	integer	Nullable References: darts.user_account
▤		deleted_ts	timestamp with time zone	Nullable
▤		is_hidden	boolean	<b>Default</b> : false
▤		retain_until_ts	timestamp with time zone	Nullable
目		ret_conf_score	integer	Nullable
▤		ret_conf_reason	character varying	Nullable
▤		created_by	integer	References: darts.user_account
目		created_ts	timestamp with time zone	
目		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
$\rightarrow$	darts.court_case	darts.case_documentcas_id = darts.court_casecas_id	case_document_case_fk
$\rightarrow$	darts.user_account	darts.case_documentcreated_by = darts.user_accountusr_id	case_document_created_by_fk
<b>&gt;</b>	darts.user_account	darts.case_documentlast_modified_by = darts.user_accountusr_id	case_document_last_modified_by_fk
$\rightarrow$	darts.user_account	darts.case_documentdeleted_by = darts.user_accountusr_id	case_document_deleted_by_fk

#### Linked from

	Table	Join	Title / Name / Description
_	darts.external_object_directory	darts.case_documentcad_id = darts.external_object_directorycad_id	eod_case_document_fk
-	darts.object_admin_action	darts.case_documentcad_id = darts.object_admin_actioncad_id	oaa_case_document_fk

	Columns	Name / Description
?	cad_id	case_document_pk

## 12.1.12. Table: darts.case\_judge\_ae

## Columns

		Name	Data type	Description / Attributes
■	1	cas_id	integer	foreign key from case, part of composite natural key and PK References: darts.court_case
■	1	jud_id	integer	foreign key from judge, part of composite natural key and PK <b>References</b> : darts.judge

## Links to

	Table	Join	Title / Name / Description
<b>—</b>	darts.court_case	darts.case_judge_aecas_id = darts.court_casecas_id	case_judge_ae_case_fk
$\rightarrow$	darts.judge	darts.case_judge_aejud_id = darts.judgejud_id	case_judge_ae_judge_fk

Columns		Name / Description
9	cas_id, jud_id	case_judge_ae_pk

## 12.1.13. Table: darts.case\_management\_retention

#### Columns

		Name	Data type	Description / Attributes
■	1	cmr_id	integer	
		cas_id	integer	References: darts.court_case
		rpt_id	integer	References: darts.retention_policy_type
		eve_id	integer	References: darts.event
		total_sentence	character varying	Nullable

#### Links to

	Table	Join	Title / Name / Description
<b>—</b>	darts.court_case	darts.case_management_retentioncas_ id = darts.court_casecas_id	case_management_retention_court_case_fk
<b>—</b>	darts.event	darts.case_management_retentioneve _id = darts.eventeve_id	case_management_retention_event_fk
<b>-</b>	darts.retention_policy_type	darts.case_management_retentionrpt_i d = darts.retention_policy_typerpt_id	case_management_retention_retention_policy_type_fk

## Linked from

Table	Join	Title / Name / Description
	darts.case_management_retentioncmr _id = darts.case_retentioncmr_id	case_retention_case_management_retention_fk

	Columns	Name / Description
9	cmr_id	case_management_retention_pk

## 12.1.14. Table: darts.case\_overflow

#### Columns

		Name	Data type	Description / Attributes
■	1	cof_id	integer	
■		cas_id	integer	Nullable References: darts.court_case
B		rpt_id	integer	Nullable References: darts.retention_policy_type
▤		case_object_id	character varying	Nullable
▤		case_total_sentence	character varying	Nullable
▤		retention_event_ts	timestamp with time zone	Nullable
▤		case_retention_fixed	character varying	Nullable
▤		retention_applies_from_ts	timestamp with time zone	Nullable
▤		end_of_sentence_date_ts	timestamp with time zone	Nullable
▤		manual_retention_override	integer	Nullable
▤		retain_until_ts	timestamp with time zone	Nullable
▤		c_closed_pre_live	integer	Nullable
▤		c_case_closed_date_pre_live	timestamp with time zone	Nullable
▤		case_created_ts	timestamp with time zone	Nullable
▤		audio_folder_object_id	character varying(16)	Nullable
▤		case_last_modified_ts	timestamp with time zone	Nullable
▤		audio_last_modified_ts	timestamp with time zone	Nullable
▤		c_case_id	character varying(32)	Nullable
▤		c_courthouse	character varying(64)	Nullable
■		c_type	character varying(32)	Nullable
▤		c_upload_priority	integer	Nullable
■		c_reporting_restrictions	character varying(128)	Nullable
▤		case_object_name	character varying(255)	Nullable
B		r_folder_path	character varying(740)	Nullable
		c_interpreter_used	integer	Nullable
■		created_ts	timestamp with time zone	Default: CURRENT_TIMESTAMP
■		last_modified_ts	timestamp with time zone	

#### Links to

	Table	Join	Title / Name / Description
<b>—</b>	darts.court_case	darts.case_overflowcas_id = darts.court_casecas_id	case_overflow_court_case_fk
<b>—</b>	darts.retention_policy_type	<pre>darts.case_overflowrpt_id = darts.retention_policy_typerpt_id</pre>	case_overflow_retention_policy_type_fk

	Columns	Name / Description
Ŷ	cof_id	case_overflow_pk

## 12.1.15. Table: darts.case\_retention

#### Columns

		Name	Data type	Description / Attributes
	1	car_id	integer	primary key of case_retention
■		cas_id	integer	foreign key from court_case References: darts.court_case
■		rpt_id	integer	References: darts.retention_policy_type
■		cmr_id	integer	Nullable References: darts.case_management_retention
■		total_sentence	character varying	Nullable
		retain_until_ts	timestamp with time zone	
		retain_until_applied_on_ts	timestamp with time zone	Nullable
		current_state	character varying	
		comments	character varying	Nullable
■		confidence_category	integer	Nullable
		retention_object_id	character varying	Nullable
		submitted_by	integer	References: darts.user_account
		created_ts	timestamp with time zone	
		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
$\rightarrow$	darts.case_management_retention	darts.case_retentioncmr_id = darts.case_management_retentioncmr_id	case_retention_case_management_retention_fk
<b>&gt;</b>	darts.court_case	darts.case_retentioncas_id = darts.court_casecas_id	case_retention_court_case_fk
<b>&gt;</b>	darts.retention_policy_type	<pre>darts.case_retentionrpt_id = darts.retention_policy_typerpt_id</pre>	case_retention_retention_policy_type_fk
<b>&gt;</b>	darts.user_account	darts.case_retentioncreated_by = darts.user_accountusr_id	case_retention_created_by_fk
<b>&gt;</b>	darts.user_account	darts.case_retentionlast_modified_by = darts.user_accountusr_id	case_retention_last_modified_by_fk
<b>—</b>	darts.user_account	darts.case_retentionsubmitted_by = darts.user_accountusr_id	case_retention_submitted_by_fk

	Columns	Name / Description
9	car_id	case_retention_pk

## 12.1.16. Table: darts.case\_retention\_audit\_heritage

#### Columns

		Name	Data type	Description / Attributes
■	1	rah_id	integer	
■		cas_id	integer	Nullable References: darts.court_case
■		rpt_id	integer	Nullable References: darts.retention_policy_type
▤		case_retention_audit_object_id	character varying(16)	
▤		is_current	boolean	Nullable
▤		i_partition	integer	Nullable
▤		c_case_id	character varying(32)	Nullable
■		c_date_retention_amended	timestamp with time zone	Nullable
■		c_comments	character varying	Nullable
■		c_date_previous_retention	timestamp with time zone	Nullable
■		c_username	integer	Nullable References: darts.user_account
▤		c_status	character varying(32)	Nullable
▤		c_courthouse	character varying(64)	Nullable
▤		c_policy_type	character varying(20)	Nullable
▤		c_case_closed_date	timestamp with time zone	Nullable
▤		object_name	character varying(255)	Nullable
■		r_creator_name	integer	Nullable References: darts.user_account
■		r_creation_date	timestamp with time zone	Nullable
■		r_modifier	integer	Nullable References: darts.user_account
▤		r_modify_date	timestamp with time zone	Nullable
■		owner_name	integer	Nullable References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
<b>-</b>	darts.court_case	darts.case_retention_audit_heritagecas _id = darts.court_casecas_id	case_retention_audit_heritage_court_case_fk
<b>—</b>	darts.retention_policy_type	darts.case_retention_audit_heritagerpt _id = darts.retention_policy_typerpt_id	case_retention_audit_heritage_retention_policy_type_fk
<b>&gt;</b>	darts.user_account	darts.case_retention_audit_heritagec_u sername = darts.user_accountusr_id	case_retention_audit_heritage_c_username_fk
<b>-</b>	darts.user_account	darts.case_retention_audit_heritager_c reator_name = darts.user_accountusr_id	case_retention_audit_heritage_r_creator_name_fk
<b>—</b>	darts.user_account	darts.case_retention_audit_heritager_ modifier = darts.user_accountusr_id	case_retention_audit_heritage_r_modifier_fk

	Table	Join	Title / Name / Description
<b>—</b>	darts.user_account	darts.case_retention_audit_heritageow ner_name = darts.user_accountusr_id	case_retention_audit_heritage_owner_name_fk

	Columns	Name / Description
9	rah_id	case_retention_audit_heritage_pk

## 12.1.17. Table: darts.case\_retention\_extra

#### Columns

		Name	Data type	Description / Attributes
	1	cas_id	integer	References: darts.court_case
		current_rah_id	integer	Nullable
		current_rah_rpt_id	integer	Nullable
		current_rpr_id	integer	Nullable
■		current_rpr_rpt_id	integer	Nullable
		retention_fixed_rpt_id	integer	Nullable
■		case_total_sentence	character varying	Nullable
■		case_retention_fixed	character varying	Nullable
■		end_of_sentence_date_ts	timestamp with time zone	Nullable
■		manual_retention_override	integer	Nullable
■		actual_case_closed_flag	integer	Nullable
■		actual_case_closed_ts	timestamp with time zone	Nullable
		actual_retain_until_ts	timestamp with time zone	Nullable
		actual_case_created_ts	timestamp with time zone	Nullable
■		submitted_by	integer	Nullable
■		rps_retainer_object_id	character varying	Nullable
		case_closed_eve_id	integer	Nullable
■		case_closed_event_ts	timestamp with time zone	Nullable
■		max_event_ts	timestamp with time zone	Nullable
■		max_media_ts	timestamp with time zone	Nullable
■		closure_method_type	character varying	Nullable
■		best_case_closed_ts	timestamp with time zone	Nullable
■		best_case_closed_type	character varying	Nullable
■		best_retainer_retain_until_ts	timestamp with time zone	Nullable
B		best_audit_retain_until_ts	timestamp with time zone	Nullable
B		retention_aged_policy_name	character varying	Nullable
B		case_closed_diff_in_days	integer	Nullable
B		r_retain_until_diff_in_days	integer	Nullable
B		a_retain_until_diff_in_days	integer	Nullable
B		validation_error_1	character varying	Nullable
B		validation_error_2	character varying	Nullable
		validation_error_3	character varying	Nullable
		validation_error_4	character varying	Nullable
		validation_error_5	character varying	Nullable
B		ret_conf_score	integer	Nullable

	Name	Data type	Description / Attributes
■	ret_conf_reason	character varying	Nullable
■	ret_conf_updated_ts	timestamp with time zone	Nullable
■	validated_ts	timestamp with time zone	Nullable
■	created_ts	timestamp with time zone	
■	last_modified_ts	timestamp with time zone	
▤	migrated_ts	timestamp with time zone	Nullable

## Links to

	Table	Join	Title / Name / Description
>	- Loarts court case	<pre>darts.case_retention_extracas_id = darts.court_casecas_id</pre>	case_retention_extra_court_case_fk

	Columns	Name / Description
Ŷ	cas_id	case_retention_extra_pk

## 12.1.18. Table: darts.case\_transcription\_ae

#### Columns

		Name	Data type	Description / Attributes
	1	cas_id	integer	foreign key from case, part of composite natural key and PK <b>References</b> : darts.court_case
■	1	tra_id	integer	foreign key from transcription, part of composite natural key and PK <b>References</b> : darts.transcription

## Links to

	Table	Join	Title / Name / Description
$\rightarrow$	darts.court_case	darts.case_transcription_aecas_id = darts.court_casecas_id	case_transcription_ae_case_fk
<b>—</b>	darts.transcription	darts.case_transcription_aetra_id = darts.transcriptiontra_id	case_transcription_ae_transcription_fk

	Columns	Name / Description
Ŷ	cas_id, tra_id	case_transcription_ae_pk

## 12.1.19. Table: darts.court\_case

#### Columns

third integer primary key of court.case  third case_object.id analyses case_object.id character varying(16) shallable case_object.id character varying(16) shallable folder_path character varying (16) shallable folder_path character varying shallable case_object.id character varying shallable folder_path character varying shallable folder_path character varying shallable case_object.id character varying shallable folder_path character varying shallable case_pumber character varying shallable case_object.id character varying shallable charact			Name	Data type	Description / Attributes
References: darts counthouse    Part   References: darts counthouse	■	1	cas_id	integer	primary key of court_case
References: darts event, handler    case_object_ild   character varying(16)   internal Documentum primary key from moj_case_s   Nullable	■	1	cth_id	integer	
Character varying to	■		evh_id	integer	
folder_path   character varying   Nullable     vase_number   character varying   directly sourced from moj_case_sc_case_id     case_type   character varying   Nullable     upload_priority   integer   Nullable     case_dosed   boolean   migrated from moj_case_sc, converted from numeric to boolean     interpreter_used   boolean   migrated from moj_case_sc, converted from numeric to boolean     case_closed_ts   timestamp with time zone   Nullable     is_retention_updated   boolean   Default_false     retention_retries   integer   Nullable     is_data_anonymised   boolean   Default_false     data_anonymised_by   integer   Nullable     data_anonymised_ts   timestamp with time zone   Nullable     ret_conf_score   integer   Nullable     ret_conf_score   integer   Nullable     ret_conf_reason   character varying   Nullable     ret_conf_updated_ts   timestamp with time zone   Nullable     ret_conf_updated_ts   timestamp with time zone   Nullable     ret_conf_updated_ts   timestamp with time zone   Nullable     deleted_ts   timestamp with time zone   Nullable     deleted_ts   timestamp with time zone   Nullable     ret_conf_updated_ts   timestamp with time zone   Nullable     deleted_ts   timestamp with time zone   Nullable     ret_conf_updated_ts   timestamp with time zone   Nullable     deleted_ts   timestamp with time zone   Nullable     ret_tone_tone_tone_tone_tone_tone_tone_to	■		case_object_id	character varying(16)	
case_number   character varying   directly sourced from moj_case_s.c_case_id	▤		case_object_name	character varying(255)	Nullable
Case_type   Character varying   Nullable	▤		folder_path	character varying	Nullable
Upload_priority   Integer   Nullable	▤	1	case_number	character varying	directly sourced from moj_case_s.c_case_id
case_closed   boolean   migrated from moj_case_s, converted from numeric to boolean   migrated from moj_case_s, converted from numeric to boolean   migrated from moj_case_s, converted from numeric to boolean   directly sourced from moj_case_s.c_case_closed_date   nullable	▤		case_type	character varying	Nullable
interpreter_used   boolean   migrated from moj_case_s, converted from numeric to boolean	▤		upload_priority	integer	Nullable
□	▤		case_closed	boolean	migrated from moj_case_s, converted from numeric to boolean
Itemstamp with time zone   Nullable	■		interpreter_used	boolean	migrated from moj_case_s, converted from numeric to boolean
retention_retries integer Nullable    is_data_anonymised boolean Default: false	■		case_closed_ts	timestamp with time zone	
is_data_anonymised   boolean   Default: false	▤		is_retention_updated	boolean	Default: false
data_anonymised_by integer References: darts.user_account  data_anonymised_ts timestamp with time zone Nullable ret_conf_score integer Nullable ret_conf_reason character varying Nullable ret_conf_updated_ts timestamp with time zone Nullable ret_conf_updated_ts timestamp with time zone Nullable lis_deleted boolean Default: false leted_by integer Nullable References: darts.user_account  letered_ts timestamp with time zone Nullable References: darts.user_account References: darts.user_account References: darts.user_account References: darts.user_account References: darts.user_account References: darts.user_account	▤		retention_retries	integer	Nullable
Integer   References: darts.user_account	▤		is_data_anonymised	boolean	<b>Default</b> : false
ret_conf_score integer Nullable ret_conf_reason character varying Nullable ret_conf_updated_ts timestamp with time zone Nullable lis_deleted boolean Default: false lis_deleted_by integer Nullable References: darts.user_account lideleted_ts timestamp with time zone Nullable ret_conf_updated_ts timestamp with time zone Nullable References: darts.user_account References: darts.user_account References: darts.user_account References: darts.user_account	■		data_anonymised_by	integer	
Image:	▤		data_anonymised_ts	timestamp with time zone	Nullable
Image:	▤		ret_conf_score	integer	Nullable
is_deleted   boolean   Default: false	▤		ret_conf_reason	character varying	Nullable
deleted_by   integer   Nullable   References: darts.user_account     deleted_ts   timestamp with time zone   Nullable     created_ts   timestamp with time zone     created_by   integer   References: darts.user_account	▤		ret_conf_updated_ts	timestamp with time zone	Nullable
References: darts.user_account  deleted_ts timestamp with time zone Nullable  created_ts timestamp with time zone  created_ts timestamp with time zone  created_by integer References: darts.user_account	▤		is_deleted	boolean	Default: false
created_ts timestamp with time zone created_by integer References: darts.user_account	B		deleted_by	integer	
created_by integer References: darts.user_account	■		deleted_ts	timestamp with time zone	Nullable
	■		created_ts	timestamp with time zone	
	■		created_by	integer	References: darts.user_account
last_modified_ts timestamp with time zone	■		last_modified_ts	timestamp with time zone	
■     last_modified_by     integer     References: darts.user_account	■		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
>		<pre>darts.court_casecth_id = darts.courthousecth_id</pre>	court_case_courthouse_fk

	Table	Join	Title / Name / Description
$\leftarrow$	darts.event_handler	darts.court_caseevh_id = darts.event_handlerevh_id	court_case_event_handler_fk
$\leftarrow$	darts.user_account	darts.court_casecreated_by = darts.user_accountusr_id	court_case_created_by_fk
<b>&gt;</b>	darts.user_account	darts.court_caselast_modified_by = darts.user_accountusr_id	court_case_modified_by_fk
$\rightarrow$	darts.user_account	darts.court_casedeleted_by = darts.user_accountusr_id	court_case_deleted_by_fk
$\rightarrow$	darts.user_account	darts.court_casedata_anonymised_by = darts.user_accountusr_id	court_case_data_anonymised_by_fk

## Linked from

	Table	Join	Title / Name / Description
$\rightarrow$	darts.audit	darts.court_casecas_id = darts.auditcas_id	audit_case_fk
$\rightarrow$	darts.case_document	darts.court_casecas_id = darts.case_documentcas_id	case_document_case_fk
$\rightarrow$	darts.case_judge_ae	darts.court_casecas_id = darts.case_judge_aecas_id	case_judge_ae_case_fk
$\rightarrow$	darts.case_management_retention	darts.court_casecas_id = darts.case_management_retentioncas_id	case_management_retention_court_case_fk
$\rightarrow$	darts.case_overflow	darts.court_casecas_id = darts.case_overflowcas_id	case_overflow_court_case_fk
$\rightarrow$	darts.case_retention	darts.court_casecas_id = darts.case_retentioncas_id	case_retention_court_case_fk
$\rightarrow$	darts.case_retention_audit_heritage	darts.court_casecas_id = darts.case_retention_audit_heritagecas_id	case_retention_audit_heritage_court_case_fk
$\rightarrow$	darts.case_retention_extra	darts.court_casecas_id = darts.case_retention_extracas_id	case_retention_extra_court_case_fk
$\rightarrow$	darts.case_transcription_ae	darts.court_casecas_id = darts.case_transcription_aecas_id	case_transcription_ae_case_fk
$\rightarrow$	darts.defence	darts.court_casecas_id = darts.defencecas_id	defence_court_case_fk
$\rightarrow$	darts.defendant	darts.court_casecas_id = darts.defendantcas_id	defendant_court_case_fk
$\rightarrow$	darts.event_linked_case	darts.court_casecas_id = darts.event_linked_casecas_id	event_linked_case_court_case_fk
$\rightarrow$	darts.hearing	darts.court_casecas_id = darts.hearingcas_id	hearing_case_fk
$\rightarrow$	darts.media_linked_case	darts.court_casecas_id = darts.media_linked_casecas_id	media_linked_case_court_case_fk
$\rightarrow$	darts.notification	darts.court_casecas_id = darts.notificationcas_id	notification_case_fk
$\rightarrow$	darts.prosecutor	darts.court_casecas_id = darts.prosecutorcas_id	prosecutor_court_case_fk
$\rightarrow$	darts.transcription_linked_case	darts.court_casecas_id = darts.transcription_linked_casecas_id	transcription_linked_case_court_case_fk

	Columns	Name / Description
?	cas_id	court_case_pk
Ŷ	case_number, cth_id	cas_case_number_cth_id_unq

## 12.1.20. Table: darts.courthouse

#### Columns

		Name	Data type	Description / Attributes
■	1	cth_id	integer	primary key of courthouse
■		courthouse_object_id	character varying(16)	Nullable
■		folder_path	character varying	Nullable
■		courthouse_code	integer	corresponds to the c_crown_court_code found in daily lists Nullable
■	1	courthouse_name	character varying	directly sourced from moj_courthouse_s.c_id
■		display_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
$\rightarrow$	darts.user_account	<pre>darts.courthousecreated_by = darts.user_accountusr_id</pre>	courthouse_created_by_fk
$\rightarrow$	darts.user_account	darts.courthouselast_modified_by = darts.user_accountusr_id	courthouse_modified_by_fk

#### Linked from

	Table	Join	Title / Name / Description
$\rightarrow$	darts.court_case	darts.courthousecth_id = darts.court_casecth_id	court_case_courthouse_fk
$\rightarrow$	darts.courthouse_region_ae	darts.courthousecth_id = darts.courthouse_region_aecth_id	courthouse_region_courthouse_fk
$\rightarrow$	darts.courtroom	darts.courthousecth_id = darts.courtroomcth_id	courtroom_courthouse_fk
<b>→</b>	darts.security_group_courthouse_ae	darts.courthousecth_id = darts.security_group_courthouse_aect h_id	security_group_courthouse_courthouse_fk

	Columns	Name / Description
?	cth_id	courthouse_pk
P	courthouse_name	courthouse_courthouse_name_key

# 12.1.21. Table: darts.courthouse\_region\_ae

## Columns

		Name	Data type	Description / Attributes
■	1	cth_id	integer	References: darts.courthouse
■	1	reg_id	integer	References: darts.region

## Links to

	Table	Join	Title / Name / Description
<b>-</b>	darts.courthouse	darts.courthouse_region_aecth_id = darts.courthousecth_id	courthouse_region_courthouse_fk
<b>-</b>	darts.region	darts.courthouse_region_aereg_id = darts.regionreg_id	courthouse_region_region_fk

	Columns	Name / Description
9	cth_id, reg_id	courthouse_region_ae_pk

## 12.1.22. Table: darts.courtroom

#### Columns

		Name	Data type	Description / Attributes
■	1	ctr_id	integer	primary key of courtroom
■	1	cth_id	integer	foreign key to courthouse  References: darts.courthouse
■	1	courtroom_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account

#### Links to

		Table	Join	Title / Name / Description
>	<b>—</b>	darts.courthouse	<pre>darts.courtroomcth_id = darts.courthousecth_id</pre>	courtroom_courthouse_fk
>	<b>—</b>	darts.user_account	darts.courtroomcreated_by = darts.user_accountusr_id	courtroom_created_by_fk

#### Linked from

	Table	Join	Title / Name / Description
$\rightarrow$	darts.event	darts.courtroomctr_id = darts.eventctr_id	event_courtroom_fk
$\rightarrow$	darts.hearing	darts.courtroomctr_id = darts.hearingctr_id	hearing_courtroom_fk
$\rightarrow$	darts.media	darts.courtroomctr_id = darts.mediactr_id	media_courtroom_fk
$\rightarrow$	darts.node_register	darts.courtroomctr_id = darts.node_registerctr_id	node_register_courtroom_fk
$\rightarrow$	darts.transcription	darts.courtroomctr_id = darts.transcriptionctr_id	transcription_courtroom_fk

	Columns	Name / Description
P	ctr_id	courtroom_pk
P	cth_id, courtroom_name	ctr_chr_crn_unq

# 12.1.23. Table: darts.daily\_list

## Columns

		Name	Data type	Description / Attributes
B	1	dal_id	integer	primary key of daily_list
B		courthouse_code	integer	Nullable
B		listing_courthouse	character varying	
B		daily_list_object_id	character varying(16)	internal Documentum primary key from moj_daily_list_s Nullable
B		unique_id	character varying	directly sourced from moj_daily_list_s, received as part of the XML, used to find duplicate daily lists  Nullable
B		job_status	character varying	directly sourced from moj_daily_list_s
B		published_ts	timestamp with time zone	directly sourced from moj_daily_list_s.c_timestamp Nullable
B		start_dt	date	directly sourced from moj_daily_list_s.c_start_date Nullable
B		end_dt	date	directly sourced from moj_daily_list_s.c_end_date Nullable
B		daily_list_id_s	character varying	directly sourced from moj_daily_list_s Nullable
B		daily_list_source	character varying	directly sourced from moj_daily_list_s Nullable
B		daily_list_content_json	character varying	Nullable
■		daily_list_content_xml	character varying	Nullable
■		message_id	character varying	Nullable
■		content_object_id	character varying(16)	Nullable
■		subcontent_object_id	character varying(16)	Nullable
■		subcontent_position	integer	Nullable
B		clip_id	character varying	Nullable
B		storage_id	character varying(16)	Nullable
■		data_ticket	integer	Nullable
■		external_location	character varying	Nullable
B		elt_id	integer	Nullable References: darts.external_location_type
■		osr_uuid	bigint	Nullable
B		created_ts	timestamp with time zone	
B		created_by	integer	References: darts.user_account
B		last_modified_ts	timestamp with time zone	
		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
<b>-</b>	darts.external_location_type	darts.daily_listelt_id = darts.external_location_typeelt_id	daily_list_external_location_type_fk
<b>&gt;</b>	darts.user_account	<pre>darts.daily_listcreated_by = darts.user_accountusr_id</pre>	daily_list_created_by_fk
<b>&gt;</b>	darts.user_account	darts.daily_listlast_modified_by = darts.user_accountusr_id	daily_list_modified_by_fk

	Columns	Name / Description
P	dal_id	daily_list_pk

# 12.1.24. Table: darts.data\_anonymisation

#### Columns

		Name	Data type	Description / Attributes
■	1	dan_id	integer	primary key of data_anonymisation
■		eve_id	bigint	foreign key to event, unenforced to support deletion of event without reference to this table  Nullable  References: darts.event
		trc_id	integer	foreign key of transcription_comment, unenforce to support deletion of transcription_comment without reference to this table  Nullable  References: darts.transcription_comment
■		is_manual_request	boolean	Nullable
■		requested_by	integer	References: darts.user_account
■		requested_ts	timestamp with time zone	
B		approved_by	integer	Nullable References: darts.user_account
■		approved_ts	timestamp with time zone	Nullable

## Links to

	Table	Join	Title / Name / Description
<b>-</b>	darts.event	darts.data_anonymisationeve_id = darts.eventeve_id	data_anonymisation_event_fk
<b>-</b>	darts.transcription_comment	darts.data_anonymisationtrc_id = darts.transcription_commenttrc_id	data_anonymisation_transcription_comment_fk
<b>-</b>	darts.user_account	darts.data_anonymisationrequested_b y = darts.user_accountusr_id	data_anonymisation_requested_by_fk
<b>&gt;</b>	darts.user_account	darts.data_anonymisationapproved_by = darts.user_accountusr_id	data_anonymisation_approved_by_fk

	Columns	Name / Description
?	dan_id	data_anonymisation_pk

## 12.1.25. Table: darts.defence

#### Columns

		Name	Data type	Description / Attributes
■	1	dfc_id	integer	primary key of defence_name
■	9	cas_id	integer	foreign key from court_case References: darts.court_case
■	1	defence_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
<b>-</b>	darts.court_case	darts.defencecas_id = darts.court_casecas_id	defence_court_case_fk
<b>&gt;</b>	darts.user_account	<pre>darts.defencecreated_by = darts.user_accountusr_id</pre>	defence_created_by_fk
<b>&gt;</b>	darts.user_account	darts.defencelast_modified_by = darts.user_accountusr_id	defence_modified_by_fk

	Columns	Name / Description
Ŷ	dfc_id	defence_pk
Ŷ	cas_id, defence_name	dfc_cas_id_defence_name_unq

## 12.1.26. Table: darts.defendant

#### Columns

		Name	Data type	Description / Attributes
■	1	dfd_id	integer	primary key of defendant_name
■	9	cas_id	integer	foreign key from court_case References: darts.court_case
■	1	defendant_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
<b>-</b>	darts.court_case	darts.defendantcas_id = darts.court_casecas_id	defendant_court_case_fk
<b>-</b>	darts.user_account	darts.defendantcreated_by = darts.user_accountusr_id	defendant_created_by_fk
<b>&gt;</b>	darts.user_account	<pre>darts.defendantlast_modified_by = darts.user_accountusr_id</pre>	defendant_modified_by_fk

	Columns	Name / Description
P	dfd_id	defendant_pk
P	cas_id, defendant_name	dfd_cas_id_defendant_name_unq

## 12.1.27. Table: darts.event

#### Columns

		Name	Data type	Description / Attributes
▤	1	eve_id	bigint	primary key of moj_event
■		ctr_id	integer	foreign key from moj_courtroom References: darts.courtroom
		evh_id	integer	foreign key for the moj_event_handler table  References: darts.event_handler
■		event_object_id	character varying(16)	internal Documentum primary key from moj_event_s Nullable
■		event_id	integer	directly sourced from moj_event_s Nullable
		event_text	character varying	inherited from moj_annotation_s.c_text <b>Nullable</b>
		event_ts	timestamp with time zone	inherited from moj_annotation_s
■		message_id	character varying	no migration element, records the id of the message that gave rise to this event <b>Nullable</b>
		is_log_entry	boolean	
目		event_status	integer	Nullable
▤		is_current	boolean	Default: true
▤		is_data_anonymised	boolean	Default: false
■		version_label	character varying(32)	inherited from dm_sysobject_r, for r_object_type of moj_event Nullable
▤		chronicle_id	character varying(16)	Nullable
▤		antecedent_id	character varying(16)	Nullable
▤		created_ts	timestamp with time zone	
▤		created_by	integer	References: darts.user_account
▤		last_modified_ts	timestamp with time zone	
▤		last_modified_by	integer	References: darts.user_account

## Links to

	Table	Join	Title / Name / Description
<b>-</b>	darts.courtroom	<pre>darts.eventctr_id = darts.courtroomctr_id</pre>	event_courtroom_fk
<b>&gt;</b>	darts.event_handler	<pre>darts.eventevh_id = darts.event_handlerevh_id</pre>	event_event_handler_fk
$\rightarrow$	darts.user_account	<pre>darts.eventcreated_by = darts.user_accountusr_id</pre>	event_created_by_fk
$\rightarrow$	darts.user_account	<pre>darts.eventlast_modified_by = darts.user_accountusr_id</pre>	event_modified_by_fk

#### Linked from

	Table	Join	Title / Name / Description
$\rightarrow$	darts.case_management_retention	darts.eventeve_id = darts.case_management_retentioneve _id	case_management_retention_event_fk
$\rightarrow$	darts.data_anonymisation	darts.eventeve_id = darts.data_anonymisationeve_id	data_anonymisation_event_fk
$\rightarrow$	darts.event_linked_case	darts.eventeve_id = darts.event_linked_caseeve_id	event_linked_case_event_fk
$\rightarrow$	darts.hearing_event_ae	darts.eventeve_id = darts.hearing_event_aeeve_id	hearing_event_ae_event_fk

Columns	Name / Description
Y eve_id	event_pk

## 12.1.28. Table: darts.event\_handler

content will be derived from TBL\_MOJ\_DOC\_HANDLER in the legacy database, but currently has no primary key and 6 fully duplicated rows

#### Columns

		Name	Data type	Description / Attributes
■	1	evh_id	integer	primary key of moj_event_type
■		event_type	character varying	directly sourced from doc_type
■		event_sub_type	character varying	directly sourced from doc_sub_type Nullable
■		event_name	character varying	directly sourced from event_name
■		handler	character varying	directly sourced from doc_handler Nullable
■		active	boolean	
■		is_reporting_restriction	boolean	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
→	darts.user_account	<pre>darts.event_handlercreated_by = darts.user_accountusr_id</pre>	event_handler_created_by_fk

#### Linked from

	Table	Join	Title / Name / Description
$\rightarrow$	darts.court_case	<pre>darts.event_handlerevh_id = darts.court_caseevh_id</pre>	court_case_event_handler_fk
$\rightarrow$	darts.event	darts.event_handlerevh_id = darts.eventevh_id	event_event_handler_fk

Columns	Name / Description
evh_id	event_handler_pk

# 12.1.29. Table: darts.event\_linked\_case

#### content is to be populated via migration

#### Columns

		Name	Data type	Description / Attributes
■	1	elc_id	bigint	
■		eve_id	bigint	References: darts.event
■		cas_id	integer	Nullable References: darts.court_case
■		courthouse_name	character varying	Nullable
■		case_number	character varying	Nullable

#### Links to

	Table	Join	Title / Name / Description
>	- darts.court_case	<pre>darts.event_linked_casecas_id = darts.court_casecas_id</pre>	event_linked_case_court_case_fk
<b>&gt;</b>	- darts.event	<pre>darts.event_linked_caseeve_id = darts.eventeve_id</pre>	event_linked_case_event_fk

	Columns	Name / Description
9	elc_id	event_linked_case_pk

## 12.1.30. Table: darts.external\_location\_type

#### used to record acceptable external locations, found in external\_object\_directory

#### Columns

		Name	Data type	Description / Attributes
■	1	elt_id	integer	
■		elt_description	character varying	Nullable

#### Linked from

	Table	Join	Title / Name / Description
$\rightarrow$	darts.daily_list	darts.external_location_typeelt_id = darts.daily_listelt_id	daily_list_external_location_type_fk
$\rightarrow$	darts.external_object_directory	darts.external_location_typeelt_id = darts.external_object_directoryelt_id	eod_external_location_type_fk

	Columns	Name / Description
P	elt_id	external_location_type_pk

# 12.1.31. Table: darts.external\_object\_directory

#### Columns

		Name	Data type	Description / Attributes
	1	eod_id	bigint	primary key of external_object_directory
目		ado_id	integer	foreign key from annotation_document  Nullable  References: darts.annotation_document
■		cad_id	integer	Nullable References: darts.case_document
B		med_id	bigint	foreign key from moj_media Nullable References: darts.media
■		trd_id	integer	foreign key from transcription_document Nullable References: darts.transcription_document
		ors_id	integer	References: darts.object_record_status
B		elt_id	integer	foreign key from external_location_type  References: darts.external_location_type
		osr_uuid	bigint	Nullable
■		external_location	character varying	Nullable
		external_file_id	character varying	Nullable
■		external_record_id	character varying	Nullable
■		checksum	character varying	Nullable
■		transfer_attempts	integer	Nullable
		manifest_file	character varying	Nullable
■		event_date_ts	timestamp with time zone	Nullable
■		data_ingestion_ts	timestamp with time zone	Nullable
■		verification_attempts	integer	Nullable
		error_code	character varying	Nullable
		is_response_cleaned	boolean	Default: false
		update_retention	boolean	
B		input_upload_processed_ts	timestamp with time zone	Nullable
		force_response_cleanup	boolean	Nullable
B		is_dets	boolean	Default: false
		created_ts	timestamp with time zone	
B		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
		last_modified_by	integer	References: darts.user_account

#### Links to

Table	Join	Title / Name / Description
→ darts.annotation_document	darts.external_object_directoryado_id = darts.annotation_documentado_id	eod_annotation_document_fk

	Table	Join	Title / Name / Description
<b>&gt;</b>	darts.case_document	darts.external_object_directorycad_id = darts.case_documentcad_id	eod_case_document_fk
<b>—</b>	darts.external_location_type	darts.external_object_directoryelt_id = darts.external_location_typeelt_id	eod_external_location_type_fk
<b>-</b>	darts.media	darts.external_object_directorymed_id = darts.mediamed_id	eod_media_fk
<b>&gt;</b>	darts.object_record_status	darts.external_object_directoryors_id = darts.object_record_statusors_id	eod_object_record_status_fk
<b>&gt;</b>	darts.transcription_document	darts.external_object_directorytrd_id = darts.transcription_documenttrd_id	eod_transcription_document_fk
$\rightarrow$	darts.user_account	darts.external_object_directorylast_mo dified_by = darts.user_accountusr_id	eod_modified_by_fk
<b>-</b>	darts.user_account	darts.external_object_directorycreated _by = darts.user_accountusr_id	external_object_directory_created_by_fk

## Linked from

Table	Join	Title / Name / Description
	darts.external_object_directoryeod_id = darts.extobjdir_process_detaileod_id	epd_external_object_directory_fk

	Columns	Name / Description
Ŷ	eod_id	external_object_directory_pk

# 12.1.32. Table: darts.external\_service\_auth\_token

#### Columns

		Name	Data type	Description / Attributes
■	1	esa_id	integer	primary key of external_service_auth_token
■		external_service_userid	character varying	userId used by external services OR requestId user by Audio Request
■		token_type	integer	1=soap token, 2=email link token
■		token	character varying	Encrypted Token
■		expiry_ts	timestamp with time zone	Expiry Date & Time of the Token Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

## Links to

	Table	Join	Title / Name / Description
<b>—</b>	darts.user_account	darts.external_service_auth_tokencreat ed_by = darts.user_accountusr_id	external_service_auth_token_created_by_fk
→	darts.user_account	darts.external_service_auth_token ast_ modified_by = darts.user_accountusr_id	external_service_auth_token_modified_by_fk

	Columns	Name / Description
9	esa_id	external_service_auth_token_pk

# 12.1.33. Table: darts.extobjdir\_process\_detail

This table is an extension of external\_object\_directory.

#### Columns

		Name	Data type	Description / Attributes
■	1	epd_id	bigint	primary key of extobjdir_process_detail, needed to support Hibernate. Logically eod_id is the PK
■	1	eod_id	bigint	foreign key from external_object_directory  References: darts.external_object_directory
▤		event_date_ts	timestamp with time zone	Nullable
■		update_retention	boolean	
■		input_upload_filename	character varying	Nullable
■		create_record_filename	character varying	Nullable
■		create_record_processed_ts	timestamp with time zone	Nullable
■		upload_file_filename	character varying	Nullable
■		upload_file_processed_ts	timestamp with time zone	Nullable
目		create_rec_inv_filename	character varying	Nullable
▤		create_rec_inv_processed_ts	timestamp with time zone	Nullable
■		upload_file_inv_filename	character varying	Nullable
■		upload_file_inv_processed_ts	timestamp with time zone	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
目		last_modified_by	integer	References: darts.user_account

## Links to

	Table	Join	Title / Name / Description
<b>—</b>	darts.external_object_directory	darts.extobjdir_process_detaileod_id = darts.external_object_directoryeod_id	epd_external_object_directory_fk
<b>—</b>	darts.user_account	darts.extobjdir_process_detailcreated_ by = darts.user_accountusr_id	epd_created_by_fk
<b>—</b>	darts.user_account	darts.extobjdir_process_detaillast_mod ified_by = darts.user_accountusr_id	epd_last_modified_by_fk

	Columns	Name / Description
Ŷ	epd_id	extobjdir_process_detail_pk
Ŷ	eod_id	extobjdir_process_detail_eod_id_key

## 12.1.34. Table: darts.hearing

#### Columns

		Name	Data type	Description / Attributes
■	1	hea_id	integer	primary key of hearing
■	1	cas_id	integer	foreign key from case  References: darts.court_case
■	1	ctr_id	integer	foreign key from courtroom  References: darts.courtroom
■	1	hearing_date	date	directly sourced from moj_case_r
■		scheduled_start_time	time without time zone	Nullable
■		hearing_is_actual	boolean	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
<b>-</b>	darts.court_case	darts.hearingcas_id = darts.court_casecas_id	hearing_case_fk
<b>&gt;</b>	darts.courtroom	darts.hearingctr_id = darts.courtroomctr_id	hearing_courtroom_fk
<b>&gt;</b>	darts.user_account	darts.hearingcreated_by = darts.user_accountusr_id	hearing_created_by_fk
<b>&gt;</b>	darts.user_account	darts.hearing ast_modified_by = darts.user_accountusr_id	hearing_modified_by_fk

#### Linked from

	Table	Join	Title / Name / Description
$\rightarrow$	darts.hearing_annotation_ae	darts.hearinghea_id = darts.hearing_annotation_aehea_id	hearing_annotation_ae_hearing_fk
$\rightarrow$	darts.hearing_event_ae	darts.hearinghea_id = darts.hearing_event_aehea_id	hearing_event_ae_hearing_fk
$\rightarrow$	darts.hearing_judge_ae	darts.hearinghea_id = darts.hearing_judge_aehea_id	hearing_judge_ae_hearing_fk
$\rightarrow$	darts.hearing_media_ae	darts.hearinghea_id = darts.hearing_media_aehea_id	hearing_media_ae_hearing_fk
$\rightarrow$	darts.hearing_transcription_ae	darts.hearinghea_id = darts.hearing_transcription_aehea_id	hearing_transcription_ae_hearing_fk
$\rightarrow$	darts.media_request	darts.hearinghea_id = darts.media_requesthea_id	media_request_hearing_fk

	Columns	Name / Description
Ŷ	hea_id	hearing_pk

	Columns	Name / Description
P	cas_id, ctr_id, hearing_date	hea_cas_ctr_hd_unq

# 12.1.35. Table: darts.hearing\_annotation\_ae

#### Columns

		Name	Data type	Description / Attributes
	1	hea_id	integer	foreign key from hearing, part of composite natural key and PK <b>References</b> : darts.hearing
■	1	ann_id	integer	foreign key from annotation, part of composite natural key and PK <b>References</b> : darts.annotation

#### Links to

	Table	Join	Title / Name / Description
<b>-</b>	darts.annotation	darts.hearing_annotation_aeann_id = darts.annotationann_id	hearing_annotation_ae_annotation_fk
<b>-</b>	darts.hearing	darts.hearing_annotation_aehea_id = darts.hearinghea_id	hearing_annotation_ae_hearing_fk

Columns		Name / Description
9	hea_id, ann_id	hearing_annotation_ae_pk

# 12.1.36. Table: darts.hearing\_event\_ae

## Columns

		Name	Data type	Description / Attributes
■	1	hea_id	integer	foreign key from hearing, part of composite natural key <b>References</b> : darts.hearing
■	1	eve_id	bigint	foreign key from event, part of composite natural key References: darts.event

#### Links to

	Table	Join	Title / Name / Description
<b>&gt;</b>	darts.event	darts.hearing_event_aeeve_id = darts.eventeve_id	hearing_event_ae_event_fk
<b>&gt;</b>	darts.hearing	darts.hearing_event_aehea_id = darts.hearinghea_id	hearing_event_ae_hearing_fk

Columns		Name / Description
P	hea_id, eve_id	hearing_event_ae_pk

# 12.1.37. Table: darts.hearing\_judge\_ae

#### Columns

		Name	Data type	Description / Attributes
	1	hea_id	integer	foreign key from case, part of composite natural key and PK <b>References</b> : darts.hearing
■	1	jud_id	integer	foreign key from judge, part of composite natural key and PK <b>References</b> : darts.judge

## Links to

	Table	Join	Title / Name / Description
<b>&gt;</b>	darts.hearing	darts.hearing_judge_aehea_id = darts.hearinghea_id	hearing_judge_ae_hearing_fk
<b>&gt;</b>	· darts.judge	darts.hearing_judge_aejud_id = darts.judgejud_id	hearing_judge_ae_judge_fk

Columns		Name / Description
9	hea_id, jud_id	hearing_judge_ae_pk

# 12.1.38. Table: darts.hearing\_media\_ae

#### Columns

		Name	Data type	Description / Attributes
	1	hea_id	integer	foreign key from case, part of composite natural key <b>References</b> : darts.hearing
■	1	med_id	bigint	foreign key from media, part of composite natural key <b>References</b> : darts.media

## Links to

	Table	Join	Title / Name / Description
<b>&gt;</b>	darts.hearing	darts.hearing_media_aehea_id = darts.hearinghea_id	hearing_media_ae_hearing_fk
<b>&gt;</b>	darts.media	darts.hearing_media_aemed_id = darts.mediamed_id	hearing_media_ae_media_fk

Columns		Name / Description
9	hea_id, med_id	hearing_media_ae_pk

# 12.1.39. Table: darts.hearing\_transcription\_ae

#### Columns

		Name	Data type	Description / Attributes
	1	hea_id	integer	foreign key from hearing, part of composite natural key and PK <b>References</b> : darts.hearing
■	1	tra_id	integer	foreign key from transcription, part of composite natural key and PK <b>References</b> : darts.transcription

#### Links to

	Table	Join	Title / Name / Description
<b>-</b>	darts.hearing	darts.hearing_transcription_aehea_id = darts.hearinghea_id	hearing_transcription_ae_hearing_fk
<b>-</b>	darts.transcription	darts.hearing_transcription_aetra_id = darts.transcriptiontra_id	hearing_transcription_ae_transcription_fk

Columns		Name / Description
9	hea_id, tra_id	hearing_transcription_ae_pk

# 12.1.40. Table: darts.judge

### Columns

		Name	Data type	Description / Attributes
■	1	jud_id	integer	primary key of judge_name
■	1	judge_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

### Links to

	Table	Join	Title / Name / Description
<b>&gt;</b>	- Luarte licer account	<pre>darts.judgecreated_by = darts.user_accountusr_id</pre>	judge_created_by_fk
>		<pre>darts.judgelast_modified_by = darts.user_accountusr_id</pre>	judge_modified_by_fk

### Linked from

	Table	Join	Title / Name / Description
$\rightarrow$	darts.case_judge_ae	darts.judgejud_id = darts.case_judge_aejud_id	case_judge_ae_judge_fk
$\rightarrow$	darts.hearing_judge_ae	darts.judgejud_id = darts.hearing_judge_aejud_id	hearing_judge_ae_judge_fk

	Columns	Name / Description
?	jud_id	judge_pk
9	judge_name	judge_judge_name_key

### 12.1.41. Table: darts.media

#### Columns

	um	Name	Data type	Description / Attributes
B	1	med_id	bigint	primary key of media
■		ctr_id	integer	foreign key from courtroom  References: darts.courtroom
B		media_object_id	character varying(16)	internal Documentum primary key from moj_media_s Nullable
▤		content_object_id	character varying(16)	Nullable
▤		subcontent_object_id	character varying(16)	Nullable
▤		subcontent_position	integer	Nullable
▤		clip_id	character varying(54)	Nullable
▤		storage_id	character varying(16)	Nullable
▤		data_ticket	integer	Nullable
▤		channel	integer	directly sourced from moj_media_s
▤		total_channels	integer	directly sourced from moj_media_s
▤		start_ts	timestamp with time zone	inherited from moj_case_document_s
▤		end_ts	timestamp with time zone	inherited from moj_case_document_s
▤		media_file	character varying	
▤		media_format	character varying	
▤		media_type	character(1)	Default: 'A'::bpchar
目		file_size	bigint	
▤		checksum	character varying	Nullable
■		is_hidden	boolean	Default: false
▤		is_deleted	boolean	Default: false
■		is_current	boolean	Nullable
■		deleted_by	integer	Nullable References: darts.user_account
■		deleted_ts	timestamp with time zone	Nullable
		media_status	character varying	Nullable
B		version_label	character varying(32)	inherited from dm_sysobject_r, for r_object_type of moj_media Nullable
■		chronicle_id	character varying(16)	Nullable
■		antecedent_id	character varying(16)	Nullable
■		retain_until_ts	timestamp with time zone	Nullable
B		ret_conf_score	integer	Nullable
■		ret_conf_reason	character varying	Nullable
		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
▤		last_modified_ts	timestamp with time zone	

	Name	Data type	Description / Attributes
■	last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
<b>—</b>	darts.courtroom	darts.mediactr_id = darts.courtroomctr_id	media_courtroom_fk
<b>&gt;</b>	darts.user_account	darts.mediacreated_by = darts.user_accountusr_id	media_created_by_fk
<b>&gt;</b>	darts.user_account	darts.medialast_modified_by = darts.user_accountusr_id	media_modified_by_fk
<b>—</b>	darts.user_account	darts.mediadeleted_by = darts.user_accountusr_id	media_deleted_by_fk

### Linked from

	Table	Join	Title / Name / Description
$\rightarrow$	darts.external_object_directory	darts.mediamed_id = darts.external_object_directorymed_id	eod_media_fk
$\rightarrow$	darts.hearing_media_ae	darts.mediamed_id = darts.hearing_media_aemed_id	hearing_media_ae_media_fk
$\rightarrow$	darts.media_linked_case	darts.mediamed_id = darts.media_linked_casemed_id	media_linked_case_media_fk
$\rightarrow$	darts.object_admin_action	darts.mediamed_id = darts.object_admin_actionmed_id	oaa_media_fk
$\rightarrow$	darts.object_retrieval_queue	darts.mediamed_id = darts.object_retrieval_queuemed_id	object_retrieval_queue_media_fk

	Columns	Name / Description
P	med_id	media_pk

## 12.1.42. Table: darts.media\_linked\_case

### content is to be populated via migration

#### Columns

		Name	Data type	Description / Attributes
■	1	mlc_id	bigint	
■		med_id	bigint	References: darts.media
■		cas_id	integer	Nullable References: darts.court_case
■		courthouse_name	character varying	Nullable
■		case_number	character varying	Nullable
■		source	integer	Nullable Default: 0
■		created_ts	timestamp with time zone	Nullable
■		created_by	integer	Nullable References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
<b>-</b>	darts.court_case	darts.media_linked_casecas_id = darts.court_casecas_id	media_linked_case_court_case_fk
<b>&gt;</b>	darts.media	darts.media_linked_casemed_id = darts.mediamed_id	media_linked_case_media_fk
<b>&gt;</b>	darts.user_account	darts.media_linked_casecreated_by = darts.user_accountusr_id	media_linked_case_created_by_fk

	Columns	Name / Description
9	mlc_id	media_linked_case_pk

# 12.1.43. Table: darts.media\_request

### Columns

		Name	Data type	Description / Attributes
■	1	mer_id	integer	primary key of media_request
■		hea_id	integer	foreign key of hearing References: darts.hearing
■		requestor	integer	requestor of the media request, possibly migrated from moj_transformation_request_s References: darts.user_account
▤		current_owner	integer	References: darts.user_account
▤		request_status	character varying	status of the migration request
■		request_type	character varying	
		req_proc_attempts	integer	number of attempts by ATS to process the request Nullable
		start_ts	timestamp with time zone	start time in the search criteria for request, possibly migrated from moj_cached_media_s or moj_transformation_request_s
■		end_ts	timestamp with time zone	end time in the search criteria for request, possibly migrated from moj_cached_media_s or moj_transformation_request_s
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
▤		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
<b>—</b>	darts.hearing	darts.media_requesthea_id = darts.hearinghea_id	media_request_hearing_fk
<b>&gt;</b>	darts.user_account	darts.media_requestcreated_by = darts.user_accountusr_id	media_request_created_by_fk
$\rightarrow$	darts.user_account	darts.media_request ast_modified_by = darts.user_accountusr_id	media_request_modified_by_fk
<b>&gt;</b>	darts.user_account	darts.media_requestrequestor = darts.user_accountusr_id	media_request_requestor_fk
$\rightarrow$	darts.user_account	darts.media_requestcurrent_owner = darts.user_accountusr_id	media_request_current_owner_fk

### Linked from

Table	Join	Title / Name / Description
→ darts.transformed_media	<pre>darts.media_requestmer_id = darts.transformed_mediamer_id</pre>	trm_media_request_fk

	Columns	Name / Description
9	mer_id	media_request_pk

## 12.1.44. Table: darts.node\_register

### corresponds to tbl\_moj\_node from legacy

### Columns

		Name	Data type	Description / Attributes
■	1	node_id	integer	primary key of node_register
■		ctr_id	integer	foreign key from moj_courtroom, legacy stored courthouse and courtroon un-normalised  References: darts.courtroom
■		node_type	character varying	<b>Default</b> : 'DAR'::character varying
■		hostname	character varying	
■		ip_address	character varying	
■		mac_address	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
$\rightarrow$	darts.courtroom	darts.node_registerctr_id = darts.courtroomctr_id	node_register_courtroom_fk
$\rightarrow$	darts.user_account	darts.node_registercreated_by = darts.user_accountusr_id	node_register_created_by_fk

	Columns	Name / Description
P	node_id	node_register_pk

### 12.1.45. Table: darts.notification

## Columns

		Name	Data type	Description / Attributes
■	1	not_id	bigint	primary key of notification
■		cas_id	integer	foreign key to case  References: darts.court_case
■		notification_event	character varying	event giving rise to the need for outgoing notification
		notification_status	character varying	status of the notification, expected to be one of [O]pen, [P]rocessing, [S]end, [F]ailed
■		email_address	character varying	recipient of the notification
		send_attempts	integer	number of outgoing requests to gov.uk  Nullable
■		template_values	character varying	any extra fields not already covered or inferred from the case, in JSON format  Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

### Links to

	Table	Join	Title / Name / Description
<b>-</b>	darts.court_case	darts.notificationcas_id = darts.court_casecas_id	notification_case_fk
$\rightarrow$	darts.user_account	darts.notificationcreated_by = darts.user_accountusr_id	notification_created_by_fk
<b>&gt;</b>	darts.user_account	darts.notification ast_modified_by = darts.user_accountusr_id	notification_modified_by_fk

	Columns	Name / Description
9	not_id	notification_pk

# 12.1.46. Table: darts.object\_admin\_action

### Columns

		Name	Data type	Description / Attributes
■	1	oaa_id	integer	
		ado_id	integer	Nullable References: darts.annotation_document
		cad_id	integer	Nullable References: darts.case_document
		med_id	bigint	Nullable References: darts.media
■		trd_id	integer	Nullable References: darts.transcription_document
		ohr_id	integer	Nullable References: darts.object_hidden_reason
■		hidden_by	integer	Nullable References: darts.user_account
■		hidden_ts	timestamp with time zone	Nullable
■		marked_for_manual_deletion	boolean	<b>Default</b> : false
■		marked_for_manual_del_by	integer	Nullable References: darts.user_account
■		marked_for_manual_del_ts	timestamp with time zone	Nullable
■		ticket_reference	character varying	Nullable
■		comments	character varying	Nullable

### Links to

	Table	Join	Title / Name / Description
<b>&gt;</b>	darts.annotation_document	darts.object_admin_actionado_id = darts.annotation_documentado_id	oaa_annotation_document_fk
<b>—</b>	darts.case_document	darts.object_admin_actioncad_id = darts.case_documentcad_id	oaa_case_document_fk
<b>&gt;</b>	darts.media	darts.object_admin_actionmed_id = darts.mediamed_id	oaa_media_fk
<b>&gt;</b>	darts.object_hidden_reason	darts.object_admin_actionohr_id = darts.object_hidden_reasonohr_id	object_admin_action_ohr_id_fk
<b>&gt;</b>	darts.transcription_document	darts.object_admin_actiontrd_id = darts.transcription_documenttrd_id	oaa_transcription_document_fk
<b>&gt;</b>	darts.user_account	darts.object_admin_actionhidden_by = darts.user_accountusr_id	object_admin_action_hidden_by_fk
<b>-</b>	darts.user_account	darts.object_admin_actionmarked_for_ manual_del_by = darts.user_accountusr_id	object_admin_action_marked_for_manual_del_by_fk

	Columns	Name / Description
P	oaa_id	object_admin_action_pk

### 12.1.47. Table: darts.object\_hidden\_reason

used to record acceptable reasons for data to be hidden in tables ADO,CAD, MED, TRD

#### Columns

		Name	Data type	Description / Attributes
■	1	ohr_id	integer	
■		ohr_reason	character varying	
■		display_name	character varying	
■		display_state	boolean	Default: true
■		display_order	integer	
■		marked_for_deletion	boolean	Default: false

#### Linked from

	Table	Join	Title / Name / Description
$\rightarrow$	darts.object_admin_action	<pre>darts.object_hidden_reasonohr_id = darts.object_admin_actionohr_id</pre>	object_admin_action_ohr_id_fk

	Columns	Name / Description
9	ohr_id	object_hidden_reason_pk

### 12.1.48. Table: darts.object\_record\_status

#### used to record acceptable statuses found in [external/transient]\_object\_directory

#### Columns

		Name	Data type	Description / Attributes
■	1	ors_id	integer	
■		ors_description	character varying	Nullable

#### Linked from

	Table	Join	Title / Name / Description
$\rightarrow$	darts.external_object_directory	<pre>darts.object_record_statusors_id = darts.external_object_directoryors_id</pre>	eod_object_record_status_fk
$\rightarrow$	darts.transient_object_directory	<pre>darts.object_record_statusors_id = darts.transient_object_directoryors_id</pre>	tod_object_record_status_fk

	Columns	Name / Description
9	ors_id	object_record_status_pk

# 12.1.49. Table: darts.object\_retrieval\_queue

### Columns

		Name	Data type	Description / Attributes
■	1	orq_id	integer	
■		med_id	bigint	Nullable References: darts.media
		trd_id	integer	Nullable References: darts.transcription_document
▤		parent_object_id	character varying	Nullable
■		content_object_id	character varying	Nullable
■		storage_id	character varying(16)	Nullable
■		clip_id	character varying	Nullable
■		data_ticket	integer	Nullable
■		acknowledged_ts	timestamp with time zone	Nullable
		migrated_ts	timestamp with time zone	Nullable
■		status	character varying	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
▤		last_modified_by	integer	References: darts.user_account

### Links to

	Table	Join	Title / Name / Description
$\rightarrow$	darts.media	darts.object_retrieval_queuemed_id = darts.mediamed_id	object_retrieval_queue_media_fk
$\rightarrow$	darts.transcription_document	darts.object_retrieval_queuetrd_id = darts.transcription_documenttrd_id	object_retrieval_queue_transcription_document_fk
$\rightarrow$	darts.user_account	darts.object_retrieval_queuecreated_b y = darts.user_accountusr_id	object_retrieval_queue_created_by_fk
$\rightarrow$	darts.user_account	darts.object_retrieval_queuelast_modifi ed_by = darts.user_accountusr_id	object_retrieval_queue_last_modified_by_fk

	Columns	Name / Description
9	orq_id	object_retrieval_queue_pk

# 12.1.50. Table: darts.object\_state\_record

### Columns

		Name	Data type	Description / Attributes
B	1	osr_uuid	bigint	
		eod_id	bigint	Nullable
■		arm_eod_id	bigint	Nullable
		dal_id	integer	Nullable
B		parent_object_id	character varying	Nullable
		content_object_id	character varying	Nullable
■		id_clip	character varying	Nullable
▤		dets_location	character varying	Nullable
▤		flag_file_transfer_to_dets	boolean	Nullable
▤		date_file_transfer_to_dets	timestamp with time zone	Nullable
▤		md5_doc_transfer_to_dets	character varying	Nullable
▤		file_size_bytes_centera	bigint	Nullable
▤		file_size_bytes_dets	bigint	Nullable
■		flag_file_av_scan_pass	boolean	Nullable
▤		date_file_av_scan_pass	timestamp with time zone	Nullable
■		flag_file_transf_toarml	boolean	Nullable
▤		date_file_transf_toarml	timestamp with time zone	Nullable
B		md5_file_transf_arml	character varying	Nullable
▤		file_size_bytes_arml	bigint	Nullable
▤		flag_file_mfst_created	boolean	Nullable
▤		date_file_mfst_created	timestamp with time zone	Nullable
▤		id_manifest_file	character varying	Nullable
▤		flag_mfst_transf_to_arml	boolean	Nullable
■		date_mfst_transf_to_arml	timestamp with time zone	Nullable
B		flag_rspn_recvd_from_arml	boolean	Nullable
B		date_rspn_recvd_from_arml	timestamp with time zone	Nullable
B		flag_file_ingest_status	boolean	Nullable
B		date_file_ingest_to_arm	timestamp with time zone	Nullable
B		md5_file_ingest_to_arm	character varying	Nullable
B		file_size_ingest_to_arm	bigint	Nullable
B		id_response_file	character varying	Nullable
B		id_response_cr_file	character varying	Nullable
B		id_response_uf_file	character varying	Nullable
		flag_file_dets_cleanup_status	boolean	Nullable
B		date_file_dets_cleanup	timestamp with time zone	Nullable

	Name	Data type	Description / Attributes
■	object_status	character varying	Nullable
■	storage_id	character varying	Nullable
■	data_ticket	integer	Nullable

	Columns	Name / Description
Ŷ	osr_uuid	object_state_record_pk

# 12.1.51. Table: darts.prosecutor

### Columns

		Name	Data type	Description / Attributes
■	1	prn_id	integer	primary key of prosecutor_name
■	9	cas_id	integer	foreign key from court_case References: darts.court_case
■	1	prosecutor_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
<b>-</b>	darts.court_case	darts.prosecutorcas_id = darts.court_casecas_id	prosecutor_court_case_fk
<b>&gt;</b>	darts.user_account	darts.prosecutorcreated_by = darts.user_accountusr_id	prosecutor_created_by_fk
<b>&gt;</b>	darts.user_account	darts.prosecutorlast_modified_by = darts.user_accountusr_id	prosecutor_modified_by_fk

	Columns	Name / Description
Ŷ	prn_id	prosecutor_pk
Ŷ	cas_id, prosecutor_name	prn_cas_id_prosecutor_name_unq

# 12.1.52. Table: darts.region

### Columns

		Name	Data type	Description / Attributes
■	1	reg_id	integer	
▤		region_name	character varying	

### Linked from

	Table	Join	Title / Name / Description
-	→ darts.courthouse_region_ae	darts.regionreg_id = darts.courthouse_region_aereg_id	courthouse_region_region_fk

	Columns	Name / Description
9	reg_id	region_pk

## 12.1.53. Table: darts.report

### Columns

		Name	Data type	Description / Attributes
■	1	rep_id	integer	primary key of report
■		report_object_id	character varying(16)	internal Documentum primary key from moj_report_s Nullable
		name	character varying	directly sourced from moj_report_s Nullable
		subject	character varying	directly sourced from moj_report_s Nullable
■		report_text	character varying	directly sourced from moj_report_s Nullable
		query	character varying	directly sourced from moj_report_s Nullable
■		recipients	character varying	directly sourced from moj_report_s Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

### Links to

		Table	Join	Title / Name / Description
}	→	darts.user_account	<pre>darts.reportcreated_by = darts.user_accountusr_id</pre>	report_created_by_fk
}	→	darts.user_account	<pre>darts.reportlast_modified_by = darts.user_accountusr_id</pre>	report_modified_by_fk

	Columns	Name / Description
9	rep_id	report_pk

# 12.1.54. Table: darts.retention\_confidence\_category\_mapper

### Columns

		Name	Data type	Description / Attributes
■	1	rcc_id	integer	
■		ret_conf_score	integer	Nullable
■		ret_conf_reason	character varying	Nullable
■		confidence_category	integer	Nullable
■		description	character varying	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
▤		last_modified_by	integer	References: darts.user_account

### Links to

	Table	Join	Title / Name / Description
<b>-</b>	darts.user_account	darts.retention_confidence_category_ mappercreated_by = darts.user_accountusr_id	retention_confidence_category_mapper_created_by_fk
<b>-</b>	darts.user_account	darts.retention_confidence_category_ mapperlast_modified_by = darts.user_accountusr_id	retention_confidence_category_mapper_last_modified_by_fk

	Columns	Name / Description
9	rcc_id	retention_confidence_category_mapper_pk

# 12.1.55. Table: darts.retention\_policy\_type

### Columns

		Name	Data type	Description / Attributes
■	1	rpt_id	integer	
■		fixed_policy_key	character varying	
■		policy_name	character varying	
■		display_name	character varying	
■		duration	character varying	
■		policy_start_ts	timestamp with time zone	
■		policy_end_ts	timestamp with time zone	Nullable
■		description	character varying	
■		retention_policy_object_id	character varying	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

### Links to

	Table	Join	Title / Name / Description
<b>—</b>	darts.user_account	darts.retention_policy_typecreated_by = darts.user_accountusr_id	retention_policy_type_created_by_fk
<b>—</b>	darts.user_account	darts.retention_policy_type ast_modifie d_by = darts.user_accountusr_id	retention_policy_type_last_modified_by_fk

### Linked from

	Table	Join	Title / Name / Description
$\rightarrow$	darts.case_management_retention	darts.retention_policy_typerpt_id = darts.case_management_retentionrpt_i d	case_management_retention_retention_policy_type_fk
$\rightarrow$	darts.case_overflow	darts.retention_policy_typerpt_id = darts.case_overflowrpt_id	case_overflow_retention_policy_type_fk
$\rightarrow$	darts.case_retention	<pre>darts.retention_policy_typerpt_id = darts.case_retentionrpt_id</pre>	case_retention_retention_policy_type_fk
$\rightarrow$	darts.case_retention_audit_heritage	darts.retention_policy_typerpt_id = darts.case_retention_audit_heritagerpt _id	case_retention_audit_heritage_retention_policy_type_fk
$\rightarrow$	darts.rps_retainer	darts.retention_policy_typerpt_id = darts.rps_retainerrpt_id	rps_retainer_retention_policy_type_fk

	Columns	Name / Description
Ŷ	rpt_id	retention_policy_type_pk

# 12.1.56. Table: darts.retention\_policy\_type\_heritage\_mapping

### Columns

		Name	Data type	Description / Attributes
■	1	rhm_id	integer	
■		heritage_policy_name	character varying	
■		heritage_table	character varying	
■		modernised_rpt_id	integer	

	Columns	Name / Description
?	rhm_id	retention_policy_type_heritage_mapping_pk

## 12.1.57. Table: darts.revinfo

## Columns

		Name	Data type	Description / Attributes
■	1	rev	integer	
■		revtstmp	bigint	Nullable
■		audit_user	integer	Nullable References: darts.user_account

### Links to

	Table	Join	Title / Name / Description
<b>&gt;</b>	- darts.user_account	darts.revinfoaudit_user = darts.user_accountusr_id	revinfo_audit_user_fk

	Columns	Name / Description
9	rev	revinfo_pkey

### 12.1.58. Table: darts.rps\_retainer

is essentially a legacy table, based on the component tables necessary to derive the dmc\_rps\_retainer object

#### Columns

		Name	Data type	Description / Attributes
■	1	rpr_id	integer	primary key of case_rps_retainer
■		rpt_id	integer	References: darts.retention_policy_type
■		rps_retainer_object_id	character varying	
■		case_object_id	character varying	Nullable
■		audio_folder_object_id	character varying	Nullable
▤		is_current	boolean	Nullable
▤		dm_retainer_root_id	character varying	Nullable
■		dm_retention_rule_type	integer	Nullable
■		dm_retention_date	timestamp with time zone	Nullable
■		dmc_current_phase_id	character varying	Nullable
■		dmc_entry_date	timestamp with time zone	Nullable
■		dmc_parent_ancestor_id	character varying	Nullable
■		dmc_phase_name	character varying	Nullable
■		dmc_qualification_date	timestamp with time zone	Nullable
■		dmc_retention_base_date	timestamp with time zone	Nullable
■		dmc_retention_policy_id	character varying	Nullable
■		dmc_ultimate_ancestor_id	character varying	Nullable
■		dmc_vdm_retention_rule	integer	Nullable
■		dmc_is_superseded	integer	Nullable
■		dmc_superseded_date	timestamp with time zone	Nullable
■		dmc_superseded_phase_id	character varying	Nullable
▤		dmc_snapshot_retention_rule	integer	Nullable
■		dmc_approval_required	integer	Nullable
■		dmc_approval_status	character varying	Nullable
■		dmc_approved_date	timestamp with time zone	Nullable
▤		dmc_projected_disposition_date	timestamp with time zone	Nullable
■		dmc_is_qualification_suspended	integer	Nullable
■		dmc_suspension_lift_date	timestamp with time zone	Nullable
B		dmc_base_date_override	timestamp with time zone	Nullable
B		dms_object_name	character varying	Nullable
		dms_i_chronicle_id	character varying	Nullable
		dms_r_policy_id	character varying	Nullable
■		dms_r_resume_state	integer	Nullable
		dms_r_current_state	integer	Nullable
		created_ts	timestamp with time zone	

	Name	Data type	Description / Attributes
	created_by	integer	References: darts.user_account
■	last_modified_ts	timestamp with time zone	
■	last_modified_by	integer	References: darts.user_account

### Links to

	Table	Join	Title / Name / Description
<b>—</b>	darts.retention_policy_type	<pre>darts.rps_retainerrpt_id = darts.retention_policy_typerpt_id</pre>	rps_retainer_retention_policy_type_fk
<b>—</b>	darts.user_account	darts.rps_retainercreated_by = darts.user_accountusr_id	rps_retainer_created_by_fk
<b>—</b>	darts.user_account	darts.rps_retainerlast_modified_by = darts.user_accountusr_id	rps_retainer_last_modified_by_fk

	Columns	Name / Description
9	rpr_id	rps_retainer_pk

### 12.1.59. Table: darts.security\_group

migration columns all sourced directly from dm\_group\_s, additional attributes may be required from dm\_user\_s, but data only where dm\_user\_s.r\_is\_group=1

#### Columns

		Name	Data type	Description / Attributes
	1	grp_id	integer	primary key of security_group
■		rol_id	integer	References: darts.security_role
■		global_access	boolean	Default: false
		display_state	boolean	
■		display_name	character varying	for purpose of providing a display_name for modernised solution
■		dm_group_s_object_id	character varying(16)	internal Documentum primary key from dm_group_s Nullable
■		group_name	character varying	
■		group_display_name	character varying	derived directly from dm_group_s.group_display_name Nullable
目		is_private	boolean	Nullable
■		description	character varying	Nullable
■		group_global_unique_id	character varying	Nullable
■		use_interpreter	boolean	Default: false
■		created_ts	timestamp with time zone	
目		created_by	integer	References: darts.user_account
目		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
<b>-</b>	darts.security_role	<pre>darts.security_grouprol_id = darts.security_rolerol_id</pre>	security_group_role_fk
<b>&gt;</b>	darts.user_account	darts.security_groupcreated_by = darts.user_accountusr_id	security_group_created_by_fk
<b>&gt;</b>	darts.user_account	darts.security_grouplast_modified_by = darts.user_accountusr_id	security_group_last_modified_by_fk

#### Linked from

	Table	Join	Title / Name / Description
-	darts.security_group_courthouse_ae	<pre>darts.security_groupgrp_id = darts.security_group_courthouse_aegr p_id</pre>	security_group_courthouse_group_fk
	darts.security_group_user_account_ ae	<pre>darts.security_groupgrp_id = darts.security_group_user_account_ae grp_id</pre>	security_group_user_account_ae_group_fk

		Columns	Name / Description
9	grp_id		security_group_pk

# 12.1.60. Table: darts.security\_group\_courthouse\_ae

### Columns

		Name	Data type	Description / Attributes
	1	grp_id	integer	References: darts.security_group
■	1	cth_id	integer	References: darts.courthouse

### Links to

	Table	Join	Title / Name / Description
$\rightarrow$	darts.courthouse	darts.security_group_courthouse_aect h_id = darts.courthousecth_id	security_group_courthouse_courthouse_fk
<b>—</b>	darts.security_group	darts.security_group_courthouse_aegr p_id = darts.security_groupgrp_id	security_group_courthouse_group_fk

Columns		Name / Description
?	grp_id, cth_id	security_group_courthouse_ae_pk

### 12.1.61. Table: darts.security\_group\_user\_account\_ae

is the associative entity mapping users to groups, content will be defined by dm\_group\_r

#### Columns

		Name	Data type	Description / Attributes
■	1	usr_id	integer	foreign key from user_account  References: darts.user_account
B	1	grp_id	integer	foreign key from security_group  References: darts.security_group

#### Links to

	Table	Join	Title / Name / Description
<b>—</b>	darts.security_group	darts.security_group_user_account_ae grp_id = darts.security_groupgrp_id	security_group_user_account_ae_group_fk
<b>—</b>	darts.user_account	darts.security_group_user_account_ae usr_id = darts.user_accountusr_id	security_group_user_account_ae_user_fk

	Columns	Name / Description
P	usr_id, grp_id	security_group_user_account_ae_pk

## 12.1.62. Table: darts.security\_permission

## Columns

		Name	Data type	Description / Attributes
■	1	per_id	integer	
■		permission_name	character varying	

### Linked from

	Table	Join	Title / Name / Description
_	darts.security_role_permission_ae	<pre>darts.security_permissionper_id = darts.security_role_permission_aeper_i d</pre>	security_role_permission_permission_fk

	Columns	Name / Description
?	per_id	security_permission_pk

# 12.1.63. Table: darts.security\_role

### Columns

		Name	Data type	Description / Attributes
■	1	rol_id	integer	
■		role_name	character varying	
■		display_name	character varying	
■		display_state	boolean	

### Linked from

		Table	Join	Title / Name / Description
-	<b>→</b>	darts.security_group	<pre>darts.security_rolerol_id = darts.security_grouprol_id</pre>	security_group_role_fk
-	<b>→</b>	darts.security_role_permission_ae	<pre>darts.security_rolerol_id = darts.security_role_permission_aerol_id</pre>	security_role_permission_ae_role_fk

	Columns	Name / Description
?	rol_id	security_role_pk

# 12.1.64. Table: darts.security\_role\_permission\_ae

### Columns

		Name	Data type	Description / Attributes
■	1	rol_id	integer	References: darts.security_role
■	1	per_id	integer	References: darts.security_permission

### Links to

	Table	Join	Title / Name / Description
$\rightarrow$	darts.security_permission	darts.security_role_permission_aeper_i d = darts.security_permissionper_id	security_role_permission_permission_fk
<b>—</b>	darts.security_role	darts.security_role_permission_aerol_id = darts.security_rolerol_id	security_role_permission_ae_role_fk

	Columns	Name / Description
9	rol_id, per_id	security_role_permission_ae_pk

## 12.1.65. Table: darts.transcription

## Columns

		Name	Data type	Description / Attributes
	1	tra_id	integer	primary key of transcription
		trt_id	integer	foreign key to transcription_type, sourced from moj_transcription_s.c_type <b>References</b> : darts.transcription_type
■		ctr_id	integer	foreign key from courtroom Nullable References: darts.courtroom
		tru_id	integer	foreign key from transcription_urgency Nullable References: darts.transcription_urgency
		trs_id	integer	Nullable References: darts.transcription_status
		transcription_object_id	character varying(16)	internal Documentum primary key from moj_transcription_s Nullable
		transcription_object_name	character varying(255)	Nullable
		requested_by	integer	foreign key from user_account, corresponding to moj_transcription_s.c_requestor Nullable References: darts.user_account
		hearing_date	date	directly sourced from moj_transcription_s Nullable
		start_ts	timestamp with time zone	inherited from moj_case_document_s <b>Nullable</b>
		end_ts	timestamp with time zone	inherited from moj_case_document_s <b>Nullable</b>
		is_manual_transcription	boolean	
		is_current	boolean	Nullable
		hide_request_from_requestor	boolean	
		is_deleted	boolean	Default: false
		deleted_by	integer	Nullable References: darts.user_account
		deleted_ts	timestamp with time zone	Nullable
		version_label	character varying(32)	inherited from dm_sysobject_r, for r_object_type of moj_transcription Nullable
		chronicle_id	character varying(16)	Nullable
		antecedent_id	character varying(16)	Nullable
		c_current_state	character varying	Nullable
		r_current_state	integer	Nullable
		created_ts	timestamp with time zone	
		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
<b>&gt;</b>	darts.courtroom	darts.transcriptionctr_id = darts.courtroomctr_id	transcription_courtroom_fk
$\rightarrow$	darts.transcription_status	darts.transcriptiontrs_id = darts.transcription_statustrs_id	transcription_transcription_status_fk
<b>&gt;</b>	darts.transcription_type	<pre>darts.transcriptiontrt_id = darts.transcription_typetrt_id</pre>	transcription_transcription_type_fk
<b>&gt;</b>	darts.transcription_urgency	darts.transcriptiontru_id = darts.transcription_urgencytru_id	transcription_urgency_fk
<b>&gt;</b>	darts.user_account	darts.transcription ast_modified_by = darts.user_accountusr_id	transcription_last_modified_by_fk
<b>&gt;</b>	darts.user_account	darts.transcriptionrequested_by = darts.user_accountusr_id	transcription_requested_by_fk
<b>&gt;</b>	darts.user_account	darts.transcriptioncreated_by = darts.user_accountusr_id	transcription_created_by_fk
$\rightarrow$	darts.user_account	darts.transcriptiondeleted_by = darts.user_accountusr_id	transcription_deleted_by_fk

### Linked from

	Table	Join	Title / Name / Description
$\rightarrow$	darts.case_transcription_ae	darts.transcriptiontra_id = darts.case_transcription_aetra_id	case_transcription_ae_transcription_fk
$\rightarrow$	darts.hearing_transcription_ae	darts.transcriptiontra_id = darts.hearing_transcription_aetra_id	hearing_transcription_ae_transcription_fk
$\rightarrow$	darts.transcription_comment	darts.transcriptiontra_id = darts.transcription_commenttra_id	transcription_comment_transcription_fk
$\rightarrow$	darts.transcription_document	darts.transcriptiontra_id = darts.transcription_documenttra_id	transcription_document_transcription_fk
$\rightarrow$	darts.transcription_linked_case	darts.transcriptiontra_id = darts.transcription_linked_casetra_id	transcription_linked_case_transcription_fk
$\rightarrow$	darts.transcription_workflow	darts.transcriptiontra_id = darts.transcription_workflowtra_id	transcription_workflow_transcription_fk

	Columns	Name / Description
9	tra_id	transcription_pk

## 12.1.66. Table: darts.transcription\_comment

#### Columns

		Name	Data type	Description / Attributes
■	1	trc_id	integer	primary key of transcription_comment
		tra_id	integer	foreign key from transcription References: darts.transcription
■		trw_id	integer	foreign key from transcription_workflow Nullable References: darts.transcription_workflow
		transcription_object_id	character varying(16)	internal Documentum id from moj_transcription_s acting as foreign key <b>Nullable</b>
■		transcription_comment	character varying	directly sourced from moj_transcription_r Nullable
		comment_ts	timestamp with time zone	Nullable
		author	integer	Nullable References: darts.user_account
■		is_migrated	boolean	Default: false
		is_data_anonymised	boolean	<b>Default</b> : false
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
$\rightarrow$	darts.transcription	darts.transcription_commenttra_id = darts.transcriptiontra_id	transcription_comment_transcription_fk
<b>&gt;</b>	darts.transcription_workflow	darts.transcription_commenttrw_id = darts.transcription_workflowtrw_id	transcription_comment_transcription_workflow_fk
<b>&gt;</b>	darts.user_account	darts.transcription_commentauthor = darts.user_accountusr_id	transcription_comment_author_fk
<b>&gt;</b>	darts.user_account	darts.transcription_commentcreated_b y = darts.user_accountusr_id	transcription_comment_created_by_fk
$\rightarrow$	darts.user_account	darts.transcription_commentlast_modified_by = darts.user_accountusr_id	transcription_comment_modified_by_fk

### Linked from

Table	Join	Title / Name / Description
	<pre>darts.transcription_commenttrc_id = darts.data_anonymisationtrc_id</pre>	data_anonymisation_transcription_comment_fk

	,	Columns	Name / Description
9	trc_id		transcription_comment_pk

# 12.1.67. Table: darts.transcription\_document

### Columns

		Name	Data type	Description / Attributes
B	1	trd_id	integer	primary key of transcription_document
■		tra_id	integer	foreign key from transcription <b>References</b> : darts.transcription
■		content_object_id	character varying(16)	Nullable
■		subcontent_object_id	character varying(16)	Nullable
B		subcontent_position	integer	Nullable
B		clip_id	character varying(54)	Nullable
■		storage_id	character varying(16)	Nullable
B		data_ticket	integer	Nullable
■		file_name	character varying	
■		file_type	character varying	
■		file_size	integer	
■		checksum	character varying	Nullable
B		is_deleted	boolean	<b>Default</b> : false
I		deleted_by	integer	Nullable References: darts.user_account
B		deleted_ts	timestamp with time zone	Nullable
■		is_hidden	boolean	<b>Default</b> : false
■		retain_until_ts	timestamp with time zone	Nullable
■		ret_conf_score	integer	Nullable
B		ret_conf_reason	character varying	Nullable
B		uploaded_by	integer	References: darts.user_account
■		uploaded_ts	timestamp with time zone	
B		last_modified_ts	timestamp with time zone	
B		last_modified_by	integer	References: darts.user_account

### Links to

	Table	Join	Title / Name / Description
<b>-</b>	darts.transcription	darts.transcription_documenttra_id = darts.transcriptiontra_id	transcription_document_transcription_fk
<b>&gt;</b>	darts.user_account	darts.transcription_documentdeleted_ by = darts.user_accountusr_id	transcription_document_deleted_by_fk
$\rightarrow$	darts.user_account	darts.transcription_documentuploade d_by = darts.user_accountusr_id	transcription_document_uploaded_by_fk
$\rightarrow$	darts.user_account	darts.transcription_documentlast_modi fied_by = darts.user_accountusr_id	transcription_document_last_modified_by_fk

### Linked from

	Table	Join	Title / Name / Description
$\rightarrow$	darts.external_object_directory	darts.transcription_documenttrd_id = darts.external_object_directorytrd_id	eod_transcription_document_fk
$\rightarrow$	darts.object_admin_action	darts.transcription_documenttrd_id = darts.object_admin_actiontrd_id	oaa_transcription_document_fk
$\rightarrow$	darts.object_retrieval_queue	darts.transcription_documenttrd_id = darts.object_retrieval_queuetrd_id	object_retrieval_queue_transcription_document_fk

	Columns	Name / Description
Ŷ	trd_id	transcription_document_pk

# 12.1.68. Table: darts.transcription\_linked\_case

### Columns

		Name	Data type	Description / Attributes
■	1	tlc_id	integer	primary key of transcription_linked_case
■		tra_id	integer	foreign key from transcription References: darts.transcription
		cas_id	integer	foreign key from court_case, mandatory if either courthouse_name or case_number are null Nullable References: darts.court_case
		courthouse_name	character varying	mandatory if cas_id is null <b>Nullable</b>
		case_number	character varying	mandatory if cas_id is null <b>Nullable</b>

### Links to

	Table	Join	Title / Name / Description
<b>—</b>	darts.court_case	darts.transcription_linked_casecas_id = darts.court_casecas_id	transcription_linked_case_court_case_fk
<b>—</b>	darts.transcription	darts.transcription_linked_casetra_id = darts.transcriptiontra_id	transcription_linked_case_transcription_fk

	Columns	Name / Description
P	tlc_id	transcription_linked_case_pk

# 12.1.69. Table: darts.transcription\_status

### standing data table

### Columns

		Name	Data type	Description / Attributes
■	1	trs_id	integer	primary key of transcription_status
■		status_type	character varying	
■		display_name	character varying	

### Linked from

	Table	Join	Title / Name / Description
$\rightarrow$	darts.transcription	<pre>darts.transcription_statustrs_id = darts.transcriptiontrs_id</pre>	transcription_transcription_status_fk
$\rightarrow$	darts.transcription_workflow	darts.transcription_statustrs_id = darts.transcription_workflowtrs_id	transcription_workflow_transcription_status_fk

	Columns	Name / Description
?	trs_id	transcription_status_pk

## 12.1.70. Table: darts.transcription\_type

### standing data table, migrated from tbl\_moj\_transcription\_type

#### Columns

		Name	Data type	Description / Attributes
■	1	trt_id	integer	primary key, but not sequence generated
B		description	character varying	
■		display_state	boolean	

### Linked from

	Table	Join	Title / Name / Description
-	→ darts.transcription	<pre>darts.transcription_typetrt_id = darts.transcriptiontrt_id</pre>	transcription_transcription_type_fk

	Columns	Name / Description
•	trt_id	transcription_type_pk

## 12.1.71. Table: darts.transcription\_urgency

#### will be migrated from tbl\_moj\_urgency

#### Columns

		Name	Data type	Description / Attributes
■	1	tru_id	integer	inherited from tbl_moj_urgency.urgency_id
■		description	character varying	inherited from tbl_moj_urgency.description
■		display_state	boolean	
■		priority_order	integer	

#### Linked from

Table	Join	Title / Name / Description
	<pre>darts.transcription_urgencytru_id = darts.transcriptiontru_id</pre>	transcription_urgency_fk

#### Unique keys

	Columns	Name / Description
P	tru_id	transcription_urgency_pk

# 12.1.72. Table: darts.transcription\_workflow

#### Columns

		Name	Data type	Description / Attributes
■	1	trw_id	integer	
■		tra_id	integer	References: darts.transcription
■		trs_id	integer	References: darts.transcription_status
■		workflow_actor	integer	References: darts.user_account
■		workflow_ts	timestamp with time zone	

#### Links to

	Table	Join	Title / Name / Description
<b>—</b>	darts.transcription	darts.transcription_workflowtra_id = darts.transcriptiontra_id	transcription_workflow_transcription_fk
<b>—</b>	darts.transcription_status	darts.transcription_workflowtrs_id = darts.transcription_statustrs_id	transcription_workflow_transcription_status_fk
<b>—</b>	darts.user_account	darts.transcription_workflowworkflow_ actor = darts.user_accountusr_id	transcription_workflow_workflow_actor_fk

#### Linked from

	Table	Join	Title / Name / Description
-	→ I darfs franscription comment	darts.transcription_workflowtrw_id = darts.transcription_commenttrw_id	transcription_comment_transcription_workflow_fk

# Unique keys

	Columns	Name / Description
9	trw_id	transcription_workflow_pk

## Triggers

Name	When	Description
trw_ar_trg	After Insert	

### 12.1.73. Table: darts.transformed\_media

to accommodate the possibility that a single media\_request may be fulfilled as more than one resulting piece of media

#### Columns

		Name	Data type	Description / Attributes
■	1	trm_id	integer	
■		mer_id	integer	References: darts.media_request
■		start_ts	timestamp with time zone	
■		end_ts	timestamp with time zone	
■		last_accessed_ts	timestamp with time zone	Nullable
■		expiry_ts	timestamp with time zone	Nullable
■		output_filename	character varying	filename of the requested media object, possibly migrated from moj_transformation_request_s Nullable
■		output_filesize	integer	Nullable
■		output_format	character varying	format of the requested media object, possibly migrated from moj_transformation_s  Nullable
■		checksum	character varying	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
<b>-</b>	darts.media_request	darts.transformed_mediamer_id = darts.media_requestmer_id	trm_media_request_fk
<b>&gt;</b>	darts.user_account	darts.transformed_mediacreated_by = darts.user_accountusr_id	transformed_media_created_by_fk
<b>&gt;</b>	darts.user_account	darts.transformed_medialast_modified _by = darts.user_accountusr_id	transformed_media_last_modified_by_fk

#### Linked from

Table	Join	Title / Name / Description
→ I darts transient object directory I	<pre>darts.transformed_mediatrm_id = darts.transient_object_directorytrm_id</pre>	tod_transformed_media_fk

#### Unique keys

	Columns	Name / Description
?	trm_id	transformed_media_pk

# 12.1.74. Table: darts.transient\_object\_directory

#### Columns

		Name	Data type	Description / Attributes
■	1	tod_id	integer	
■		trm_id	integer	References: darts.transformed_media
■		ors_id	integer	References: darts.object_record_status
■		external_location	character varying	
■		checksum	character varying	Nullable
■		transfer_attempts	integer	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

#### Links to

	Table	Join	Title / Name / Description
<b>—</b>	darts.object_record_status	darts.transient_object_directoryors_id = darts.object_record_statusors_id	tod_object_record_status_fk
<b>—</b>	darts.transformed_media	darts.transient_object_directorytrm_id = darts.transformed_mediatrm_id	tod_transformed_media_fk
$\rightarrow$	darts.user_account	darts.transient_object_directorylast_m odified_by = darts.user_accountusr_id	tod_modified_by_fk
$\rightarrow$	darts.user_account	darts.transient_object_directorycreated _by = darts.user_accountusr_id	transient_object_directory_created_by_fk

### Unique keys

	Columns	Name / Description
Ŷ	tod_id	transient_object_directory_pk

### 12.1.75. Table: darts.user\_account

migration columns all sourced directly from dm\_user\_s, but only for rows where r\_is\_group = 0

#### Columns

		Name	Data type	Description / Attributes
■	1	usr_id	integer	primary key of user_account
■		dm_user_s_object_id	character varying(16)	internal Documentum primary key from dm_user_s Nullable
■		user_name	character varying	Nullable
■		user_os_name	character varying	Nullable
目		user_full_name	character varying	directly migrated from dm_user_s.user_name
■		user_email_address	character varying	Nullable
目		user_ldap_dn	character varying	Nullable
■		user_global_unique_id	character varying	Nullable
目		user_login_name	character varying	Nullable
■		user_login_domain	character varying	Nullable
■		user_state	smallint	Nullable
▤		description	character varying	Nullable
目		is_active	boolean	
■		last_login_ts	timestamp with time zone	Nullable
目		is_system_user	boolean	<b>Default</b> : false
■		account_guid	character varying	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	
		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	

#### Linked from

	Table	Join	Title / Name / Description
$\rightarrow$	darts.annotation	darts.user_accountusr_id = darts.annotationcurrent_owner	annotation_current_owner_fk
$\rightarrow$	darts.annotation	darts.user_accountusr_id = darts.annotationcreated_by	annotation_created_by_fk
$\rightarrow$	darts.annotation	darts.user_accountusr_id = darts.annotationlast_modified_by	annotation_modified_by_fk
$\rightarrow$	darts.annotation	darts.user_accountusr_id = darts.annotationdeleted_by	annotation_deleted_by_fk
$\rightarrow$	darts.annotation_document	darts.user_accountusr_id = darts.annotation_documentdeleted_by	annotation_document_deleted_by_fk
$\rightarrow$	darts.annotation_document	darts.user_accountusr_id = darts.annotation_documentuploaded_by	annotation_document_uploaded_by_fk
<b>→</b>	darts.annotation_document	darts.user_accountusr_id = darts.annotation_documentlast_modified_by	annotation_document_last_modified_by_fk

	Table	Join	Title / Name / Description
$\rightarrow$	darts.arm_rpo_execution_detail	<pre>darts.user_accountusr_id = darts.arm_rpo_execution_detailcreated _by</pre>	arm_rpo_execution_detail_created_by_fk
$\rightarrow$	darts.arm_rpo_execution_detail	darts.user_accountusr_id = darts.arm_rpo_execution_detaillast_mo dified_by	arm_rpo_execution_detail_last_modified_by_fk
$\rightarrow$	darts.audit	darts.user_accountusr_id = darts.auditusr_id	audit_user_account_fk
$\rightarrow$	darts.audit	darts.user_accountusr_id = darts.auditcreated_by	audit_created_by_fk
$\rightarrow$	darts.audit	darts.user_accountusr_id = darts.auditlast_modified_by	audit_modified_by_fk
$\rightarrow$	darts.audit_activity	darts.user_accountusr_id = darts.audit_activitycreated_by	audit_activity_created_by_fk
$\rightarrow$	darts.audit_activity	darts.user_accountusr_id = darts.audit_activitylast_modified_by	audit_activity_modified_by_fk
$\rightarrow$	darts.automated_task	darts.user_accountusr_id = darts.automated_taskcreated_by	automated_task_created_by_fk
$\rightarrow$	darts.automated_task	darts.user_accountusr_id = darts.automated_tasklast_modified_by	automated_task_modified_by_fk
$\rightarrow$	darts.case_document	darts.user_accountusr_id = darts.case_documentcreated_by	case_document_created_by_fk
$\rightarrow$	darts.case_document	darts.user_accountusr_id = darts.case_documentlast_modified_by	case_document_last_modified_by_fk
$\rightarrow$	darts.case_document	darts.user_accountusr_id = darts.case_documentdeleted_by	case_document_deleted_by_fk
$\rightarrow$	darts.case_retention	darts.user_accountusr_id = darts.case_retentioncreated_by	case_retention_created_by_fk
$\rightarrow$	darts.case_retention	darts.user_accountusr_id = darts.case_retentionlast_modified_by	case_retention_last_modified_by_fk
$\rightarrow$	darts.case_retention	darts.user_accountusr_id = darts.case_retentionsubmitted_by	case_retention_submitted_by_fk
$\rightarrow$	darts.case_retention_audit_heritage	<pre>darts.user_accountusr_id = darts.case_retention_audit_heritagec_u sername</pre>	case_retention_audit_heritage_c_username_fk
$\rightarrow$	darts.case_retention_audit_heritage	<pre>darts.user_accountusr_id = darts.case_retention_audit_heritager_c reator_name</pre>	case_retention_audit_heritage_r_creator_name_fk
$\rightarrow$	darts.case_retention_audit_heritage	darts.user_accountusr_id = darts.case_retention_audit_heritager_modifier	case_retention_audit_heritage_r_modifier_fk
$\rightarrow$	darts.case_retention_audit_heritage	darts.user_accountusr_id = darts.case_retention_audit_heritageow ner_name	case_retention_audit_heritage_owner_name_fk
$\rightarrow$	darts.court_case	darts.user_accountusr_id = darts.court_casecreated_by	court_case_created_by_fk
<b>→</b>	darts.court_case	darts.user_accountusr_id = darts.court_caselast_modified_by	court_case_modified_by_fk
$\rightarrow$	darts.court_case	darts.user_accountusr_id = darts.court_casedeleted_by	court_case_deleted_by_fk

	Table	Join	Title / Name / Description
$\rightarrow$	darts.court_case	darts.user_accountusr_id = darts.court_casedata_anonymised_by	court_case_data_anonymised_by_fk
$\rightarrow$	darts.courthouse	darts.user_accountusr_id = darts.courthousecreated_by	courthouse_created_by_fk
$\rightarrow$	darts.courthouse	darts.user_accountusr_id = darts.courthouselast_modified_by	courthouse_modified_by_fk
$\rightarrow$	darts.courtroom	darts.user_accountusr_id = darts.courtroomcreated_by	courtroom_created_by_fk
$\rightarrow$	darts.daily_list	darts.user_accountusr_id = darts.daily_listcreated_by	daily_list_created_by_fk
$\rightarrow$	darts.daily_list	darts.user_accountusr_id = darts.daily_listlast_modified_by	daily_list_modified_by_fk
$\rightarrow$	darts.data_anonymisation	darts.user_accountusr_id = darts.data_anonymisationrequested_b y	data_anonymisation_requested_by_fk
$\rightarrow$	darts.data_anonymisation	darts.user_accountusr_id = darts.data_anonymisationapproved_by	data_anonymisation_approved_by_fk
$\rightarrow$	darts.defence	darts.user_accountusr_id = darts.defencecreated_by	defence_created_by_fk
$\rightarrow$	darts.defence	darts.user_accountusr_id = darts.defencelast_modified_by	defence_modified_by_fk
$\rightarrow$	darts.defendant	darts.user_accountusr_id = darts.defendantcreated_by	defendant_created_by_fk
$\rightarrow$	darts.defendant	darts.user_accountusr_id = darts.defendantlast_modified_by	defendant_modified_by_fk
$\rightarrow$	darts.event	darts.user_accountusr_id = darts.eventcreated_by	event_created_by_fk
$\rightarrow$	darts.event	darts.user_accountusr_id = darts.eventlast_modified_by	event_modified_by_fk
$\rightarrow$	darts.event_handler	darts.user_accountusr_id = darts.event_handlercreated_by	event_handler_created_by_fk
$\rightarrow$	darts.external_object_directory	darts.user_accountusr_id = darts.external_object_directorylast_mo dified_by	eod_modified_by_fk
$\rightarrow$	darts.external_object_directory	darts.user_accountusr_id = darts.external_object_directorycreated _by	external_object_directory_created_by_fk
$\rightarrow$	darts.external_service_auth_token	darts.user_accountusr_id = darts.external_service_auth_tokencreat ed_by	external_service_auth_token_created_by_fk
$\rightarrow$	darts.external_service_auth_token	darts.user_accountusr_id = darts.external_service_auth_tokenlast_modified_by	external_service_auth_token_modified_by_fk
$\rightarrow$	darts.extobjdir_process_detail	<pre>darts.user_accountusr_id = darts.extobjdir_process_detailcreated_ by</pre>	epd_created_by_fk
$\rightarrow$	darts.extobjdir_process_detail	darts.user_accountusr_id = darts.extobjdir_process_detaillast_mod ified_by	epd_last_modified_by_fk
$\rightarrow$	darts.hearing	darts.user_accountusr_id = darts.hearingcreated_by	hearing_created_by_fk

	Table	Join	Title / Name / Description
$\rightarrow$	darts.hearing	darts.user_accountusr_id = darts.hearinglast_modified_by	hearing_modified_by_fk
$\rightarrow$	darts.judge	<pre>darts.user_accountusr_id = darts.judgecreated_by</pre>	judge_created_by_fk
$\rightarrow$	darts.judge	<pre>darts.user_accountusr_id = darts.judgelast_modified_by</pre>	judge_modified_by_fk
$\rightarrow$	darts.media	<pre>darts.user_accountusr_id = darts.mediacreated_by</pre>	media_created_by_fk
$\rightarrow$	darts.media	<pre>darts.user_accountusr_id = darts.medialast_modified_by</pre>	media_modified_by_fk
$\rightarrow$	darts.media	<pre>darts.user_accountusr_id = darts.mediadeleted_by</pre>	media_deleted_by_fk
$\rightarrow$	darts.media_linked_case	<pre>darts.user_accountusr_id = darts.media_linked_casecreated_by</pre>	media_linked_case_created_by_fk
$\rightarrow$	darts.media_request	<pre>darts.user_accountusr_id = darts.media_requestcreated_by</pre>	media_request_created_by_fk
$\rightarrow$	darts.media_request	<pre>darts.user_accountusr_id = darts.media_requestlast_modified_by</pre>	media_request_modified_by_fk
$\rightarrow$	darts.media_request	<pre>darts.user_accountusr_id = darts.media_requestrequestor</pre>	media_request_requestor_fk
$\rightarrow$	darts.media_request	<pre>darts.user_accountusr_id = darts.media_requestcurrent_owner</pre>	media_request_current_owner_fk
$\rightarrow$	darts.node_register	<pre>darts.user_accountusr_id = darts.node_registercreated_by</pre>	node_register_created_by_fk
$\rightarrow$	darts.notification	<pre>darts.user_accountusr_id = darts.notificationcreated_by</pre>	notification_created_by_fk
$\rightarrow$	darts.notification	<pre>darts.user_accountusr_id = darts.notificationlast_modified_by</pre>	notification_modified_by_fk
<b>→</b>	darts.object_admin_action	<pre>darts.user_accountusr_id = darts.object_admin_actionhidden_by</pre>	object_admin_action_hidden_by_fk
$\rightarrow$	darts.object_admin_action	<pre>darts.user_accountusr_id = darts.object_admin_actionmarked_for_ manual_del_by</pre>	object_admin_action_marked_for_manual_del_by_fk
<b>→</b>	darts.object_retrieval_queue	<pre>darts.user_accountusr_id = darts.object_retrieval_queuecreated_b y</pre>	object_retrieval_queue_created_by_fk
$\rightarrow$	darts.object_retrieval_queue	<pre>darts.user_accountusr_id = darts.object_retrieval_queuelast_modifi ed_by</pre>	object_retrieval_queue_last_modified_by_fk
$\rightarrow$	darts.prosecutor	<pre>darts.user_accountusr_id = darts.prosecutorcreated_by</pre>	prosecutor_created_by_fk
$\rightarrow$	darts.prosecutor	<pre>darts.user_accountusr_id = darts.prosecutorlast_modified_by</pre>	prosecutor_modified_by_fk
$\rightarrow$	darts.report	<pre>darts.user_accountusr_id = darts.reportcreated_by</pre>	report_created_by_fk
$\rightarrow$	darts.report	<pre>darts.user_accountusr_id = darts.reportlast_modified_by</pre>	report_modified_by_fk
$\rightarrow$	darts.retention_confidence_categor y_mapper	darts.user_accountusr_id = darts.retention_confidence_category_mappercreated_by	retention_confidence_category_mapper_created_by_fk

	Table	Join	Title / Name / Description
$\rightarrow$	darts.retention_confidence_categor y_mapper	<pre>darts.user_accountusr_id = darts.retention_confidence_category_ mapperlast_modified_by</pre>	retention_confidence_category_mapper_last_modified_by_fk
$\rightarrow$	darts.retention_policy_type	darts.user_accountusr_id = darts.retention_policy_typecreated_by	retention_policy_type_created_by_fk
<b>→</b>	darts.retention_policy_type	<pre>darts.user_accountusr_id = darts.retention_policy_typelast_modifie d_by</pre>	retention_policy_type_last_modified_by_fk
$\rightarrow$	darts.revinfo	<pre>darts.user_accountusr_id = darts.revinfoaudit_user</pre>	revinfo_audit_user_fk
$\rightarrow$	darts.rps_retainer	<pre>darts.user_accountusr_id = darts.rps_retainercreated_by</pre>	rps_retainer_created_by_fk
$\rightarrow$	darts.rps_retainer	<pre>darts.user_accountusr_id = darts.rps_retainerlast_modified_by</pre>	rps_retainer_last_modified_by_fk
$\rightarrow$	darts.security_group	<pre>darts.user_accountusr_id = darts.security_groupcreated_by</pre>	security_group_created_by_fk
$\rightarrow$	darts.security_group	<pre>darts.user_accountusr_id = darts.security_grouplast_modified_by</pre>	security_group_last_modified_by_fk
<b>→</b>	darts.security_group_user_account_ ae	<pre>darts.user_accountusr_id = darts.security_group_user_account_ae usr_id</pre>	security_group_user_account_ae_user_fk
$\rightarrow$	darts.transcription	<pre>darts.user_accountusr_id = darts.transcriptionlast_modified_by</pre>	transcription_last_modified_by_fk
$\rightarrow$	darts.transcription	<pre>darts.user_accountusr_id = darts.transcriptionrequested_by</pre>	transcription_requested_by_fk
$\rightarrow$	darts.transcription	<pre>darts.user_accountusr_id = darts.transcriptioncreated_by</pre>	transcription_created_by_fk
$\rightarrow$	darts.transcription	<pre>darts.user_accountusr_id = darts.transcriptiondeleted_by</pre>	transcription_deleted_by_fk
$\rightarrow$	darts.transcription_comment	<pre>darts.user_accountusr_id = darts.transcription_commentauthor</pre>	transcription_comment_author_fk
<b>→</b>	darts.transcription_comment	<pre>darts.user_accountusr_id =   darts.transcription_commentcreated_b y</pre>	transcription_comment_created_by_fk
$\rightarrow$	darts.transcription_comment	<pre>darts.user_accountusr_id = darts.transcription_commentlast_modif ied_by</pre>	transcription_comment_modified_by_fk
$\rightarrow$	darts.transcription_document	<pre>darts.user_accountusr_id = darts.transcription_documentdeleted_ by</pre>	transcription_document_deleted_by_fk
<b>→</b>	darts.transcription_document	<pre>darts.user_accountusr_id = darts.transcription_documentuploade d_by</pre>	transcription_document_uploaded_by_fk
<b>→</b>	darts.transcription_document	<pre>darts.user_accountusr_id = darts.transcription_documentlast_modi fied_by</pre>	transcription_document_last_modified_by_fk
$\rightarrow$	darts.transcription_workflow	<pre>darts.user_accountusr_id = darts.transcription_workflowworkflow_ actor</pre>	transcription_workflow_workflow_actor_fk
$\rightarrow$	darts.transformed_media	<pre>darts.user_accountusr_id = darts.transformed_mediacreated_by</pre>	transformed_media_created_by_fk

	Table	Join	Title / Name / Description
$\rightarrow$	darts.transformed_media	darts.user_accountusr_id = darts.transformed_medialast_modified _by	transformed_media_last_modified_by_fk
$\rightarrow$	darts.transient_object_directory	darts.user_accountusr_id = darts.transient_object_directorylast_m odified_by	tod_modified_by_fk
$\rightarrow$	darts.transient_object_directory	darts.user_accountusr_id = darts.transient_object_directorycreated _by	transient_object_directory_created_by_fk

## Unique keys

	Columns	Name / Description
9	usr_id	user_account_pk

### 12.2. Procedures

#### 12.2.1. Procedure: dbms\_metadata.set\_transform\_param

Used to customize DDL through configuring session-level transform params.

	Name	Data type	Description
<b>→</b> @	name	text	
<b>→</b> @	value	boolean	

# 12.2.2. Procedure: public.sum\_n\_product

	Name	Data type	Description
<b>→</b> @	х	integer	
<b>→</b> @	у	integer	
<b>-</b> @•	sum	integer	
÷@•	prod	integer	

# 12.3. Functions

### 12.3.1. Function: darts.gin\_extract\_query\_trgm

	Name	Data type	Description
<b>-@</b> •	Returns	internal	
<b>→</b> @	\$1	text	
<b>→</b> @	\$2	internal	
<b>→</b> @	\$3	smallint	
<b>→</b> @	\$4	internal	
<b>→</b> @	\$5	internal	
<b>→</b> @	\$6	internal	
<b>→</b> @	\$7	internal	

# 12.3.2. Function: darts.gin\_extract\_value\_trgm

	Name	Data type	Description
<b>-</b> @•	Returns	internal	
→@	\$1	text	
<b>→</b> @	\$2	internal	

# 12.3.3. Function: darts.gin\_trgm\_consistent

	Name	Data type	Description
÷@•	Returns	boolean	
<b>→</b> @	\$1	internal	
<b>→</b> @	\$2	smallint	
<b>→</b> @	\$3	text	
<b>→</b> @	\$4	integer	
<b>→</b> @	\$5	internal	
<b>→</b> @	\$6	internal	
<b>→</b> @	\$7	internal	
<b>→</b> @	\$8	internal	

# 12.3.4. Function: darts.gin\_trgm\_triconsistent

	Name	Data type	Description
-⁄@•	Returns	"char"	
<b>→</b> @	\$1	internal	
<b>→</b> @	\$2	smallint	
<b>→</b> @	\$3	text	
<b>→</b> @	\$4	integer	
<b>→</b> @	\$5	internal	
<b>→</b> @	\$6	internal	
<b>→</b> @	\$7	internal	

# 12.3.5. Function: darts.gtrgm\_compress

	Name	Data type	Description
-⁄@•	Returns	internal	
<b>→</b> @	\$1	internal	

# 12.3.6. Function: darts.gtrgm\_consistent

	Name	Data type	Description
<b>-</b> @•	Returns	boolean	
→@	\$1	internal	
→@	\$2	text	
→@	\$3	smallint	
<b>→</b> @	\$4	oid	
<b>→</b> @	\$5	internal	

# 12.3.7. Function: darts.gtrgm\_decompress

	Name	Data type	Description
-⁄@•	Returns	internal	
<b>→</b> @	\$1	internal	

# 12.3.8. Function: darts.gtrgm\_distance

	Name	Data type	Description
*@>	Returns	double precision	
<b>→</b> @	\$1	internal	
<b>→</b> @	\$2	text	
<b>→</b> @	\$3	smallint	
<b>→</b> @	\$4	oid	
→@	\$5	internal	

# 12.3.9. Function: darts.gtrgm\_in

	Name	Data type	Description
÷@•	Returns	gtrgm	
<b>→</b> @	\$1	cstring	

# 12.3.10. Function: darts.gtrgm\_options

	Name	Data type	Description
÷@•	Returns	void	
<b>→</b> @	\$1	internal	

## 12.3.11. Function: darts.gtrgm\_out

	Name	Data type	Description
<b>-</b> @•	Returns	cstring	
<b>→</b> @	\$1	gtrgm	

## 12.3.12. Function: darts.gtrgm\_penalty

	Name	Data type	Description
<b>-</b> @•	Returns	internal	
<b>→</b> @	\$1	internal	
<b>→</b> @	\$2	internal	
<b>→</b> @	\$3	internal	

# 12.3.13. Function: darts.gtrgm\_picksplit

	Name	Data type	Description
-⁄@>	Returns	internal	
<b>→</b> @	\$1	internal	
<b>→</b> @	\$2	internal	

# 12.3.14. Function: darts.gtrgm\_same

	Name	Data type	Description
<b>-</b> @•	Returns	internal	
<b>→</b> @	\$1	gtrgm	
<b>→</b> @	\$2	gtrgm	
<b>→</b> @	\$3	internal	

# 12.3.15. Function: darts.gtrgm\_union

	Name	Data type	Description
÷@•	Returns	gtrgm	
<b>→</b> @	\$1	internal	
<b>→</b> @	\$2	internal	

# 12.3.16. Function: darts.set\_limit

	Name	Data type	Description
÷@•	Returns	real	
<b>→</b> @	\$1	real	

# 12.3.17. Function: darts.show\_limit

	Name	Data type	Description
<b>-</b> @•	Returns	real	

# 12.3.18. Function: darts.show\_trgm

	Name	Data type	Description
÷@•	Returns	ARRAY	
<b>→</b> @	\$1	text	

## 12.3.19. Function: darts.similarity

	Name	Data type	Description
-;@>	Returns	real	
<b>→</b> @	\$1	text	
<b>→</b> @	\$2	text	

## 12.3.20. Function: darts.similarity\_dist

	Name	Data type	Description
<b>-</b> @•	Returns	real	
<b>→</b> @	\$1	text	
<b>→</b> @	\$2	text	

## 12.3.21. Function: darts.similarity\_op

	Name	Data type	Description
<b>-</b> @•	Returns	boolean	
<b>→</b> @	\$1	text	
<b>→</b> @	\$2	text	

# 12.3.22. Function: darts.strict\_word\_similarity

	Name	Data type	Description
-;@>	Returns	real	
<b>→</b> @	\$1	text	
<b>→</b> @	\$2	text	

# 12.3.23. Function: darts.strict\_word\_similarity\_commutator\_op

	Name	Data type	Description
-⁄@>	Returns	boolean	
<b>→</b> @	\$1	text	
<b>→</b> @	\$2	text	

## 12.3.24. Function: darts.strict\_word\_similarity\_dist\_commutator\_op

	Name	Data type	Description
-;@>	Returns	real	
<b>→</b> @	\$1	text	
<b>→</b> @	\$2	text	

# 12.3.25. Function: darts.strict\_word\_similarity\_dist\_op

	Name	Data type	Description
<b>-</b> @•	Returns	real	
<b>→</b> @	\$1	text	
<b>→</b> @	\$2	text	

# 12.3.26. Function: darts.strict\_word\_similarity\_op

	Name	Data type	Description
-⁄@>	Returns	boolean	
<b>→</b> @	\$1	text	
<b>→</b> @	\$2	text	

# 12.3.27. Function: darts.tra\_trw\_sync\_fnc

	Name	Data type	Description
Returns		trigger	

# 12.3.28. Function: darts.word\_similarity

	Name	Data type	Description
-⁄@>	Returns	real	
<b>→</b> @	\$1	text	
<b>→</b> @	\$2	text	

# 12.3.29. Function: darts.word\_similarity\_commutator\_op

	Name	Data type	Description
-;@>	Returns	boolean	
<b>→</b> @	\$1	text	
<b>→</b> @	\$2	text	

# 12.3.30. Function: darts.word\_similarity\_dist\_commutator\_op

	Name	Data type	Description
-⁄@>	Returns	real	
<b>→</b> @	\$1	text	
<b>→</b> @	\$2	text	

# 12.3.31. Function: darts.word\_similarity\_dist\_op

	Name	Data type	Description
-;@>	Returns	real	
<b>→</b> @	\$1	text	
<b>→</b> @	\$2	text	

# 12.3.32. Function: darts.word\_similarity\_op

	Name	Data type	Description
-⁄@>	Returns	boolean	
<b>→</b> @	\$1	text	
<b>→</b> @	\$2	text	

# 12.3.33. Function: dbms\_metadata.get\_check\_constraint\_ddl

#### This function retrieves DDL of a check constraint

	Name	Data type	Description
<b>-</b> @•	Returns	text	
<b>→</b> @	schema_name	text	
→@	constraint_name	text	

# 12.3.34. Function: dbms\_metadata.get\_constraint\_ddl

#### This function retrieves DDL of a constraint

	Name	Data type	Description
<b>-</b> @•	Returns	text	
<b>→</b> @	schema_name	text	
→@	constraint_name	text	

## 12.3.35. Function: dbms\_metadata.get\_constraints\_ddl\_of\_table

This function retrieves DDL of all constraints of provided table

	Name	Data type	Description
<b>-</b> @•	Returns	text	
<b>→</b> @	p_schema	text	
→@	p_table	text	

## 12.3.36. Function: dbms\_metadata.get\_ddl

Retrieves DDL of database objects. Supported object types are TABLE, VIEW, SEQUENCE, PROCEDURE, FUNCTION.

	Name	Data type	Description
÷@>	Returns	text	
÷@	object_type	text	
<b>→</b> @	name	text	
<b>→</b> @	schema	text	

## 12.3.37. Function: dbms\_metadata.get\_dependent\_ddl

Retrieves DDL of dependent objects on provided base object. Supported dependent object types are SEQUENCE, CONSTRAINT, INDEX.

	Name	Data type	Description
-;@>	Returns	text	
→@	object_type	text	
<b>→</b> @	base_object_name	text	
<b>→</b> @	base_object_schema	text	

## 12.3.38. Function: dbms\_metadata.get\_granted\_ddl

Retrieves the SQL statements to recreate granted privileges and roles for a specified grantee.

	Name	Data type	Description
-;@>	Returns	text	
<b>→</b> @	object_type	text	
<b>→</b> @	grantee	text	

## 12.3.39. Function: dbms\_metadata.get\_granted\_roles\_ddl

This function extracts the SQL statements to recreate roles granted to a specified grantee

	Name	Data type	Description
÷@•	Returns	text	
<b>→</b> @	p_grantee	text	

# 12.3.40. Function: dbms\_metadata.get\_index\_ddl

#### This function retrieves DDL of an index

	Name	Data type	Description
<b>-</b> @•	Returns	text	
<b>→</b> @	schema_name	text	
→@	index_name	text	

## 12.3.41. Function: dbms\_metadata.get\_indexes\_ddl\_of\_table

This function retrieves DDL of all indexes of provided table

	Name	Data type	Description
-;@>	Returns	text	
÷@	p_schema	text	
<b>→</b> @	p_table	text	

# 12.3.42. Function: dbms\_metadata.get\_object\_oid

### This function returns oid of given object

	Name	Data type	Description
<b>-</b> @•	Returns	oid	
<b>→</b> @	p_object_type	text	
<b>→</b> @	p_schema	text	
<b>→</b> @	p_object_name	text	

# 12.3.43. Function: dbms\_metadata.get\_ref\_constraint\_ddl

#### This function retrieves DDL of a referential constraint

	Name	Data type	Description
-;@>	Returns	text	
<b>→</b> @	schema_name	text	
<b>→</b> @	constraint_name	text	

# 12.3.44. Function: dbms\_metadata.get\_ref\_constraints\_ddl\_of\_table

This function retrieves DDL of all constraints of provided table

	Name	Data type	Description
<b>-</b> @•	Returns	text	
<b>→</b> @	p_schema	text	
→@	p_table	text	

# 12.3.45. Function: dbms\_metadata.get\_routine\_ddl

# This function retrieves DDL of a procedure/function

	Name	Data type	Description
-⁄@•	Returns	text	
÷@	schema_name	text	
→@	routine_name	text	
<b>→</b> @	routine_type	text	

# 12.3.46. Function: dbms\_metadata.get\_schema\_oid

#### This function returns oid of given schema

	Name	Data type	Description
-;@>	Returns	oid	
<b>→</b> @	p_schema	text	

# 12.3.47. Function: dbms\_metadata.get\_sequence\_ddl

# This function retrieves DDL of a sequence

	Name	Data type	Description
<b>-</b> @•	Returns	text	
<b>→</b> @	p_schema	text	
<b>→</b> @	p_sequence	text	

## 12.3.48. Function: dbms\_metadata.get\_sequence\_ddl\_of\_table

This function retrieves DDL of all dependent sequences on provided table

	Name	Data type	Description
-;@>	Returns	text	
÷@	p_schema	text	
<b>→</b> @	p_table	text	

### 12.3.49. Function: dbms\_metadata.get\_table\_ddl

This function retrieves a basic table DDL without constraints and indexes. DDL will include list of columns of the table, along with datatypes, DEFAULT values and NOT NULL constraints, in the order of the attnum. DDL will also include comments on table and columns if any.

	Name	Data type	Description
*@×	Returns	text	
<b>→</b> @	p_schema	text	
<b>→</b> @	p_table	text	

# 12.3.50. Function: dbms\_metadata.get\_trigger\_ddl

### This function retrieves DDL of a trigger

	Name	Data type	Description
<b>-</b> @•	Returns	text	
<b>→</b> @	schema_name	text	
→@	trigger_name	text	

## 12.3.51. Function: dbms\_metadata.get\_triggers\_ddl\_of\_table

### This function retrieves DDL of all triggers of provided table

	Name	Data type	Description
<b>-</b> @•	Returns	text	
<b>→</b> @	schema_name	text	
<b>→</b> @	table_name	text	

# 12.3.52. Function: dbms\_metadata.get\_type\_ddl

# This function retrieves DDL of a user defined type

	Name	Data type	Description
÷@•	Returns	text	
<b>→</b> @	p_schema_name	text	
<b>→</b> @	p_type_name	text	

# 12.3.53. Function: dbms\_metadata.get\_view\_ddl

#### This function retrieves DDL of a view

	Name	Data type	Description
<b>-</b> @•	Returns	text	
<b>→</b> @	view_schema	text	
→@	view_name	text	

# 12.3.54. Function: dbms\_metadata.init\_transform\_params

	Name	Data type	Description
Returns		void	

## 12.3.55. Function: dbms\_metadata.set\_default\_transform\_params

Used to set default values to all transform params.

	Name	Data type	Description
<b>-@</b> •	Returns	void	