CGI IT UK LMITED

postgres_app_v48_sec_v15@localhost Data Dictionary

11/09/2023

Table of contents

oos	tgres@lo	ocalhost	7
1.	darts pr	roposed_courtroom_and_user_account_omitted*	8
2.	dart_pro	oposed_security	9
3.	darts_pr	proposed_retention	10
4.	darts_p	proposed_courthouse	11
5.	Other		12
	5.1. Table	eses	12
	5.1.1. T	Table: darts.annotation	12
	5.1.2.	Table: darts.audit	12
	5.1.3.	Table: darts.audit_activity	13
	5.1.4.	Table: darts.automated_task	14
	5.1.5.	Table: darts.case_judge_ae	14
	5.1.6.	Table: darts.case_retention	15
	5.1.7.	Table: darts.case_retention_event	16
	5.1.8.	Table: darts.court_case	16
	5.1.9.	Table: darts.courthouse	18
	5.1.10.	Table: darts.courthouse_region_ae	19
	5.1.11.	Table: darts.courtroom	19
	5.1.12.	Table: darts.daily_list	20
	5.1.13.	Table: darts.defence	21
	5.1.14.	Table: darts.defendant	21
	5.1.15.	Table: darts.device_register	22
	5.1.16.	Table: darts.event	23
	5.1.17.	Table: darts.event_handler	24
	5.1.18.	Table: darts.external_location_type	25
	5.1.19.	Table: darts.external_object_directory	25
	5.1.20.	Table: darts.external_service_auth_token	26
	5.1.21.	Table: darts.hearing	27
	5.1.22.	Table: darts.hearing_event_ae	28
	5.1.23.	Table: darts.hearing_judge_ae	28
	5.1.24.	Table: darts.hearing_media_ae	29
	5.1.25.	Table: darts.judge	29
	5.1.26.	Table: darts.media	30
	5.1.27.	Table: darts.media_request	31
	5.1.28.	Table: darts.notification	32
	5.1.29.	Table: darts.object_directory_status	33
	5.1.30.	Table: darts.prosecutor	33
	5.1.31.	Table: darts.region	34
	5.1.32.	Table: darts.report	35
		Table: darts.retention_policy	
	5.1.34.	Table: darts.security_group	36
		Table: darts.security_group_courthouse_ae	
		Table: darts.security_group_user_account_ae	
		Table: darts.security_permission	
	5.1.38.	Table: darts.security_role	38


5.1.39.	Table: darts.security_role_permission_ae	39
5.1.40.	Table: darts.transcription	39
5.1.41.	Table: darts.transcription_comment	41
5.1.42.	Table: darts.transcription_status	42
5.1.43.	Table: darts.transcription_type	42
5.1.44.	Table: darts.transcription_urgency	43
5.1.45.	Table: darts.transcription_workflow	43
5.1.46.	Table: darts.transient_object_directory	44
5.1.47.	Table: darts.user_account	45

Legend


- **?** Primary key
- Primary key disabled
- 1 User-defined primary key
- **?** Unique key
- ¶ Unique key disabled
- **%** User-defined unique key
- Active trigger
- Disabled trigger
- → Many to one relation
- $\succ_{\mathbf{i}}$ User-defined many to one relation
- ✓ User-defined one to many relation
- \succ User-defined many to many relation
- One to one relation
- user-defined one to one relation
- →@ Input
- @ Output
- Input/Output
- Uses dependency
- User-defined uses dependency
- Used by dependency
- User-defined used by dependency

postgres@localhost


1. darts proposed_courtroom_and_user_account_omitted*

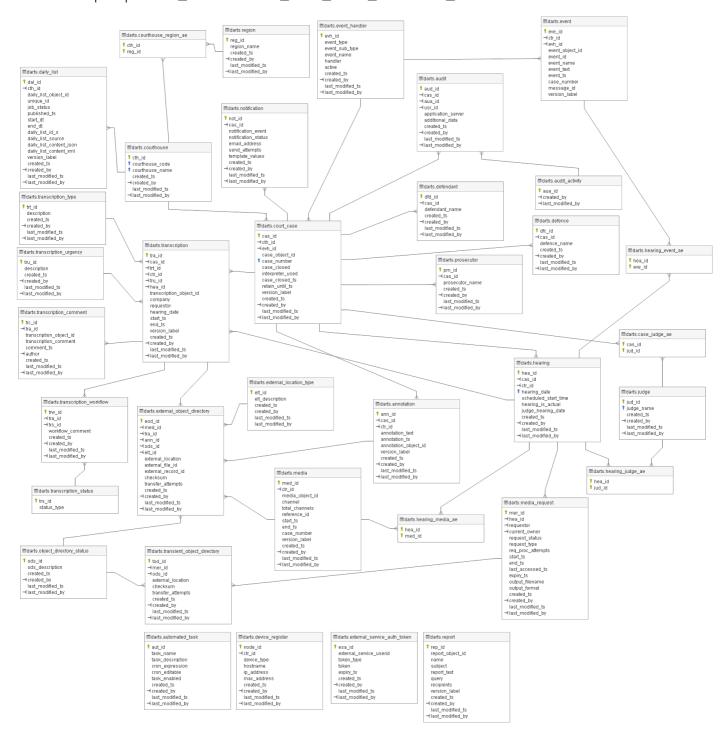


2. dart_proposed_security

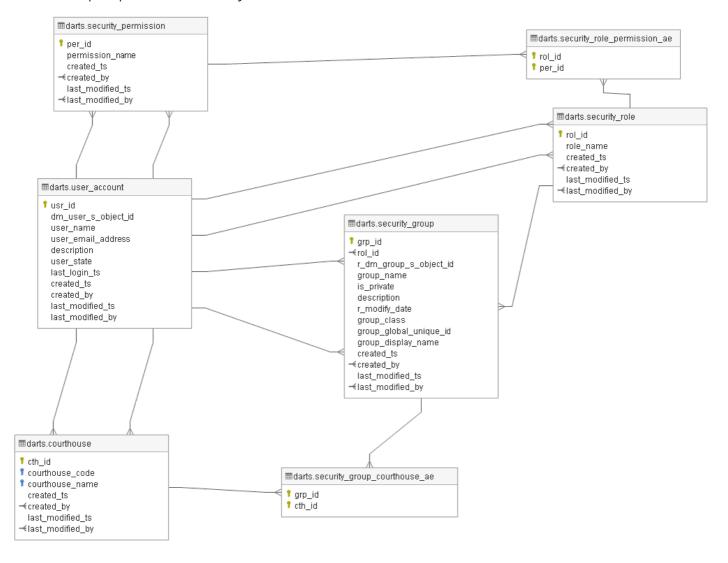

3. darts_proposed_retention

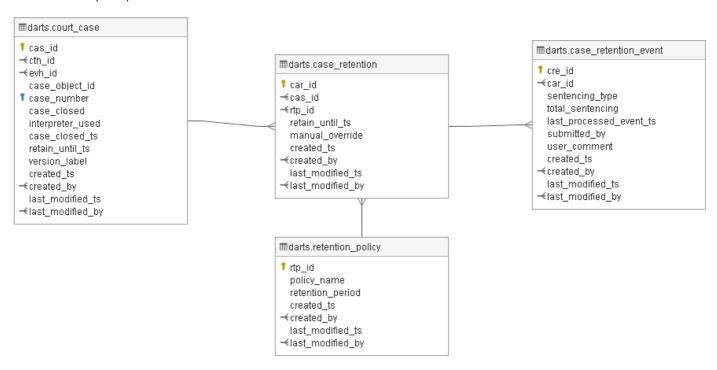

4. darts_proposed_courthouse

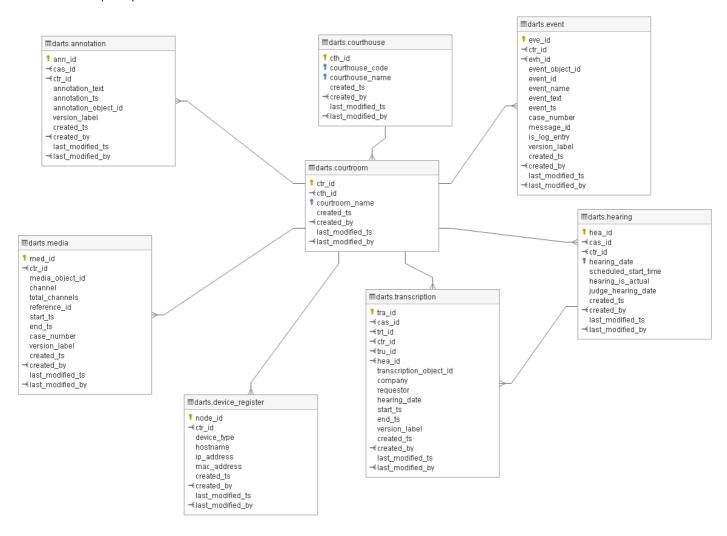

5. Other

5.1. Tables

5.1.1. Table: darts.annotation

Columns

		Name	Data type	Description / Attributes
目	1	ann_id	integer	primary key of annotation
■		cas_id	integer	foreign key from court_case References: darts.court_case
		ctr_id	integer	foreign key from courtroom Nullable References: darts.courtroom
■		annotation_text	character varying	directly sourced from moj_annotation_s.c_text Nullable
		annotation_ts	timestamp with time zone	directly sourced from moj_annotation_s Nullable
■		annotation_object_id	character varying(16)	internal Documentum primary key from moj_annotation_s Nullable
■		version_label	character varying(32)	inherited from dm_sysobject_r, for r_object_type of moj_annotation Nullable
■		created_ts	timestamp with time zone	
目		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.court_case	darts.annotationcas_id = darts.court_casecas_id	annotation_case_fk
>	darts.courtroom	darts.annotationctr_id = darts.courtroomctr_id	annotation_courtroom_fk
>	darts.user_account	darts.annotationcreated_by = darts.user_accountusr_id	annotation_created_by_fk
\rightarrow	darts.user_account	darts.annotationlast_modified_by = darts.user_accountusr_id	annotation_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
-	€ I darts external_object_directory	<pre>darts.annotationann_id = darts.external_object_directoryann_id</pre>	eod_annotation_fk

Unique keys

		Name / Description
Ŷ	ann_id	annotation_pk

5.1.2. Table: darts.audit

Columns

		Name	Data type	Description / Attributes
■	1	aud_id	integer	primary key of audit
		cas_id	integer	foreign key from case References: darts.court_case
		aua_id	integer	primary key of audit_activity References: darts.audit_activity
		usr_id	integer	foreign key from user_account References: darts.user_account
		application_server	character varying	
■		additional_data	character varying	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
>	darts.audit_activity	darts.auditaua_id = darts.audit_activityaua_id	audit_audit_activity_fk
>	darts.court_case	darts.auditcas_id = darts.court_casecas_id	audit_case_fk
-	darts.user_account	darts.auditusr_id = darts.user_accountusr_id	audit_user_account_fk
\rightarrow	darts.user_account	darts.auditcreated_by = darts.user_accountusr_id	audit_created_by_fk
—	darts.user_account	darts.auditlast_modified_by = darts.user_accountusr_id	audit_modified_by_fk

Unique keys

		Name / Description	
P	aud_id	audit_pk	

5.1.3. Table: darts.audit_activity

		Name	Data type	Description / Attributes		
目	1	aua_id	integer			
■		activity_name	character varying			
■		activity_description	character varying			
■		created_ts	timestamp with time zone			
■		created_by	integer	References: darts.user_account		
■		last_modified_ts	timestamp with time zone			
■		last_modified_by	integer	References: darts.user_account		

	Table	Join	Title / Name / Description
>	darts.user_account	darts.audit_activity created_by = darts.user_accountusr_id	audit_activity_created_by_fk
-	darts.user_account	darts.audit_activity ast_modified_by = darts.user_accountusr_id	audit_activity_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
-	darts.audit	darts.audit_activityaua_id = darts.auditaua_id	audit_audit_activity_fk

Unique keys

		Name / Description
?	aua_id	audit_activity_pk

5.1.4. Table: darts.automated_task

Columns

		Name	Data type	Description / Attributes
	1	aut_id	integer	primary key of automated_task
■		task_name	character varying	
目		task_description	character varying	
■		cron_expression	character varying	
■		cron_editable	boolean	
■		task_enabled	boolean	
目		created_ts	timestamp with time zone	
目		created_by	integer	References: darts.user_account
目		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

		Table	Join	Title / Name / Description
>	_	darts.user_account	<pre>darts.automated_taskcreated_by = darts.user_accountusr_id</pre>	automated_task_created_by_fk
>	_	darts.user_account	darts.automated_tasklast_modified_by = darts.user_accountusr_id	automated_task_modified_by_fk

Unique keys

		Name / Description
9	aut_id	automated_task_pk

5.1.5. Table: darts.case_judge_ae

Columns

		Name	Data type	Description / Attributes
■	1	cas_id	integer	foreign key from case, part of composite natural key and PK References: darts.court_case
	1	jud_id	integer	foreign key from judge, part of composite natural key and PK References: darts.judge

Links to

	Table	Join	Title / Name / Description
-	darts.court_case	darts.case_judge_aecas_id = darts.court_casecas_id	case_judge_ae_case_fk
—	darts.judge	darts.case_judge_aejud_id = darts.judgejud_id	case_judge_ae_judge_fk

Unique keys

		Name / Description
P	cas_id, jud_id	case_judge_ae_pk

5.1.6. Table: darts.case_retention

Columns

		Name	Data type	Description / Attributes
■	1	car_id	integer	primary key of case_retention
■		cas_id	integer	foreign key from court_case References: darts.court_case
		rtp_id	integer	foreign key from retention_policy References: darts.retention_policy
■		retain_until_ts	timestamp with time zone	Nullable
■		manual_override	boolean	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

	Table	Join	Title / Name / Description
-	darts.court_case	darts.case_retentioncas_id = darts.court_casecas_id	case_retention_case_fk
>	darts.retention_policy	darts.case_retentionrtp_id = darts.retention_policyrtp_id	case_retention_retention_policy_fk
>	darts.user_account	darts.case_retentioncreated_by = darts.user_accountusr_id	case_retention_created_by_fk
>	darts.user_account	darts.case_retentionlast_modified_by = darts.user_accountusr_id	case_retention_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
-	darts.case_retention_event	darts.case_retention_car_id = darts.case_retention_eventcar_id	case_retention_event_case_retention_fk

Unique keys

		Name / Description
P	car_id	case_retention_pk

5.1.7. Table: darts.case_retention_event

Columns

		Name	Data type	Description / Attributes
■	1	cre_id	integer	primary key of case_retention_event
■		car_id	integer	foreign key from case_retention References: darts.case_retention
■		sentencing_type	integer	
■		total_sentencing	character varying	Nullable
■		last_processed_event_ts	timestamp with time zone	
■		submitted_by	integer	Nullable
■		user_comment	character varying	Nullable
■		created_ts	timestamp with time zone	
		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.case_retention	darts.case_retention_eventcar_id = darts.case_retentioncar_id	case_retention_event_case_retention_fk
-	darts.user_account	darts.case_retention_eventcreated_by = darts.user_accountusr_id	case_retention_event_created_by_fk
\rightarrow	darts.user_account	darts.case_retention_eventlast_modifie d_by = darts.user_accountusr_id	case_retention_event_modified_by_fk

Unique keys

		Name / Description
Ŷ	cre_id	case_retention_event_pk

5.1.8. Table: darts.court_case

		Name	Data type	Description / Attributes
■	1	cas_id	integer	primary key of court_case

		Name	Data type	Description / Attributes
■	1	cth_id	integer	foreign key to courthouse References: darts.courthouse
■		evh_id	integer	Nullable References: darts.event_handler
■		case_object_id	character varying(16)	internal Documentum primary key from moj_case_s Nullable
■	1	case_number	character varying	directly sourced from moj_case_s.c_case_id
▤		case_closed	boolean	migrated from moj_case_s, converted from numeric to boolean
▤		interpreter_used	boolean	migrated from moj_case_s, converted from numeric to boolean
		case_closed_ts	timestamp with time zone	directly sourced from moj_case_s.c_case_closed_date Nullable
■		retain_until_ts	timestamp with time zone	Nullable
■		version_label	character varying(32)	inherited from dm_sysobject_r, for r_object_type of moj_case, containing the version record Nullable
目		created_ts	timestamp with time zone	
目		created_by	integer	References: darts.user_account
▤		last_modified_ts	timestamp with time zone	
▤		last_modified_by	integer	References: darts.user_account

	Table	Join	Title / Name / Description
>	darts.courthouse	darts.court_casecth_id = darts.courthousecth_id	court_case_courthouse_fk
>	darts.event_handler	darts.court_caseevh_id = darts.event_handlerevh_id	court_case_event_handler_fk
>	darts.user_account	darts.court_casecreated_by = darts.user_accountusr_id	court_case_created_by_fk
>	darts.user_account	darts.court_caselast_modified_by = darts.user_accountusr_id	court_case_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.annotation	darts.court_casecas_id = darts.annotationcas_id	annotation_case_fk
\rightarrow	darts.audit	darts.court_casecas_id = darts.auditcas_id	audit_case_fk
\rightarrow	darts.case_judge_ae	darts.court_casecas_id = darts.case_judge_aecas_id	case_judge_ae_case_fk
\rightarrow	darts.case_retention	darts.court_casecas_id = darts.case_retentioncas_id	case_retention_case_fk
\rightarrow	darts.defence	darts.court_casecas_id = darts.defencecas_id	defence_court_case_fk
\rightarrow	darts.defendant	darts.court_casecas_id = darts.defendantcas_id	defendant_court_case_fk
\rightarrow	darts.hearing	darts.court_casecas_id = darts.hearingcas_id	hearing_case_fk

	Table	Join	Title / Name / Description
\rightarrow	darts.notification	darts.court_casecas_id = darts.notificationcas_id	notification_case_fk
\rightarrow	darts.prosecutor	darts.court_casecas_id = darts.prosecutorcas_id	prosecutor_court_case_fk
\rightarrow	darts.transcription	darts.court_casecas_id = darts.transcriptioncas_id	transcription_case_fk

Unique keys

		Name / Description
Ŷ	cas_id	court_case_pk
Ŷ	case_number, cth_id	cas_case_number_cth_id_unq

5.1.9. Table: darts.courthouse

Columns

		Name	Data type	Description / Attributes
■	1	cth_id	integer	primary key of courthouse
■	1	courthouse_code	integer	corresponds to the c_crown_court_code found in daily lists
■	1	courthouse_name	character varying	directly sourced from moj_courthouse_s.c_id
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.user_account	<pre>darts.courthousecreated_by = darts.user_accountusr_id</pre>	courthouse_created_by_fk
>	darts.user_account	darts.courthouselast_modified_by = darts.user_accountusr_id	courthouse_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.court_case	darts.courthousecth_id = darts.court_casecth_id	court_case_courthouse_fk
\rightarrow	darts.courthouse_region_ae	darts.courthousecth_id = darts.courthouse_region_aecth_id	courthouse_region_courthouse_fk
\rightarrow	darts.courtroom	darts.courthousecth_id = darts.courtroomcth_id	courtroom_courthouse_fk
\rightarrow	darts.daily_list	darts.courthousecth_id = darts.daily_listcth_id	daily_list_courthouse_fk
\rightarrow	darts.security_group_courthouse_ae	darts.courthousecth_id = darts.security_group_courthouse_aect h_id	security_group_courthouse_courthouse_fk

Unique keys

		Name / Description
?	cth_id	courthouse_pk
9	courthouse_code	courthouse_courthouse_code_key
9	courthouse_name	courthouse_courthouse_name_key

5.1.10. Table: darts.courthouse_region_ae

Columns

		Name	Data type	Description / Attributes
■	1	cth_id	integer	References: darts.courthouse
■	1	reg_id	integer	References: darts.region

Links to

	Table	Join	Title / Name / Description
-	darts.courthouse	darts.courthouse_region_aecth_id = darts.courthousecth_id	courthouse_region_courthouse_fk
>	darts.region	darts.courthouse_region_aereg_id = darts.regionreg_id	courthouse_region_region_fk

Unique keys

		Name / Description
P	cth_id, reg_id	courthouse_region_ae_pk

5.1.11. Table: darts.courtroom

Columns

		Name	Data type	Description / Attributes
■	1	ctr_id	integer	primary key of courtroom
■	9	cth_id	integer	foreign key to courthouse References: darts.courthouse
■	1	courtroom_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
目		last_modified_by	integer	References: darts.user_account

	Table	Join	Title / Name / Description
-	darts.courthouse	darts.courtroomcth_id = darts.courthousecth_id	courtroom_courthouse_fk
-	darts.user_account	<pre>darts.courtroomcreated_by = darts.user_accountusr_id</pre>	courtroom_created_by_fk
—	darts.user_account	darts.courtroomlast_modified_by = darts.user_accountusr_id	courtroom_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.annotation	darts.courtroomctr_id = darts.annotationctr_id	annotation_courtroom_fk
\rightarrow	darts.device_register	darts.courtroomctr_id = darts.device_registerctr_id	device_register_courtroom_fk
\rightarrow	darts.event	darts.courtroomctr_id = darts.eventctr_id	event_courtroom_fk
\rightarrow	darts.hearing	darts.courtroomctr_id = darts.hearingctr_id	hearing_courtroom_fk
\rightarrow	darts.media	darts.courtroomctr_id = darts.mediactr_id	media_courtroom_fk
\rightarrow	darts.transcription	darts.courtroomctr_id = darts.transcriptionctr_id	transcription_courtroom_fk

Unique keys

		Name / Description
Ŷ	ctr_id	courtroom_pk
Ŷ	cth_id, courtroom_name	ctr_chr_crn_unq

5.1.12. Table: darts.daily_list

		Name	Data type	Description / Attributes
	1	dal_id	integer	primary key of daily_list
■		cth_id	integer	foreign key from courthouse References: darts.courthouse
■		daily_list_object_id	character varying(16)	internal Documentum primary key from moj_daily_list_s Nullable
		unique_id	character varying	directly sourced from moj_daily_list_s, received as part of the XML, used to find duplicate daily lists Nullable
■		job_status	character varying	directly sourced from moj_daily_list_s
		published_ts	timestamp with time zone	directly sourced from moj_daily_list_s.c_timestamp Nullable
■		start_dt	date	directly sourced from moj_daily_list_s.c_start_date Nullable
		end_dt	date	directly sourced from moj_daily_list_s.c_end_date Nullable
		daily_list_id_s	character varying	directly sourced from moj_daily_list_s Nullable
		daily_list_source	character varying	directly sourced from moj_daily_list_s Nullable
■		daily_list_content_json	character varying	Nullable
▤		daily_list_content_xml	character varying	Nullable
		version_label	character varying(32)	inherited from dm_sysobject_r, for r_object_type of moj_daily_list Nullable
▤		created_ts	timestamp with time zone	

	Name	Data type	Description / Attributes
■	created_by	integer	References: darts.user_account
■	last_modified_ts	timestamp with time zone	
	last_modified_by	integer	References: darts.user_account

	Table	Join	Title / Name / Description
>	darts.courthouse	<pre>darts.daily_listcth_id = darts.courthousecth_id</pre>	daily_list_courthouse_fk
>	darts.user_account	<pre>darts.daily_listcreated_by = darts.user_accountusr_id</pre>	daily_list_created_by_fk
>	darts.user_account	<pre>darts.daily_listlast_modified_by = darts.user_accountusr_id</pre>	daily_list_modified_by_fk

Unique keys

		Name / Description
Ŷ	dal_id	daily_list_pk

5.1.13. Table: darts.defence

Columns

		Name	Data type	Description / Attributes
■	1	dfc_id	integer	primary key of defence
		cas_id	integer	foreign key from court_case References: darts.court_case
■		defence_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
>	darts.court_case	darts.defencecas_id = darts.court_casecas_id	defence_court_case_fk
>	darts.user_account	<pre>darts.defencecreated_by = darts.user_accountusr_id</pre>	defence_created_by_fk
>	darts.user_account	darts.defencelast_modified_by = darts.user_accountusr_id	defence_modified_by_fk

Unique keys

		Name / Description
•	dfc_id	defence_pk

5.1.14. Table: darts.defendant

Columns

		Name	Data type	Description / Attributes
■	1	dfd_id	integer	primary key of defendant
		cas_id	integer	foreign key from court_case References: darts.court_case
■		defendant_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
>	darts.court_case	darts.defendantcas_id = darts.court_casecas_id	defendant_court_case_fk
>	darts.user_account	<pre>darts.defendantcreated_by = darts.user_accountusr_id</pre>	defendant_created_by_fk
>	darts.user_account	<pre>darts.defendantlast_modified_by = darts.user_accountusr_id</pre>	defendant_modified_by_fk

Unique keys

		Name / Description
Ŷ	dfd_id	defendant_pk

5.1.15. Table: darts.device_register corresponds to tbl_moj_node from legacy

		-		
		Name	Data type	Description / Attributes
■	1	node_id	integer	primary key of device_register
■		ctr_id	integer	foreign key from moj_courtroom, legacy stored courthouse and courtroon un-normalised References: darts.courtroom
■		device_type	character varying	Default : 'DAR'::character varying
■		hostname	character varying	
■		ip_address	character varying	
■		mac_address	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
目		last_modified_by	integer	References: darts.user_account

	Table	Join	Title / Name / Description
-	darts.courtroom	darts.device_registerctr_id = darts.courtroomctr_id	device_register_courtroom_fk
—	darts.user_account	darts.device_registercreated_by = darts.user_accountusr_id	device_register_created_by_fk
\rightarrow	darts.user_account	darts.device_registerlast_modified_by = darts.user_accountusr_id	device_register_modified_by_fk

Unique keys

		Name / Description
9	node_id	device_register_pk

5.1.16. Table: darts.event

COII				
		Name	Data type	Description / Attributes
▤	1	eve_id	integer	primary key of moj_event
■		ctr_id	integer	foreign key from moj_courtroom Nullable References: darts.courtroom
■		evh_id	integer	foreign key for the moj_event_handler table Nullable References: darts.event_handler
		event_object_id	character varying(16)	internal Documentum primary key from moj_event_s Nullable
		event_id	integer	directly sourced from moj_event_s Nullable
		event_name	character varying	inherited from dm_sysobect_s.object_name Nullable
■		event_text	character varying	inherited from moj_annotation_s.c_text Nullable
■		event_ts	timestamp with time zone	inherited from moj_annotation_s Nullable
■		case_number	character varying(32)[])	Nullable
B		message_id	character varying	no migration element, records the id of the message that gave rise to this event Nullable
■		is_log_entry	boolean	
		version_label	character varying(32)	inherited from dm_sysobject_r, for r_object_type of moj_event Nullable
		created_ts	timestamp with time zone	
		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
		last_modified_by	integer	References: darts.user_account

	Table	Join	Title / Name / Description
-	darts.courtroom	<pre>darts.eventctr_id = darts.courtroomctr_id</pre>	event_courtroom_fk
-	darts.event_handler	<pre>darts.eventevh_id = darts.event_handlerevh_id</pre>	event_event_handler_fk
\rightarrow	darts.user_account	<pre>darts.eventcreated_by = darts.user_accountusr_id</pre>	event_created_by_fk
-	darts.user_account	darts.eventlast_modified_by = darts.user_accountusr_id	event_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
-	darts.hearing_event_ae	<pre>darts.eventeve_id = darts.hearing_event_aeeve_id</pre>	hearing_event_ae_event_fk

Unique keys

		Name / Description
Ŷ	eve_id	event_pk

5.1.17. Table: darts.event_handler

content will be derived from TBL_MOJ_DOC_HANDLER in the legacy database, but currently has no primary key and 6 fully duplicated rows

Columns

		Name	Data type	Description / Attributes		
目	1	evh_id	integer	primary key of moj_event_type		
■		event_type	character varying	directly sourced from doc_type		
B		event_sub_type	character varying	directly sourced from doc_sub_type Nullable		
▤		event_name	character varying	directly sourced from event_name		
■		handler	character varying	directly sourced from doc_handler Nullable		
目		active	boolean			
目		created_ts	timestamp with time zone			
■		created_by	integer	References: darts.user_account		
▤		last_modified_ts	timestamp with time zone			
目		last_modified_by	integer	References: darts.user_account		

	Table	Join	Title / Name / Description
—	darts.user_account	<pre>darts.event_handlercreated_by = darts.user_accountusr_id</pre>	event_handler_created_by_fk
—	darts.user_account	<pre>darts.event_handlerlast_modified_by = darts.user_accountusr_id</pre>	event_handler_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.court_case	darts.event_handlerevh_id = darts.court_caseevh_id	court_case_event_handler_fk
\rightarrow	darts.event	darts.event_handlerevh_id = darts.eventevh_id	event_event_handler_fk

Unique keys

		Name / Description
?	evh_id	event_handler_pk

5.1.18. Table: darts.external_location_type

used to record acceptable external locations, found in external_object_directory

Columns

		Name	Data type	Description / Attributes
■	1	elt_id	integer	
■		elt_description	character varying	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	

Linked from

	Table	Join	Title / Name / Description
_	darts.external_object_directory	darts.external_location_typeelt_id = darts.external_object_directoryelt_id	eod_external_location_type_fk

Unique keys

		Name / Description
P	elt_id	external_location_type_pk

5.1.19. Table: darts.external_object_directory

COI	Columns					
		Name	Data type	Description / Attributes		
■	1	eod_id	integer	primary key of external_object_directory		
■		med_id	integer	foreign key from moj_media Nullable References: darts.media		
■		tra_id	integer	foreign key from moj_transcription Nullable References: darts.transcription		
■		ann_id	integer	foreign key from annotation Nullable References: darts.annotation		
■		ods_id	integer	References: darts.object_directory_status		

	Name	Data type	Description / Attributes
■	elt_id	integer	foreign key from external_location_type References: darts.external_location_type
▤	external_location	uuid	
▤	external_file_id	character varying	Nullable
▤	external_record_id	character varying	Nullable
▤	checksum	character varying	Nullable
■	transfer_attempts	integer	Nullable
▤	created_ts	timestamp with time zone	
■	created_by	integer	References: darts.user_account
▤	last_modified_ts	timestamp with time zone	
▤	last_modified_by	integer	References: darts.user_account

	Table	Join	Title / Name / Description
—	darts.annotation	darts.external_object_directoryann_id = darts.annotationann_id	eod_annotation_fk
—	darts.external_location_type	darts.external_object_directoryelt_id = darts.external_location_typeelt_id	eod_external_location_type_fk
—	darts.media	darts.external_object_directorymed_id = darts.mediamed_id	eod_media_fk
-	darts.object_directory_status	darts.external_object_directoryods_id = darts.object_directory_statusods_id	eod_object_directory_status_fk
—	darts.transcription	darts.external_object_directorytra_id = darts.transcriptiontra_id	eod_transcription_fk
—	darts.user_account	darts.external_object_directorylast_mo dified_by = darts.user_accountusr_id	eod_modified_by_fk
\rightarrow	darts.user_account	darts.external_object_directorycreated _by = darts.user_accountusr_id	external_object_directory_created_by_fk

Unique keys

		Name / Description
9	eod_id	external_object_directory_pk

5.1.20. Table: darts.external_service_auth_token

		Name	Data type	Description / Attributes
■	1	esa_id	integer	primary key of external_service_auth_token
▤		external_service_userid	character varying	userId used by external services OR requestId user by Audio Request
■		token_type	integer	1=soap token, 2=email link token
■		token	character varying	Encrypted Token
■		expiry_ts	timestamp with time zone	Expiry Date & Time of the Token Nullable
		created_ts	timestamp with time zone	

	Name	Data type	Description / Attributes
■	created_by	integer	References: darts.user_account
■	last_modified_ts	timestamp with time zone	
	last_modified_by	integer	References: darts.user_account

	Table	Join	Title / Name / Description
-	darts.user_account	darts.external_service_auth_tokencreat ed_by = darts.user_accountusr_id	external_service_auth_token_created_by_fk
-	darts.user_account	darts.external_service_auth_token ast_ modified_by = darts.user_accountusr_id	external_service_auth_token_modified_by_fk

Unique keys

		Name / Description
P	esa_id	external_service_auth_token_pk

5.1.21. Table: darts.hearing

Columns

		Name	Data type	Description / Attributes
	1	hea_id	integer	primary key of hearing
	1	cas_id	integer	foreign key from case References: darts.court_case
■	ĵ	ctr_id	integer	foreign key from courtroom References: darts.courtroom
■	1	hearing_date	date	directly sourced from moj_case_r
■		scheduled_start_time	time without time zone	Nullable
■		hearing_is_actual	boolean	
■		judge_hearing_date	character varying	directly sourced from moj_case_r Nullable
■		created_ts	timestamp with time zone	
		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

	Table	Join	Title / Name / Description
>	darts.court_case	<pre>darts.hearingcas_id = darts.court_casecas_id</pre>	hearing_case_fk
>	darts.courtroom	darts.hearingctr_id = darts.courtroomctr_id	hearing_courtroom_fk
>	darts.user_account	<pre>darts.hearingcreated_by = darts.user_accountusr_id</pre>	hearing_created_by_fk
>	darts.user_account	darts.hearinglast_modified_by = darts.user_accountusr_id	hearing_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.hearing_event_ae	darts.hearinghea_id = darts.hearing_event_aehea_id	hearing_event_ae_hearing_fk
\rightarrow	darts.hearing_judge_ae	darts.hearinghea_id = darts.hearing_judge_aehea_id	hearing_judge_ae_hearing_fk
\rightarrow	darts.hearing_media_ae	darts.hearinghea_id = darts.hearing_media_aehea_id	hearing_media_ae_hearing_fk
\rightarrow	darts.media_request	darts.hearinghea_id = darts.media_requesthea_id	media_request_hearing_fk
\rightarrow	darts.transcription	darts.hearinghea_id = darts.transcriptionhea_id	transcription_hearing_fk

Unique keys

		Name / Description	
?	hea_id	hearing_pk	
9	cas_id, ctr_id, hearing_date	hea_cas_ctr_hd_unq	

5.1.22. Table: darts.hearing_event_ae

Columns

	Name	Data type	Description / Attributes
1	hea_id	integer	foreign key from hearing, part of composite natural key References : darts.hearing
1	eve_id	integer	foreign key from event, part of composite natural key References : darts.event

Links to

	Table	Join	Title / Name / Description
-	darts.event	darts.hearing_event_aeeve_id = darts.eventeve_id	hearing_event_ae_event_fk
\rightarrow	darts.hearing	darts.hearing_event_aehea_id = darts.hearinghea_id	hearing_event_ae_hearing_fk

Unique keys

		Name / Description
P	hea_id, eve_id	hearing_event_ae_pk

5.1.23. Table: darts.hearing_judge_ae

		Name	Data type	Description / Attributes
■	1	hea_id	integer	foreign key from case, part of composite natural key and PK References : darts.hearing
■	1	jud_id	integer	foreign key from judge, part of composite natural key and PK References: darts.judge

	Table	Join	Title / Name / Description
-	darts.hearing	darts.hearing_judge_aehea_id = darts.hearinghea_id	hearing_judge_ae_hearing_fk
-	darts.judge	darts.hearing_judge_aejud_id = darts.judgejud_id	hearing_judge_ae_judge_fk

Unique keys

		Name / Description
?	hea_id, jud_id	hearing_judge_ae_pk

5.1.24. Table: darts.hearing_media_ae

Columns

		Name	Data type	Description / Attributes
■	1	hea_id	integer	foreign key from case, part of composite natural key References : darts.hearing
	1	med_id	integer	foreign key from media, part of composite natural key References : darts.media

Links to

	Table	Join	Title / Name / Description
—	darts.hearing	darts.hearing_media_aehea_id = darts.hearinghea_id	hearing_media_ae_hearing_fk
-	darts.media	<pre>darts.hearing_media_aemed_id = darts.mediamed_id</pre>	hearing_media_ae_media_fk

Unique keys

		Name / Description
Ŷ	hea_id, med_id	hearing_media_ae_pk

5.1.25. Table: darts.judge

Columns

		Name	Data type	Description / Attributes
■	1	jud_id	integer	primary key of judge
■	1	judge_name	character varying	
■		created_ts	timestamp with time zone	
目		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
目		last_modified_by	integer	References: darts.user_account

	Table	Join	Title / Name / Description
>	- darts.user_account	darts.judgecreated_by = darts.user_accountusr_id	judge_created_by_fk

		Table	Join	Title / Name / Description
>	-	darts.user_account	<pre>darts.judgelast_modified_by = darts.user_accountusr_id</pre>	judge_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
→	darts.case_judge_ae	darts.judgejud_id = darts.case_judge_aejud_id	case_judge_ae_judge_fk
→	darts.hearing_judge_ae	darts.judgejud_id = darts.hearing_judge_aejud_id	hearing_judge_ae_judge_fk

Unique keys

		Name / Description
P	jud_id	judge_pk
P	judge_name	judge_judge_name_key

5.1.26. Table: darts.media

Columns

		Name	Data type	Description / Attributes		
■	1	med_id	integer	primary key of media		
■		ctr_id	integer	foreign key from courtroom Nullable References: darts.courtroom		
■		media_object_id	character varying(16)	internal Documentum primary key from moj_media_s Nullable		
▤		channel	integer	directly sourced from moj_media_s		
▤		total_channels	integer	directly sourced from moj_media_s		
		reference_id	character varying	directly sourced from moj_media_s Nullable		
▤		start_ts	timestamp with time zone	inherited from moj_case_document_s		
▤		end_ts	timestamp with time zone	inherited from moj_case_document_s		
▤		case_number	character varying(32)[])	Nullable		
■		version_label	character varying(32)	inherited from dm_sysobject_r, for r_object_type of moj_media Nullable		
▤		created_ts	timestamp with time zone			
▤		created_by	integer	References: darts.user_account		
▤		last_modified_ts	timestamp with time zone			
目		last_modified_by	integer	References: darts.user_account		

	Table	Join	Title / Name / Description
\rightarrow	darts.courtroom	darts.mediactr_id = darts.courtroomctr_id	media_courtroom_fk
—	darts.user_account	darts.mediacreated_by = darts.user_accountusr_id	media_created_by_fk

		Table	Join	Title / Name / Description
>	→	darts.user_account	<pre>darts.medialast_modified_by = darts.user_accountusr_id</pre>	media_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.external_object_directory	darts.mediamed_id = darts.external_object_directorymed_id	eod_media_fk
\rightarrow	darts.hearing_media_ae	darts.mediamed_id = darts.hearing_media_aemed_id	hearing_media_ae_media_fk

Unique keys

		Name / Description	
P	med_id	media_pk	

5.1.27. Table: darts.media_request

		Name	Data type	Description / Attributes
	1	mer_id	integer	primary key of media_request
■		hea_id	integer	foreign key of hearing References: darts.hearing
		requestor	integer	requestor of the media request, possibly migrated from moj_transformation_request_s References: darts.user_account
目		current_owner	integer	References: darts.user_account
▤		request_status	character varying	status of the migration request
■		request_type	character varying	
		req_proc_attempts	integer	number of attempts by ATS to process the request Nullable
■		start_ts	timestamp with time zone	start time in the search criteria for request, possibly migrated from moj_cached_media_s or moj_transformation_request_s
		end_ts	timestamp with time zone	end time in the search criteria for request, possibly migrated from moj_cached_media_s or moj_transformation_request_s
▤		last_accessed_ts	timestamp with time zone	Nullable
▤		expiry_ts	timestamp with time zone	Nullable
		output_filename	character varying	filename of the requested media object, possibly migrated from moj_transformation_request_s Nullable
目		output_format	character varying	format of the requested media object, possibly migrated from moj_transformation_s Nullable
■		created_ts	timestamp with time zone	
		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

	Table	Join	Title / Name / Description
>	darts.hearing	darts.media_requesthea_id = darts.hearinghea_id	media_request_hearing_fk
-	darts.user_account	<pre>darts.media_requestcreated_by = darts.user_accountusr_id</pre>	media_request_created_by_fk
-	darts.user_account	darts.media_requestlast_modified_by = darts.user_accountusr_id	media_request_modified_by_fk
>	darts.user_account	darts.media_requestrequestor = darts.user_accountusr_id	media_request_requestor_fk
>	darts.user_account	darts.media_requestcurrent_owner = darts.user_accountusr_id	media_request_current_owner_fk

Linked from

	Table	Join	Title / Name / Description
_	darts.transient_object_directory	darts.media_requestmer_id = darts.transient_object_directorymer_id	tod_media_request_fk

Unique keys

		Name / Description
P	mer_id	media_request_pk

5.1.28. Table: darts.notification

Columns

		Name	Data type	Description / Attributes
	1	not_id	integer	primary key of notification
■		cas_id	integer	foreign key to case References: darts.court_case
		notification_event	character varying	event giving rise to the need for outgoing notification
		notification_status	character varying	status of the notification, expected to be one of [O]pen, [P]rocessing, [S]end, [F]ailed
		email_address	character varying	recipient of the notification
		send_attempts	integer	number of outgoing requests to gov.uk Nullable
		template_values	character varying	any extra fields not already covered or inferred from the case, in JSON format Nullable
■		created_ts	timestamp with time zone	
		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
		last_modified_by	integer	References: darts.user_account

	Table	Join	Title / Name / Description
>	- I darts court case	<pre>darts.notificationcas_id = darts.court_casecas_id</pre>	notification_case_fk

	Table	Join	Title / Name / Description
\rightarrow	darts.user_account	<pre>darts.notificationcreated_by = darts.user_accountusr_id</pre>	notification_created_by_fk
-	darts.user_account	<pre>darts.notificationlast_modified_by = darts.user_accountusr_id</pre>	notification_modified_by_fk

Unique keys

		Name / Description
9	not_id	notification_pk

5.1.29. Table: darts.object_directory_status

used to record acceptable statuses found in [external/transient]_object_directory

Columns

		Name	Data type	Description / Attributes
■	1	ods_id	integer	
■		ods_description	character varying	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
—	darts.user_account	darts.object_directory_statuscreated_b y = darts.user_accountusr_id	object_directory_status_created_by_fk
—	darts.user_account	darts.object_directory_status ast_modified_by = darts.user_accountusr_id	object_directory_status_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.external_object_directory	darts.object_directory_statusods_id = darts.external_object_directoryods_id	eod_object_directory_status_fk
\rightarrow	darts.transient_object_directory	darts.object_directory_statusods_id = darts.transient_object_directoryods_id	tod_object_directory_status_fk

Unique keys

		Name / Description
?	ods_id	object_directory_status_pk

5.1.30. Table: darts.prosecutor

		Name	Data type	Description / Attributes
目	1	prn_id	integer	primary key of prosecutor
■		cas_id	integer	foreign key from court_case References: darts.court_case

	Name	Data type	Description / Attributes
■	prosecutor_name	character varying	
■	created_ts	timestamp with time zone	
■	created_by	integer	References: darts.user_account
■	last_modified_ts	timestamp with time zone	
■	last_modified_by	integer	References: darts.user_account

	Table	Join	Title / Name / Description
>	darts.court_case	darts.prosecutorcas_id = darts.court_casecas_id	prosecutor_court_case_fk
>	darts.user_account	<pre>darts.prosecutorcreated_by = darts.user_accountusr_id</pre>	prosecutor_created_by_fk
>	darts.user_account	<pre>darts.prosecutorlast_modified_by = darts.user_accountusr_id</pre>	prosecutor_modified_by_fk

Unique keys

		Name / Description
?	prn_id	prosecutor_pk

5.1.31. Table: darts.region

Columns

		Name	Data type	Description / Attributes
■	1	reg_id	integer	
■		region_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
≡		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.user_account	<pre>darts.regioncreated_by = darts.user_accountusr_id</pre>	region_created_by_fk
-	darts.user_account	<pre>darts.regionlast_modified_by = darts.user_accountusr_id</pre>	region_modified_by_fk

Linked from

		Table	Join	Title / Name / Description
-	~	darts.courthouse_region_ae	darts.regionreg_id = darts.courthouse_region_aereg_id	courthouse_region_region_fk

Unique keys

		Name / Description
?	reg_id	region_pk

5.1.32. Table: darts.report

Columns

		Name	Data type	Description / Attributes
■	1	rep_id	integer	primary key of report
■		report_object_id	character varying(16)	internal Documentum primary key from moj_report_s Nullable
■		name	character varying	directly sourced from moj_report_s Nullable
■		subject	character varying	directly sourced from moj_report_s Nullable
■		report_text	character varying	directly sourced from moj_report_s Nullable
■		query	character varying	directly sourced from moj_report_s Nullable
■		recipients	character varying	directly sourced from moj_report_s Nullable
■		version_label	character varying(32)	inherited from dm_sysobject_r, for r_object_type of moj_report Nullable
■		created_ts	timestamp with time zone	
目		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
▤		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
—	darts.user_account	<pre>darts.reportcreated_by = darts.user_accountusr_id</pre>	report_created_by_fk
—	darts.user_account	darts.reportlast_modified_by = darts.user_accountusr_id	report_modified_by_fk

Unique keys

		Name / Description
Ŷ	rep_id	report_pk

5.1.33. Table: darts.retention_policy

	201d THIS				
		Name	Data type	Description / Attributes	
■	1	rtp_id	integer	primary key of retention_policy	
■		policy_name	character varying		
■		retention_period	integer		
■		created_ts	timestamp with time zone		
		created_by	integer	References: darts.user_account	
■		last_modified_ts	timestamp with time zone		

	Name	Data type	Description / Attributes
■	last_modified_by	integer	References: darts.user_account

		Table	Join	Title / Name / Description
>	—	darts.user_account	darts.retention_policycreated_by = darts.user_accountusr_id	retention_policy_created_by_fk
>	—	darts.user_account	darts.retention_policylast_modified_by = darts.user_accountusr_id	retention_policy_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
-	+ Loarts case retention	<pre>darts.retention_policyrtp_id = darts.case_retentionrtp_id</pre>	case_retention_retention_policy_fk

Unique keys

		Name / Description
?	rtp_id	retention_policy_pk

5.1.34. Table: darts.security_group

migration columns all sourced directly from dm_group_s, additional attributes may be required from dm_user_s, but data only where dm_user_s.r_is_group=1

Columns

		Name	Data type	Description / Attributes
■	1	grp_id	integer	primary key of security_group
■		rol_id	integer	References: darts.security_role
		r_dm_group_s_object_id	character varying(16)	internal Documentum primary key from dm_group_s Nullable
▤		group_name	character varying	
■		is_private	boolean	Nullable
■		description	character varying	Nullable
		r_modify_date	timestamp with time zone	Nullable
		group_class	character varying	Nullable
■		group_global_unique_id	character varying	Nullable
■		group_display_name	character varying	Nullable
		created_ts	timestamp with time zone	
		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
▤		last_modified_by	integer	References: darts.user_account

		Table	Join	Title / Name / Description
>	→	darts.security_role	<pre>darts.security_grouprol_id = darts.security_rolerol_id</pre>	security_group_role_fk

	Table	Join	Title / Name / Description
—	darts.user_account	darts.security_groupcreated_by = darts.user_accountusr_id	security_group_created_by_fk
→	darts.user_account	darts.security_grouplast_modified_by = darts.user_accountusr_id	security_group_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.security_group_courthouse_ae	darts.security_groupgrp_id = darts.security_group_courthouse_aegr p_id	security_group_courthouse_group_fk
\rightarrow	darts.security_group_user_account_ ae	darts.security_groupgrp_id = darts.security_group_user_account_ae grp_id	security_group_user_account_ae_group_fk

Unique keys

		Name / Description
?	grp_id	security_group_pk

5.1.35. Table: darts.security_group_courthouse_ae

Columns

		Name	Data type	Description / Attributes
■	1	grp_id	integer	References: darts.security_group
■	1	cth_id	integer	References: darts.courthouse

Links to

	Table	Join	Title / Name / Description
-	darts.courthouse	darts.security_group_courthouse_aect h_id = darts.courthousecth_id	security_group_courthouse_courthouse_fk
-	darts.security_group	darts.security_group_courthouse_aegr p_id = darts.security_groupgrp_id	security_group_courthouse_group_fk

Unique keys

		Name / Description
Ŷ	grp_id, cth_id	security_group_courthouse_ae_pk

5.1.36. Table: darts.security_group_user_account_ae

is the associative entity mapping users to groups, content will be defined by dm_group_r

		Name	Data type	Description / Attributes
■	1	usr_id	integer	foreign key from user_account References: darts.user_account
■	1	grp_id	integer	foreign key from security_group References: darts.security_group

		Table	Join	Title / Name / Description
>	⊢ d	darts.security_group	darts.security_group_user_account_ae grp_id = darts.security_groupgrp_id	security_group_user_account_ae_group_fk
>	⊢ d	darts.user_account	darts.security_group_user_account_ae usr_id = darts.user_accountusr_id	security_group_user_account_ae_user_fk

Unique keys

		Name / Description
?	usr_id, grp_id	security_group_user_account_ae_pk

5.1.37. Table: darts.security_permission

Columns

		Name	Data type	Description / Attributes
■	1	per_id	integer	
■		permission_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.user_account	darts.security_permissioncreated_by = darts.user_accountusr_id	security_permission_created_by_fk
-	darts.user_account	darts.security_permissionlast_modified _by = darts.user_accountusr_id	security_permission_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
-	darts.security_role_permission_ae	darts.security_permissionper_id = darts.security_role_permission_aeper_i d	security_role_permission_permission_fk

Unique keys

		Name / Description
Ŷ	per_id	security_permission_pk

5.1.38. Table: darts.security_role

		Name	Data type	Description / Attributes
▤	1	rol_id	integer	
■		role_name	character varying	
目		created_ts	timestamp with time zone	

	Name	Data type	Description / Attributes
■	created_by	integer	References: darts.user_account
■	last_modified_ts	timestamp with time zone	
■	last_modified_by	integer	References: darts.user_account

	Table	Join	Title / Name / Description
-	darts.user_account	darts.security_rolecreated_by = darts.user_accountusr_id	security_role_created_by_fk
>	darts.user_account	darts.security_rolelast_modified_by = darts.user_accountusr_id	security_role_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.security_group	<pre>darts.security_rolerol_id = darts.security_grouprol_id</pre>	security_group_role_fk
→	darts.security_role_permission_ae	<pre>darts.security_rolerol_id = darts.security_role_permission_aerol_id</pre>	security_role_permission_ae_role_fk

Unique keys

		Name / Description
Ŷ	rol_id	security_role_pk

5.1.39. Table: darts.security_role_permission_ae

Columns

		Name	Data type	Description / Attributes
■	1	rol_id	integer	References: darts.security_role
■	1	per_id	integer	References: darts.security_permission

Links to

	Table	Join	Title / Name / Description
—	darts.security_permission	darts.security_role_permission_aeper_i d = darts.security_permissionper_id	security_role_permission_permission_fk
—	darts.security_role	darts.security_role_permission_aerol_id = darts.security_rolerol_id	security_role_permission_ae_role_fk

Unique keys

		Name / Description
?	rol_id, per_id	security_role_permission_ae_pk

5.1.40. Table: darts.transcription

		Name	Data type	Description / Attributes
▤	1	tra_id	integer	primary key of transcription

	Name	Data type	Description / Attributes
	cas_id	integer	foreign key from case References: darts.court_case
	trt_id	integer	foreign key to transcription_type, sourced from moj_transcription_s.c_type References: darts.transcription_type
■	ctr_id	integer	foreign key from courtroom Nullable References: darts.courtroom
■	tru_id	integer	foreign key from transcription_urgency Nullable References: darts.transcription_urgency
	hea_id	integer	Nullable References: darts.hearing
	transcription_object_id	character varying(16)	internal Documentum primary key from moj_transcription_s Nullable
	company	character varying	directly sourced from moj_transcription_s Nullable
■	requestor	character varying	directly sourced from moj_transcription_s Nullable
■	hearing_date	timestamp with time zone	directly sourced from moj_transcription_s Nullable
■	start_ts	timestamp with time zone	inherited from moj_case_document_s Nullable
■	end_ts	timestamp with time zone	inherited from moj_case_document_s Nullable
	version_label	character varying(32)	inherited from dm_sysobject_r, for r_object_type of moj_transcription Nullable
■	created_ts	timestamp with time zone	
▤	created_by	integer	References: darts.user_account
■	last_modified_ts	timestamp with time zone	
▤	last_modified_by	integer	References: darts.user_account

	Table	Join	Title / Name / Description			
\rightarrow	darts.court_case	darts.transcriptioncas_id = darts.court_casecas_id	transcription_case_fk			
\rightarrow	darts.courtroom	darts.transcriptionctr_id = darts.courtroomctr_id	transcription_courtroom_fk			
—	darts.hearing	darts.transcriptionhea_id = darts.hearinghea_id	transcription_hearing_fk			
\rightarrow	darts.transcription_type	darts.transcriptiontrt_id = darts.transcription_typetrt_id	transcription_transcription_type_fk			
\rightarrow	darts.transcription_urgency	darts.transcriptiontru_id = darts.transcription_urgencytru_id	transcription_urgency_fk			
\rightarrow	darts.user_account	darts.transcriptionlast_modified_by = darts.user_accountusr_id	transcription_last_modified_by_fk			
\rightarrow	darts.user_account	darts.transcriptioncreated_by = darts.user_accountusr_id	transcription_created_by_fk			

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.external_object_directory	darts.transcriptiontra_id = darts.external_object_directorytra_id	eod_transcription_fk
\rightarrow	darts.transcription_comment	darts.transcriptiontra_id = darts.transcription_commenttra_id	transcription_comment_transcription_fk
\rightarrow	darts.transcription_workflow	darts.transcriptiontra_id = darts.transcription_workflowtra_id	transcription_workflow_transcription_fk

Unique keys

		Name / Description
Ŷ	tra_id	transcription_pk

5.1.41. Table: darts.transcription_comment

Columns

		Name	Data type	Description / Attributes
■	1	trc_id	integer	primary key of transcription_comment
■		tra_id	integer	foreign key from transcription Nullable References: darts.transcription
■		transcription_object_id	character varying(16)	internal Documentum id from moj_transcription_s acting as foreign key Nullable
■		transcription_comment	character varying	directly sourced from moj_transcription_r Nullable
		comment_ts	timestamp with time zone	Nullable
■		author	integer	Nullable References: darts.user_account
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
>	darts.transcription	darts.transcription_commenttra_id = darts.transcriptiontra_id	transcription_comment_transcription_fk
>	darts.user_account	darts.transcription_commentauthor = darts.user_accountusr_id	transcription_comment_author_fk
>	darts.user_account	darts.transcription_commentcreated_b y = darts.user_accountusr_id	transcription_comment_created_by_fk
-	darts.user_account	darts.transcription_commentlast_modified_by = darts.user_accountusr_id	transcription_comment_modified_by_fk

		Name / Description
?	trc_id	transcription_comment_pk

5.1.42. Table: darts.transcription_status

standing data table

Columns

		Name	Data type	Description / Attributes
■	1	trs_id	integer	primary key of transcription_status
■		status_type	character varying	

Linked from

	Table	Join	Title / Name / Description
-	darts.transcription_workflow	darts.transcription_statustrs_id = darts.transcription_workflowtrs_id	transcription_workflow_transcription_status_fk

Unique keys

		Name / Description
Ŷ	trs_id	transcription_status_pk

5.1.43. Table: darts.transcription_type

standing data table, migrated from tbl_moj_transcription_type

Columns

		Name	Data type	Description / Attributes
■	1	trt_id	integer	primary key, but not sequence generated
■		description	character varying	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.user_account	darts.transcription_typecreated_by = darts.user_accountusr_id	transcription_type_created_by_fk
-	darts.user_account	darts.transcription_typelast_modified_ by = darts.user_accountusr_id	transcription_type_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
_	darts.transcription	<pre>darts.transcription_typetrt_id = darts.transcriptiontrt_id</pre>	transcription_transcription_type_fk

		Name / Description
9	trt_id	transcription_type_pk

5.1.44. Table: darts.transcription_urgency

will be migrated from tbl_moj_urgency

Columns

		Name	Data type	Description / Attributes
■	1	tru_id	integer	inherited from tbl_moj_urgency.urgency_id
		description	character varying	inherited from tbl_moj_urgency.description Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.user_account	darts.transcription_urgencycreated_by = darts.user_accountusr_id	transcription_urgency_created_by_fk
-	darts.user_account	darts.transcription_urgencylast_modified_by = darts.user_accountusr_id	transcription_urgency_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
-	darts.transcription	darts.transcription_urgencytru_id = darts.transcriptiontru_id	transcription_urgency_fk

Unique keys

		Name / Description
P	tru_id	transcription_urgency_pk

5.1.45. Table: darts.transcription_workflow

		Name	Data type	Description / Attributes
■	1	trw_id	integer	
目		tra_id	integer	References: darts.transcription
目		trs_id	integer	References: darts.transcription_status
■		workflow_comment	character varying	Nullable
■		created_ts	timestamp with time zone	
目		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

	Table	Join	Title / Name / Description
-	darts.transcription	darts.transcription_workflowtra_id = darts.transcriptiontra_id	transcription_workflow_transcription_fk
-	darts.transcription_status	darts.transcription_workflowtrs_id = darts.transcription_statustrs_id	transcription_workflow_transcription_status_fk
-	darts.user_account	darts.transcription_workflowcreated_b y = darts.user_accountusr_id	transcription_workflow_created_by_fk
-	darts.user_account	darts.transcription_workflowlast_modified_by = darts.user_accountusr_id	transcription_workflow_last_modified_by_fk

Unique keys

		Name / Description
Ŷ	trw_id	transcription_workflow_pk

5.1.46. Table: darts.transient_object_directory

Columns

		Name	Data type	Description / Attributes
■	1	tod_id	integer	
■		mer_id	integer	References: darts.media_request
■		ods_id	integer	References: darts.object_directory_status
目		external_location	uuid	
■		checksum	character varying	Nullable
■		transfer_attempts	integer	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.media_request	darts.transient_object_directorymer_id = darts.media_requestmer_id	tod_media_request_fk
-	darts.object_directory_status	darts.transient_object_directoryods_id = darts.object_directory_statusods_id	tod_object_directory_status_fk
-	darts.user_account	darts.transient_object_directorylast_m odified_by = darts.user_accountusr_id	tod_modified_by_fk
\rightarrow	darts.user_account	darts.transient_object_directorycreated _by = darts.user_accountusr_id	transient_object_directory_created_by_fk

		Name / Description
?	tod_id	transient_object_directory_pk

5.1.47. Table: darts.user_account

migration columns all sourced directly from dm_user_s, but only for rows where r_is_group = 0

Columns

		Name	Data type	Description / Attributes
■	1	usr_id	integer	primary key of user_account
		dm_user_s_object_id	character varying(16)	internal Documentum primary key from dm_user_s Nullable
▤		user_name	character varying	Nullable
■		user_email_address	character varying	Nullable
■		description	character varying	Nullable
目		user_state	integer	Nullable
■		last_login_ts	timestamp with time zone	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	

Linked from

	inked from					
	Table	Join	Title / Name / Description			
\rightarrow	darts.annotation	darts.user_accountusr_id = darts.annotationcreated_by	annotation_created_by_fk			
\rightarrow	darts.annotation	darts.user_accountusr_id = darts.annotationlast_modified_by	annotation_modified_by_fk			
\rightarrow	darts.audit	darts.user_accountusr_id = darts.auditusr_id	audit_user_account_fk			
\rightarrow	darts.audit	darts.user_accountusr_id = darts.auditcreated_by	audit_created_by_fk			
\rightarrow	darts.audit	darts.user_accountusr_id = darts.auditlast_modified_by	audit_modified_by_fk			
\rightarrow	darts.audit_activity	darts.user_accountusr_id = darts.audit_activitycreated_by	audit_activity_created_by_fk			
\rightarrow	darts.audit_activity	darts.user_accountusr_id = darts.audit_activitylast_modified_by	audit_activity_modified_by_fk			
\rightarrow	darts.automated_task	darts.user_accountusr_id = darts.automated_taskcreated_by	automated_task_created_by_fk			
\rightarrow	darts.automated_task	darts.user_accountusr_id = darts.automated_tasklast_modified_by	automated_task_modified_by_fk			
\rightarrow	darts.case_retention	darts.user_accountusr_id = darts.case_retentioncreated_by	case_retention_created_by_fk			
\rightarrow	darts.case_retention	darts.user_accountusr_id = darts.case_retentionlast_modified_by	case_retention_modified_by_fk			
\rightarrow	darts.case_retention_event	darts.user_accountusr_id = darts.case_retention_eventcreated_by	case_retention_event_created_by_fk			
\rightarrow	darts.case_retention_event	darts.user_accountusr_id = darts.case_retention_eventlast_modifie d_by	case_retention_event_modified_by_fk			

	Table	Join	Title / Name / Description
\rightarrow	darts.court_case	darts.user_accountusr_id = darts.court_casecreated_by	court_case_created_by_fk
\rightarrow	darts.court_case	darts.user_accountusr_id = darts.court_caselast_modified_by	court_case_modified_by_fk
\rightarrow	darts.courthouse	darts.user_accountusr_id = darts.courthousecreated_by	courthouse_created_by_fk
\rightarrow	darts.courthouse	darts.user_accountusr_id = darts.courthouselast_modified_by	courthouse_modified_by_fk
\rightarrow	darts.courtroom	darts.user_accountusr_id = darts.courtroomcreated_by	courtroom_created_by_fk
\rightarrow	darts.courtroom	darts.user_accountusr_id = darts.courtroomlast_modified_by	courtroom_modified_by_fk
\rightarrow	darts.daily_list	darts.user_accountusr_id = darts.daily_listcreated_by	daily_list_created_by_fk
\rightarrow	darts.daily_list	darts.user_accountusr_id = darts.daily_listlast_modified_by	daily_list_modified_by_fk
\rightarrow	darts.defence	darts.user_accountusr_id = darts.defencecreated_by	defence_created_by_fk
\rightarrow	darts.defence	darts.user_accountusr_id = darts.defencelast_modified_by	defence_modified_by_fk
\rightarrow	darts.defendant	darts.user_accountusr_id = darts.defendantcreated_by	defendant_created_by_fk
\rightarrow	darts.defendant	darts.user_accountusr_id = darts.defendantlast_modified_by	defendant_modified_by_fk
\rightarrow	darts.device_register	darts.user_accountusr_id = darts.device_registercreated_by	device_register_created_by_fk
\rightarrow	darts.device_register	darts.user_accountusr_id = darts.device_registerlast_modified_by	device_register_modified_by_fk
→	darts.event	darts.user_accountusr_id = darts.eventcreated_by	event_created_by_fk
→	darts.event	darts.user_accountusr_id = darts.eventlast_modified_by	event_modified_by_fk
→	darts.event_handler	darts.user_accountusr_id = darts.event_handlercreated_by	event_handler_created_by_fk
→	darts.event_handler	darts.user_accountusr_id = darts.event_handlerlast_modified_by	event_handler_modified_by_fk
\rightarrow	darts.external_object_directory	darts.user_accountusr_id = darts.external_object_directorylast_mo dified_by	eod_modified_by_fk
\rightarrow	darts.external_object_directory	<pre>darts.user_accountusr_id = darts.external_object_directorycreated _by</pre>	external_object_directory_created_by_fk
→	darts.external_service_auth_token	darts.user_accountusr_id = darts.external_service_auth_tokencreat ed_by	external_service_auth_token_created_by_fk
\rightarrow	darts.external_service_auth_token	darts.user_accountusr_id = darts.external_service_auth_tokenlast_modified_by	external_service_auth_token_modified_by_fk
\rightarrow	darts.hearing	darts.user_accountusr_id = darts.hearingcreated_by	hearing_created_by_fk

	Table	Join	Title / Name / Description
\rightarrow	darts.hearing	darts.user_accountusr_id = darts.hearinglast_modified_by	hearing_modified_by_fk
\rightarrow	darts.judge	darts.user_accountusr_id = darts.judgecreated_by	judge_created_by_fk
\rightarrow	darts.judge	darts.user_accountusr_id = darts.judgelast_modified_by	judge_modified_by_fk
\rightarrow	darts.media	darts.user_accountusr_id = darts.mediacreated_by	media_created_by_fk
\rightarrow	darts.media	darts.user_accountusr_id = darts.medialast_modified_by	media_modified_by_fk
\rightarrow	darts.media_request	darts.user_accountusr_id = darts.media_requestcreated_by	media_request_created_by_fk
\rightarrow	darts.media_request	darts.user_accountusr_id = darts.media_requestlast_modified_by	media_request_modified_by_fk
\rightarrow	darts.media_request	darts.user_accountusr_id = darts.media_requestrequestor	media_request_requestor_fk
\rightarrow	darts.media_request	darts.user_accountusr_id = darts.media_requestcurrent_owner	media_request_current_owner_fk
\rightarrow	darts.notification	darts.user_accountusr_id = darts.notificationcreated_by	notification_created_by_fk
\rightarrow	darts.notification	darts.user_accountusr_id = darts.notificationlast_modified_by	notification_modified_by_fk
→	darts.object_directory_status	darts.user_accountusr_id = darts.object_directory_statuscreated_b y	object_directory_status_created_by_fk
\rightarrow	darts.object_directory_status	darts.user_accountusr_id = darts.object_directory_statuslast_modified_by	object_directory_status_modified_by_fk
\rightarrow	darts.prosecutor	darts.user_accountusr_id = darts.prosecutorcreated_by	prosecutor_created_by_fk
\rightarrow	darts.prosecutor	darts.user_accountusr_id = darts.prosecutorlast_modified_by	prosecutor_modified_by_fk
\rightarrow	darts.region	darts.user_accountusr_id = darts.regioncreated_by	region_created_by_fk
\rightarrow	darts.region	darts.user_accountusr_id = darts.regionlast_modified_by	region_modified_by_fk
\rightarrow	darts.report	darts.user_accountusr_id = darts.reportcreated_by	report_created_by_fk
\rightarrow	darts.report	darts.user_accountusr_id = darts.reportlast_modified_by	report_modified_by_fk
\rightarrow	darts.retention_policy	darts.user_accountusr_id = darts.retention_policycreated_by	retention_policy_created_by_fk
\rightarrow	darts.retention_policy	darts.user_accountusr_id = darts.retention_policylast_modified_by	retention_policy_modified_by_fk
\rightarrow	darts.security_group	darts.user_accountusr_id = darts.security_groupcreated_by	security_group_created_by_fk
\rightarrow	darts.security_group	darts.user_accountusr_id = darts.security_grouplast_modified_by	security_group_modified_by_fk

	Table	Join	Title / Name / Description
\rightarrow	darts.security_group_user_account_ ae	darts.user_accountusr_id = darts.security_group_user_account_ae usr_id	security_group_user_account_ae_user_fk
\rightarrow	darts.security_permission	darts.user_accountusr_id = darts.security_permissioncreated_by	security_permission_created_by_fk
\rightarrow	darts.security_permission	darts.user_accountusr_id = darts.security_permissionlast_modified _by	security_permission_modified_by_fk
\rightarrow	darts.security_role	darts.user_accountusr_id = darts.security_rolecreated_by	security_role_created_by_fk
\rightarrow	darts.security_role	darts.user_accountusr_id = darts.security_rolelast_modified_by	security_role_modified_by_fk
\rightarrow	darts.transcription	darts.user_accountusr_id = darts.transcriptionlast_modified_by	transcription_last_modified_by_fk
\rightarrow	darts.transcription	darts.user_accountusr_id = darts.transcriptioncreated_by	transcription_created_by_fk
\rightarrow	darts.transcription_comment	darts.user_accountusr_id = darts.transcription_commentauthor	transcription_comment_author_fk
\rightarrow	darts.transcription_comment	darts.user_accountusr_id = darts.transcription_commentcreated_b y	transcription_comment_created_by_fk
\rightarrow	darts.transcription_comment	darts.user_accountusr_id = darts.transcription_commentlast_modified_by	transcription_comment_modified_by_fk
\rightarrow	darts.transcription_type	darts.user_accountusr_id = darts.transcription_typecreated_by	transcription_type_created_by_fk
\rightarrow	darts.transcription_type	<pre>darts.user_accountusr_id = darts.transcription_typelast_modified_ by</pre>	transcription_type_modified_by_fk
\rightarrow	darts.transcription_urgency	darts.user_accountusr_id = darts.transcription_urgencycreated_by	transcription_urgency_created_by_fk
\rightarrow	darts.transcription_urgency	darts.user_accountusr_id = darts.transcription_urgencylast_modified_by	transcription_urgency_modified_by_fk
\rightarrow	darts.transcription_workflow	darts.user_accountusr_id = darts.transcription_workflowcreated_b y	transcription_workflow_created_by_fk
\rightarrow	darts.transcription_workflow	darts.user_accountusr_id = darts.transcription_workflowlast_modified_by	transcription_workflow_last_modified_by_fk
→	darts.transient_object_directory	darts.user_accountusr_id = darts.transient_object_directorylast_m odified_by	tod_modified_by_fk
→	darts.transient_object_directory	darts.user_accountusr_id = darts.transient_object_directorycreated _by	transient_object_directory_created_by_fk

		Name / Description
?	usr_id	user_account_pk