CGI UK

postgres_app_v72_5_sec_v24_ret_v20_osr_v8 @localhost Data Dictionary

04/03/2025

Table of contents

postgres@localhost	9
1. darts courtroom_omitted	
2. dart_security	11
3. darts_retention	
4. darts_annotation	14
5. darts_court_case	15
6. darts_courthouse	
7. darts_media	17
8. darts_transcription	18
9. darts_tables_only	19
10. darts_obj_state_record	20
11. darts_arm_rpo	21
12. Other	22
12.1. Tables	22
12.1.1. Table: darts.annotation	22
12.1.2. Table: darts.annotation_document	24
12.1.3. Table: darts.arm_automated_task	26
12.1.4. Table: darts.arm_rpo_execution_detail	27
12.1.5. Table: darts.arm_rpo_state	28
12.1.6. Table: darts.arm_rpo_status	29
12.1.7. Table: darts.audit	30
12.1.8. Table: darts.audit_activity	31
12.1.9. Table: darts.audit_heritage	32
12.1.10. Table: darts.automated_task	34
12.1.11. Table: darts.case_document	35
12.1.12. Table: darts.case_judge_ae	36
12.1.13. Table: darts.case_management_retention	37
12.1.14. Table: darts.case_overflow	38
12.1.15. Table: darts.case_retention	39
12.1.16. Table: darts.case_retention_audit_heritage	40
12.1.17. Table: darts.case_retention_extra	42
12.1.18. Table: darts.case_transcription_ae	44
12.1.19. Table: darts.court_case	45
12.1.20. Table: darts.courthouse	48
12.1.21. Table: darts.courthouse_region_ae	49
12.1.22. Table: darts.courtroom	50
12.1.23. Table: darts.daily_list	51
12.1.24. Table: darts.data_anonymisation	53
12.1.25. Table: darts.defence	54
12.1.26. Table: darts.defendant	55
12.1.27. Table: darts.event	56
12.1.28. Table: darts.event_handler	58
12.1.29. Table: darts.event_linked_case	59
12.1.30. Table: darts.external_location_type	60
12.1.31. Table: darts.external_object_directory	61

12.1.32.	Table: darts.external_service_auth_token	63
12.1.33.	Table: darts.extobjdir_process_detail	64
12.1.34.	Table: darts.hearing	65
12.1.35.	Table: darts.hearing_annotation_ae	67
12.1.36.	Table: darts.hearing_event_ae	68
12.1.37.	Table: darts.hearing_judge_ae	69
12.1.38.	Table: darts.hearing_media_ae	70
12.1.39.	Table: darts.hearing_transcription_ae	71
12.1.40.	Table: darts.judge	72
12.1.41.	Table: darts.media	73
12.1.42.	Table: darts.media_linked_case	75
12.1.43.	Table: darts.media_request	76
12.1.44.	Table: darts.node_register	77
12.1.45.	Table: darts.notification	78
12.1.46.	Table: darts.object_admin_action	79
12.1.47.	Table: darts.object_hidden_reason	80
12.1.48.	Table: darts.object_record_status	81
12.1.49.	Table: darts.object_retrieval_queue	82
12.1.50.	Table: darts.object_state_record	83
12.1.51.	Table: darts.prosecutor	85
12.1.52.	Table: darts.region	86
12.1.53.	Table: darts.report	87
12.1.54.	Table: darts.retention_confidence_category_mapper	88
12.1.55.	Table: darts.retention_policy_type	89
12.1.56.	Table: darts.retention_policy_type_heritage_mapping	90
12.1.57.	Table: darts.revinfo	91
12.1.58.	Table: darts.rps_retainer	92
12.1.59.	Table: darts.security_group	94
12.1.60.	Table: darts.security_group_courthouse_ae	95
12.1.61.	Table: darts.security_group_user_account_ae	96
12.1.62.	Table: darts.security_permission	97
12.1.63.	Table: darts.security_role	98
12.1.64.	Table: darts.security_role_permission_ae	99
12.1.65.	Table: darts.transcription	100
12.1.66.	Table: darts.transcription_comment	102
12.1.67.	Table: darts.transcription_document	103
12.1.68.	Table: darts.transcription_linked_case	105
12.1.69.	Table: darts.transcription_status	106
12.1.70.	Table: darts.transcription_type	107
12.1.71.	Table: darts.transcription_urgency	108
12.1.72.	Table: darts.transcription_workflow	109
12.1.73.	Table: darts.transformed_media	110
	Table: darts.transient_object_directory	
12.1.75.	Table: darts.user_account	112
12.2. Prod	cedures	
	Procedure: dhms metadata set transform naram	118

12.2.2.	Procedure: public.sum_n_product	119
12.3. Fun	ctions	
12.3.1.	Function: darts.gin_extract_query_trgm	120
12.3.2.	Function: darts.gin_extract_value_trgm	121
12.3.3.	Function: darts.gin_trgm_consistent	122
12.3.4.	Function: darts.gin_trgm_triconsistent	123
12.3.5.	Function: darts.gtrgm_compress	124
12.3.6.	Function: darts.gtrgm_consistent	125
12.3.7.	Function: darts.gtrgm_decompress	126
12.3.8.	Function: darts.gtrgm_distance	127
12.3.9.	Function: darts.gtrgm_in	128
12.3.10.	Function: darts.gtrgm_options	129
12.3.11.	Function: darts.gtrgm_out	130
12.3.12.	Function: darts.gtrgm_penalty	131
12.3.13.	Function: darts.gtrgm_picksplit	
12.3.14.	Function: darts.gtrgm_same	
12.3.15.	Function: darts.gtrgm_union	134
12.3.16.	Function: darts.set_limit	135
12.3.17.	Function: darts.show_limit	
12.3.18.	Function: darts.show_trgm	137
12.3.19.	Function: darts.similarity	
12.3.20.	Function: darts.similarity_dist	
12.3.21.	Function: darts.similarity_op	140
12.3.22.	Function: darts.strict_word_similarity	
12.3.23.	Function: darts.strict_word_similarity_commutator_op	142
12.3.24.	Function: darts.strict_word_similarity_dist_commutator_op	143
12.3.25.	Function: darts.strict_word_similarity_dist_op	144
12.3.26.	Function: darts.strict_word_similarity_op	145
12.3.27.	Function: darts.tra_trw_sync_fnc	146
12.3.28.	Function: darts.word_similarity	
12.3.29.	Function: darts.word_similarity_commutator_op	148
12.3.30.	Function: darts.word_similarity_dist_commutator_op	149
12.3.31.	Function: darts.word_similarity_dist_op	150
12.3.32.	Function: darts.word_similarity_op	
12.3.33.	Function: dbms_metadata.get_check_constraint_ddl	
12.3.34.	Function: dbms_metadata.get_constraint_ddl	153
12.3.35.	Function: dbms_metadata.get_constraints_ddl_of_table	154
12.3.36.	Function: dbms_metadata.get_ddl	155
12.3.37.	Function: dbms_metadata.get_dependent_ddl	156
12.3.38.	Function: dbms_metadata.get_granted_ddl	
12.3.39.	Function: dbms_metadata.get_granted_roles_ddl	158
12.3.40.	Function: dbms_metadata.get_index_ddl	159
	Function: dbms_metadata.get_indexes_ddl_of_table	
12.3.42.	Function: dbms_metadata.get_object_oid	161
	Function: dbms_metadata.get_ref_constraint_ddl	
12.3.44.	Function: dbms_metadata.get_ref_constraints_ddl_of_table	


12.3.45.	Function: dbms_metadata.get_routine_ddl16-	4
12.3.46.	Function: dbms_metadata.get_schema_oid	5
12.3.47.	Function: dbms_metadata.get_sequence_ddl	6
12.3.48.	Function: dbms_metadata.get_sequence_ddl_of_table	7
12.3.49.	Function: dbms_metadata.get_table_ddl	8
	Function: dbms_metadata.get_trigger_ddl16	
12.3.51.	Function: dbms_metadata.get_triggers_ddl_of_table	0
12.3.52.	Function: dbms_metadata.get_type_ddl17	1
12.3.53.	Function: dbms_metadata.get_view_ddl	2
12.3.54.	Function: dbms_metadata.init_transform_params	3
12.3.55.	Function: dbms_metadata.set_default_transform_params	4

Legend


- **?** Primary key
- Primary key disabled
- **1** User-defined primary key
- **?** Unique key
- Unique key disabled
- **%** User-defined unique key
- Active trigger
- Disabled trigger
- → Many to one relation
- → User-defined many to one relation
- → One to many relation
- → Many to many relation
- ₩ User-defined many to many relation
- One to one relation
- User-defined one to one relation
- Input
- Output
- Input/Output
- Uses dependency
- User-defined uses dependency
- Used by dependency
- Tuser-defined used by dependency

postgres@localhost


1. darts courtroom omitted

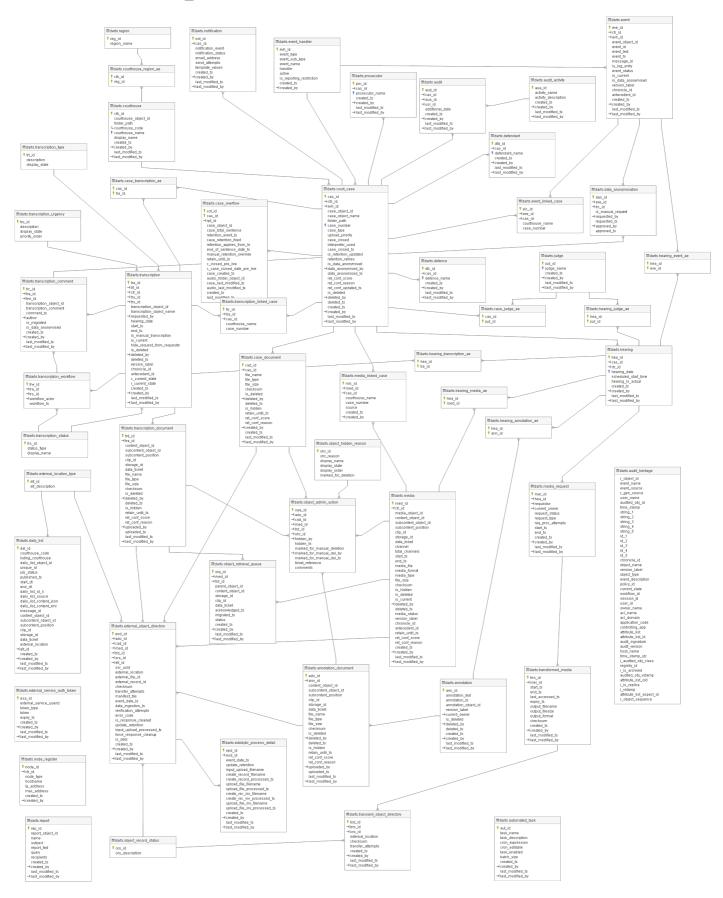


2. dart_security

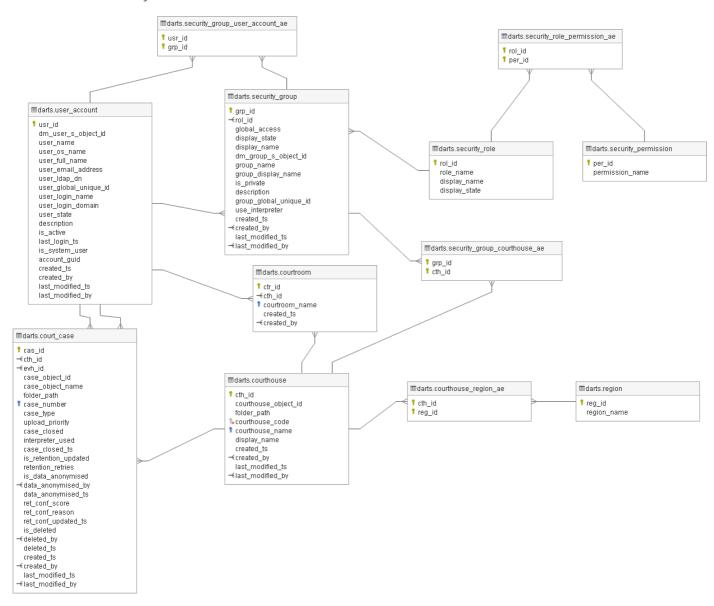


3. darts_retention

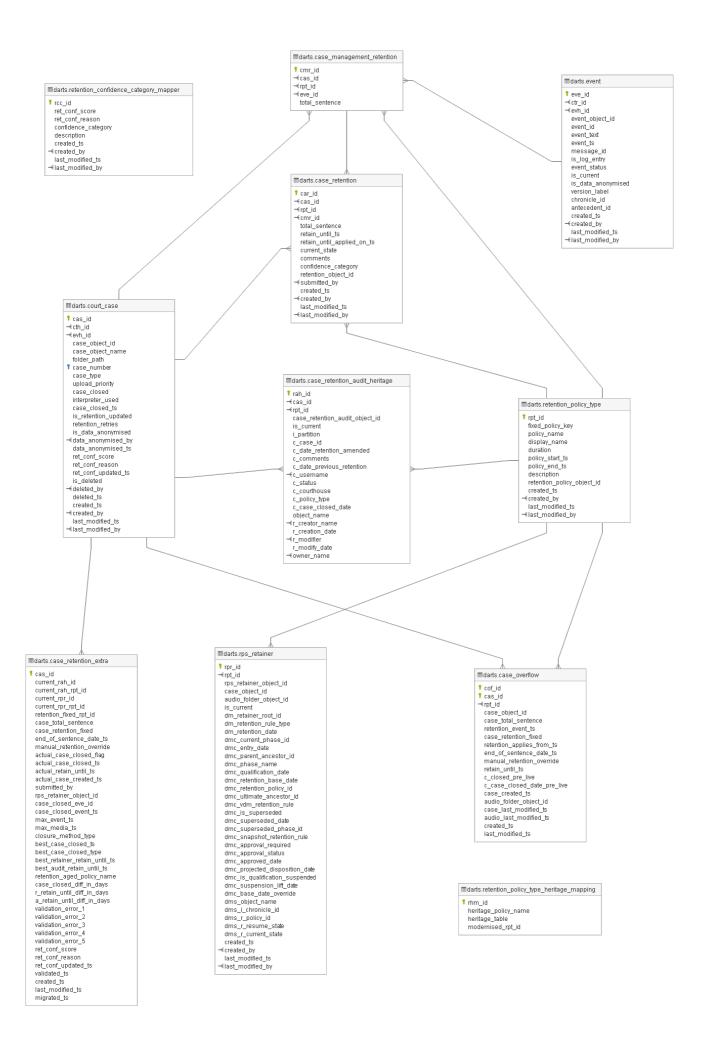


4. darts_annotation

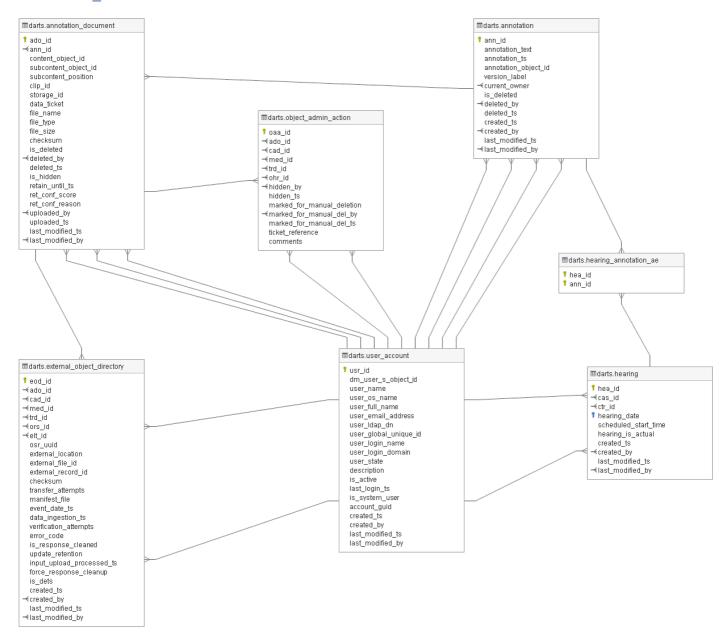


5. darts_court_case

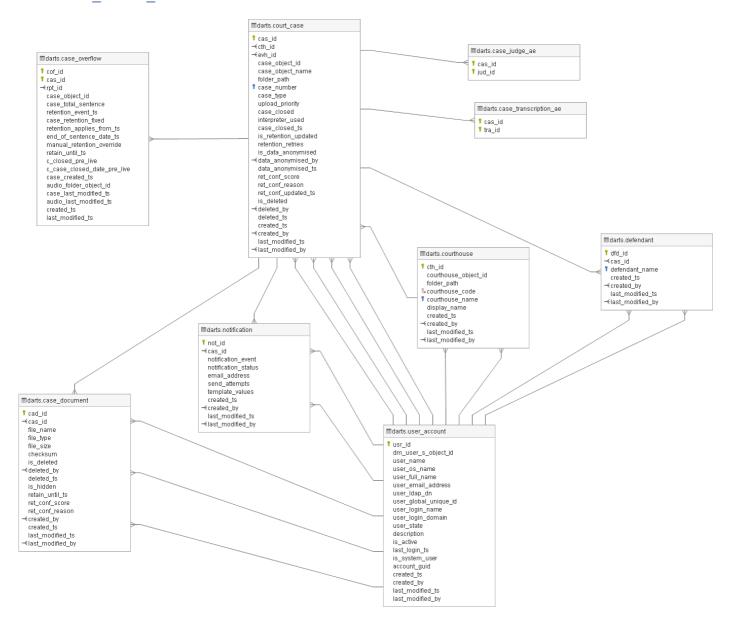


6. darts_courthouse

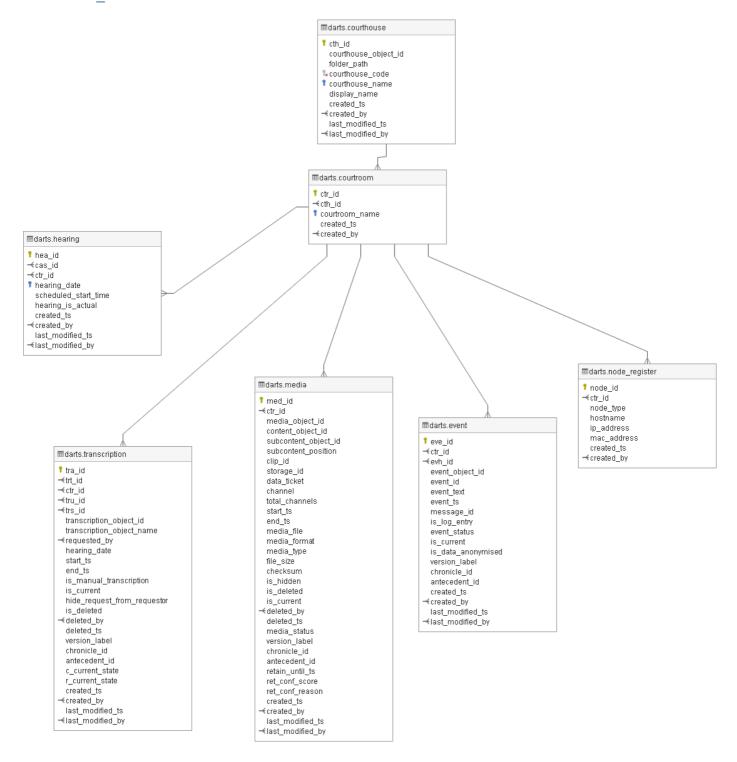


7. darts media

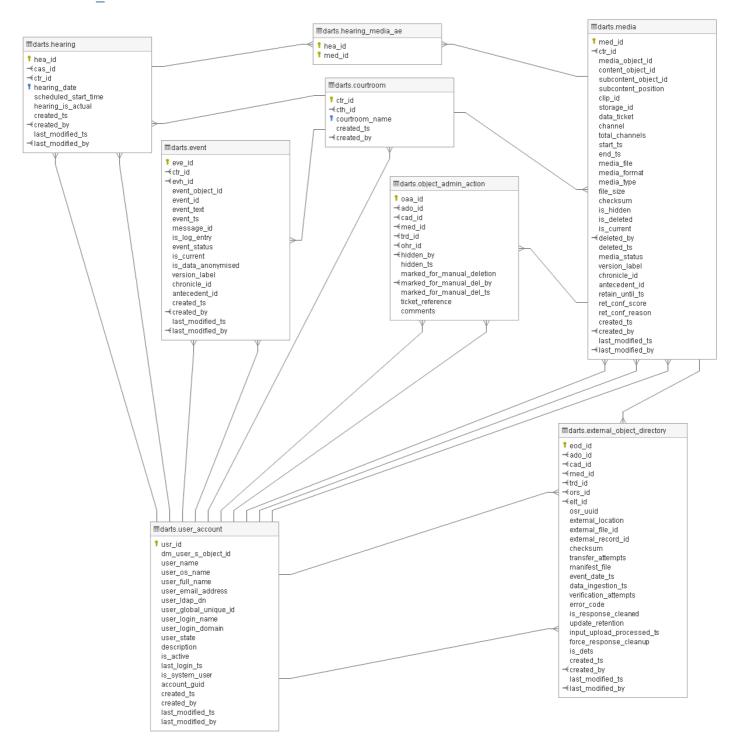

8. darts_transcription

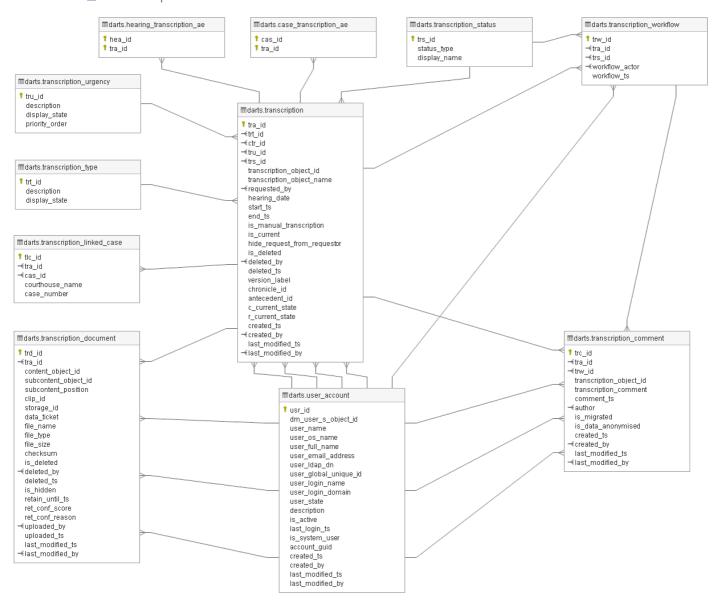

9. darts_tables_only

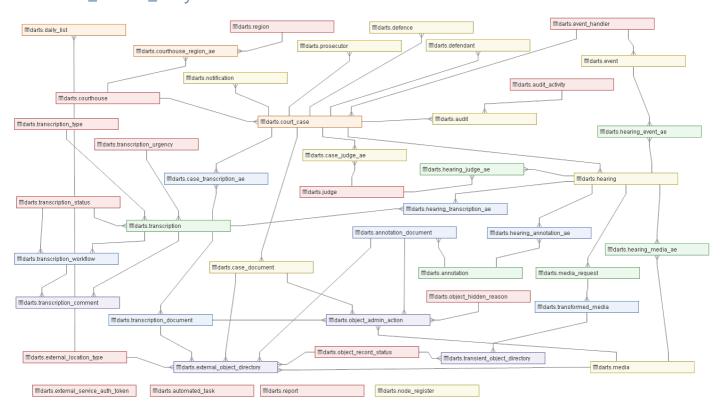



10. darts_obj_state_record

■darts.object_state_record 🕴 osr_uuid eod_id arm_eod_id parent_object_id content_object_id id_clip dets_location flag_file_transfer_to_dets date_file_transfer_to_dets md5_doc_transfer_to_dets file_size_bytes_centera file_size_bytes_dets flag_file_av_scan_pass date_file_av_scan_pass flag_file_transf_toarml date_file_transf_toarml md5_file_transf_arml file_size_bytes_arml flag_file_mfst_created date_file_mfst_created id_manifest_file flag_mfst_transf_to_arml date_mfst_transf_to_arml flag_rspn_recvd_from_arml date_rspn_recvd_from_arml flag_file_ingest_status date_file_ingest_to_arm md5_file_ingest_to_arm file_size_ingest_to_arm id_response_file id_response_cr_file id_response_uf_file flag_file_dets_cleanup_status date_file_dets_cleanup object_status storage_id data_ticket



11. darts_arm_rpo

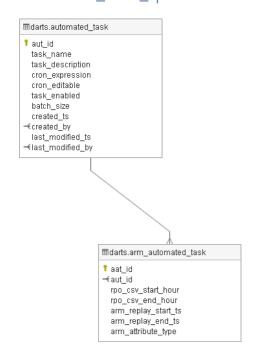

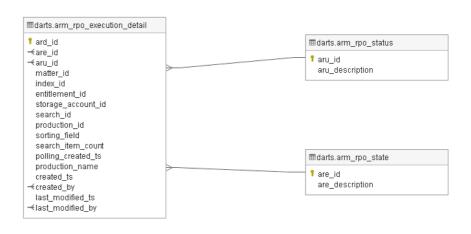

12. Other

12.1. Tables

12.1.1. Table: darts.annotation

Columns

		Name	Data type	Description / Attributes
目	1	ann_id	integer	primary key of annotation
		annotation_text	character varying	directly sourced from moj_annotation_s.c_text Nullable
		annotation_ts	timestamp with time zone	directly sourced from moj_annotation_s Nullable
■		annotation_object_id	character varying(16)	internal Documentum primary key from moj_annotation_s Nullable
		version_label	character varying(32)	inherited from dm_sysobject_r, for r_object_type of moj_annotation Nullable
■		current_owner	integer	References: darts.user_account
■		is_deleted	boolean	Default: false
■		deleted_by	integer	Nullable References: darts.user_account
■		deleted_ts	timestamp with time zone	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
—	darts.user_account	darts.annotationcurrent_owner = darts.user_accountusr_id	annotation_current_owner_fk
>	darts.user_account	darts.annotationcreated_by = darts.user_accountusr_id	annotation_created_by_fk
—	darts.user_account	darts.annotationlast_modified_by = darts.user_accountusr_id	annotation_modified_by_fk
—	darts.user_account	darts.annotationdeleted_by = darts.user_accountusr_id	annotation_deleted_by_fk

Linked from

Table		Join	Title / Name / Description
\rightarrow	darts.annotation_document	<pre>darts.annotationann_id = darts.annotation_documentann_id</pre>	annotation_document_annotation_fk
\rightarrow	darts.hearing_annotation_ae	darts.annotationann_id = darts.hearing_annotation_aeann_id	hearing_annotation_ae_annotation_fk

	Columns	Name / Description
9	ann_id	annotation_pk

12.1.2. Table: darts.annotation_document

Columns

		Name	Data type	Description / Attributes
■	1	ado_id	integer	primary key of annotation_document
B		ann_id	integer	foreign key from annotation References : darts.annotation
B		content_object_id	character varying(16)	Nullable
B		subcontent_object_id	character varying(16)	Nullable
B		subcontent_position	integer	Nullable
B		clip_id	character varying(54)	Nullable
■		storage_id	character varying(16)	Nullable
B		data_ticket	integer	Nullable
■		file_name	character varying	
■		file_type	character varying	
		file_size	integer	
B		checksum	character varying	Nullable
B		is_deleted	boolean	Default : false
B		deleted_by	integer	Nullable References: darts.user_account
B		deleted_ts	timestamp with time zone	Nullable
■		is_hidden	boolean	Default : false
■		retain_until_ts	timestamp with time zone	Nullable
■		ret_conf_score	integer	Nullable
B		ret_conf_reason	character varying	Nullable
B		uploaded_by	integer	References: darts.user_account
B		uploaded_ts	timestamp with time zone	
B		last_modified_ts	timestamp with time zone	
B		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.annotation	darts.annotation_documentann_id = darts.annotationann_id	annotation_document_annotation_fk
>	darts.user_account	darts.annotation_documentdeleted_by = darts.user_accountusr_id	annotation_document_deleted_by_fk
\rightarrow	darts.user_account	darts.annotation_documentuploaded_ by = darts.user_accountusr_id	annotation_document_uploaded_by_fk
>	darts.user_account	darts.annotation_documentlast_modified_by = darts.user_accountusr_id	annotation_document_last_modified_by_fk

Linked from

Table		Join	Title / Name / Description
\rightarrow	darts.external_object_directory	darts.annotation_documentado_id = darts.external_object_directoryado_id	eod_annotation_document_fk
→	darts.object_admin_action	darts.annotation_documentado_id = darts.object_admin_actionado_id	oaa_annotation_document_fk

	Columns	Name / Description
P	ado_id	annotation_document_pk

12.1.3. Table: darts.arm_automated_task

Columns

		Name	Data type	Description / Attributes
■	1	aat_id	integer	primary key of arm_automated_task
■		aut_id	integer	foreign key to automated_task References: darts.automated_task
■		rpo_csv_start_hour	integer	Nullable
■		rpo_csv_end_hour	integer	Nullable
■		arm_replay_start_ts	timestamp with time zone	Nullable
■		arm_replay_end_ts	timestamp with time zone	Nullable
■		arm_attribute_type	character varying	Nullable

Links to

		Table	Join	Title / Name / Description
>	_	darts.automated_task	<pre>darts.arm_automated_taskaut_id = darts.automated_taskaut_id</pre>	arm_automated_task_automated_task_fk

	Columns	Name / Description
P	aat_id	arm_automated_task_pk

12.1.4. Table: darts.arm_rpo_execution_detail

Columns

		Name	Data type	Description / Attributes
▤	1	ard_id	integer	primary key of arm_rpo_execution_detail
		are_id	integer	foreign key to arm_rpo_state Nullable References: darts.arm_rpo_state
■		aru_id	integer	foreign key to arm_rpo_status Nullable References: darts.arm_rpo_status
▤		matter_id	character varying	Nullable
▤		index_id	character varying	Nullable
▤		entitlement_id	character varying	Nullable
▤		storage_account_id	character varying	Nullable
■		search_id	character varying	Nullable
■		production_id	character varying	Nullable
■		sorting_field	character varying	Nullable
■		search_item_count	integer	Nullable
■		polling_created_ts	timestamp with time zone	Nullable
■		production_name	character varying	Nullable
■		created_ts	timestamp with time zone	
		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.arm_rpo_state	darts.arm_rpo_execution_detailare_id = darts.arm_rpo_stateare_id	arm_rpo_execution_detail_arm_state_fk
\rightarrow	darts.arm_rpo_status	darts.arm_rpo_execution_detailaru_id = darts.arm_rpo_statusaru_id	arm_rpo_execution_detail_arm_status_fk
>	darts.user_account	darts.arm_rpo_execution_detailcreated _by = darts.user_accountusr_id	arm_rpo_execution_detail_created_by_fk
>	darts.user_account	darts.arm_rpo_execution_detaillast_mo dified_by = darts.user_accountusr_id	arm_rpo_execution_detail_last_modified_by_fk

	Columns	Name / Description
Ŷ	ard_id	arm_rpo_execution_detail_pk

12.1.5. Table: darts.arm_rpo_state

Columns

		Name	Data type	Description / Attributes
■	1	are_id	integer	primary key of arm_rpo_state
■		are_description	character varying	

Linked from

	Table	Join	Title / Name / Description
_	darts.arm_rpo_execution_detail	darts.arm_rpo_stateare_id = darts.arm_rpo_execution_detailare_id	arm_rpo_execution_detail_arm_state_fk

	Columns	Name / Description
9	are_id	arm_rpo_state_pk

12.1.6. Table: darts.arm_rpo_status

Columns

		Name	Data type	Description / Attributes
■	1	aru_id	integer	primary key of arm_rpo_status
目		aru_description	character varying	

Linked from

Table	Join	Title / Name / Description
→ Lidarts arm indicate a secution detail	darts.arm_rpo_statusaru_id = darts.arm_rpo_execution_detailaru_id	arm_rpo_execution_detail_arm_status_fk

	Columns	Name / Description
?	aru_id	arm_rpo_status_pk

12.1.7. Table: darts.audit

Columns

		Name	Data type	Description / Attributes
■	1	aud_id	integer	primary key of audit
■		cas_id	integer	foreign key from case Nullable References: darts.court_case
■		aua_id	integer	primary key of audit_activity References: darts.audit_activity
■		usr_id	integer	foreign key from user_account References: darts.user_account
■		additional_data	character varying	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.audit_activity	darts.auditaua_id = darts.audit_activityaua_id	audit_audit_activity_fk
-	darts.court_case	darts.auditcas_id = darts.court_casecas_id	audit_case_fk
>	darts.user_account	darts.auditusr_id = darts.user_accountusr_id	audit_user_account_fk
> —	darts.user_account	darts.auditcreated_by = darts.user_accountusr_id	audit_created_by_fk
>	darts.user_account	darts.auditlast_modified_by = darts.user_accountusr_id	audit_modified_by_fk

	Columns	Name / Description
9	aud_id	audit_pk

12.1.8. Table: darts.audit_activity

Columns

		Name	Data type	Description / Attributes
■	1	aua_id	integer	
■		activity_name	character varying	
■		activity_description	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
—	darts.user_account	<pre>darts.audit_activitycreated_by = darts.user_accountusr_id</pre>	audit_activity_created_by_fk
—	darts.user_account	<pre>darts.audit_activity ast_modified_by = darts.user_accountusr_id</pre>	audit_activity_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
-		darts.audit_activityaua_id = darts.auditaua_id	audit_audit_activity_fk

	Columns	Name / Description
P	aua_id	audit_activity_pk

12.1.9. Table: darts.audit_heritage

Columns

	Name	Data type	Description / Attributes
▤	r_object_id	character varying	Nullable
■	event_name	character varying	Nullable
■	event_source	character varying	Nullable
■	r_gen_source	integer	Nullable
■	user_name	character varying	Nullable
■	audited_obj_id	character varying	Nullable
■	time_stamp	timestamp with time zone	Nullable
■	string_1	character varying	Nullable
■	string_2	character varying	Nullable
■	string_3	character varying	Nullable
■	string_4	character varying	Nullable
■	string_5	character varying	Nullable
▤	id_1	character varying	Nullable
▤	id_2	character varying	Nullable
■	id_3	character varying	Nullable
■	id_4	character varying	Nullable
▤	id_5	character varying	Nullable
■	chronicle_id	character varying	Nullable
■	object_name	character varying	Nullable
▤	version_label	character varying	Nullable
▤	object_type	character varying	Nullable
▤	event_description	character varying	Nullable
▤	policy_id	character varying	Nullable
■	current_state	character varying	Nullable
▤	workflow_id	character varying	Nullable
▤	session_id	character varying	Nullable
▤	user_id	character varying	Nullable
■	owner_name	character varying	Nullable
▤	acl_name	character varying	Nullable
▤	acl_domain	character varying	Nullable
▤	application_code	character varying	Nullable
■	controlling_app	character varying	Nullable
B	attribute_list	character varying	Nullable
■	attribute_list_id	character varying	Nullable
■	audit_signature	character varying	Nullable
_			

	Name	Data type	Description / Attributes
■	audit_version	integer	Nullable
▤	host_name	character varying	Nullable
▤	time_stamp_utc	timestamp with time zone	Nullable
■	i_audited_obj_class	integer	Nullable
■	registry_id	character varying	Nullable
目	i_is_archived	integer	Nullable
▤	audited_obj_vstamp	integer	Nullable
▤	attribute_list_old	character varying	Nullable
▤	i_is_replica	integer	Nullable
▤	i_vstamp	integer	Nullable
■	attribute_list_aspect_id	character varying	Nullable
■	r_object_sequence	integer	Nullable

12.1.10. Table: darts.automated_task

Columns

		Name	Data type	Description / Attributes
■	1	aut_id	integer	primary key of automated_task
■		task_name	character varying	
■		task_description	character varying	
■		cron_expression	character varying	
■		cron_editable	boolean	
■		task_enabled	boolean	Default: true
■		batch_size	integer	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
—	darts.user_account	<pre>darts.automated_taskcreated_by = darts.user_accountusr_id</pre>	automated_task_created_by_fk
—	darts.user_account	darts.automated_tasklast_modified_by = darts.user_accountusr_id	automated_task_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.arm_automated_task	<pre>darts.automated_taskaut_id = darts.arm_automated_taskaut_id</pre>	arm_automated_task_automated_task_fk

Columns		Name / Description
Ŷ	aut_id	automated_task_pk

12.1.11. Table: darts.case_document

Columns

		Name	Data type	Description / Attributes
目	1	cad_id	integer	
▤		cas_id	integer	References: darts.court_case
▤		file_name	character varying	
▤		file_type	character varying	
▤		file_size	integer	
▤		checksum	character varying	Nullable
▤		is_deleted	boolean	Default: false
■		deleted_by	integer	Nullable References: darts.user_account
▤		deleted_ts	timestamp with time zone	Nullable
▤		is_hidden	boolean	Default : false
▤		retain_until_ts	timestamp with time zone	Nullable
目		ret_conf_score	integer	Nullable
▤		ret_conf_reason	character varying	Nullable
▤		created_by	integer	References: darts.user_account
目		created_ts	timestamp with time zone	
目		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.court_case	darts.case_documentcas_id = darts.court_casecas_id	case_document_case_fk
\rightarrow	darts.user_account	darts.case_documentcreated_by = darts.user_accountusr_id	case_document_created_by_fk
>	darts.user_account	darts.case_documentlast_modified_by = darts.user_accountusr_id	case_document_last_modified_by_fk
\rightarrow	darts.user_account	darts.case_documentdeleted_by = darts.user_accountusr_id	case_document_deleted_by_fk

Linked from

	Table	Join	Title / Name / Description
_	darts.external_object_directory	darts.case_documentcad_id = darts.external_object_directorycad_id	eod_case_document_fk
-	darts.object_admin_action	darts.case_documentcad_id = darts.object_admin_actioncad_id	oaa_case_document_fk

	Columns	Name / Description
?	cad_id	case_document_pk

12.1.12. Table: darts.case_judge_ae

Columns

		Name	Data type	Description / Attributes
■	1	cas_id	integer	foreign key from case, part of composite natural key and PK References: darts.court_case
■	1	jud_id	integer	foreign key from judge, part of composite natural key and PK References : darts.judge

Links to

	Table	Join	Title / Name / Description
—	darts.court_case	darts.case_judge_aecas_id = darts.court_casecas_id	case_judge_ae_case_fk
\rightarrow	darts.judge	darts.case_judge_aejud_id = darts.judgejud_id	case_judge_ae_judge_fk

Columns		Name / Description
9	cas_id, jud_id	case_judge_ae_pk

12.1.13. Table: darts.case_management_retention

Columns

		Name	Data type	Description / Attributes
■	1	cmr_id	integer	
		cas_id	integer	References: darts.court_case
		rpt_id	integer	References: darts.retention_policy_type
		eve_id	integer	References: darts.event
		total_sentence	character varying	Nullable

Links to

	Table	Join	Title / Name / Description
—	darts.court_case	darts.case_management_retentioncas_ id = darts.court_casecas_id	case_management_retention_court_case_fk
—	darts.event	darts.case_management_retentioneve _id = darts.eventeve_id	case_management_retention_event_fk
-	darts.retention_policy_type	darts.case_management_retentionrpt_i d = darts.retention_policy_typerpt_id	case_management_retention_retention_policy_type_fk

Linked from

Table	Join	Title / Name / Description
	darts.case_management_retentioncmr _id = darts.case_retentioncmr_id	case_retention_case_management_retention_fk

	Columns	Name / Description
9	cmr_id	case_management_retention_pk

12.1.14. Table: darts.case_overflow

Columns

		Name	Data type	Description / Attributes
■	1	cof_id	integer	
■		cas_id	integer	Nullable References: darts.court_case
■		rpt_id	integer	Nullable References: darts.retention_policy_type
■		case_object_id	character varying	Nullable
■		case_total_sentence	character varying	Nullable
■		retention_event_ts	timestamp with time zone	Nullable
■		case_retention_fixed	character varying	Nullable
■		retention_applies_from_ts	timestamp with time zone	Nullable
■		end_of_sentence_date_ts	timestamp with time zone	Nullable
■		manual_retention_override	integer	Nullable
■		retain_until_ts	timestamp with time zone	Nullable
■		c_closed_pre_live	integer	Nullable
■		c_case_closed_date_pre_live	timestamp with time zone	Nullable
■		case_created_ts	timestamp with time zone	Nullable
■		audio_folder_object_id	character varying(16)	Nullable
■		case_last_modified_ts	timestamp with time zone	Nullable
■		audio_last_modified_ts	timestamp with time zone	Nullable
■		created_ts	timestamp with time zone	Default: CURRENT_TIMESTAMP
■		last_modified_ts	timestamp with time zone	

Links to

	Table	Join	Title / Name / Description
—	darts.court_case	<pre>darts.case_overflowcas_id = darts.court_casecas_id</pre>	case_overflow_court_case_fk
—	darts.retention_policy_type	<pre>darts.case_overflowrpt_id = darts.retention_policy_typerpt_id</pre>	case_overflow_retention_policy_type_fk

	Columns	Name / Description
P	cof_id	case_overflow_pk

12.1.15. Table: darts.case_retention

Columns

		Name	Data type	Description / Attributes
	1	car_id	integer	primary key of case_retention
■		cas_id	integer	foreign key from court_case References: darts.court_case
■		rpt_id	integer	References: darts.retention_policy_type
■		cmr_id	integer	Nullable References: darts.case_management_retention
■		total_sentence	character varying	Nullable
		retain_until_ts	timestamp with time zone	
		retain_until_applied_on_ts	timestamp with time zone	Nullable
		current_state	character varying	
		comments	character varying	Nullable
■		confidence_category	integer	Nullable
		retention_object_id	character varying	Nullable
		submitted_by	integer	References: darts.user_account
		created_ts	timestamp with time zone	
		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.case_management_retention	darts.case_retentioncmr_id = darts.case_management_retentioncmr_id	case_retention_case_management_retention_fk
>	darts.court_case	darts.case_retentioncas_id = darts.court_casecas_id	case_retention_court_case_fk
>	darts.retention_policy_type	<pre>darts.case_retentionrpt_id = darts.retention_policy_typerpt_id</pre>	case_retention_retention_policy_type_fk
>	darts.user_account	darts.case_retentioncreated_by = darts.user_accountusr_id	case_retention_created_by_fk
>	darts.user_account	darts.case_retentionlast_modified_by = darts.user_accountusr_id	case_retention_last_modified_by_fk
—	darts.user_account	darts.case_retentionsubmitted_by = darts.user_accountusr_id	case_retention_submitted_by_fk

	Columns	Name / Description
9	car_id	case_retention_pk

12.1.16. Table: darts.case_retention_audit_heritage

Columns

		Name	Data type	Description / Attributes
■	1	rah_id	integer	
■		cas_id	integer	Nullable References: darts.court_case
		rpt_id	integer	Nullable References: darts.retention_policy_type
■		case_retention_audit_object_id	character varying(16)	
■		is_current	boolean	Nullable
■		i_partition	integer	Nullable
		c_case_id	character varying(32)	Nullable
■		c_date_retention_amended	timestamp with time zone	Nullable
■		c_comments	character varying	Nullable
		c_date_previous_retention	timestamp with time zone	Nullable
■		c_username	integer	Nullable References: darts.user_account
▤		c_status	character varying(32)	Nullable
■		c_courthouse	character varying(64)	Nullable
■		c_policy_type	character varying(20)	Nullable
■		c_case_closed_date	timestamp with time zone	Nullable
B		object_name	character varying(255)	Nullable
▤		r_creator_name	integer	Nullable References: darts.user_account
■		r_creation_date	timestamp with time zone	Nullable
■		r_modifier	integer	Nullable References: darts.user_account
■		r_modify_date	timestamp with time zone	Nullable
		owner_name	integer	Nullable References: darts.user_account

Links to

	Table	Join	Title / Name / Description
—	darts.court_case	darts.case_retention_audit_heritagecas _id = darts.court_casecas_id	case_retention_audit_heritage_court_case_fk
>	darts.retention_policy_type	darts.case_retention_audit_heritagerpt _id = darts.retention_policy_typerpt_id	case_retention_audit_heritage_retention_policy_type_fk
\rightarrow	darts.user_account	darts.case_retention_audit_heritagec_u sername = darts.user_accountusr_id	case_retention_audit_heritage_c_username_fk
-	darts.user_account	darts.case_retention_audit_heritager_c reator_name = darts.user_accountusr_id	case_retention_audit_heritage_r_creator_name_fk
>	darts.user_account	darts.case_retention_audit_heritager_ modifier = darts.user_accountusr_id	case_retention_audit_heritage_r_modifier_fk

	Table	Join	Title / Name / Description
—	darts.user_account	darts.case_retention_audit_heritageow ner_name = darts.user_accountusr_id	case_retention_audit_heritage_owner_name_fk

	Columns	Name / Description
9	rah_id	case_retention_audit_heritage_pk

12.1.17. Table: darts.case_retention_extra

Columns

		Name	Data type	Description / Attributes
	1	cas_id	integer	References: darts.court_case
		current_rah_id	integer	Nullable
		current_rah_rpt_id	integer	Nullable
		current_rpr_id	integer	Nullable
		current_rpr_rpt_id	integer	Nullable
		retention_fixed_rpt_id	integer	Nullable
■		case_total_sentence	character varying	Nullable
■		case_retention_fixed	character varying	Nullable
■		end_of_sentence_date_ts	timestamp with time zone	Nullable
■		manual_retention_override	integer	Nullable
■		actual_case_closed_flag	integer	Nullable
■		actual_case_closed_ts	timestamp with time zone	Nullable
■		actual_retain_until_ts	timestamp with time zone	Nullable
		actual_case_created_ts	timestamp with time zone	Nullable
■		submitted_by	integer	Nullable
■		rps_retainer_object_id	character varying	Nullable
■		case_closed_eve_id	integer	Nullable
■		case_closed_event_ts	timestamp with time zone	Nullable
■		max_event_ts	timestamp with time zone	Nullable
■		max_media_ts	timestamp with time zone	Nullable
■		closure_method_type	character varying	Nullable
■		best_case_closed_ts	timestamp with time zone	Nullable
■		best_case_closed_type	character varying	Nullable
■		best_retainer_retain_until_ts	timestamp with time zone	Nullable
B		best_audit_retain_until_ts	timestamp with time zone	Nullable
B		retention_aged_policy_name	character varying	Nullable
B		case_closed_diff_in_days	integer	Nullable
B		r_retain_until_diff_in_days	integer	Nullable
B		a_retain_until_diff_in_days	integer	Nullable
B		validation_error_1	character varying	Nullable
B		validation_error_2	character varying	Nullable
		validation_error_3	character varying	Nullable
		validation_error_4	character varying	Nullable
		validation_error_5	character varying	Nullable
B		ret_conf_score	integer	Nullable

	Name	Data type	Description / Attributes
■	ret_conf_reason	character varying	Nullable
■	ret_conf_updated_ts	timestamp with time zone	Nullable
■	validated_ts	timestamp with time zone	Nullable
■	created_ts	timestamp with time zone	
■	last_modified_ts	timestamp with time zone	
■	migrated_ts	timestamp with time zone	Nullable

Links to

	Table	Join	Title / Name / Description
>	- Loarts court case	<pre>darts.case_retention_extracas_id = darts.court_casecas_id</pre>	case_retention_extra_court_case_fk

	Columns	Name / Description
Ŷ	cas_id	case_retention_extra_pk

12.1.18. Table: darts.case_transcription_ae

Columns

		Name	Data type	Description / Attributes
■	1	cas_id	integer	foreign key from case, part of composite natural key and PK References : darts.court_case
■	1	tra_id	integer	foreign key from transcription, part of composite natural key and PK References : darts.transcription

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.court_case	darts.case_transcription_aecas_id = darts.court_casecas_id	case_transcription_ae_case_fk
\rightarrow	darts.transcription	darts.case_transcription_aetra_id = darts.transcriptiontra_id	case_transcription_ae_transcription_fk

	Columns	Name / Description
Ŷ	cas_id, tra_id	case_transcription_ae_pk

12.1.19. Table: darts.court_case

Columns

third integer primary key of court.case third case_object.id analyses case_object.id character varying(16) shallable case_object.id character varying(16) shallable folder_path character varying (16) shallable folder_path character varying shallable case_object.id character varying shallable folder_path character varying shallable folder_path character varying shallable case_object.id character varying shallable folder_path character varying shallable case_pumber character varying shallable case_object.id character varying shallable charact			Name	Data type	Description / Attributes
References: darts counthouse Part References: darts counthouse	■	1	cas_id	integer	primary key of court_case
References: darts event, handler case_object_ild character varying(16) internal Documentum primary key from moj_case_s	■	1	cth_id	integer	
Character varying to	■		evh_id	integer	
folder_path character varying Nullable vase_number character varying directly sourced from moj_case_sc_case_id case_type character varying Nullable upload_priority integer Nullable case_dosed boolean migrated from moj_case_sc, converted from numeric to boolean interpreter_used boolean migrated from moj_case_sc, converted from numeric to boolean case_closed_ts timestamp with time zone Nullable is_retention_updated boolean Default_false retention_retries integer Nullable is_data_anonymised boolean Default_false data_anonymised_by integer Nullable data_anonymised_ts timestamp with time zone Nullable ret_conf_score integer Nullable ret_conf_score integer Nullable ret_conf_reason character varying Nullable ret_conf_updated_ts timestamp with time zone Nullable ret_conf_updated_ts timestamp with time zone Nullable ret_conf_updated_ts timestamp with time zone Nullable deleted_ts timestamp with time zone Nullable deleted_ts timestamp with time zone Nullable ret_conf_updated_ts timestamp with time zone Nullable deleted_ts timestamp with time zone Nullable ret_conf_updated_ts timestamp with time zone Nullable deleted_ts timestamp with time zone Nullable ret_tone_tone_tone_tone_tone_tone_tone_to	■		case_object_id	character varying(16)	
case_number character varying directly sourced from moj_case_s.c_case_id	▤		case_object_name	character varying(255)	Nullable
Case_type Character varying Nullable	▤		folder_path	character varying	Nullable
Upload_priority Integer Nullable	▤	1	case_number	character varying	directly sourced from moj_case_s.c_case_id
case_closed boolean migrated from moj_case_s, converted from numeric to boolean migrated from moj_case_s, converted from numeric to boolean migrated from moj_case_s, converted from numeric to boolean directly sourced from moj_case_s.c_case_closed_date nullable	▤		case_type	character varying	Nullable
interpreter_used boolean migrated from moj_case_s, converted from numeric to boolean	▤		upload_priority	integer	Nullable
□	▤		case_closed	boolean	migrated from moj_case_s, converted from numeric to boolean
Itemstamp with time zone Nullable	■		interpreter_used	boolean	migrated from moj_case_s, converted from numeric to boolean
retention_retries integer Nullable is_data_anonymised boolean Default: false	■		case_closed_ts	timestamp with time zone	
is_data_anonymised boolean Default: false	▤		is_retention_updated	boolean	Default: false
data_anonymised_by integer References: darts.user_account data_anonymised_ts timestamp with time zone Nullable ret_conf_score integer Nullable ret_conf_reason character varying Nullable ret_conf_updated_ts timestamp with time zone Nullable ret_conf_updated_ts timestamp with time zone Nullable lis_deleted boolean Default: false leted_by integer Nullable References: darts.user_account letered_ts timestamp with time zone Nullable References: darts.user_account References: darts.user_account References: darts.user_account References: darts.user_account References: darts.user_account References: darts.user_account	▤		retention_retries	integer	Nullable
Integer References: darts.user_account	▤		is_data_anonymised	boolean	Default : false
ret_conf_score integer Nullable ret_conf_reason character varying Nullable ret_conf_updated_ts timestamp with time zone Nullable lis_deleted boolean Default: false leted_by integer Nullable References: darts.user_account leted_ts timestamp with time zone Nullable ret_conf_updated_ts timestamp with time zone Nullable References: darts.user_account References: darts.user_account References: darts.user_account References: darts.user_account	■		data_anonymised_by	integer	
Image:	▤		data_anonymised_ts	timestamp with time zone	Nullable
Image:	▤		ret_conf_score	integer	Nullable
is_deleted boolean Default: false	▤		ret_conf_reason	character varying	Nullable
deleted_by integer Nullable References: darts.user_account deleted_ts timestamp with time zone Nullable created_ts timestamp with time zone created_by integer References: darts.user_account	▤		ret_conf_updated_ts	timestamp with time zone	Nullable
References: darts.user_account deleted_ts timestamp with time zone Nullable created_ts timestamp with time zone created_ts timestamp with time zone created_by integer References: darts.user_account	▤		is_deleted	boolean	Default: false
created_ts timestamp with time zone created_by integer References: darts.user_account	B		deleted_by	integer	
created_by integer References: darts.user_account	■		deleted_ts	timestamp with time zone	Nullable
	B		created_ts	timestamp with time zone	
	■		created_by	integer	References: darts.user_account
last_modified_ts timestamp with time zone	■		last_modified_ts	timestamp with time zone	
■ last_modified_by integer References: darts.user_account	■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
>		<pre>darts.court_casecth_id = darts.courthousecth_id</pre>	court_case_courthouse_fk

	Table	Join	Title / Name / Description
\leftarrow	darts.event_handler	darts.court_caseevh_id = darts.event_handlerevh_id	court_case_event_handler_fk
\leftarrow	darts.user_account	darts.court_casecreated_by = darts.user_accountusr_id	court_case_created_by_fk
>	darts.user_account	darts.court_caselast_modified_by = darts.user_accountusr_id	court_case_modified_by_fk
\rightarrow	darts.user_account	darts.court_casedeleted_by = darts.user_accountusr_id	court_case_deleted_by_fk
\rightarrow	darts.user_account	darts.court_casedata_anonymised_by = darts.user_accountusr_id	court_case_data_anonymised_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.audit	darts.court_casecas_id = darts.auditcas_id	audit_case_fk
\rightarrow	darts.case_document	darts.court_casecas_id = darts.case_documentcas_id	case_document_case_fk
\rightarrow	darts.case_judge_ae	darts.court_casecas_id = darts.case_judge_aecas_id	case_judge_ae_case_fk
\rightarrow	darts.case_management_retention	darts.court_casecas_id = darts.case_management_retentioncas_id	case_management_retention_court_case_fk
\rightarrow	darts.case_overflow	darts.court_casecas_id = darts.case_overflowcas_id	case_overflow_court_case_fk
\rightarrow	darts.case_retention	darts.court_casecas_id = darts.case_retentioncas_id	case_retention_court_case_fk
\rightarrow	darts.case_retention_audit_heritage	darts.court_casecas_id = darts.case_retention_audit_heritagecas_id	case_retention_audit_heritage_court_case_fk
\rightarrow	darts.case_retention_extra	darts.court_casecas_id = darts.case_retention_extracas_id	case_retention_extra_court_case_fk
\rightarrow	darts.case_transcription_ae	darts.court_casecas_id = darts.case_transcription_aecas_id	case_transcription_ae_case_fk
\rightarrow	darts.defence	darts.court_casecas_id = darts.defencecas_id	defence_court_case_fk
\rightarrow	darts.defendant	darts.court_casecas_id = darts.defendantcas_id	defendant_court_case_fk
\rightarrow	darts.event_linked_case	darts.court_casecas_id = darts.event_linked_casecas_id	event_linked_case_court_case_fk
\rightarrow	darts.hearing	darts.court_casecas_id = darts.hearingcas_id	hearing_case_fk
\rightarrow	darts.media_linked_case	darts.court_casecas_id = darts.media_linked_casecas_id	media_linked_case_court_case_fk
\rightarrow	darts.notification	darts.court_casecas_id = darts.notificationcas_id	notification_case_fk
\rightarrow	darts.prosecutor	darts.court_casecas_id = darts.prosecutorcas_id	prosecutor_court_case_fk
\rightarrow	darts.transcription_linked_case	darts.court_casecas_id = darts.transcription_linked_casecas_id	transcription_linked_case_court_case_fk

	Columns	Name / Description
P	cas_id	court_case_pk
Ŷ	case_number, cth_id	cas_case_number_cth_id_unq

12.1.20. Table: darts.courthouse

Columns

		Name	Data type	Description / Attributes
■	1	cth_id	integer	primary key of courthouse
■		courthouse_object_id	character varying(16)	Nullable
■		folder_path	character varying	Nullable
■		courthouse_code	integer	corresponds to the c_crown_court_code found in daily lists Nullable
■	1	courthouse_name	character varying	directly sourced from moj_courthouse_s.c_id
■		display_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
▤		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.user_account	<pre>darts.courthousecreated_by = darts.user_accountusr_id</pre>	courthouse_created_by_fk
→	darts.user_account	darts.courthouselast_modified_by = darts.user_accountusr_id	courthouse_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.court_case	<pre>darts.courthousecth_id = darts.court_casecth_id</pre>	court_case_courthouse_fk
\rightarrow	darts.courthouse_region_ae	<pre>darts.courthousecth_id = darts.courthouse_region_aecth_id</pre>	courthouse_region_courthouse_fk
\rightarrow	darts.courtroom	<pre>darts.courthousecth_id = darts.courtroomcth_id</pre>	courtroom_courthouse_fk
→	darts.security_group_courthouse_ae	darts.courthousecth_id = darts.security_group_courthouse_aect h_id	security_group_courthouse_courthouse_fk

	Columns	Name / Description	
?	cth_id	courthouse_pk	
Ŷ	courthouse_name	courthouse_courthouse_name_key	

12.1.21. Table: darts.courthouse_region_ae

Columns

		Name	Data type	Description / Attributes
■	1	cth_id	integer	References: darts.courthouse
■	1	reg_id	integer	References: darts.region

Links to

	Table	Join	Title / Name / Description
-	darts.courthouse	darts.courthouse_region_aecth_id = darts.courthousecth_id	courthouse_region_courthouse_fk
-	darts.region	darts.courthouse_region_aereg_id = darts.regionreg_id	courthouse_region_region_fk

	Columns	Name / Description
9	cth_id, reg_id	courthouse_region_ae_pk

12.1.22. Table: darts.courtroom

Columns

		Name	Data type	Description / Attributes
▤	1	ctr_id	integer	primary key of courtroom
■	1	cth_id	integer	foreign key to courthouse References: darts.courthouse
■	1	courtroom_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
>	- darts.courthouse	darts.courtroomcth_id = darts.courthousecth_id	courtroom_courthouse_fk
>	- darts.user_account	darts.courtroomcreated_by = darts.user_accountusr_id	courtroom_created_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.event	darts.courtroomctr_id = darts.eventctr_id	event_courtroom_fk
\rightarrow	darts.hearing	darts.courtroomctr_id = darts.hearingctr_id	hearing_courtroom_fk
\rightarrow	darts.media	darts.courtroomctr_id = darts.mediactr_id	media_courtroom_fk
\rightarrow	darts.node_register	darts.courtroomctr_id = darts.node_registerctr_id	node_register_courtroom_fk
\rightarrow	darts.transcription	darts.courtroomctr_id = darts.transcriptionctr_id	transcription_courtroom_fk

	Columns	Name / Description
?	ctr_id	courtroom_pk
9	cth_id, courtroom_name	ctr_chr_crn_unq

12.1.23. Table: darts.daily_list

Columns

		Name	Data type	Description / Attributes
■	1	dal_id	integer	primary key of daily_list
■		courthouse_code	integer	Nullable
▤		listing_courthouse	character varying	
■		daily_list_object_id	character varying(16)	internal Documentum primary key from moj_daily_list_s Nullable
■		unique_id	character varying	directly sourced from moj_daily_list_s, received as part of the XML, used to find duplicate daily lists Nullable
▤		job_status	character varying	directly sourced from moj_daily_list_s
■		published_ts	timestamp with time zone	directly sourced from moj_daily_list_s.c_timestamp Nullable
■		start_dt	date	directly sourced from moj_daily_list_s.c_start_date Nullable
■		end_dt	date	directly sourced from moj_daily_list_s.c_end_date Nullable
■		daily_list_id_s	character varying	directly sourced from moj_daily_list_s Nullable
■		daily_list_source	character varying	directly sourced from moj_daily_list_s Nullable
▤		daily_list_content_json	character varying	Nullable
■		daily_list_content_xml	character varying	Nullable
▤		message_id	character varying	Nullable
▤		content_object_id	character varying(16)	Nullable
▤		subcontent_object_id	character varying(16)	Nullable
▤		subcontent_position	integer	Nullable
▤		clip_id	character varying	Nullable
▤		storage_id	character varying(16)	Nullable
▤		data_ticket	integer	Nullable
■		external_location	uuid	Nullable
B		elt_id	integer	Nullable References: darts.external_location_type
▤		created_ts	timestamp with time zone	
▤		created_by	integer	References: darts.user_account
▤		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
→	darts.external_location_type	<pre>darts.daily_listelt_id = darts.external_location_typeelt_id</pre>	daily_list_external_location_type_fk

	Table	Join	Title / Name / Description
>	- darts.user_account	<pre>darts.daily_listcreated_by = darts.user_accountusr_id</pre>	daily_list_created_by_fk
>	- darts.user_account	<pre>darts.daily_listlast_modified_by = darts.user_accountusr_id</pre>	daily_list_modified_by_fk

	Columns	Name / Description
P	dal_id	daily_list_pk

12.1.24. Table: darts.data_anonymisation

Columns

		Name	Data type	Description / Attributes
■	1	dan_id	integer	primary key of data_anonymisation
■		eve_id	integer	foreign key to event, unenforced to support deletion of event without reference to this table Nullable References: darts.event
		trc_id	integer	foreign key of transcription_comment, unenforce to support deletion of transcription_comment without reference to this table Nullable References: darts.transcription_comment
■		is_manual_request	boolean	Nullable
■		requested_by	integer	References: darts.user_account
■		requested_ts	timestamp with time zone	
■		approved_by	integer	Nullable References: darts.user_account
■		approved_ts	timestamp with time zone	Nullable

Links to

	Table	Join	Title / Name / Description
-	darts.event	darts.data_anonymisationeve_id = darts.eventeve_id	data_anonymisation_event_fk
>	darts.transcription_comment	darts.data_anonymisationtrc_id = darts.transcription_commenttrc_id	data_anonymisation_transcription_comment_fk
>	darts.user_account	darts.data_anonymisationrequested_b y = darts.user_accountusr_id	data_anonymisation_requested_by_fk
>	darts.user_account	darts.data_anonymisationapproved_by = darts.user_accountusr_id	data_anonymisation_approved_by_fk

	Columns	Name / Description
Ŷ	dan_id	data_anonymisation_pk

12.1.25. Table: darts.defence

Columns

		Name	Data type	Description / Attributes
■	1	dfc_id	integer	primary key of defence_name
■	1	cas_id	integer	foreign key from court_case References: darts.court_case
■	1	defence_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.court_case	darts.defencecas_id = darts.court_casecas_id	defence_court_case_fk
>	darts.user_account	<pre>darts.defencecreated_by = darts.user_accountusr_id</pre>	defence_created_by_fk
>	darts.user_account	darts.defencelast_modified_by = darts.user_accountusr_id	defence_modified_by_fk

	Columns	Name / Description
Ŷ	dfc_id	defence_pk
Ŷ	cas_id, defence_name	dfc_cas_id_defence_name_unq

12.1.26. Table: darts.defendant

Columns

		Name	Data type	Description / Attributes
■	1	dfd_id	integer	primary key of defendant_name
■	9	cas_id	integer	foreign key from court_case References: darts.court_case
■	1	defendant_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
>	darts.court_case	darts.defendantcas_id = darts.court_casecas_id	defendant_court_case_fk
>	darts.user_account	darts.defendantcreated_by = darts.user_accountusr_id	defendant_created_by_fk
—	darts.user_account	darts.defendantlast_modified_by = darts.user_accountusr_id	defendant_modified_by_fk

	Columns	Name / Description	
Ŷ	dfd_id	efendant_pk	
Ŷ	cas_id, defendant_name	dfd_cas_id_defendant_name_unq	

12.1.27. Table: darts.event

Columns

		Name	Data type	Description / Attributes
■	1	eve_id	integer	primary key of moj_event
		ctr_id	integer	foreign key from moj_courtroom References: darts.courtroom
		evh_id	integer	foreign key for the moj_event_handler table References: darts.event_handler
I		event_object_id	character varying(16)	internal Documentum primary key from moj_event_s Nullable
		event_id	integer	directly sourced from moj_event_s Nullable
▤		event_text	character varying	inherited from moj_annotation_s.c_text Nullable
■		event_ts	timestamp with time zone	inherited from moj_annotation_s
		message_id	character varying	no migration element, records the id of the message that gave rise to this event Nullable
		is_log_entry	boolean	
■		event_status	integer	Nullable
■		is_current	boolean	Default: true
■		is_data_anonymised	boolean	Default: false
		version_label	character varying(32)	inherited from dm_sysobject_r, for r_object_type of moj_event Nullable
▤		chronicle_id	character varying(16)	Nullable
B		antecedent_id	character varying(16)	Nullable
▤		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
▤		last_modified_ts	timestamp with time zone	
▤		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.courtroom	<pre>darts.eventctr_id = darts.courtroomctr_id</pre>	event_courtroom_fk
-	darts.event_handler	darts.eventevh_id = darts.event_handlerevh_id	event_event_handler_fk
>	darts.user_account	darts.eventcreated_by = darts.user_accountusr_id	event_created_by_fk
>	darts.user_account	darts.eventlast_modified_by = darts.user_accountusr_id	event_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.case_management_retention	darts.eventeve_id = darts.case_management_retentioneve _id	case_management_retention_event_fk
\rightarrow	darts.data_anonymisation	darts.eventeve_id = darts.data_anonymisationeve_id	data_anonymisation_event_fk
\rightarrow	darts.event_linked_case	darts.eventeve_id = darts.event_linked_caseeve_id	event_linked_case_event_fk
\rightarrow	darts.hearing_event_ae	darts.eventeve_id = darts.hearing_event_aeeve_id	hearing_event_ae_event_fk

Columns	Name / Description
Y eve_id	event_pk

12.1.28. Table: darts.event_handler

content will be derived from TBL_MOJ_DOC_HANDLER in the legacy database, but currently has no primary key and 6 fully duplicated rows

Columns

		Name	Data type	Description / Attributes
■	1	evh_id	integer	primary key of moj_event_type
▤		event_type	character varying	directly sourced from doc_type
■		event_sub_type	character varying	directly sourced from doc_sub_type Nullable
		event_name	character varying	directly sourced from event_name
■		handler	character varying	directly sourced from doc_handler Nullable
		active	boolean	
		is_reporting_restriction	boolean	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
→	darts.user_account	<pre>darts.event_handlercreated_by = darts.user_accountusr_id</pre>	event_handler_created_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.court_case	<pre>darts.event_handlerevh_id = darts.court_caseevh_id</pre>	court_case_event_handler_fk
\rightarrow	darts.event	darts.event_handlerevh_id = darts.eventevh_id	event_event_handler_fk

Columns	Name / Description
evh_id	event_handler_pk

12.1.29. Table: darts.event_linked_case

content is to be populated via migration

Columns

		Name	Data type	Description / Attributes
■	1	elc_id	integer	
■		eve_id	integer	References: darts.event
■		cas_id	integer	Nullable References: darts.court_case
■		courthouse_name	character varying	Nullable
■		case_number	character varying	Nullable

Links to

	Table	Join	Title / Name / Description
>	- darts.court_case	<pre>darts.event_linked_casecas_id = darts.court_casecas_id</pre>	event_linked_case_court_case_fk
>	- darts.event	<pre>darts.event_linked_caseeve_id = darts.eventeve_id</pre>	event_linked_case_event_fk

	Columns	Name / Description
9	elc_id	event_linked_case_pk

12.1.30. Table: darts.external_location_type

used to record acceptable external locations, found in external_object_directory

Columns

		Name	Data type	Description / Attributes
■	1	elt_id	integer	
■		elt_description	character varying	Nullable

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.daily_list	darts.external_location_typeelt_id = darts.daily_listelt_id	daily_list_external_location_type_fk
\rightarrow	darts.external_object_directory	darts.external_location_typeelt_id = darts.external_object_directoryelt_id	eod_external_location_type_fk

	Columns	Name / Description
9	elt_id	external_location_type_pk

12.1.31. Table: darts.external_object_directory

Columns

		Name	Data type	Description / Attributes
	1	eod_id	integer	primary key of external_object_directory
▤		ado_id	integer	foreign key from annotation_document Nullable References: darts.annotation_document
B		cad_id	integer	Nullable References: darts.case_document
▤		med_id	integer	foreign key from moj_media Nullable References: darts.media
B		trd_id	integer	foreign key from transcription_document Nullable References: darts.transcription_document
■		ors_id	integer	References: darts.object_record_status
B		elt_id	integer	foreign key from external_location_type References: darts.external_location_type
		osr_uuid	bigint	Nullable
		external_location	uuid	Nullable
		external_file_id	character varying	Nullable
B		external_record_id	character varying	Nullable
		checksum	character varying	Nullable
		transfer_attempts	integer	Nullable
		manifest_file	character varying	Nullable
B		event_date_ts	timestamp with time zone	Nullable
		data_ingestion_ts	timestamp with time zone	Nullable
■		verification_attempts	integer	Nullable
		error_code	character varying	Nullable
B		is_response_cleaned	boolean	Default : false
		update_retention	boolean	
		input_upload_processed_ts	timestamp with time zone	Nullable
		force_response_cleanup	boolean	Nullable
		is_dets	boolean	Default : false
		created_ts	timestamp with time zone	
		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

Table	Join	Title / Name / Description
— Loarts annotation document	<pre>darts.external_object_directoryado_id = darts.annotation_documentado_id</pre>	eod_annotation_document_fk

	Table	Join	Title / Name / Description
>	darts.case_document	darts.external_object_directorycad_id = darts.case_documentcad_id	eod_case_document_fk
—	darts.external_location_type	darts.external_object_directoryelt_id = darts.external_location_typeelt_id	eod_external_location_type_fk
-	darts.media	darts.external_object_directorymed_id = darts.mediamed_id	eod_media_fk
>	darts.object_record_status	darts.external_object_directoryors_id = darts.object_record_statusors_id	eod_object_record_status_fk
>	darts.transcription_document	darts.external_object_directorytrd_id = darts.transcription_documenttrd_id	eod_transcription_document_fk
\rightarrow	darts.user_account	darts.external_object_directorylast_mo dified_by = darts.user_accountusr_id	eod_modified_by_fk
-	darts.user_account	darts.external_object_directorycreated _by = darts.user_accountusr_id	external_object_directory_created_by_fk

Linked from

Table	Join	Title / Name / Description
→ darts.extobjdir_process_detail	darts.external_object_directoryeod_id = darts.extobjdir_process_detaileod_id	

	Columns	Name / Description
Ŷ	eod_id	external_object_directory_pk

12.1.32. Table: darts.external_service_auth_token

Columns

		Name	Data type	Description / Attributes
■	1	esa_id	integer	primary key of external_service_auth_token
■		external_service_userid	character varying	userId used by external services OR requestId user by Audio Request
■		token_type	integer	1=soap token, 2=email link token
■		token	character varying	Encrypted Token
■		expiry_ts	timestamp with time zone	Expiry Date & Time of the Token Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
—	darts.user_account	darts.external_service_auth_tokencreat ed_by = darts.user_accountusr_id	external_service_auth_token_created_by_fk
→	darts.user_account	darts.external_service_auth_token ast_ modified_by = darts.user_accountusr_id	external_service_auth_token_modified_by_fk

	Columns	Name / Description
9	esa_id	external_service_auth_token_pk

12.1.33. Table: darts.extobjdir_process_detail

This table is an extension of external_object_directory.

Columns

		Name	Data type	Description / Attributes
	1	epd_id	integer	primary key of extobjdir_process_detail, needed to support Hibernate. Logically eod_id is the PK
■	1	eod_id	integer	foreign key from external_object_directory References : darts.external_object_directory
▤		event_date_ts	timestamp with time zone	Nullable
▤		update_retention	boolean	
目		input_upload_filename	character varying	Nullable
■		create_record_filename	character varying	Nullable
■		create_record_processed_ts	timestamp with time zone	Nullable
■		upload_file_filename	character varying	Nullable
▤		upload_file_processed_ts	timestamp with time zone	Nullable
▤		create_rec_inv_filename	character varying	Nullable
▤		create_rec_inv_processed_ts	timestamp with time zone	Nullable
目		upload_file_inv_filename	character varying	Nullable
目		upload_file_inv_processed_ts	timestamp with time zone	Nullable
目		created_ts	timestamp with time zone	
目		created_by	integer	References: darts.user_account
目		last_modified_ts	timestamp with time zone	
目		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
—	darts.external_object_directory	darts.extobjdir_process_detaileod_id = darts.external_object_directoryeod_id	epd_external_object_directory_fk
—	darts.user_account	darts.extobjdir_process_detailcreated_ by = darts.user_accountusr_id	epd_created_by_fk
—	darts.user_account	darts.extobjdir_process_detaillast_mod ified_by = darts.user_accountusr_id	epd_last_modified_by_fk

	Columns	Name / Description
Ŷ	epd_id	extobjdir_process_detail_pk
Ŷ	eod_id	extobjdir_process_detail_eod_id_key

12.1.34. Table: darts.hearing

Columns

		Name	Data type	Description / Attributes
■	1	hea_id	integer	primary key of hearing
■	1	cas_id	integer	foreign key from case References: darts.court_case
■	1	ctr_id	integer	foreign key from courtroom References: darts.courtroom
	1	hearing_date	date	directly sourced from moj_case_r
■		scheduled_start_time	time without time zone	Nullable
■		hearing_is_actual	boolean	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.court_case	darts.hearingcas_id = darts.court_casecas_id	hearing_case_fk
>	darts.courtroom	<pre>darts.hearingctr_id = darts.courtroomctr_id</pre>	hearing_courtroom_fk
>	darts.user_account	<pre>darts.hearingcreated_by = darts.user_accountusr_id</pre>	hearing_created_by_fk
>	darts.user_account	<pre>darts.hearinglast_modified_by = darts.user_accountusr_id</pre>	hearing_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.hearing_annotation_ae	darts.hearinghea_id = darts.hearing_annotation_aehea_id	hearing_annotation_ae_hearing_fk
\rightarrow	darts.hearing_event_ae	darts.hearinghea_id = darts.hearing_event_aehea_id	hearing_event_ae_hearing_fk
\rightarrow	darts.hearing_judge_ae	darts.hearinghea_id = darts.hearing_judge_aehea_id	hearing_judge_ae_hearing_fk
\rightarrow	darts.hearing_media_ae	darts.hearinghea_id = darts.hearing_media_aehea_id	hearing_media_ae_hearing_fk
\rightarrow	darts.hearing_transcription_ae	darts.hearinghea_id = darts.hearing_transcription_aehea_id	hearing_transcription_ae_hearing_fk
\rightarrow	darts.media_request	darts.hearinghea_id = darts.media_requesthea_id	media_request_hearing_fk

	Columns	Name / Description
?	hea_id	hearing_pk

	Columns	Name / Description
P	cas_id, ctr_id, hearing_date	hea_cas_ctr_hd_unq

12.1.35. Table: darts.hearing_annotation_ae

Columns

		Name	Data type	Description / Attributes
	1	hea_id	integer	foreign key from hearing, part of composite natural key and PK References : darts.hearing
■	1	ann_id	integer	foreign key from annotation, part of composite natural key and PK References : darts.annotation

Links to

	Table	Join	Title / Name / Description
-	darts.annotation	darts.hearing_annotation_aeann_id = darts.annotationann_id	hearing_annotation_ae_annotation_fk
-	darts.hearing	darts.hearing_annotation_aehea_id = darts.hearinghea_id	hearing_annotation_ae_hearing_fk

Columns		Name / Description
9	hea_id, ann_id	hearing_annotation_ae_pk

12.1.36. Table: darts.hearing_event_ae

Columns

		Name	Data type	Description / Attributes
■	1	hea_id	integer	foreign key from hearing, part of composite natural key References : darts.hearing
■	1	eve_id	integer	foreign key from event, part of composite natural key References: darts.event

Links to

	Table	Join	Title / Name / Description
>	darts.event	darts.hearing_event_aeeve_id = darts.eventeve_id	hearing_event_ae_event_fk
-	darts.hearing	darts.hearing_event_aehea_id = darts.hearinghea_id	hearing_event_ae_hearing_fk

Columns		Name / Description
P	hea_id, eve_id	hearing_event_ae_pk

12.1.37. Table: darts.hearing_judge_ae

Columns

		Name	Data type	Description / Attributes
■	1	hea_id	integer	foreign key from case, part of composite natural key and PK References : darts.hearing
■	1	jud_id	integer	foreign key from judge, part of composite natural key and PK References : darts.judge

Links to

	Table	Join	Title / Name / Description
>	darts.hearing	darts.hearing_judge_aehea_id = darts.hearinghea_id	hearing_judge_ae_hearing_fk
>	· darts.judge	darts.hearing_judge_aejud_id = darts.judgejud_id	hearing_judge_ae_judge_fk

Columns		Name / Description
9	hea_id, jud_id	hearing_judge_ae_pk

12.1.38. Table: darts.hearing_media_ae

Columns

		Name	Data type	Description / Attributes
■	1	hea_id	integer	foreign key from case, part of composite natural key References : darts.hearing
B	1	med_id	integer	foreign key from media, part of composite natural key References : darts.media

Links to

	Table	Join	Title / Name / Description
-	darts.hearing	darts.hearing_media_aehea_id = darts.hearinghea_id	hearing_media_ae_hearing_fk
-	darts.media	darts.hearing_media_aemed_id = darts.mediamed_id	hearing_media_ae_media_fk

	Columns	Name / Description
9	hea_id, med_id	hearing_media_ae_pk

12.1.39. Table: darts.hearing_transcription_ae

Columns

		Name	Data type	Description / Attributes
■	1	hea_id	integer	foreign key from hearing, part of composite natural key and PK References : darts.hearing
■	1	tra_id	integer	foreign key from transcription, part of composite natural key and PK References : darts.transcription

Links to

	Table	Join	Title / Name / Description
>	- darts.hearing	darts.hearing_transcription_aehea_id = darts.hearinghea_id	hearing_transcription_ae_hearing_fk
>	- darts.transcription	darts.hearing_transcription_aetra_id = darts.transcriptiontra_id	hearing_transcription_ae_transcription_fk

	Columns	Name / Description
9	hea_id, tra_id	hearing_transcription_ae_pk

12.1.40. Table: darts.judge

Columns

		Name	Data type	Description / Attributes
■	1	jud_id	integer	primary key of judge_name
■	1	judge_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

		Table	Join	Title / Name / Description
:	—	darts.user_account	<pre>darts.judgecreated_by = darts.user_accountusr_id</pre>	judge_created_by_fk
:	—	darts.user_account	<pre>darts.judgelast_modified_by = darts.user_accountusr_id</pre>	judge_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.case_judge_ae	darts.judgejud_id = darts.case_judge_aejud_id	case_judge_ae_judge_fk
\rightarrow	darts.hearing_judge_ae	darts.judgejud_id = darts.hearing_judge_aejud_id	hearing_judge_ae_judge_fk

	Columns	Name / Description
?	jud_id	judge_pk
9	judge_name	judge_judge_name_key

12.1.41. Table: darts.media

Columns

	um	Name	Data type	Description / Attributes
B	1	med_id	integer	primary key of media
B		ctr_id	integer	foreign key from courtroom References: darts.courtroom
B		media_object_id	character varying(16)	internal Documentum primary key from moj_media_s Nullable
▤		content_object_id	character varying(16)	Nullable
▤		subcontent_object_id	character varying(16)	Nullable
▤		subcontent_position	integer	Nullable
▤		clip_id	character varying(54)	Nullable
▤		storage_id	character varying(16)	Nullable
▤		data_ticket	integer	Nullable
目		channel	integer	directly sourced from moj_media_s
■		total_channels	integer	directly sourced from moj_media_s
■		start_ts	timestamp with time zone	inherited from moj_case_document_s
■		end_ts	timestamp with time zone	inherited from moj_case_document_s
■		media_file	character varying	
■		media_format	character varying	
■		media_type	character(1)	Default: 'A'::bpchar
■		file_size	bigint	
目		checksum	character varying	Nullable
■		is_hidden	boolean	Default: false
▤		is_deleted	boolean	Default : false
▤		is_current	boolean	Nullable
■		deleted_by	integer	Nullable References: darts.user_account
▤		deleted_ts	timestamp with time zone	Nullable
		media_status	character varying	Nullable
B		version_label	character varying(32)	inherited from dm_sysobject_r, for r_object_type of moj_media Nullable
▤		chronicle_id	character varying(16)	Nullable
		antecedent_id	character varying(16)	Nullable
■		retain_until_ts	timestamp with time zone	Nullable
B		ret_conf_score	integer	Nullable
■		ret_conf_reason	character varying	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
▤		last_modified_ts	timestamp with time zone	

	Name	Data type	Description / Attributes
■	last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.courtroom	<pre>darts.mediactr_id = darts.courtroomctr_id</pre>	media_courtroom_fk
>	darts.user_account	darts.mediacreated_by = darts.user_accountusr_id	media_created_by_fk
>	darts.user_account	darts.medialast_modified_by = darts.user_accountusr_id	media_modified_by_fk
>	darts.user_account	darts.mediadeleted_by = darts.user_accountusr_id	media_deleted_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.external_object_directory	darts.mediamed_id = darts.external_object_directorymed_id	eod_media_fk
\rightarrow	darts.hearing_media_ae	darts.mediamed_id = darts.hearing_media_aemed_id	hearing_media_ae_media_fk
\rightarrow	darts.media_linked_case	darts.mediamed_id = darts.media_linked_casemed_id	media_linked_case_media_fk
\rightarrow	darts.object_admin_action	darts.mediamed_id = darts.object_admin_actionmed_id	oaa_media_fk
\rightarrow	darts.object_retrieval_queue	darts.mediamed_id = darts.object_retrieval_queuemed_id	object_retrieval_queue_media_fk

	Columns	Name / Description
P	med_id	media_pk

12.1.42. Table: darts.media_linked_case

content is to be populated via migration

Columns

		Name	Data type	Description / Attributes
■	1	mlc_id	integer	
■		med_id	integer	References: darts.media
		cas_id	integer	Nullable References: darts.court_case
■		courthouse_name	character varying	Nullable
■		case_number	character varying	Nullable
		source	integer	Nullable Default: 0
■		created_ts	timestamp with time zone	Nullable
		created_by	integer	Nullable References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.court_case	darts.media_linked_casecas_id = darts.court_casecas_id	media_linked_case_court_case_fk
>	darts.media	darts.media_linked_casemed_id = darts.mediamed_id	media_linked_case_media_fk
>	darts.user_account	darts.media_linked_casecreated_by = darts.user_accountusr_id	media_linked_case_created_by_fk

Columns	Name / Description
💡 mlc_id	media_linked_case_pk

12.1.43. Table: darts.media_request

Columns

		Name	Data type	Description / Attributes
■	1	mer_id	integer	primary key of media_request
■		hea_id	integer	foreign key of hearing References: darts.hearing
■		requestor	integer	requestor of the media request, possibly migrated from moj_transformation_request_s References: darts.user_account
▤		current_owner	integer	References: darts.user_account
▤		request_status	character varying	status of the migration request
■		request_type	character varying	
		req_proc_attempts	integer	number of attempts by ATS to process the request Nullable
		start_ts	timestamp with time zone	start time in the search criteria for request, possibly migrated from moj_cached_media_s or moj_transformation_request_s
■		end_ts	timestamp with time zone	end time in the search criteria for request, possibly migrated from moj_cached_media_s or moj_transformation_request_s
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
▤		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.hearing	darts.media_requesthea_id = darts.hearinghea_id	media_request_hearing_fk
>	darts.user_account	darts.media_requestcreated_by = darts.user_accountusr_id	media_request_created_by_fk
\rightarrow	darts.user_account	darts.media_request ast_modified_by = darts.user_accountusr_id	media_request_modified_by_fk
>	darts.user_account	darts.media_requestrequestor = darts.user_accountusr_id	media_request_requestor_fk
\rightarrow	darts.user_account	darts.media_requestcurrent_owner = darts.user_accountusr_id	media_request_current_owner_fk

Linked from

Table	Join	Title / Name / Description
→ darts.transformed_media	<pre>darts.media_requestmer_id = darts.transformed_mediamer_id</pre>	trm_media_request_fk

	Columns	Name / Description
P	mer_id	media_request_pk

12.1.44. Table: darts.node_register

corresponds to tbl_moj_node from legacy

Columns

		Name	Data type	Description / Attributes
■	1	node_id	integer	primary key of node_register
■		ctr_id	integer	foreign key from moj_courtroom, legacy stored courthouse and courtroon un-normalised References: darts.courtroom
■		node_type	character varying	Default : 'DAR'::character varying
■		hostname	character varying	
■		ip_address	character varying	
■		mac_address	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.courtroom	darts.node_registerctr_id = darts.courtroomctr_id	node_register_courtroom_fk
\rightarrow	darts.user_account	darts.node_registercreated_by = darts.user_accountusr_id	node_register_created_by_fk

	Columns	Name / Description
P	node_id	node_register_pk

12.1.45. Table: darts.notification

Columns

		Name	Data type	Description / Attributes
■	1	not_id	integer	primary key of notification
		cas_id	integer	foreign key to case References: darts.court_case
■		notification_event	character varying	event giving rise to the need for outgoing notification
		notification_status	character varying	status of the notification, expected to be one of [O]pen, [P]rocessing, [S]end, [F]ailed
■		email_address	character varying	recipient of the notification
		send_attempts	integer	number of outgoing requests to gov.uk Nullable
■		template_values	character varying	any extra fields not already covered or inferred from the case, in JSON format Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.court_case	darts.notificationcas_id = darts.court_casecas_id	notification_case_fk
\rightarrow	darts.user_account	darts.notificationcreated_by = darts.user_accountusr_id	notification_created_by_fk
>	darts.user_account	darts.notification ast_modified_by = darts.user_accountusr_id	notification_modified_by_fk

	Columns	Name / Description
9	not_id	notification_pk

12.1.46. Table: darts.object_admin_action

Columns

		Name	Data type	Description / Attributes
目	1	oaa_id	integer	
■		ado_id	integer	Nullable References: darts.annotation_document
		cad_id	integer	Nullable References: darts.case_document
		med_id	integer	Nullable References: darts.media
		trd_id	integer	Nullable References: darts.transcription_document
		ohr_id	integer	Nullable References: darts.object_hidden_reason
■		hidden_by	integer	Nullable References: darts.user_account
■		hidden_ts	timestamp with time zone	Nullable
▤		marked_for_manual_deletion	boolean	Default : false
		marked_for_manual_del_by	integer	Nullable References: darts.user_account
▤		marked_for_manual_del_ts	timestamp with time zone	Nullable
▤		ticket_reference	character varying	Nullable
▤		comments	character varying	Nullable

Links to

	Table	Join	Title / Name / Description
—	darts.annotation_document	darts.object_admin_actionado_id = darts.annotation_documentado_id	oaa_annotation_document_fk
—	darts.case_document	darts.object_admin_actioncad_id = darts.case_documentcad_id	oaa_case_document_fk
—	darts.media	darts.object_admin_actionmed_id = darts.mediamed_id	oaa_media_fk
> —	darts.object_hidden_reason	darts.object_admin_actionohr_id = darts.object_hidden_reasonohr_id	object_admin_action_ohr_id_fk
>	darts.transcription_document	darts.object_admin_actiontrd_id = darts.transcription_documenttrd_id	oaa_transcription_document_fk
> —	darts.user_account	darts.object_admin_actionhidden_by = darts.user_accountusr_id	object_admin_action_hidden_by_fk
—	darts.user_account	darts.object_admin_actionmarked_for_ manual_del_by = darts.user_accountusr_id	object_admin_action_marked_for_manual_del_by_fk

	Columns	Name / Description
?	oaa_id	object_admin_action_pk

12.1.47. Table: darts.object_hidden_reason

used to record acceptable reasons for data to be hidden in tables ADO,CAD, MED, TRD

Columns

		Name	Data type	Description / Attributes
	1	ohr_id	integer	
■		ohr_reason	character varying	
■		display_name	character varying	
■		display_state	boolean	Default: true
■		display_order	integer	
■		marked_for_deletion	boolean	Default: false

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.object_admin_action	<pre>darts.object_hidden_reasonohr_id = darts.object_admin_actionohr_id</pre>	object_admin_action_ohr_id_fk

	Columns	Name / Description
P	ohr_id	object_hidden_reason_pk

12.1.48. Table: darts.object_record_status

used to record acceptable statuses found in [external/transient]_object_directory

Columns

		Name	Data type	Description / Attributes
■	1	ors_id	integer	
■		ors_description	character varying	Nullable

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.external_object_directory	<pre>darts.object_record_statusors_id = darts.external_object_directoryors_id</pre>	eod_object_record_status_fk
\rightarrow	darts.transient_object_directory	<pre>darts.object_record_statusors_id = darts.transient_object_directoryors_id</pre>	tod_object_record_status_fk

	Columns	Name / Description
9	ors_id	object_record_status_pk

12.1.49. Table: darts.object_retrieval_queue

Columns

		Name	Data type	Description / Attributes
■	1	orq_id	integer	
■		med_id	integer	Nullable References: darts.media
		trd_id	integer	Nullable References: darts.transcription_document
▤		parent_object_id	character varying	Nullable
■		content_object_id	character varying	Nullable
■		storage_id	character varying(16)	Nullable
■		clip_id	character varying	Nullable
■		data_ticket	integer	Nullable
■		acknowledged_ts	timestamp with time zone	Nullable
■		migrated_ts	timestamp with time zone	Nullable
■		status	character varying	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
▤		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.media	darts.object_retrieval_queuemed_id = darts.mediamed_id	object_retrieval_queue_media_fk
\rightarrow	darts.transcription_document	darts.object_retrieval_queuetrd_id = darts.transcription_documenttrd_id	object_retrieval_queue_transcription_document_fk
>	darts.user_account	darts.object_retrieval_queuecreated_b y = darts.user_accountusr_id	object_retrieval_queue_created_by_fk
\rightarrow	darts.user_account	darts.object_retrieval_queuelast_modified_by = darts.user_accountusr_id	object_retrieval_queue_last_modified_by_fk

	Columns	Name / Description
9	orq_id	object_retrieval_queue_pk

12.1.50. Table: darts.object_state_record

Columns

		Name	Data type	Description / Attributes
B	1	osr_uuid	bigint	
		eod_id	character varying	Nullable
B		arm_eod_id	character varying	Nullable
B		parent_object_id	character varying	Nullable
B		content_object_id	character varying	Nullable
		id_clip	character varying	Nullable
■		dets_location	character varying	Nullable
■		flag_file_transfer_to_dets	boolean	Nullable
■		date_file_transfer_to_dets	timestamp with time zone	Nullable
		md5_doc_transfer_to_dets	character varying	Nullable
		file_size_bytes_centera	bigint	Nullable
		file_size_bytes_dets	bigint	Nullable
		flag_file_av_scan_pass	boolean	Nullable
		date_file_av_scan_pass	timestamp with time zone	Nullable
		flag_file_transf_toarml	boolean	Nullable
B		date_file_transf_toarml	timestamp with time zone	Nullable
		md5_file_transf_arml	character varying	Nullable
		file_size_bytes_arml	bigint	Nullable
B		flag_file_mfst_created	boolean	Nullable
B		date_file_mfst_created	timestamp with time zone	Nullable
B		id_manifest_file	character varying	Nullable
		flag_mfst_transf_to_arml	boolean	Nullable
		date_mfst_transf_to_arml	timestamp with time zone	Nullable
		flag_rspn_recvd_from_arml	boolean	Nullable
B		date_rspn_recvd_from_arml	timestamp with time zone	Nullable
B		flag_file_ingest_status	boolean	Nullable
B		date_file_ingest_to_arm	timestamp with time zone	Nullable
B		md5_file_ingest_to_arm	character varying	Nullable
B		file_size_ingest_to_arm	bigint	Nullable
B		id_response_file	character varying	Nullable
B		id_response_cr_file	character varying	Nullable
B		id_response_uf_file	character varying	Nullable
B		flag_file_dets_cleanup_status	boolean	Nullable
		date_file_dets_cleanup	timestamp with time zone	Nullable
B		object_status	character varying	Nullable

	Name	Data type	Description / Attributes
■	storage_id	character varying	Nullable
■	data_ticket	integer	Nullable

	Columns	Name / Description
9	osr_uuid	object_state_record_pk

12.1.51. Table: darts.prosecutor

Columns

		Name	Data type	Description / Attributes
■	1	prn_id	integer	primary key of prosecutor_name
■	9	cas_id	integer	foreign key from court_case References: darts.court_case
■	1	prosecutor_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.court_case	darts.prosecutorcas_id = darts.court_casecas_id	prosecutor_court_case_fk
>	darts.user_account	darts.prosecutorcreated_by = darts.user_accountusr_id	prosecutor_created_by_fk
>	darts.user_account	darts.prosecutorlast_modified_by = darts.user_accountusr_id	prosecutor_modified_by_fk

	Columns	Name / Description
Ŷ	prn_id	prosecutor_pk
Ŷ	cas_id, prosecutor_name	prn_cas_id_prosecutor_name_unq

12.1.52. Table: darts.region

Columns

		Name	Data type	Description / Attributes
▤	1	reg_id	integer	
▤		region_name	character varying	

Linked from

	Table	Join	Title / Name / Description
-	→ darts.courthouse_region_ae	darts.regionreg_id = darts.courthouse_region_aereg_id	courthouse_region_region_fk

	Columns	Name / Description
9	reg_id	region_pk

12.1.53. Table: darts.report

Columns

		Name	Data type	Description / Attributes
■	1	rep_id	integer	primary key of report
■		report_object_id	character varying(16)	internal Documentum primary key from moj_report_s Nullable
		name	character varying	directly sourced from moj_report_s Nullable
		subject	character varying	directly sourced from moj_report_s Nullable
■		report_text	character varying	directly sourced from moj_report_s Nullable
		query	character varying	directly sourced from moj_report_s Nullable
■		recipients	character varying	directly sourced from moj_report_s Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

		Table	Join	Title / Name / Description
}	—	darts.user_account	<pre>darts.reportcreated_by = darts.user_accountusr_id</pre>	report_created_by_fk
}	—	darts.user_account	<pre>darts.reportlast_modified_by = darts.user_accountusr_id</pre>	report_modified_by_fk

	Columns	Name / Description
9	rep_id	report_pk

12.1.54. Table: darts.retention_confidence_category_mapper

Columns

		Name	Data type	Description / Attributes
■	1	rcc_id	integer	
■		ret_conf_score	integer	Nullable
■		ret_conf_reason	character varying	Nullable
■		confidence_category	integer	Nullable
■		description	character varying	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
▤		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\leftarrow	darts.user_account	darts.retention_confidence_category_ mappercreated_by = darts.user_accountusr_id	retention_confidence_category_mapper_created_by_fk
—	darts.user_account	darts.retention_confidence_category_ mapperlast_modified_by = darts.user_accountusr_id	retention_confidence_category_mapper_last_modified_by_fk

	Columns	Name / Description
P	rcc_id	retention_confidence_category_mapper_pk

12.1.55. Table: darts.retention_policy_type

Columns

		Name	Data type	Description / Attributes
■	1	rpt_id	integer	
■		fixed_policy_key	character varying	
■		policy_name	character varying	
■		display_name	character varying	
■		duration	character varying	
■		policy_start_ts	timestamp with time zone	
■		policy_end_ts	timestamp with time zone	Nullable
■		description	character varying	
■		retention_policy_object_id	character varying	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
—	darts.user_account	darts.retention_policy_typecreated_by = darts.user_accountusr_id	retention_policy_type_created_by_fk
—	darts.user_account	darts.retention_policy_type ast_modifie d_by = darts.user_accountusr_id	retention_policy_type_last_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.case_management_retention	darts.retention_policy_typerpt_id = darts.case_management_retentionrpt_i d	case_management_retention_retention_policy_type_fk
\rightarrow	darts.case_overflow	darts.retention_policy_typerpt_id = darts.case_overflowrpt_id	case_overflow_retention_policy_type_fk
\rightarrow	darts.case_retention	<pre>darts.retention_policy_typerpt_id = darts.case_retentionrpt_id</pre>	case_retention_retention_policy_type_fk
\rightarrow	darts.case_retention_audit_heritage	darts.retention_policy_typerpt_id = darts.case_retention_audit_heritagerpt _id	case_retention_audit_heritage_retention_policy_type_fk
\rightarrow	darts.rps_retainer	darts.retention_policy_typerpt_id = darts.rps_retainerrpt_id	rps_retainer_retention_policy_type_fk

	Columns	Name / Description
P	rpt_id	retention_policy_type_pk

12.1.56. Table: darts.retention_policy_type_heritage_mapping

Columns

		Name	Data type	Description / Attributes
■	1	rhm_id	integer	
■		heritage_policy_name	character varying	
■		heritage_table	character varying	
■		modernised_rpt_id	integer	

	Columns	Name / Description
?	rhm_id	retention_policy_type_heritage_mapping_pk

12.1.57. Table: darts.revinfo

Columns

		Name	Data type	Description / Attributes
■	1	rev	integer	
■		revtstmp	bigint	Nullable
■		audit_user	integer	Nullable References: darts.user_account

Links to

	Table	Join	Title / Name / Description
—	darts.user_account	<pre>darts.revinfoaudit_user = darts.user_accountusr_id</pre>	revinfo_audit_user_fk

	Columns	Name / Description
?	rev	revinfo_pkey

12.1.58. Table: darts.rps_retainer

is essentially a legacy table, based on the component tables necessary to derive the dmc_rps_retainer object

Columns

		Name	Data type	Description / Attributes
■	1	rpr_id	integer	primary key of case_rps_retainer
▤		rpt_id	integer	References: darts.retention_policy_type
■		rps_retainer_object_id	character varying	
		case_object_id	character varying	Nullable
▤		audio_folder_object_id	character varying	Nullable
▤		is_current	boolean	Nullable
■		dm_retainer_root_id	character varying	Nullable
■		dm_retention_rule_type	integer	Nullable
■		dm_retention_date	timestamp with time zone	Nullable
■		dmc_current_phase_id	character varying	Nullable
■		dmc_entry_date	timestamp with time zone	Nullable
■		dmc_parent_ancestor_id	character varying	Nullable
■		dmc_phase_name	character varying	Nullable
■		dmc_qualification_date	timestamp with time zone	Nullable
▤		dmc_retention_base_date	timestamp with time zone	Nullable
■		dmc_retention_policy_id	character varying	Nullable
■		dmc_ultimate_ancestor_id	character varying	Nullable
■		dmc_vdm_retention_rule	integer	Nullable
▤		dmc_is_superseded	integer	Nullable
■		dmc_superseded_date	timestamp with time zone	Nullable
■		dmc_superseded_phase_id	character varying	Nullable
▤		dmc_snapshot_retention_rule	integer	Nullable
■		dmc_approval_required	integer	Nullable
■		dmc_approval_status	character varying	Nullable
■		dmc_approved_date	timestamp with time zone	Nullable
▤		dmc_projected_disposition_date	timestamp with time zone	Nullable
▤		dmc_is_qualification_suspended	integer	Nullable
■		dmc_suspension_lift_date	timestamp with time zone	Nullable
		dmc_base_date_override	timestamp with time zone	Nullable
		dms_object_name	character varying	Nullable
		dms_i_chronicle_id	character varying	Nullable
■		dms_r_policy_id	character varying	Nullable
		dms_r_resume_state	integer	Nullable
		dms_r_current_state	integer	Nullable
		created_ts	timestamp with time zone	

	Name	Data type	Description / Attributes
	created_by	integer	References: darts.user_account
■	last_modified_ts	timestamp with time zone	
■	last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.retention_policy_type	<pre>darts.rps_retainerrpt_id = darts.retention_policy_typerpt_id</pre>	rps_retainer_retention_policy_type_fk
-	darts.user_account	darts.rps_retainercreated_by = darts.user_accountusr_id	rps_retainer_created_by_fk
>	darts.user_account	darts.rps_retainerlast_modified_by = darts.user_accountusr_id	rps_retainer_last_modified_by_fk

	Columns	Name / Description
9	rpr_id	rps_retainer_pk

12.1.59. Table: darts.security_group

migration columns all sourced directly from dm_group_s, additional attributes may be required from dm_user_s, but data only where dm_user_s.r_is_group=1

Columns

		Name	Data type	Description / Attributes
	1	grp_id	integer	primary key of security_group
■		rol_id	integer	References: darts.security_role
■		global_access	boolean	Default: false
		display_state	boolean	
■		display_name	character varying	for purpose of providing a display_name for modernised solution
■		dm_group_s_object_id	character varying(16)	internal Documentum primary key from dm_group_s Nullable
■		group_name	character varying	
■		group_display_name	character varying	derived directly from dm_group_s.group_display_name Nullable
目		is_private	boolean	Nullable
■		description	character varying	Nullable
■		group_global_unique_id	character varying	Nullable
■		use_interpreter	boolean	Default: false
■		created_ts	timestamp with time zone	
目		created_by	integer	References: darts.user_account
目		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.security_role	<pre>darts.security_grouprol_id = darts.security_rolerol_id</pre>	security_group_role_fk
>	darts.user_account	darts.security_groupcreated_by = darts.user_accountusr_id	security_group_created_by_fk
>	darts.user_account	darts.security_grouplast_modified_by = darts.user_accountusr_id	security_group_last_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
-	darts.security_group_courthouse_ae	<pre>darts.security_groupgrp_id = darts.security_group_courthouse_aegr p_id</pre>	security_group_courthouse_group_fk
	darts.security_group_user_account_ ae	<pre>darts.security_groupgrp_id = darts.security_group_user_account_ae grp_id</pre>	security_group_user_account_ae_group_fk

		Columns	Name / Description
9	grp_id		security_group_pk

12.1.60. Table: darts.security_group_courthouse_ae

Columns

		Name	Data type	Description / Attributes
▤	1	grp_id	integer	References: darts.security_group
▤	1	cth_id	integer	References: darts.courthouse

Links to

	Table	Join	Title / Name / Description
>	darts.courthouse	darts.security_group_courthouse_aect h_id = darts.courthousecth_id	security_group_courthouse_courthouse_fk
-	darts.security_group	darts.security_group_courthouse_aegr p_id = darts.security_groupgrp_id	security_group_courthouse_group_fk

Columns		Name / Description
?	grp_id, cth_id	security_group_courthouse_ae_pk

12.1.61. Table: darts.security_group_user_account_ae

is the associative entity mapping users to groups, content will be defined by dm_group_r

Columns

		Name	Data type	Description / Attributes
■	1	usr_id	integer	foreign key from user_account References: darts.user_account
B	1	grp_id	integer	foreign key from security_group References: darts.security_group

Links to

	Table	Join	Title / Name / Description
—	darts.security_group	darts.security_group_user_account_ae grp_id = darts.security_groupgrp_id	security_group_user_account_ae_group_fk
—	darts.user_account	darts.security_group_user_account_ae usr_id = darts.user_accountusr_id	security_group_user_account_ae_user_fk

Columns		Name / Description
?	usr_id, grp_id	security_group_user_account_ae_pk

12.1.62. Table: darts.security_permission

Columns

		Name	Data type	Description / Attributes
■	1	per_id	integer	
■		permission_name	character varying	

Linked from

	Table	Join	Title / Name / Description
_	darts.security_role_permission_ae	<pre>darts.security_permissionper_id = darts.security_role_permission_aeper_i d</pre>	security_role_permission_permission_fk

	Columns	Name / Description
9	per_id	security_permission_pk

12.1.63. Table: darts.security_role

Columns

		Name	Data type	Description / Attributes
■	1	rol_id	integer	
■		role_name	character varying	
■		display_name	character varying	
■		display_state	boolean	

Linked from

		Table	Join	Title / Name / Description
-	→	darts.security_group	<pre>darts.security_rolerol_id = darts.security_grouprol_id</pre>	security_group_role_fk
-	→	darts.security_role_permission_ae	<pre>darts.security_rolerol_id = darts.security_role_permission_aerol_id</pre>	security_role_permission_ae_role_fk

	Columns	Name / Description
?	rol_id	security_role_pk

12.1.64. Table: darts.security_role_permission_ae

Columns

		Name	Data type	Description / Attributes
■	1	rol_id	integer	References: darts.security_role
■	1	per_id	integer	References: darts.security_permission

Links to

	Table	Join	Title / Name / Description
>	- darts.security_permission	darts.security_role_permission_aeper_i d = darts.security_permissionper_id	security_role_permission_permission_fk
+	darts.security_role	darts.security_role_permission_aerol_id = darts.security_rolerol_id	security_role_permission_ae_role_fk

	Columns	Name / Description
9	rol_id, per_id	security_role_permission_ae_pk

12.1.65. Table: darts.transcription

Columns

		Name	Data type	Description / Attributes
	1	tra_id	integer	primary key of transcription
		trt_id	integer	foreign key to transcription_type, sourced from moj_transcription_s.c_type References : darts.transcription_type
■		ctr_id	integer	foreign key from courtroom Nullable References: darts.courtroom
		tru_id	integer	foreign key from transcription_urgency Nullable References: darts.transcription_urgency
		trs_id	integer	Nullable References: darts.transcription_status
		transcription_object_id	character varying(16)	internal Documentum primary key from moj_transcription_s Nullable
		transcription_object_name	character varying(255)	Nullable
		requested_by	integer	foreign key from user_account, corresponding to moj_transcription_s.c_requestor Nullable References: darts.user_account
		hearing_date	date	directly sourced from moj_transcription_s Nullable
		start_ts	timestamp with time zone	inherited from moj_case_document_s Nullable
		end_ts	timestamp with time zone	inherited from moj_case_document_s Nullable
		is_manual_transcription	boolean	
		is_current	boolean	Nullable
		hide_request_from_requestor	boolean	
		is_deleted	boolean	Default : false
		deleted_by	integer	Nullable References: darts.user_account
		deleted_ts	timestamp with time zone	Nullable
		version_label	character varying(32)	inherited from dm_sysobject_r, for r_object_type of moj_transcription Nullable
		chronicle_id	character varying(16)	Nullable
		antecedent_id	character varying(16)	Nullable
		c_current_state	character varying	Nullable
		r_current_state	integer	Nullable
		created_ts	timestamp with time zone	
		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.courtroom	darts.transcriptionctr_id = darts.courtroomctr_id	transcription_courtroom_fk
>	darts.transcription_status	darts.transcriptiontrs_id = darts.transcription_statustrs_id	transcription_transcription_status_fk
\rightarrow	darts.transcription_type	darts.transcriptiontrt_id = darts.transcription_typetrt_id	transcription_transcription_type_fk
\rightarrow	darts.transcription_urgency	darts.transcriptiontru_id = darts.transcription_urgencytru_id	transcription_urgency_fk
>	darts.user_account	darts.transcriptionlast_modified_by = darts.user_accountusr_id	transcription_last_modified_by_fk
>	darts.user_account	darts.transcriptionrequested_by = darts.user_accountusr_id	transcription_requested_by_fk
\rightarrow	darts.user_account	darts.transcriptioncreated_by = darts.user_accountusr_id	transcription_created_by_fk
>	darts.user_account	darts.transcriptiondeleted_by = darts.user_accountusr_id	transcription_deleted_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.case_transcription_ae	darts.transcriptiontra_id = darts.case_transcription_aetra_id	case_transcription_ae_transcription_fk
\rightarrow	darts.hearing_transcription_ae	darts.transcriptiontra_id = darts.hearing_transcription_aetra_id	hearing_transcription_ae_transcription_fk
\rightarrow	darts.transcription_comment	darts.transcriptiontra_id = darts.transcription_commenttra_id	transcription_comment_transcription_fk
\rightarrow	darts.transcription_document	darts.transcriptiontra_id = darts.transcription_documenttra_id	transcription_document_transcription_fk
\rightarrow	darts.transcription_linked_case	darts.transcriptiontra_id = darts.transcription_linked_casetra_id	transcription_linked_case_transcription_fk
\rightarrow	darts.transcription_workflow	darts.transcriptiontra_id = darts.transcription_workflowtra_id	transcription_workflow_transcription_fk

	Columns	Name / Description
9	tra_id	transcription_pk

12.1.66. Table: darts.transcription_comment

Columns

		Name	Data type	Description / Attributes
■	1	trc_id	integer	primary key of transcription_comment
		tra_id	integer	foreign key from transcription References : darts.transcription
■		trw_id	integer	foreign key from transcription_workflow Nullable References: darts.transcription_workflow
■		transcription_object_id	character varying(16)	internal Documentum id from moj_transcription_s acting as foreign key Nullable
■		transcription_comment	character varying	directly sourced from moj_transcription_r Nullable
■		comment_ts	timestamp with time zone	Nullable
		author	integer	Nullable References: darts.user_account
■		is_migrated	boolean	Default: false
■		is_data_anonymised	boolean	Default : false
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.transcription	darts.transcription_commenttra_id = darts.transcriptiontra_id	transcription_comment_transcription_fk
>	darts.transcription_workflow	darts.transcription_commenttrw_id = darts.transcription_workflowtrw_id	transcription_comment_transcription_workflow_fk
>	darts.user_account	darts.transcription_commentauthor = darts.user_accountusr_id	transcription_comment_author_fk
>	darts.user_account	darts.transcription_commentcreated_b y = darts.user_accountusr_id	transcription_comment_created_by_fk
\rightarrow	darts.user_account	darts.transcription_commentlast_modified_by = darts.user_accountusr_id	transcription_comment_modified_by_fk

Linked from

Table	Join	Title / Name / Description
	<pre>darts.transcription_commenttrc_id = darts.data_anonymisationtrc_id</pre>	data_anonymisation_transcription_comment_fk

	Columns	Name / Description
9	trc_id	transcription_comment_pk

12.1.67. Table: darts.transcription_document

Columns

		Name	Data type	Description / Attributes
■	1	trd_id	integer	primary key of transcription_document
■		tra_id	integer	foreign key from transcription References : darts.transcription
▤		content_object_id	character varying(16)	Nullable
▤		subcontent_object_id	character varying(16)	Nullable
▤		subcontent_position	integer	Nullable
▤		clip_id	character varying(54)	Nullable
▤		storage_id	character varying(16)	Nullable
目		data_ticket	integer	Nullable
▤		file_name	character varying	
▤		file_type	character varying	
目		file_size	integer	
目		checksum	character varying	Nullable
▤		is_deleted	boolean	Default : false
■		deleted_by	integer	Nullable References: darts.user_account
▤		deleted_ts	timestamp with time zone	Nullable
▤		is_hidden	boolean	Default : false
▤		retain_until_ts	timestamp with time zone	Nullable
▤		ret_conf_score	integer	Nullable
▤		ret_conf_reason	character varying	Nullable
目		uploaded_by	integer	References: darts.user_account
▤		uploaded_ts	timestamp with time zone	
目		last_modified_ts	timestamp with time zone	
目		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.transcription	darts.transcription_documenttra_id = darts.transcriptiontra_id	transcription_document_transcription_fk
>	darts.user_account	darts.transcription_documentdeleted_ by = darts.user_accountusr_id	transcription_document_deleted_by_fk
\rightarrow	darts.user_account	darts.transcription_documentuploade d_by = darts.user_accountusr_id	transcription_document_uploaded_by_fk
\rightarrow	darts.user_account	darts.transcription_documentlast_modi fied_by = darts.user_accountusr_id	transcription_document_last_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.external_object_directory	darts.transcription_documenttrd_id = darts.external_object_directorytrd_id	eod_transcription_document_fk
\rightarrow	darts.object_admin_action	darts.transcription_documenttrd_id = darts.object_admin_actiontrd_id	oaa_transcription_document_fk
\rightarrow	darts.object_retrieval_queue	darts.transcription_documenttrd_id = darts.object_retrieval_queuetrd_id	object_retrieval_queue_transcription_document_fk

	Columns	Name / Description
9	trd_id	transcription_document_pk

12.1.68. Table: darts.transcription_linked_case

Columns

		Name	Data type	Description / Attributes
■	1	tlc_id	integer	primary key of transcription_linked_case
■		tra_id	integer	foreign key from transcription References: darts.transcription
		cas_id	integer	foreign key from court_case, mandatory if either courthouse_name or case_number are null Nullable References: darts.court_case
		courthouse_name	character varying	mandatory if cas_id is null Nullable
		case_number	character varying	mandatory if cas_id is null Nullable

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.court_case	darts.transcription_linked_casecas_id = darts.court_casecas_id	transcription_linked_case_court_case_fk
→	darts.transcription	darts.transcription_linked_casetra_id = darts.transcriptiontra_id	transcription_linked_case_transcription_fk

	Columns	Name / Description
Ŷ	tlc_id	transcription_linked_case_pk

12.1.69. Table: darts.transcription_status

standing data table

Columns

		Name	Data type	Description / Attributes
■	1	trs_id	integer	primary key of transcription_status
■		status_type	character varying	
■		display_name	character varying	

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.transcription	<pre>darts.transcription_statustrs_id = darts.transcriptiontrs_id</pre>	transcription_transcription_status_fk
\rightarrow	darts.transcription_workflow	darts.transcription_statustrs_id = darts.transcription_workflowtrs_id	transcription_workflow_transcription_status_fk

	Columns	Name / Description
?	trs_id	transcription_status_pk

12.1.70. Table: darts.transcription_type

standing data table, migrated from tbl_moj_transcription_type

Columns

		Name	Data type	Description / Attributes
■	1	trt_id	integer	primary key, but not sequence generated
■		description	character varying	
■		display_state	boolean	

Linked from

	Table	Join	Title / Name / Description
-	→ darts.transcription	<pre>darts.transcription_typetrt_id = darts.transcriptiontrt_id</pre>	transcription_transcription_type_fk

	Columns	Name / Description
?	trt_id	transcription_type_pk

12.1.71. Table: darts.transcription_urgency

will be migrated from tbl_moj_urgency

Columns

		Name	Data type	Description / Attributes
■	1	tru_id	integer	inherited from tbl_moj_urgency.urgency_id
■		description	character varying	inherited from tbl_moj_urgency.description
■		display_state	boolean	
■		priority_order	integer	

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.transcription	<pre>darts.transcription_urgencytru_id = darts.transcriptiontru_id</pre>	transcription_urgency_fk

	Columns	Name / Description
P	tru_id	transcription_urgency_pk

12.1.72. Table: darts.transcription_workflow

Columns

		Name	Data type	Description / Attributes
■	1	trw_id	integer	
■		tra_id	integer	References: darts.transcription
■		trs_id	integer	References: darts.transcription_status
■		workflow_actor	integer	References: darts.user_account
■		workflow_ts	timestamp with time zone	

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.transcription	darts.transcription_workflowtra_id = darts.transcriptiontra_id	transcription_workflow_transcription_fk
—	darts.transcription_status	darts.transcription_workflowtrs_id = darts.transcription_statustrs_id	transcription_workflow_transcription_status_fk
\rightarrow	darts.user_account	darts.transcription_workflowworkflow_ actor = darts.user_accountusr_id	transcription_workflow_workflow_actor_fk

Linked from

Table	Join	Title / Name / Description
- I dans transcription comment	<pre>darts.transcription_workflowtrw_id = darts.transcription_commenttrw_id</pre>	transcription_comment_transcription_workflow_fk

Unique keys

	Columns	Name / Description
9	trw_id	transcription_workflow_pk

Triggers

Name	When	Description
trw_ar_trg	After Insert	

12.1.73. Table: darts.transformed_media

to accommodate the possibility that a single media_request may be fulfilled as more than one resulting piece of media

Columns

		Name	Data type	Description / Attributes
■	1	trm_id	integer	
■		mer_id	integer	References: darts.media_request
■		start_ts	timestamp with time zone	
■		end_ts	timestamp with time zone	
■		last_accessed_ts	timestamp with time zone	Nullable
■		expiry_ts	timestamp with time zone	Nullable
■		output_filename	character varying	filename of the requested media object, possibly migrated from moj_transformation_request_s Nullable
■		output_filesize	integer	Nullable
■		output_format	character varying	format of the requested media object, possibly migrated from moj_transformation_s Nullable
■		checksum	character varying	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.media_request	darts.transformed_mediamer_id = darts.media_requestmer_id	trm_media_request_fk
>	darts.user_account	darts.transformed_mediacreated_by = darts.user_accountusr_id	transformed_media_created_by_fk
>	darts.user_account	darts.transformed_medialast_modified _by = darts.user_accountusr_id	transformed_media_last_modified_by_fk

Linked from

Table	Join	Title / Name / Description
→ I darts transient object directory I	<pre>darts.transformed_mediatrm_id = darts.transient_object_directorytrm_id</pre>	tod_transformed_media_fk

Unique keys

	Columns	Name / Description
?	trm_id	transformed_media_pk

12.1.74. Table: darts.transient_object_directory

Columns

		Name	Data type	Description / Attributes
■	1	tod_id	integer	
■		trm_id	integer	References: darts.transformed_media
■		ors_id	integer	References: darts.object_record_status
■		external_location	uuid	
■		checksum	character varying	Nullable
■		transfer_attempts	integer	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
—	darts.object_record_status	darts.transient_object_directoryors_id = darts.object_record_statusors_id	tod_object_record_status_fk
—	darts.transformed_media	darts.transient_object_directorytrm_id = darts.transformed_mediatrm_id	tod_transformed_media_fk
\rightarrow	darts.user_account	darts.transient_object_directorylast_m odified_by = darts.user_accountusr_id	tod_modified_by_fk
—	darts.user_account	darts.transient_object_directorycreated _by = darts.user_accountusr_id	transient_object_directory_created_by_fk

Unique keys

	Columns	Name / Description
Ŷ	tod_id	transient_object_directory_pk

12.1.75. Table: darts.user_account

migration columns all sourced directly from dm_user_s, but only for rows where r_is_group = 0

Columns

		Name	Data type	Description / Attributes
▤	1	usr_id	integer	primary key of user_account
		dm_user_s_object_id	character varying(16)	internal Documentum primary key from dm_user_s Nullable
▤		user_name	character varying	Nullable
▤		user_os_name	character varying	Nullable
▤		user_full_name	character varying	directly migrated from dm_user_s.user_name
▤		user_email_address	character varying	Nullable
▤		user_ldap_dn	character varying	Nullable
▤		user_global_unique_id	character varying	Nullable
▤		user_login_name	character varying	Nullable
▤		user_login_domain	character varying	Nullable
▤		user_state	smallint	Nullable
▤		description	character varying	Nullable
▤		is_active	boolean	
▤		last_login_ts	timestamp with time zone	Nullable
▤		is_system_user	boolean	Default: false
▤		account_guid	character varying	Nullable
目		created_ts	timestamp with time zone	
目		created_by	integer	
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	

Linked from

	Table Join Title / Name / Description				
	rable	JOIN	Title / Name / Description		
\rightarrow	darts.annotation	darts.user_accountusr_id = darts.annotationcurrent_owner	annotation_current_owner_fk		
\rightarrow	darts.annotation	darts.user_accountusr_id = darts.annotationcreated_by	annotation_created_by_fk		
\rightarrow	darts.annotation	darts.user_accountusr_id = darts.annotationlast_modified_by	annotation_modified_by_fk		
\rightarrow	darts.annotation	darts.user_accountusr_id = darts.annotationdeleted_by	annotation_deleted_by_fk		
\rightarrow	darts.annotation_document	darts.user_accountusr_id = darts.annotation_documentdeleted_by	annotation_document_deleted_by_fk		
\rightarrow	darts.annotation_document	darts.user_accountusr_id = darts.annotation_documentuploaded_by	annotation_document_uploaded_by_fk		
→	darts.annotation_document	darts.user_accountusr_id = darts.annotation_documentlast_modified_by	annotation_document_last_modified_by_fk		

	Table	Join	Title / Name / Description
\rightarrow	darts.arm_rpo_execution_detail	<pre>darts.user_accountusr_id = darts.arm_rpo_execution_detailcreated _by</pre>	arm_rpo_execution_detail_created_by_fk
\rightarrow	darts.arm_rpo_execution_detail	darts.user_accountusr_id = darts.arm_rpo_execution_detaillast_mo dified_by	arm_rpo_execution_detail_last_modified_by_fk
\rightarrow	darts.audit	darts.user_accountusr_id = darts.auditusr_id	audit_user_account_fk
\rightarrow	darts.audit	darts.user_accountusr_id = darts.auditcreated_by	audit_created_by_fk
\rightarrow	darts.audit	darts.user_accountusr_id = darts.auditlast_modified_by	audit_modified_by_fk
\rightarrow	darts.audit_activity	darts.user_accountusr_id = darts.audit_activitycreated_by	audit_activity_created_by_fk
\rightarrow	darts.audit_activity	darts.user_accountusr_id = darts.audit_activitylast_modified_by	audit_activity_modified_by_fk
\rightarrow	darts.automated_task	darts.user_accountusr_id = darts.automated_taskcreated_by	automated_task_created_by_fk
\rightarrow	darts.automated_task	darts.user_accountusr_id = darts.automated_tasklast_modified_by	automated_task_modified_by_fk
\rightarrow	darts.case_document	darts.user_accountusr_id = darts.case_documentcreated_by	case_document_created_by_fk
\rightarrow	darts.case_document	darts.user_accountusr_id = darts.case_documentlast_modified_by	case_document_last_modified_by_fk
\rightarrow	darts.case_document	darts.user_accountusr_id = darts.case_documentdeleted_by	case_document_deleted_by_fk
\rightarrow	darts.case_retention	darts.user_accountusr_id = darts.case_retentioncreated_by	case_retention_created_by_fk
\rightarrow	darts.case_retention	darts.user_accountusr_id = darts.case_retentionlast_modified_by	case_retention_last_modified_by_fk
\rightarrow	darts.case_retention	darts.user_accountusr_id = darts.case_retentionsubmitted_by	case_retention_submitted_by_fk
\rightarrow	darts.case_retention_audit_heritage	<pre>darts.user_accountusr_id = darts.case_retention_audit_heritagec_u sername</pre>	case_retention_audit_heritage_c_username_fk
\rightarrow	darts.case_retention_audit_heritage	<pre>darts.user_accountusr_id = darts.case_retention_audit_heritager_c reator_name</pre>	case_retention_audit_heritage_r_creator_name_fk
\rightarrow	darts.case_retention_audit_heritage	darts.user_accountusr_id = darts.case_retention_audit_heritager_modifier	case_retention_audit_heritage_r_modifier_fk
\rightarrow	darts.case_retention_audit_heritage	darts.user_accountusr_id = darts.case_retention_audit_heritageow ner_name	case_retention_audit_heritage_owner_name_fk
\rightarrow	darts.court_case	darts.user_accountusr_id = darts.court_casecreated_by	court_case_created_by_fk
→	darts.court_case	darts.user_accountusr_id = darts.court_caselast_modified_by	court_case_modified_by_fk
\rightarrow	darts.court_case	darts.user_accountusr_id = darts.court_casedeleted_by	court_case_deleted_by_fk

	Table	Join	Title / Name / Description
\rightarrow	darts.court_case	darts.user_accountusr_id = darts.court_casedata_anonymised_by	court_case_data_anonymised_by_fk
\rightarrow	darts.courthouse	darts.user_accountusr_id = darts.courthousecreated_by	courthouse_created_by_fk
\rightarrow	darts.courthouse	darts.user_accountusr_id = darts.courthouselast_modified_by	courthouse_modified_by_fk
\rightarrow	darts.courtroom	darts.user_accountusr_id = darts.courtroomcreated_by	courtroom_created_by_fk
\rightarrow	darts.daily_list	darts.user_accountusr_id = darts.daily_listcreated_by	daily_list_created_by_fk
\rightarrow	darts.daily_list	darts.user_accountusr_id = darts.daily_listlast_modified_by	daily_list_modified_by_fk
\rightarrow	darts.data_anonymisation	darts.user_accountusr_id = darts.data_anonymisationrequested_b y	data_anonymisation_requested_by_fk
\rightarrow	darts.data_anonymisation	darts.user_accountusr_id = darts.data_anonymisationapproved_by	data_anonymisation_approved_by_fk
\rightarrow	darts.defence	darts.user_accountusr_id = darts.defencecreated_by	defence_created_by_fk
\rightarrow	darts.defence	darts.user_accountusr_id = darts.defencelast_modified_by	defence_modified_by_fk
\rightarrow	darts.defendant	darts.user_accountusr_id = darts.defendantcreated_by	defendant_created_by_fk
\rightarrow	darts.defendant	darts.user_accountusr_id = darts.defendantlast_modified_by	defendant_modified_by_fk
\rightarrow	darts.event	darts.user_accountusr_id = darts.eventcreated_by	event_created_by_fk
\rightarrow	darts.event	darts.user_accountusr_id = darts.eventlast_modified_by	event_modified_by_fk
\rightarrow	darts.event_handler	darts.user_accountusr_id = darts.event_handlercreated_by	event_handler_created_by_fk
\rightarrow	darts.external_object_directory	darts.user_accountusr_id = darts.external_object_directorylast_mo dified_by	eod_modified_by_fk
\rightarrow	darts.external_object_directory	darts.user_accountusr_id = darts.external_object_directorycreated _by	external_object_directory_created_by_fk
\rightarrow	darts.external_service_auth_token	darts.user_accountusr_id = darts.external_service_auth_tokencreat ed_by	external_service_auth_token_created_by_fk
\rightarrow	darts.external_service_auth_token	darts.user_accountusr_id = darts.external_service_auth_tokenlast_modified_by	external_service_auth_token_modified_by_fk
\rightarrow	darts.extobjdir_process_detail	<pre>darts.user_accountusr_id = darts.extobjdir_process_detailcreated_ by</pre>	epd_created_by_fk
\rightarrow	darts.extobjdir_process_detail	darts.user_accountusr_id = darts.extobjdir_process_detaillast_mod ified_by	epd_last_modified_by_fk
\rightarrow	darts.hearing	darts.user_accountusr_id = darts.hearingcreated_by	hearing_created_by_fk

	Table	Join	Title / Name / Description
\rightarrow	darts.hearing	darts.user_accountusr_id = darts.hearinglast_modified_by	hearing_modified_by_fk
\rightarrow	darts.judge	darts.user_accountusr_id = darts.judgecreated_by	judge_created_by_fk
\rightarrow	darts.judge	<pre>darts.user_accountusr_id = darts.judgelast_modified_by</pre>	judge_modified_by_fk
\rightarrow	darts.media	darts.user_accountusr_id = darts.mediacreated_by	media_created_by_fk
\rightarrow	darts.media	<pre>darts.user_accountusr_id = darts.medialast_modified_by</pre>	media_modified_by_fk
\rightarrow	darts.media	darts.user_accountusr_id = darts.mediadeleted_by	media_deleted_by_fk
\rightarrow	darts.media_linked_case	darts.user_accountusr_id = darts.media_linked_casecreated_by	media_linked_case_created_by_fk
\rightarrow	darts.media_request	<pre>darts.user_accountusr_id = darts.media_requestcreated_by</pre>	media_request_created_by_fk
\rightarrow	darts.media_request	darts.user_accountusr_id = darts.media_requestlast_modified_by	media_request_modified_by_fk
\rightarrow	darts.media_request	darts.user_accountusr_id = darts.media_requestrequestor	media_request_requestor_fk
\rightarrow	darts.media_request	darts.user_accountusr_id = darts.media_requestcurrent_owner	media_request_current_owner_fk
\rightarrow	darts.node_register	<pre>darts.user_accountusr_id = darts.node_registercreated_by</pre>	node_register_created_by_fk
\rightarrow	darts.notification	<pre>darts.user_accountusr_id = darts.notificationcreated_by</pre>	notification_created_by_fk
\rightarrow	darts.notification	<pre>darts.user_accountusr_id = darts.notificationlast_modified_by</pre>	notification_modified_by_fk
\rightarrow	darts.object_admin_action	<pre>darts.user_accountusr_id = darts.object_admin_actionhidden_by</pre>	object_admin_action_hidden_by_fk
\rightarrow	darts.object_admin_action	<pre>darts.user_accountusr_id = darts.object_admin_actionmarked_for_ manual_del_by</pre>	object_admin_action_marked_for_manual_del_by_fk
\rightarrow	darts.object_retrieval_queue	<pre>darts.user_accountusr_id = darts.object_retrieval_queuecreated_b y</pre>	object_retrieval_queue_created_by_fk
\rightarrow	darts.object_retrieval_queue	<pre>darts.user_accountusr_id = darts.object_retrieval_queuelast_modifi ed_by</pre>	object_retrieval_queue_last_modified_by_fk
\rightarrow	darts.prosecutor	<pre>darts.user_accountusr_id = darts.prosecutorcreated_by</pre>	prosecutor_created_by_fk
\rightarrow	darts.prosecutor	<pre>darts.user_accountusr_id = darts.prosecutorlast_modified_by</pre>	prosecutor_modified_by_fk
\rightarrow	darts.report	<pre>darts.user_accountusr_id = darts.reportcreated_by</pre>	report_created_by_fk
\rightarrow	darts.report	<pre>darts.user_accountusr_id = darts.reportlast_modified_by</pre>	report_modified_by_fk
→	darts.retention_confidence_categor y_mapper	darts.user_accountusr_id = darts.retention_confidence_category_mappercreated_by	retention_confidence_category_mapper_created_by_fk

	Table	Join	Title / Name / Description
\rightarrow	darts.retention_confidence_categor y_mapper	<pre>darts.user_accountusr_id = darts.retention_confidence_category_ mapperlast_modified_by</pre>	retention_confidence_category_mapper_last_modified_by_fk
\rightarrow	darts.retention_policy_type	darts.user_accountusr_id = darts.retention_policy_typecreated_by	retention_policy_type_created_by_fk
→	darts.retention_policy_type	<pre>darts.user_accountusr_id = darts.retention_policy_typelast_modifie d_by</pre>	retention_policy_type_last_modified_by_fk
\rightarrow	darts.revinfo	<pre>darts.user_accountusr_id = darts.revinfoaudit_user</pre>	revinfo_audit_user_fk
\rightarrow	darts.rps_retainer	<pre>darts.user_accountusr_id = darts.rps_retainercreated_by</pre>	rps_retainer_created_by_fk
\rightarrow	darts.rps_retainer	<pre>darts.user_accountusr_id = darts.rps_retainerlast_modified_by</pre>	rps_retainer_last_modified_by_fk
\rightarrow	darts.security_group	<pre>darts.user_accountusr_id = darts.security_groupcreated_by</pre>	security_group_created_by_fk
\rightarrow	darts.security_group	<pre>darts.user_accountusr_id = darts.security_grouplast_modified_by</pre>	security_group_last_modified_by_fk
→	darts.security_group_user_account_ ae	<pre>darts.user_accountusr_id = darts.security_group_user_account_ae usr_id</pre>	security_group_user_account_ae_user_fk
\rightarrow	darts.transcription	<pre>darts.user_accountusr_id = darts.transcriptionlast_modified_by</pre>	transcription_last_modified_by_fk
\rightarrow	darts.transcription	<pre>darts.user_accountusr_id = darts.transcriptionrequested_by</pre>	transcription_requested_by_fk
\rightarrow	darts.transcription	<pre>darts.user_accountusr_id = darts.transcriptioncreated_by</pre>	transcription_created_by_fk
\rightarrow	darts.transcription	<pre>darts.user_accountusr_id = darts.transcriptiondeleted_by</pre>	transcription_deleted_by_fk
\rightarrow	darts.transcription_comment	<pre>darts.user_accountusr_id = darts.transcription_commentauthor</pre>	transcription_comment_author_fk
→	darts.transcription_comment	<pre>darts.user_accountusr_id = darts.transcription_commentcreated_b y</pre>	transcription_comment_created_by_fk
\rightarrow	darts.transcription_comment	<pre>darts.user_accountusr_id = darts.transcription_commentlast_modif ied_by</pre>	transcription_comment_modified_by_fk
\rightarrow	darts.transcription_document	<pre>darts.user_accountusr_id = darts.transcription_documentdeleted_ by</pre>	transcription_document_deleted_by_fk
→	darts.transcription_document	<pre>darts.user_accountusr_id = darts.transcription_documentuploade d_by</pre>	transcription_document_uploaded_by_fk
→	darts.transcription_document	<pre>darts.user_accountusr_id = darts.transcription_documentlast_modi fied_by</pre>	transcription_document_last_modified_by_fk
\rightarrow	darts.transcription_workflow	<pre>darts.user_accountusr_id = darts.transcription_workflowworkflow_ actor</pre>	transcription_workflow_workflow_actor_fk
\rightarrow	darts.transformed_media	darts.user_accountusr_id = darts.transformed_mediacreated_by	transformed_media_created_by_fk

	Table	Join	Title / Name / Description
\rightarrow	darts.transformed_media	darts.user_accountusr_id = darts.transformed_medialast_modified _by	transformed_media_last_modified_by_fk
→	darts.transient_object_directory	darts.user_accountusr_id = darts.transient_object_directorylast_m odified_by	tod_modified_by_fk
\rightarrow	darts.transient_object_directory	darts.user_accountusr_id = darts.transient_object_directorycreated _by	transient_object_directory_created_by_fk

Unique keys

	Columns	Name / Description
P	usr_id	user_account_pk

12.2. Procedures

12.2.1. Procedure: dbms_metadata.set_transform_param

Used to customize DDL through configuring session-level transform params.

	Name	Data type	Description
→ @	name	text	
→ @	value	boolean	

12.2.2. Procedure: public.sum_n_product

	Name	Data type	Description
→ @	Х	integer	
→ @	у	integer	
-;@>	sum	integer	
- @•	prod	integer	

12.3. Functions

12.3.1. Function: darts.gin_extract_query_trgm

	Name	Data type	Description
-⁄@•	Returns	internal	
→ @	\$1	text	
→ @	\$2	internal	
→ @	\$3	smallint	
→ @	\$4	internal	
→ @	\$5	internal	
→ @	\$6	internal	
→ @	\$7	internal	

12.3.2. Function: darts.gin_extract_value_trgm

	Name	Data type	Description
-⁄@>	Returns	internal	
→ @	\$1	text	
→ @	\$2	internal	

12.3.3. Function: darts.gin_trgm_consistent

•	Name	Data type	Description
÷@•	Returns	boolean	
→ @	\$1	internal	
→ @	\$2	smallint	
→ @	\$3	text	
→ @	\$4	integer	
→ @	\$5	internal	
→ @	\$6	internal	
→ @	\$7	internal	
→ @	\$8	internal	

12.3.4. Function: darts.gin_trgm_triconsistent

	Name	Data type	Description
-;@>	Returns	"char"	
→ @	\$1	internal	
→ @	\$2	smallint	
→ @	\$3	text	
→ @	\$4	integer	
→ @	\$5	internal	
→ @	\$6	internal	
→ @	\$7	internal	

12.3.5. Function: darts.gtrgm_compress

	Name	Data type	Description
-⁄@>	Returns	internal	
→ @	\$1	internal	

12.3.6. Function: darts.gtrgm_consistent

	Name	Data type	Description
- @•	Returns	boolean	
→ @	\$1	internal	
→ @	\$2	text	
→@	\$3	smallint	
→ @	\$4	oid	
→ @	\$5	internal	

12.3.7. Function: darts.gtrgm_decompress

	Name	Data type	Description
-⁄@>	Returns	internal	
→ @	\$1	internal	

12.3.8. Function: darts.gtrgm_distance

	Name	Data type	Description
- @•	Returns	double precision	
→ @	\$1	internal	
→ @	\$2	text	
→ @	\$3	smallint	
→ @	\$4	oid	
→ @	\$5	internal	

12.3.9. Function: darts.gtrgm_in

	Name	Data type	Description
- @•	Returns	gtrgm	
→ @	\$1	cstring	

12.3.10. Function: darts.gtrgm_options

	Name	Data type	Description
-⁄@>	Returns	void	
→ @	\$1	internal	

12.3.11. Function: darts.gtrgm_out

	Name	Data type	Description
-⁄@•	Returns	cstring	
→ @	\$1	gtrgm	

12.3.12. Function: darts.gtrgm_penalty

	Name	Data type	Description
- @•	Returns	internal	
→ @	\$1	internal	
→ @	\$2	internal	
→ @	\$3	internal	

12.3.13. Function: darts.gtrgm_picksplit

	Name	Data type	Description
-⁄@>	Returns	internal	
→ @	\$1	internal	
→ @	\$2	internal	

12.3.14. Function: darts.gtrgm_same

	Name	Data type	Description
-⁄@•	Returns	internal	
→ @	\$1	gtrgm	
→@	\$2	gtrgm	
→ @	\$3	internal	

12.3.15. Function: darts.gtrgm_union

	Name	Data type	Description
- @•	Returns	gtrgm	
→ @	\$1	internal	
→ @	\$2	internal	

12.3.16. Function: darts.set_limit

	Name	Data type	Description
-⁄@>	Returns	real	
→ @	\$1	real	

12.3.17. Function: darts.show_limit

	Name	Data type	Description
- @•	Returns	real	

12.3.18. Function: darts.show_trgm

	Name	Data type	Description
÷@•	Returns	ARRAY	
•@	\$1	text	

12.3.19. Function: darts.similarity

	Name	Data type	Description
-⁄@>	Returns	real	
→ @	\$1	text	
→ @	\$2	text	

12.3.20. Function: darts.similarity_dist

	Name	Data type	Description
- @•	Returns	real	
→ @	\$1	text	
→ @	\$2	text	

12.3.21. Function: darts.similarity_op

	Name	Data type	Description
-⁄@>	Returns	boolean	
→ @	\$1	text	
→ @	\$2	text	

12.3.22. Function: darts.strict_word_similarity

	Name	Data type	Description
-;@>	Returns	real	
→ @	\$1	text	
→ @	\$2	text	

12.3.23. Function: darts.strict_word_similarity_commutator_op

	Name	Data type	Description
-⁄@>	Returns	boolean	
→ @	\$1	text	
→ @	\$2	text	

12.3.24. Function: darts.strict_word_similarity_dist_commutator_op

	Name	Data type	Description
- @•	Returns	real	
→ @	\$1	text	
→ @	\$2	text	

12.3.25. Function: darts.strict_word_similarity_dist_op

	Name	Data type	Description
-;@>	Returns	real	
→ @	\$1	text	
→ @	\$2	text	

12.3.26. Function: darts.strict_word_similarity_op

	Name	Data type	Description
-⁄@>	Returns	boolean	
→ @	\$1	text	
→ @	\$2	text	

12.3.27. Function: darts.tra_trw_sync_fnc

	Name	Data type	Description
Returns		trigger	

12.3.28. Function: darts.word_similarity

	Name	Data type	Description
-⁄@>	Returns	real	
→ @	\$1	text	
→ @	\$2	text	

12.3.29. Function: darts.word_similarity_commutator_op

	Name	Data type	Description
-⁄@>	Returns	boolean	
→ @	\$1	text	
→ @	\$2	text	

12.3.30. Function: darts.word_similarity_dist_commutator_op

	Name	Data type	Description
-;@>	Returns	real	
→ @	\$1	text	
→ @	\$2	text	

12.3.31. Function: darts.word_similarity_dist_op

	Name	Data type	Description
-;@>	Returns	real	
→ @	\$1	text	
→ @	\$2	text	

12.3.32. Function: darts.word_similarity_op

	Name	Data type	Description
-⁄@>	Returns	boolean	
→ @	\$1	text	
→ @	\$2	text	

12.3.33. Function: dbms_metadata.get_check_constraint_ddl

This function retrieves DDL of a check constraint

	Name	Data type	Description
- @•	Returns	text	
→ @	schema_name	text	
→@	constraint_name	text	

12.3.34. Function: dbms_metadata.get_constraint_ddl

This function retrieves DDL of a constraint

	Name	Data type	Description
-;@>	Returns	text	
→ @	schema_name	text	
→@	constraint_name	text	

12.3.35. Function: dbms_metadata.get_constraints_ddl_of_table

This function retrieves DDL of all constraints of provided table

	Name	Data type	Description
÷@•	Returns	text	
→ @	p_schema	text	
→ @	p_table	text	

12.3.36. Function: dbms_metadata.get_ddl

Retrieves DDL of database objects. Supported object types are TABLE, VIEW, SEQUENCE, PROCEDURE, FUNCTION.

	Name	Data type	Description
÷@•	Returns	text	
÷@	object_type	text	
→ @	name	text	
→ @	schema	text	

12.3.37. Function: dbms_metadata.get_dependent_ddl

Retrieves DDL of dependent objects on provided base object. Supported dependent object types are SEQUENCE, CONSTRAINT, INDEX.

	Name	Data type	Description
-;@>	Returns	text	
→@	object_type	text	
→ @	base_object_name	text	
→ @	base_object_schema	text	

12.3.38. Function: dbms_metadata.get_granted_ddl

Retrieves the SQL statements to recreate granted privileges and roles for a specified grantee.

	Name	Data type	Description
÷@•	Returns	text	
→ @	object_type	text	
→ @	grantee	text	

12.3.39. Function: dbms_metadata.get_granted_roles_ddl

This function extracts the SQL statements to recreate roles granted to a specified grantee

	Name	Data type	Description
- @•	Returns	text	
→ @	p_grantee	text	

12.3.40. Function: dbms_metadata.get_index_ddl

This function retrieves DDL of an index

	Name	Data type	Description
-;@>	Returns	text	
→ @	schema_name	text	
→@	index_name	text	

12.3.41. Function: dbms_metadata.get_indexes_ddl_of_table

This function retrieves DDL of all indexes of provided table

	Name	Data type	Description
- @•	Returns	text	
→ @	p_schema	text	
→@	p_table	text	

12.3.42. Function: dbms_metadata.get_object_oid

This function returns oid of given object

	Name	Data type	Description
- @•	Returns	oid	
→ @	p_object_type	text	
→ @	p_schema	text	
→ @	p_object_name	text	

12.3.43. Function: dbms_metadata.get_ref_constraint_ddl

This function retrieves DDL of a referential constraint

	Name	Data type	Description
÷@•	Returns	text	
→ @	schema_name	text	
→ @	constraint_name	text	

12.3.44. Function: dbms_metadata.get_ref_constraints_ddl_of_table

This function retrieves DDL of all constraints of provided table

	Name	Data type	Description
- @•	Returns	text	
→ @	p_schema	text	
→@	p_table	text	

12.3.45. Function: dbms_metadata.get_routine_ddl

This function retrieves DDL of a procedure/function

	Name	Data type	Description
÷@•	Returns	text	
→ @	schema_name	text	
→@	routine_name	text	
→@	routine_type	text	

12.3.46. Function: dbms_metadata.get_schema_oid

This function returns oid of given schema

	Name	Data type	Description
-;@>	Returns	oid	
→ @	p_schema	text	

12.3.47. Function: dbms_metadata.get_sequence_ddl

This function retrieves DDL of a sequence

	Name	Data type	Description
- @•	Returns	text	
→ @	p_schema	text	
→@	p_sequence	text	

12.3.48. Function: dbms_metadata.get_sequence_ddl_of_table

This function retrieves DDL of all dependent sequences on provided table

	Name	Data type	Description
- @•	Returns	text	
→ @	p_schema	text	
→ @	p_table	text	

12.3.49. Function: dbms_metadata.get_table_ddl

This function retrieves a basic table DDL without constraints and indexes. DDL will include list of columns of the table, along with datatypes, DEFAULT values and NOT NULL constraints, in the order of the attnum. DDL will also include comments on table and columns if any.

	Name	Data type	Description
*@×	Returns	text	
→ @	p_schema	text	
→ @	p_table	text	

12.3.50. Function: dbms_metadata.get_trigger_ddl

This function retrieves DDL of a trigger

	Name	Data type	Description
- @•	Returns	text	
→ @	schema_name	text	
→@	trigger_name	text	

12.3.51. Function: dbms_metadata.get_triggers_ddl_of_table

This function retrieves DDL of all triggers of provided table

	Name	Data type	Description
- @•	Returns	text	
→ @	schema_name	text	
→@	table_name	text	

12.3.52. Function: dbms_metadata.get_type_ddl

This function retrieves DDL of a user defined type

	Name	Data type	Description
- @•	Returns	text	
→ @	p_schema_name	text	
→ @	p_type_name	text	

12.3.53. Function: dbms_metadata.get_view_ddl

This function retrieves DDL of a view

	Name	Data type	Description
-;@>	Returns	text	
→ @	view_schema	text	
→ @	view_name	text	

12.3.54. Function: dbms_metadata.init_transform_params

	Name	Data type	Description
Returns		void	

12.3.55. Function: dbms_metadata.set_default_transform_params

Used to set default values to all transform params.

	Name	Data type	Description
-@ •	Returns	void	