CGI UK

postgres_app_v73_sec_v25_ret_v27_osr_v14 @localhost Data Dictionary

18/09/2025

Table of contents

oostgres@localhost	9
1. darts courtroom_omitted	10
2. dart_security	11
3. darts_retention	
4. darts_annotation	13
5. darts_court_case	14
6. darts_courthouse	15
7. darts_media	16
8. darts_transcription	17
9. darts_tables_only	18
10. darts_obj_state_record	19
11. darts_arm_rpo	20
12. darts_retention_migration_and_assurance	21
13. Other	22
13.1. Tables	22
13.1.1. Table: darts.annotation	22
13.1.2. Table: darts.annotation_document	24
13.1.3. Table: darts.arm_automated_task	26
13.1.4. Table: darts.arm_rpo_execution_detail	27
13.1.5. Table: darts.arm_rpo_state	28
13.1.6. Table: darts.arm_rpo_status	29
13.1.7. Table: darts.audit	30
13.1.8. Table: darts.audit_activity	31
13.1.9. Table: darts.audit_heritage	32
13.1.10. Table: darts.automated_task	34
13.1.11. Table: darts.case_document	35
13.1.12. Table: darts.case_judge_ae	36
13.1.13. Table: darts.case_management_retention	37
13.1.14. Table: darts.case_overflow	38
13.1.15. Table: darts.case_retention	40
13.1.16. Table: darts.case_retention_audit_heritage	41
13.1.17. Table: darts.case_transcription_ae	43
13.1.18. Table: darts.cc_dets	44
13.1.19. Table: darts.cmr_dets	47
13.1.20. Table: darts.court_case	48
13.1.21. Table: darts.courthouse	51
13.1.22. Table: darts.courthouse_region_ae	52
13.1.23. Table: darts.courtroom	53
13.1.24. Table: darts.cr_dets	54
13.1.25. Table: darts.daily_list	55
13.1.26. Table: darts.data_anonymisation	57
13.1.27. Table: darts.defence	58
13.1.28. Table: darts.defendant	59
13.1.29. Table: darts.event	60
13.1.30. Table: darts.event_handler	62

13.1.31.	Table: darts.event_linked_case	63
13.1.32.	Table: darts.external_location_type	64
13.1.33.	Table: darts.external_object_directory	65
13.1.34.	Table: darts.external_service_auth_token	67
13.1.35.	Table: darts.extobjdir_process_detail	68
13.1.36.	Table: darts.hearing	69
13.1.37.	Table: darts.hearing_annotation_ae	71
13.1.38.	Table: darts.hearing_event_ae	72
13.1.39.	Table: darts.hearing_judge_ae	73
13.1.40.	Table: darts.hearing_media_ae	74
13.1.41.	Table: darts.hearing_transcription_ae	75
13.1.42.	Table: darts.judge	
13.1.43.	Table: darts.media	77
13.1.44.	Table: darts.media_linked_case	
13.1.45.	Table: darts.media_request	80
13.1.46.	Table: darts.node_register	81
13.1.47.	Table: darts.notification	82
13.1.48.	Table: darts.object_admin_action	83
13.1.49.	Table: darts.object_hidden_reason	84
13.1.50.	Table: darts.object_record_status	85
13.1.51.	Table: darts.object_retrieval_queue	86
13.1.52.	Table: darts.object_state_record	87
13.1.53.	Table: darts.prosecutor	89
13.1.54.	Table: darts.region	90
13.1.55.	Table: darts.report	91
13.1.56.	Table: darts.retention_confidence_category_mapper	92
13.1.57.	Table: darts.retention_policy_type	
13.1.58.	Table: darts.retention_policy_type_heritage_mapping	94
13.1.59.	Table: darts.revinfo	95
13.1.60.	Table: darts.rps_retainer	96
13.1.61.	Table: darts.security_group	98
13.1.62.	Table: darts.security_group_courthouse_ae	99
13.1.63.	Table: darts.security_group_user_account_ae	100
13.1.64.	Table: darts.security_permission	101
13.1.65.	Table: darts.security_role	102
13.1.66.	Table: darts.security_role_permission_ae	103
13.1.67.	Table: darts.transcription	104
13.1.68.	Table: darts.transcription_comment	106
13.1.69.	Table: darts.transcription_document	107
13.1.70.	Table: darts.transcription_linked_case	109
13.1.71.	Table: darts.transcription_status	110
13.1.72.	Table: darts.transcription_type	111
13.1.73.	Table: darts.transcription_urgency	112
13.1.74.	Table: darts.transcription_workflow	113
13.1.75.	Table: darts.transformed_media	114
13.1.76.	Table: darts.transient_object_directory	115

13.1.77.	. Table: darts.user_account	116
13.1.78.	. Table: darts.wk_case_activity_data	122
13.1.79.	Table: darts.wk_case_best_values_p1	123
13.1.80.	. Table: darts.wk_case_best_values_post_p1	124
13.1.81.	Table: darts.wk_case_confidence_level	125
13.1.82.	. Table: darts.wk_case_correction	126
13.1.83.	. Table: darts.wk_crah_is_current_by_creation	127
13.1.84.	. Table: darts.wk_crah_is_current_by_logic	128
13.1.85.	. Table: darts.wk_rr_is_current_by_creation	129
13.1.86.	. Table: darts.wk_rr_is_current_by_logic	130
13.2. Pro	ocedures	131
13.2.1.	Procedure: dbms_metadata.set_transform_param	131
13.2.2.	Procedure: public.sum_n_product	132
13.3. Fur	nctions	133
13.3.1.	Function: darts.gin_extract_query_trgm	133
13.3.2.	Function: darts.gin_extract_value_trgm	134
13.3.3.	Function: darts.gin_trgm_consistent	135
13.3.4.	Function: darts.gin_trgm_triconsistent	136
13.3.5.	Function: darts.gtrgm_compress	137
13.3.6.	Function: darts.gtrgm_consistent	138
13.3.7.	Function: darts.gtrgm_decompress	139
13.3.8.	Function: darts.gtrgm_distance	140
13.3.9.	Function: darts.gtrgm_in	141
13.3.10.	Function: darts.gtrgm_options	142
13.3.11.	Function: darts.gtrgm_out	143
13.3.12.	Function: darts.gtrgm_penalty	144
13.3.13.	Function: darts.gtrgm_picksplit	145
13.3.14.	Function: darts.gtrgm_same	146
13.3.15.	Function: darts.gtrgm_union	147
13.3.16.	Function: darts.set_limit	148
13.3.17.	Function: darts.show_limit	149
13.3.18.	Function: darts.show_trgm	150
13.3.19.	. Function: darts.similarity	151
13.3.20). Function: darts.similarity_dist	152
13.3.21.	. Function: darts.similarity_op	153
13.3.22	Punction: darts.strict_word_similarity	154
13.3.23.	Function: darts.strict_word_similarity_commutator_op	155
13.3.24	Function: darts.strict_word_similarity_dist_commutator_op	156
13.3.25	Function: darts.strict_word_similarity_dist_op	157
13.3.26	5. Function: darts.strict_word_similarity_op	158
13.3.27.	. Function: darts.tra_trw_sync_fnc	159
13.3.28	B. Function: darts.word_similarity	
13.3.29	Punction: darts.word_similarity_commutator_op	161
13.3.30.). Function: darts.word_similarity_dist_commutator_op	162
13.3.31.	. Function: darts.word_similarity_dist_op	163
13.3.32	Punction: darts.word_similarity_op	164


13.3.33.	Function: dbms_metadata.get_check_constraint_ddl	. 165
13.3.34.	Function: dbms_metadata.get_constraint_ddl	. 166
13.3.35.	Function: dbms_metadata.get_constraints_ddl_of_table	. 167
13.3.36.	Function: dbms_metadata.get_ddl	. 168
13.3.37.	Function: dbms_metadata.get_dependent_ddl	. 169
13.3.38.	Function: dbms_metadata.get_granted_ddl	170
	Function: dbms_metadata.get_granted_roles_ddl	
13.3.40.	Function: dbms_metadata.get_index_ddl	. 172
13.3.41.	Function: dbms_metadata.get_indexes_ddl_of_table	. 173
13.3.42.	Function: dbms_metadata.get_object_oid	.174
13.3.43.	Function: dbms_metadata.get_ref_constraint_ddl	. 175
13.3.44.	Function: dbms_metadata.get_ref_constraints_ddl_of_table	. 176
13.3.45.	Function: dbms_metadata.get_routine_ddl	. 177
13.3.46.	Function: dbms_metadata.get_schema_oid	. 178
13.3.47.	Function: dbms_metadata.get_sequence_ddl	. 179
13.3.48.	Function: dbms_metadata.get_sequence_ddl_of_table	.180
13.3.49.	Function: dbms_metadata.get_table_ddl	181
13.3.50.	Function: dbms_metadata.get_trigger_ddl	.182
13.3.51.	Function: dbms_metadata.get_triggers_ddl_of_table	. 183
13.3.52.	Function: dbms_metadata.get_type_ddl	. 184
13.3.53.	Function: dbms_metadata.get_view_ddl	. 185
13.3.54.	Function: dbms_metadata.init_transform_params	.186
13.3.55.	Function: dbms_metadata.set_default_transform_params	. 187

Legend


- **?** Primary key
- Primary key disabled
- **1** User-defined primary key
- **1** Unique key
- Unique key disabled
- **%** User-defined unique key
- Active trigger
- Disabled trigger
- → Many to one relation
- → User-defined many to one relation
- → One to many relation
- → Many to many relation
- ₩ User-defined many to many relation
- One to one relation
- User-defined one to one relation
- Input
- Output
- Input/Output
- Uses dependency
- User-defined uses dependency
- Used by dependency
- Tuser-defined used by dependency

postgres@localhost


1. darts courtroom omitted

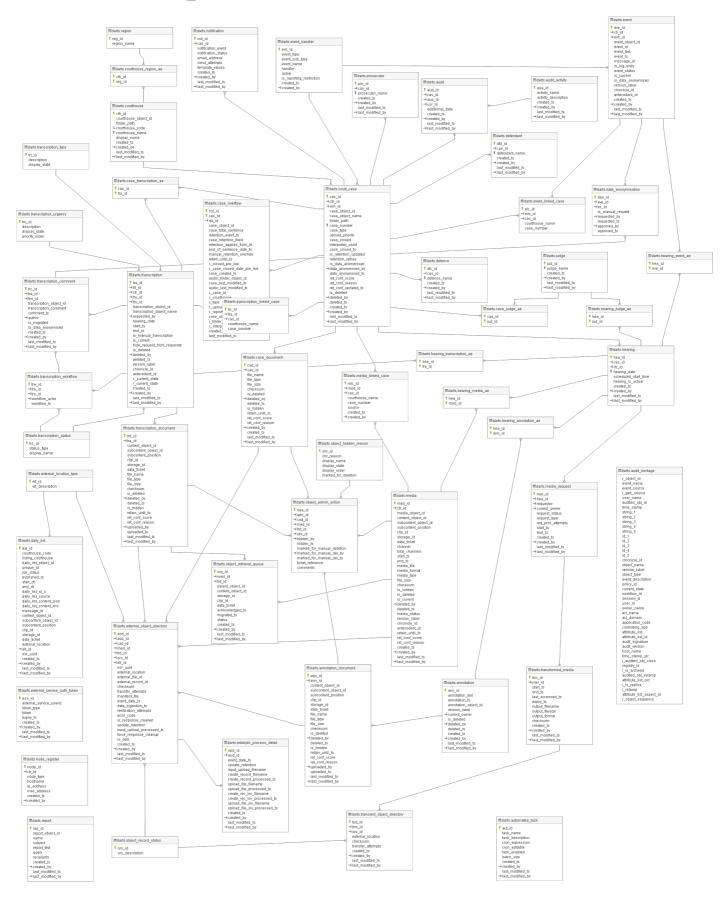


2. dart_security

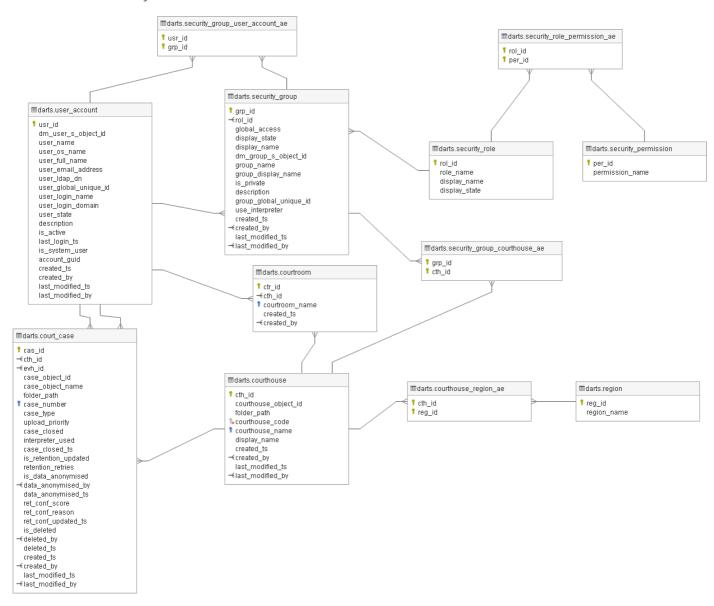


3. darts_retention

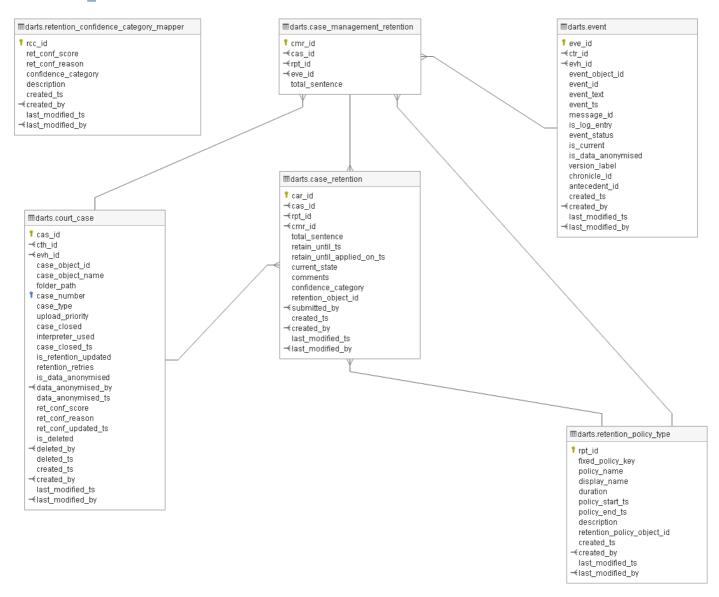


4. darts_annotation

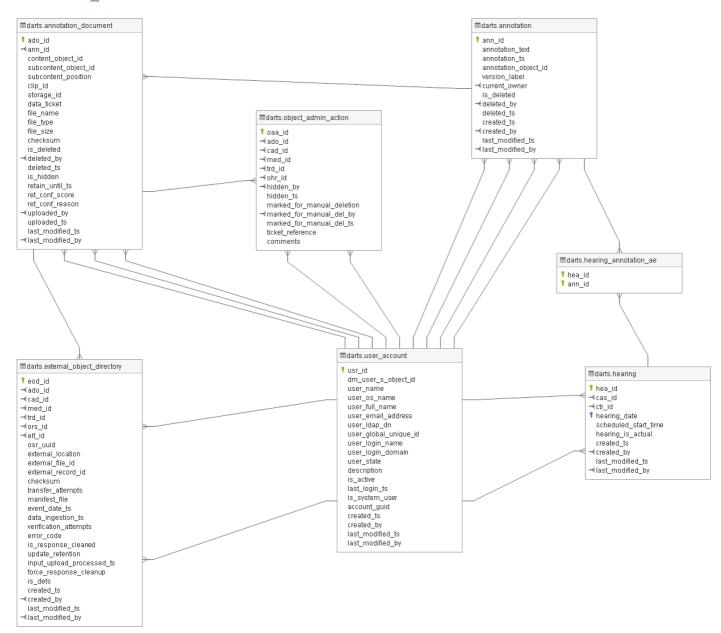


5. darts_court_case

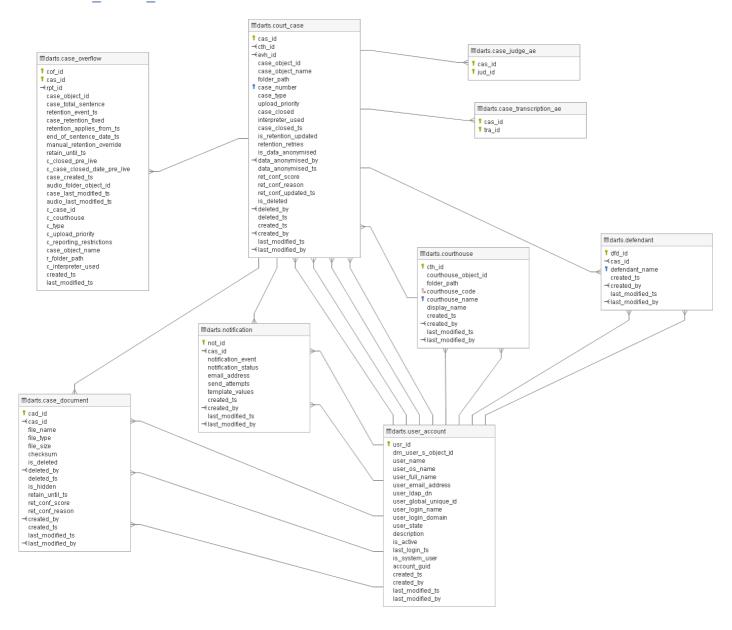


6. darts_courthouse

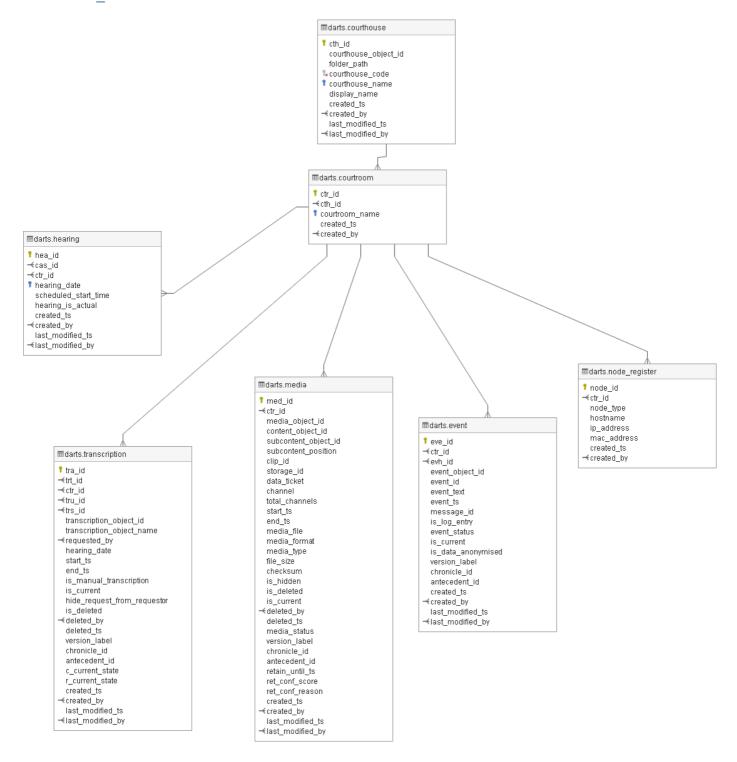


7. darts media

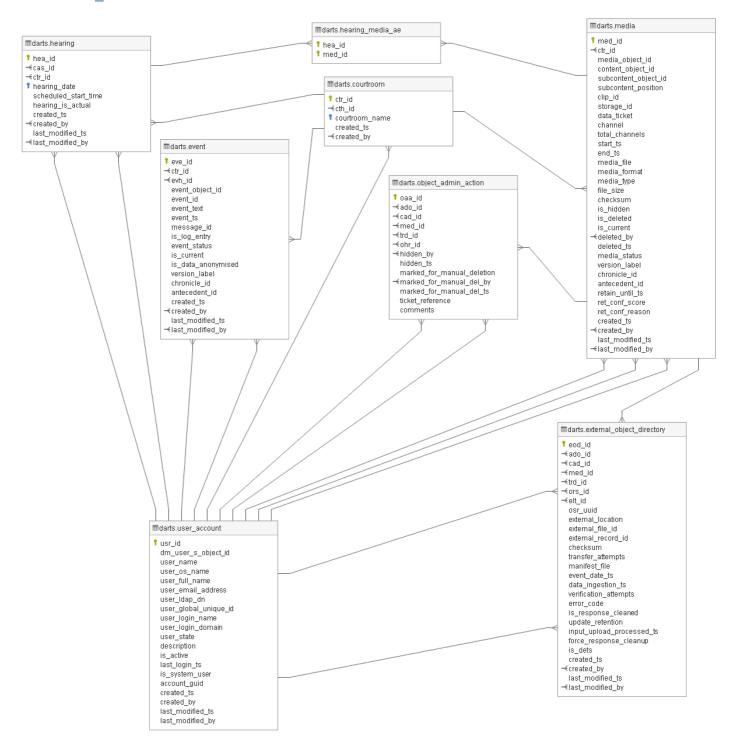

8. darts_transcription

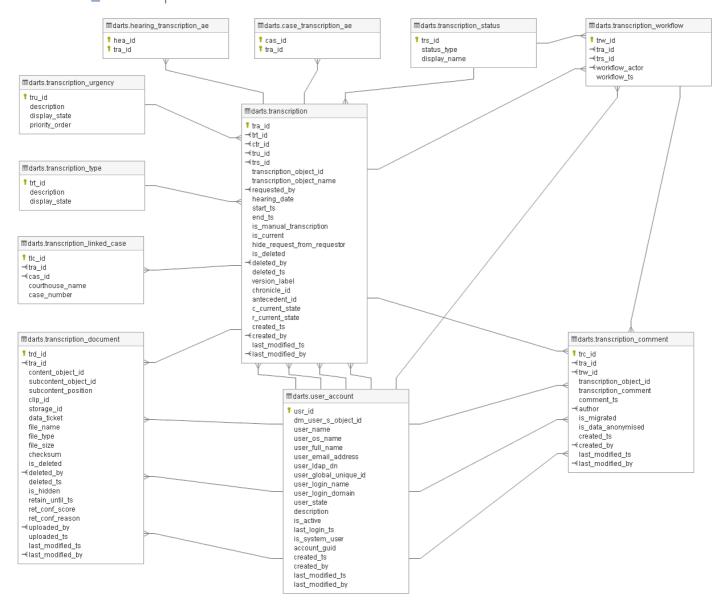

9. darts_tables_only

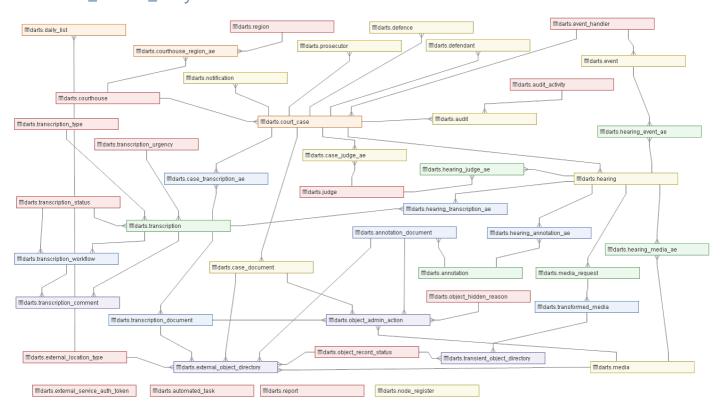



10. darts_obj_state_record

■darts.object_state_record 🔋 osr_uuid eod_id arm_eod_id dal_id parent_object_id content_object_id id_clip dets_location flag_file_transfer_to_dets date_file_transfer_to_dets md5_doc_transfer_to_dets file_size_bytes_centera file_size_bytes_dets flag_file_av_scan_pass date_file_av_scan_pass flag_file_transf_toarml date_file_transf_toarml md5_file_transf_arml file_size_bytes_arml flag_file_mfst_created date_file_mfst_created id_manifest_file flag_mfst_transf_to_arml date_mfst_transf_to_arml flag_rspn_recvd_from_arml date_rspn_recvd_from_arml flag_file_ingest_status date_file_ingest_to_arm md5_file_ingest_to_arm file_size_ingest_to_arm id_response_file id_response_cr_file id_response_uf_file flag_file_dets_cleanup_status date_file_dets_cleanup object_status storage_id data_ticket



11. darts_arm_rpo

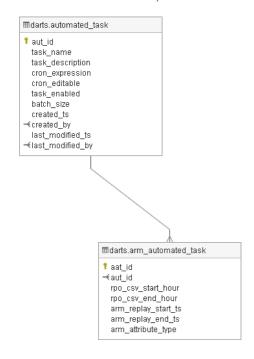

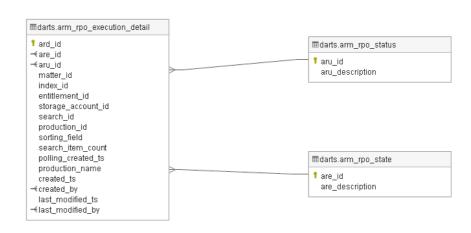

12. darts retention migration and assurance

mdarts.case overflow f cof id cas_id rpt_id case object id case_total_sentence retention event ts case_retention_fixed retention_applies_from_ts end_of_sentence_date_ts manual_retention_override retain_until_ts c closed pre live c_case_closed_date_pre_live case_created_ts audio_folder_object_id case_last_modified_ts audio_last_modified_ts c_case_id c_courthouse c type c_upload_priority c_reporting_restrictions case_object_name r_folder_path c_interpreter_used created_ts last_modified_ts

f cas_id eve_id evh_id closed date ts closed_date_type rownum

⊞darts.cr_dets f crd_id cas_id rpt id cmd_id total_sentence retain until ts retain_until_applied_on_ts current state comments confidence_category retention object id submitted_by created_ts created by last_modified_ts last_modified_by

```
■darts.case_retention_audit_heritage

         ⊸cas id
        ≺rpt_id
          case_retention_audit_object_id
          is_current
i_partition
          c case id
          c_date_retention_amended
c_comments
          c date previous retention
          c_username
          c_status
           c courthouse
           c_policy_type
          c_case_closed_date
         object_name
≼r_creator_name
          r creation date
        -dr_modifier
          r_modify_date

→nwner name

mdarts retention policy type heritage mapping
f rhm_id
```

■darts.wk case correction cas_id category_type case_closed_date_com case closed com retain_until_ts_corr new_case_closed new_closed_date_ts case_old_closed_date_ts
case_audit_old_closed_date_ts closed_date_type cmr eve id current_logic_rpt_id current_creation_rpt_id case_total_sentence new_retain_until_ts retain_until_applied_on_ts current state old_state retention_object_id latest_activity_period best_closed_date_period adjusted closed date ts adjusted_closed_date_type adjusted_eve_id

warrant_before_sentencing case_closed_before_sentencing

heritage_policy_name heritage_table

modernised rpt id

has warrant

⊞darts.rps_retainer rpr_id ⊀rpt_id rps_retainer_object_id case_object_id audio_folder_object_id is_current dm_retainer_root_id dm_retention_rule_type dm_retention_date dmc_current_phase_id dmc entry date dmc_parent_ancestor_id dmc_phase_name dmc_qualification_date dmc_retention_base_date dmc retention policy id dmc_ultimate_ancestor_id dmc_vdm_retention_rule dmc is superseded dmc_superseded_date dmc_superseded_phase_id dmc_snapshot_retention_rule dmc_approval_required dmc_approval_status dmc_approved_date dmc_projected_disposition_date dmc is qualification suspended dmc_suspension_lift_date dmc_base_date_override dms_object_name dms_i_chronicle_id dms_r_policy_id dms_r_resume_state dms_r_current_state created ts ≺created_by last_modified_ts

mdarts.wk_case_confidence_level confidence level darts.wk_case_best_values_post_p1 🕽 cas_id eve id evh_id closed_date_ts closed_date_type rownum

⊞darts.wk_case_activity_data t cas id evh_id closed date ts f closed_date_type

mdarts.wk_rr_is_current_by_creation cas_id rpr_id rpt_id case_object_id dm_retainer_root_id dms_object_name created ts last_modified_ts rps_retainer_object_id dm retention date ■darts.wk rr is current by logic f cas_id rpr_id rpt_id case object id dm_retainer_root_id dms_object_name created ts rps_retainer_object_id dm_retention_date is_current mdarts.wk_crah_is_current_by_logic 🔋 cas_id rah_id rpt_id c_policy_type

> mdarts.wk_crah_is_current_by_creation 🕯 cas_id rah_id rpt_id c_policy_type c courthouse c_case_id r_creation_date r_modify_date c username case_retention_audit_object_id ready_retain_until_date

c_username case_retention_audit_object_id

ready_retain_until_date is_current

darts.cmr_dets

dets

dets f cmd id cas_id rpt_id eve_id total_sentence

is current

c courthouse

c status

c_case_id r_creation_date

⊞darts.cc dets cas_id case_object_id c courthouse c_case_id c_closed_pre_live c_case_closed_date_pre_live c_case_closed_date_crah case created ts cas_retention_fixed case_total_sentence retention applies from ts end_of_sentence_date_ts manual_retention_override retain until ts recan_unin_s audio_folder_object_id case_closed_event_event_ts_by_pr case_closed_event_event_ts_eve_i case_closed_event_created_ts_by_ case closed event created to eve case_closed_event_event_ts_by_au case_closed_event_event_ts_eve_i case_closed_event_created_ts_by case_closed_event_created_ts_evecase_closed_event_event_ts_case case_closed_event_event_ts_eve_i
case_closed_event_created_ts_cas
case_closed_event_created_ts_eve latest_event_by_event_ts_ts latest_event_by_event_ts_eve_id latest event by created ts latest_event_by_created_ts_eve_id latest_hearing_ended_event_by_ev latest_hearing_ended_event_by_ev latest_hearing_ended_event_by_cre latest_hearing_ended_event_by_cre latest_log_event_by_event_ts latest_log_event_by_event_ts_eve_ latest_log_event_by_created_ts latest_log_event_by_created_ts_eve latest_sentencing_event_by_event_ latest_sentencing_event_by_event_ latest_sentencing_event_by_create latest_sentencing_event_by_create latest_sentencing_271_event_by_e latest_sentencing_271_event_by_e latest_sentencing_271_event_by_ci latest_sentencing_271_event_by_ci latest_media_by_created_ts latest_media_by_created_ts_eve_ic latest_media_by_start_ts latest_media_by_start_ts_eve_id latest_media_by_end_ts latest_media_by_end_ts_eve_id latest warrant event by event ts latest_warrant_event_by_event_ts_c latest_warrant_event_by_created_ts latest_warrant_event_by_created_ts ret_conf_score ret_conf_reason ret conf updated ts category_type
latest_activity_period

13. Other

13.1. Tables

13.1.1. Table: darts.annotation

Columns

		Name	Data type	Description / Attributes
■	1	ann_id	integer	primary key of annotation
		annotation_text	character varying	directly sourced from moj_annotation_s.c_text Nullable
		annotation_ts	timestamp with time zone	directly sourced from moj_annotation_s Nullable
■		annotation_object_id	character varying(16)	internal Documentum primary key from moj_annotation_s Nullable
		version_label	character varying(32)	inherited from dm_sysobject_r, for r_object_type of moj_annotation Nullable
目		current_owner	integer	References: darts.user_account
■		is_deleted	boolean	Default : false
		deleted_by	integer	Nullable References: darts.user_account
▤		deleted_ts	timestamp with time zone	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
目		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
—	darts.user_account	darts.annotationcurrent_owner = darts.user_accountusr_id	annotation_current_owner_fk
>	darts.user_account	darts.annotationcreated_by = darts.user_accountusr_id	annotation_created_by_fk
>	darts.user_account	darts.annotationlast_modified_by = darts.user_accountusr_id	annotation_modified_by_fk
—	darts.user_account	darts.annotationdeleted_by = darts.user_accountusr_id	annotation_deleted_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.annotation_document	darts.annotationann_id = darts.annotation_documentann_id	annotation_document_annotation_fk
\rightarrow	darts.hearing_annotation_ae	darts.annotationann_id = darts.hearing_annotation_aeann_id	hearing_annotation_ae_annotation_fk

	Columns	Name / Description
9	ann_id	annotation_pk

13.1.2. Table: darts.annotation_document

Columns

		Name	Data type	Description / Attributes
B	1	ado_id	integer	primary key of annotation_document
B		ann_id	integer	foreign key from annotation References: darts.annotation
B		content_object_id	character varying(16)	Nullable
B		subcontent_object_id	character varying(16)	Nullable
■		subcontent_position	integer	Nullable
■		clip_id	character varying(54)	Nullable
■		storage_id	character varying(16)	Nullable
■		data_ticket	integer	Nullable
■		file_name	character varying	
■		file_type	character varying	
■		file_size	integer	
■		checksum	character varying	Nullable
■		is_deleted	boolean	Default : false
B		deleted_by	integer	Nullable References: darts.user_account
■		deleted_ts	timestamp with time zone	Nullable
■		is_hidden	boolean	Default : false
B		retain_until_ts	timestamp with time zone	Nullable
B		ret_conf_score	integer	Nullable
B		ret_conf_reason	character varying	Nullable
		uploaded_by	integer	References: darts.user_account
B		uploaded_ts	timestamp with time zone	
B		last_modified_ts	timestamp with time zone	
		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.annotation	darts.annotation_documentann_id = darts.annotationann_id	annotation_document_annotation_fk
>	darts.user_account	darts.annotation_documentdeleted_by = darts.user_accountusr_id	annotation_document_deleted_by_fk
\rightarrow	darts.user_account	darts.annotation_documentuploaded_ by = darts.user_accountusr_id	annotation_document_uploaded_by_fk
>	darts.user_account	darts.annotation_documentlast_modified_by = darts.user_accountusr_id	annotation_document_last_modified_by_fk

Linked from

Table		Join	Title / Name / Description	
\rightarrow	darts.external_object_directory	darts.annotation_documentado_id = darts.external_object_directoryado_id	eod_annotation_document_fk	
→	darts.object_admin_action	darts.annotation_documentado_id = darts.object_admin_actionado_id	oaa_annotation_document_fk	

	Columns	Name / Description
P	ado_id	annotation_document_pk

13.1.3. Table: darts.arm_automated_task

Columns

		Name	Data type	Description / Attributes
■	1	aat_id	integer	primary key of arm_automated_task
■		aut_id	integer	foreign key to automated_task References: darts.automated_task
■		rpo_csv_start_hour	integer	Nullable
■		rpo_csv_end_hour	integer	Nullable
■		arm_replay_start_ts	timestamp with time zone	Nullable
■		arm_replay_end_ts	timestamp with time zone	Nullable
■		arm_attribute_type	character varying	Nullable

Links to

		Table	Join	Title / Name / Description
>	_	darts.automated_task	<pre>darts.arm_automated_taskaut_id = darts.automated_taskaut_id</pre>	arm_automated_task_automated_task_fk

	Columns	Name / Description
P	aat_id	arm_automated_task_pk

13.1.4. Table: darts.arm_rpo_execution_detail

Columns

		Name	Data type	Description / Attributes
■	1	ard_id	integer	primary key of arm_rpo_execution_detail
■		are_id	integer	foreign key to arm_rpo_state Nullable References: darts.arm_rpo_state
■		aru_id	integer	foreign key to arm_rpo_status Nullable References: darts.arm_rpo_status
▤		matter_id	character varying	Nullable
▤		index_id	character varying	Nullable
■		entitlement_id	character varying	Nullable
■		storage_account_id	character varying	Nullable
■		search_id	character varying	Nullable
■		production_id	character varying	Nullable
■		sorting_field	character varying	Nullable
■		search_item_count	integer	Nullable
■		polling_created_ts	timestamp with time zone	Nullable
■		production_name	character varying	Nullable
目		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.arm_rpo_state	darts.arm_rpo_execution_detailare_id = darts.arm_rpo_stateare_id	arm_rpo_execution_detail_arm_state_fk
>	darts.arm_rpo_status	darts.arm_rpo_execution_detailaru_id = darts.arm_rpo_statusaru_id	arm_rpo_execution_detail_arm_status_fk
>	darts.user_account	darts.arm_rpo_execution_detailcreated _by = darts.user_accountusr_id	arm_rpo_execution_detail_created_by_fk
>	darts.user_account	darts.arm_rpo_execution_detaillast_mo dified_by = darts.user_accountusr_id	arm_rpo_execution_detail_last_modified_by_fk

	Columns	Name / Description
Ŷ	ard_id	arm_rpo_execution_detail_pk

13.1.5. Table: darts.arm_rpo_state

Columns

		Name	Data type	Description / Attributes
▤	1	are_id	integer	primary key of arm_rpo_state
■		are_description	character varying	

Linked from

	Table	Join	Title / Name / Description
_	darts.arm_rpo_execution_detail	darts.arm_rpo_stateare_id = darts.arm_rpo_execution_detailare_id	arm_rpo_execution_detail_arm_state_fk

	Columns	Name / Description
P	are_id	arm_rpo_state_pk

13.1.6. Table: darts.arm_rpo_status

Columns

		Name	Data type	Description / Attributes
■	1	aru_id	integer	primary key of arm_rpo_status
■		aru_description	character varying	

Linked from

	Table	Join	Title / Name / Description
-	darts.arm_rpo_execution_detail	darts.arm_rpo_statusaru_id = darts.arm_rpo_execution_detailaru_id	arm_rpo_execution_detail_arm_status_fk

	Columns	Name / Description
9	aru_id	arm_rpo_status_pk

13.1.7. Table: darts.audit

Columns

		Name	Data type	Description / Attributes
■	1	aud_id	bigint	primary key of audit
■		cas_id	integer	foreign key from case Nullable References: darts.court_case
■		aua_id	integer	primary key of audit_activity References: darts.audit_activity
■		usr_id	integer	foreign key from user_account References: darts.user_account
■		additional_data	character varying	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.audit_activity	darts.auditaua_id = darts.audit_activityaua_id	audit_audit_activity_fk
\rightarrow	darts.court_case	darts.auditcas_id = darts.court_casecas_id	audit_case_fk
\rightarrow	darts.user_account	darts.auditusr_id = darts.user_accountusr_id	audit_user_account_fk
>	darts.user_account	darts.auditcreated_by = darts.user_accountusr_id	audit_created_by_fk
\rightarrow	darts.user_account	darts.auditlast_modified_by = darts.user_accountusr_id	audit_modified_by_fk

	Columns	Name / Description
9	aud_id	audit_pk

13.1.8. Table: darts.audit_activity

Columns

		Name	Data type	Description / Attributes
目	1	aua_id	integer	
■		activity_name	character varying	
■		activity_description	character varying	
▤		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
—	darts.user_account	<pre>darts.audit_activitycreated_by = darts.user_accountusr_id</pre>	audit_activity_created_by_fk
—	darts.user_account	<pre>darts.audit_activity ast_modified_by = darts.user_accountusr_id</pre>	audit_activity_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
-		darts.audit_activityaua_id = darts.auditaua_id	audit_audit_activity_fk

	Columns	Name / Description
P	aua_id	audit_activity_pk

13.1.9. Table: darts.audit_heritage

Columns

	Name	Data type	Description / Attributes
■	r_object_id	character varying	Nullable
▤	event_name	character varying	Nullable
▤	event_source	character varying	Nullable
▤	r_gen_source	integer	Nullable
▤	user_name	character varying	Nullable
▤	audited_obj_id	character varying	Nullable
▤	time_stamp	timestamp with time zone	Nullable
▤	string_1	character varying	Nullable
▤	string_2	character varying	Nullable
▤	string_3	character varying	Nullable
▤	string_4	character varying	Nullable
▤	string_5	character varying	Nullable
▤	id_1	character varying	Nullable
▤	id_2	character varying	Nullable
▤	id_3	character varying	Nullable
▤	id_4	character varying	Nullable
■	id_5	character varying	Nullable
▤	chronicle_id	character varying	Nullable
■	object_name	character varying	Nullable
	version_label	character varying	Nullable
■	object_type	character varying	Nullable
▤	event_description	character varying	Nullable
	policy_id	character varying	Nullable
	current_state	character varying	Nullable
	workflow_id	character varying	Nullable
	session_id	character varying	Nullable
	user_id	character varying	Nullable
	owner_name	character varying	Nullable
	acl_name	character varying	Nullable
	acl_domain	character varying	Nullable
	application_code	character varying	Nullable
	controlling_app	character varying	Nullable
	attribute_list	character varying	Nullable
	attribute_list_id	character varying	Nullable
	audit_signature	character varying	Nullable

	Name	Data type	Description / Attributes
■	audit_version	integer	Nullable
▤	host_name	character varying	Nullable
▤	time_stamp_utc	timestamp with time zone	Nullable
■	i_audited_obj_class	integer	Nullable
■	registry_id	character varying	Nullable
目	i_is_archived	integer	Nullable
▤	audited_obj_vstamp	integer	Nullable
▤	attribute_list_old	character varying	Nullable
▤	i_is_replica	integer	Nullable
▤	i_vstamp	integer	Nullable
■	attribute_list_aspect_id	character varying	Nullable
■	r_object_sequence	integer	Nullable

13.1.10. Table: darts.automated_task

Columns

		Name	Data type	Description / Attributes
■	1	aut_id	integer	primary key of automated_task
■		task_name	character varying	
■		task_description	character varying	
■		cron_expression	character varying	
■		cron_editable	boolean	
■		task_enabled	boolean	Default: true
■		batch_size	integer	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
—	darts.user_account	<pre>darts.automated_taskcreated_by = darts.user_accountusr_id</pre>	automated_task_created_by_fk
—	darts.user_account	darts.automated_tasklast_modified_by = darts.user_accountusr_id	automated_task_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.arm_automated_task	<pre>darts.automated_taskaut_id = darts.arm_automated_taskaut_id</pre>	arm_automated_task_automated_task_fk

	Columns	Name / Description
Ŷ	aut_id	automated_task_pk

13.1.11. Table: darts.case_document

Columns

		Name	Data type	Description / Attributes
目	1	cad_id	integer	
▤		cas_id	integer	References: darts.court_case
▤		file_name	character varying	
▤		file_type	character varying	
目		file_size	integer	
▤		checksum	character varying	Nullable
▤		is_deleted	boolean	Default: false
		deleted_by	integer	Nullable References: darts.user_account
■		deleted_ts	timestamp with time zone	Nullable
目		is_hidden	boolean	Default: false
目		retain_until_ts	timestamp with time zone	Nullable
目		ret_conf_score	integer	Nullable
■		ret_conf_reason	character varying	Nullable
目		created_by	integer	References: darts.user_account
■		created_ts	timestamp with time zone	
■		last_modified_ts	timestamp with time zone	
目		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.court_case	darts.case_documentcas_id = darts.court_casecas_id	case_document_case_fk
\rightarrow	darts.user_account	darts.case_documentcreated_by = darts.user_accountusr_id	case_document_created_by_fk
>	darts.user_account	darts.case_documentlast_modified_by = darts.user_accountusr_id	case_document_last_modified_by_fk
\rightarrow	darts.user_account	darts.case_documentdeleted_by = darts.user_accountusr_id	case_document_deleted_by_fk

Linked from

	Table	Join	Title / Name / Description
_	darts.external_object_directory	darts.case_documentcad_id = darts.external_object_directorycad_id	eod_case_document_fk
-	darts.object_admin_action	darts.case_documentcad_id = darts.object_admin_actioncad_id	oaa_case_document_fk

	Columns	Name / Description
?	cad_id	case_document_pk

13.1.12. Table: darts.case_judge_ae

Columns

		Name	Data type	Description / Attributes
■	1	cas_id	integer	foreign key from case, part of composite natural key and PK References: darts.court_case
■	1	jud_id	integer	foreign key from judge, part of composite natural key and PK References : darts.judge

Links to

	Table	Join	Title / Name / Description
—	darts.court_case	darts.case_judge_aecas_id = darts.court_casecas_id	case_judge_ae_case_fk
\rightarrow	darts.judge	darts.case_judge_aejud_id = darts.judgejud_id	case_judge_ae_judge_fk

Columns		Name / Description
9	cas_id, jud_id	case_judge_ae_pk

13.1.13. Table: darts.case_management_retention

Columns

		Name	Data type	Description / Attributes
■	1	cmr_id	integer	
		cas_id	integer	References: darts.court_case
		rpt_id	integer	References: darts.retention_policy_type
		eve_id	integer	References: darts.event
		total_sentence	character varying	Nullable

Links to

	Table	Join	Title / Name / Description
>	darts.court_case	darts.case_management_retentioncas_ id = darts.court_casecas_id	case_management_retention_court_case_fk
\rightarrow	darts.event	darts.case_management_retentioneve _id = darts.eventeve_id	case_management_retention_event_fk
-	darts.retention_policy_type	darts.case_management_retentionrpt_i d = darts.retention_policy_typerpt_id	case_management_retention_retention_policy_type_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.case_retention	darts.case_management_retentioncmr _id = darts.case_retentioncmr_id	case_retention_case_management_retention_fk

	Columns	Name / Description
9	cmr_id	case_management_retention_pk

13.1.14. Table: darts.case_overflow

Columns

		Name	Data type	Description / Attributes
■	1	cof_id	integer	
■		cas_id	integer	Nullable References: darts.court_case
B		rpt_id	integer	Nullable References: darts.retention_policy_type
▤		case_object_id	character varying	Nullable
▤		case_total_sentence	character varying	Nullable
▤		retention_event_ts	timestamp with time zone	Nullable
▤		case_retention_fixed	character varying	Nullable
▤		retention_applies_from_ts	timestamp with time zone	Nullable
▤		end_of_sentence_date_ts	timestamp with time zone	Nullable
▤		manual_retention_override	integer	Nullable
▤		retain_until_ts	timestamp with time zone	Nullable
▤		c_closed_pre_live	integer	Nullable
▤		c_case_closed_date_pre_live	timestamp with time zone	Nullable
▤		case_created_ts	timestamp with time zone	Nullable
▤		audio_folder_object_id	character varying(16)	Nullable
▤		case_last_modified_ts	timestamp with time zone	Nullable
▤		audio_last_modified_ts	timestamp with time zone	Nullable
▤		c_case_id	character varying(32)	Nullable
▤		c_courthouse	character varying(64)	Nullable
■		c_type	character varying(32)	Nullable
▤		c_upload_priority	integer	Nullable
■		c_reporting_restrictions	character varying(128)	Nullable
▤		case_object_name	character varying(255)	Nullable
B		r_folder_path	character varying(740)	Nullable
■		c_interpreter_used	integer	Nullable
■		created_ts	timestamp with time zone	Default: CURRENT_TIMESTAMP
■		last_modified_ts	timestamp with time zone	

Links to

	Table	Join	Title / Name / Description
—	darts.court_case	<pre>darts.case_overflowcas_id = darts.court_casecas_id</pre>	case_overflow_court_case_fk
—	darts.retention_policy_type	<pre>darts.case_overflowrpt_id = darts.retention_policy_typerpt_id</pre>	case_overflow_retention_policy_type_fk

	Columns	Name / Description
Ŷ	cof_id	case_overflow_pk

13.1.15. Table: darts.case_retention

Columns

		Name	Data type	Description / Attributes
	1	car_id	integer	primary key of case_retention
■		cas_id	integer	foreign key from court_case References: darts.court_case
■		rpt_id	integer	References: darts.retention_policy_type
■		cmr_id	integer	Nullable References: darts.case_management_retention
■		total_sentence	character varying	Nullable
		retain_until_ts	timestamp with time zone	
		retain_until_applied_on_ts	timestamp with time zone	Nullable
		current_state	character varying	
		comments	character varying	Nullable
■		confidence_category	integer	Nullable
		retention_object_id	character varying	Nullable
		submitted_by	integer	References: darts.user_account
		created_ts	timestamp with time zone	
		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
→	darts.case_management_retention	darts.case_retentioncmr_id = darts.case_management_retentioncmr_id	case_retention_case_management_retention_fk
>	darts.court_case	darts.case_retentioncas_id = darts.court_casecas_id	case_retention_court_case_fk
-	darts.retention_policy_type	<pre>darts.case_retentionrpt_id = darts.retention_policy_typerpt_id</pre>	case_retention_retention_policy_type_fk
\rightarrow	darts.user_account	darts.case_retentioncreated_by = darts.user_accountusr_id	case_retention_created_by_fk
>	darts.user_account	darts.case_retentionlast_modified_by = darts.user_accountusr_id	case_retention_last_modified_by_fk
\rightarrow	darts.user_account	darts.case_retentionsubmitted_by = darts.user_accountusr_id	case_retention_submitted_by_fk

	Columns	Name / Description
9	car_id	case_retention_pk

13.1.16. Table: darts.case_retention_audit_heritage

Columns

		Name	Data type	Description / Attributes
■	1	rah_id	integer	
■		cas_id	integer	Nullable References: darts.court_case
■		rpt_id	integer	Nullable References: darts.retention_policy_type
▤		case_retention_audit_object_id	character varying(16)	
▤		is_current	boolean	Nullable
▤		i_partition	integer	Nullable
▤		c_case_id	character varying(32)	Nullable
■		c_date_retention_amended	timestamp with time zone	Nullable
■		c_comments	character varying	Nullable
■		c_date_previous_retention	timestamp with time zone	Nullable
■		c_username	integer	Nullable References: darts.user_account
▤		c_status	character varying(32)	Nullable
▤		c_courthouse	character varying(64)	Nullable
▤		c_policy_type	character varying(20)	Nullable
▤		c_case_closed_date	timestamp with time zone	Nullable
▤		object_name	character varying(255)	Nullable
■		r_creator_name	integer	Nullable References: darts.user_account
■		r_creation_date	timestamp with time zone	Nullable
■		r_modifier	integer	Nullable References: darts.user_account
▤		r_modify_date	timestamp with time zone	Nullable
■		owner_name	integer	Nullable References: darts.user_account

Links to

	Table	Join	Title / Name / Description
—	darts.court_case	darts.case_retention_audit_heritagecas _id = darts.court_casecas_id	case_retention_audit_heritage_court_case_fk
>	darts.retention_policy_type	darts.case_retention_audit_heritagerpt _id = darts.retention_policy_typerpt_id	case_retention_audit_heritage_retention_policy_type_fk
\rightarrow	darts.user_account	darts.case_retention_audit_heritagec_u sername = darts.user_accountusr_id	case_retention_audit_heritage_c_username_fk
-	darts.user_account	darts.case_retention_audit_heritager_c reator_name = darts.user_accountusr_id	case_retention_audit_heritage_r_creator_name_fk
>	darts.user_account	darts.case_retention_audit_heritager_ modifier = darts.user_accountusr_id	case_retention_audit_heritage_r_modifier_fk

	Table	Join	Title / Name / Description
—	darts.user_account	darts.case_retention_audit_heritageow ner_name = darts.user_accountusr_id	case_retention_audit_heritage_owner_name_fk

	Columns	Name / Description
9	rah_id	case_retention_audit_heritage_pk

13.1.17. Table: darts.case_transcription_ae

Columns

		Name	Data type	Description / Attributes
	1	cas_id	integer	foreign key from case, part of composite natural key and PK References: darts.court_case
■	1	tra_id	integer	foreign key from transcription, part of composite natural key and PK References : darts.transcription

Links to

	Table	Join	Title / Name / Description
-	darts.court_case	darts.case_transcription_aecas_id = darts.court_casecas_id	case_transcription_ae_case_fk
—	darts.transcription	darts.case_transcription_aetra_id = darts.transcriptiontra_id	case_transcription_ae_transcription_fk

Columns		Name / Description
Ŷ	cas_id, tra_id	case_transcription_ae_pk

13.1.18. Table: darts.cc_dets

Columns

		Name	Data type	Description / Attributes
	1	cas_id	integer	
		case_object_id	character varying(16)	Nullable
		c_courthouse	character varying(64)	Nullable
		c_case_id	character varying(32)	Nullable
		c_closed_pre_live	integer	Nullable
		c_case_closed_date_pre_live	timestamp with time zone	Nullable
		c_case_closed_date_crah	timestamp with time zone	Nullable
		case_created_ts	timestamp with time zone	Nullable
		cas_retention_fixed	character varying(16)	Nullable
		case_total_sentence	character varying(16)	Nullable
		retention_applies_from_ts	timestamp with time zone	Nullable
		end_of_sentence_date_ts	timestamp with time zone	Nullable
		manual_retention_override	integer	Nullable
		retain_until_ts	timestamp with time zone	Nullable
■		audio_folder_object_id	character varying(16)	Nullable
■		case_closed_event_event_ts_by_pre _live_closed_date	timestamp with time zone	Nullable
■		case_closed_event_event_ts_eve_id_ by_pre_live_closed_date	integer	Nullable
		case_closed_event_created_ts_by_p re_live_closed_date	timestamp with time zone	Nullable
		case_closed_event_created_ts_eve_i d_by_pre_live_closed_date	integer	Nullable
		case_closed_event_event_ts_by_aud it_closed_date	timestamp with time zone	Nullable
		case_closed_event_event_ts_eve_id_ by_audit_closed_date	integer	Nullable
		case_closed_event_created_ts_by_a udit_closed_date	timestamp with time zone	Nullable
		case_closed_event_created_ts_eve_i d_by_audit_closed_date	integer	Nullable
		case_closed_event_event_ts_case_closed_event_latest	timestamp with time zone	Nullable
		case_closed_event_event_ts_eve_id_ case_closed_event_latest	integer	Nullable
■		case_closed_event_created_ts_case_ closed_event_latest	timestamp with time zone	Nullable
		case_closed_event_created_ts_eve_i d_case_closed_event_latest	integer	Nullable
		latest_event_by_event_ts_ts	timestamp with time zone	Nullable
I		latest_event_by_event_ts_eve_id	integer	Nullable

	Name	Data type	Description / Attributes
B	latest_event_by_created_ts	timestamp with time zone	Nullable
▤	latest_event_by_created_ts_eve_id	integer	Nullable
B	latest_hearing_ended_event_by_eve nt_ts	timestamp with time zone	Nullable
■	latest_hearing_ended_event_by_eve nt_ts_eve_id	integer	Nullable
	latest_hearing_ended_event_by_cre ated_ts	timestamp with time zone	Nullable
■	latest_hearing_ended_event_by_cre ated_ts_eve_id	integer	Nullable
▤	latest_log_event_by_event_ts	timestamp with time zone	Nullable
▤	latest_log_event_by_event_ts_eve_id	integer	Nullable
▤	latest_log_event_by_created_ts	timestamp with time zone	Nullable
	latest_log_event_by_created_ts_eve _id	integer	Nullable
■	latest_sentencing_event_by_event_t s	timestamp with time zone	Nullable
■	latest_sentencing_event_by_event_t s_eve_id	integer	Nullable
■	latest_sentencing_event_by_created _ts	timestamp with time zone	Nullable
■	latest_sentencing_event_by_created _ts_eve_id	integer	Nullable
■	latest_sentencing_271_event_by_eve nt_ts	timestamp with time zone	Nullable
■	latest_sentencing_271_event_by_eve nt_ts_eve_id	integer	Nullable
■	latest_sentencing_271_event_by_cre ated_ts	timestamp with time zone	Nullable
■	latest_sentencing_271_event_by_cre ated_ts_eve_id	integer	Nullable
■	latest_media_by_created_ts	timestamp with time zone	Nullable
■	latest_media_by_created_ts_eve_id	integer	Nullable
■	latest_media_by_start_ts	timestamp with time zone	Nullable
	latest_media_by_start_ts_eve_id	integer	Nullable
■	latest_media_by_end_ts	timestamp with time zone	Nullable
■	latest_media_by_end_ts_eve_id	integer	Nullable
■	latest_warrant_event_by_event_ts	timestamp with time zone	Nullable
■	latest_warrant_event_by_event_ts_e ve_id	integer	Nullable
	latest_warrant_event_by_created_ts	timestamp with time zone	Nullable
B	latest_warrant_event_by_created_ts_ eve_id	integer	Nullable
	ret_conf_score	integer	Nullable
■	ret_conf_reason	character varying(64)	Nullable

		Name	Data type	Description / Attributes
■		ret_conf_updated_ts	timestamp with time zone	Nullable
		category_type	character varying(32)	Nullable
■		latest_activity_period	character varying(5)	Nullable

	Columns	Name / Description
9	cas_id	cc_dets_pk

13.1.19. Table: darts.cmr_dets

Columns

		Name	Data type	Description / Attributes
■	1	cmd_id	integer	Default : nextval('darts.cmr_dets_cmd_id_seq'::regclass)
■		cas_id	integer	Nullable
■		rpt_id	integer	Nullable
■		eve_id	bigint	Nullable
■		total_sentence	character varying(32)	Nullable

Columns		Name / Description
P	cmd_id	cmr_dets_pk

13.1.20. Table: darts.court_case

Columns

		Name	Data type	Description / Attributes
	1	cas_id	integer	primary key of court_case
B	1	cth_id	integer	foreign key to courthouse References: darts.courthouse
B		evh_id	integer	Nullable References: darts.event_handler
B		case_object_id	character varying(16)	internal Documentum primary key from moj_case_s Nullable
■		case_object_name	character varying(255)	Nullable
▤		folder_path	character varying	Nullable
▤	1	case_number	character varying	directly sourced from moj_case_s.c_case_id
■		case_type	character varying	Nullable
■		upload_priority	integer	Nullable
▤		case_closed	boolean	migrated from moj_case_s, converted from numeric to boolean
▤		interpreter_used	boolean	migrated from moj_case_s, converted from numeric to boolean
B		case_closed_ts	timestamp with time zone	directly sourced from moj_case_s.c_case_closed_date Nullable
▤		is_retention_updated	boolean	Default: false
■		retention_retries	integer	Nullable
▤		is_data_anonymised	boolean	Default : false
B		data_anonymised_by	integer	Nullable References: darts.user_account
▤		data_anonymised_ts	timestamp with time zone	Nullable
■		ret_conf_score	integer	Nullable
▤		ret_conf_reason	character varying	Nullable
▤		ret_conf_updated_ts	timestamp with time zone	Nullable
▤		is_deleted	boolean	Default: false
目		deleted_by	integer	Nullable References: darts.user_account
▤		deleted_ts	timestamp with time zone	Nullable
▤		created_ts	timestamp with time zone	
		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
▤		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
>	— I darts collittholise	darts.court_casecth_id = darts.courthousecth_id	court_case_courthouse_fk

	Table	Join	Title / Name / Description
\leftarrow	darts.event_handler	darts.court_caseevh_id = darts.event_handlerevh_id	court_case_event_handler_fk
\leftarrow	darts.user_account	darts.court_casecreated_by = darts.user_accountusr_id	court_case_created_by_fk
>	darts.user_account	darts.court_caselast_modified_by = darts.user_accountusr_id	court_case_modified_by_fk
\rightarrow	darts.user_account	darts.court_casedeleted_by = darts.user_accountusr_id	court_case_deleted_by_fk
\rightarrow	darts.user_account	darts.court_casedata_anonymised_by = darts.user_accountusr_id	court_case_data_anonymised_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.audit	darts.court_casecas_id = darts.auditcas_id	audit_case_fk
\rightarrow	darts.case_document	darts.court_casecas_id = darts.case_documentcas_id	case_document_case_fk
\rightarrow	darts.case_judge_ae	darts.court_casecas_id = darts.case_judge_aecas_id	case_judge_ae_case_fk
\rightarrow	darts.case_management_retention	darts.court_casecas_id = darts.case_management_retentioncas_id	case_management_retention_court_case_fk
\rightarrow	darts.case_overflow	darts.court_casecas_id = darts.case_overflowcas_id	case_overflow_court_case_fk
\rightarrow	darts.case_retention	darts.court_casecas_id = darts.case_retentioncas_id	case_retention_court_case_fk
\rightarrow	darts.case_retention_audit_heritage	darts.court_casecas_id = darts.case_retention_audit_heritagecas_id	case_retention_audit_heritage_court_case_fk
\rightarrow	darts.case_transcription_ae	darts.court_casecas_id = darts.case_transcription_aecas_id	case_transcription_ae_case_fk
\rightarrow	darts.defence	darts.court_casecas_id = darts.defencecas_id	defence_court_case_fk
\rightarrow	darts.defendant	darts.court_casecas_id = darts.defendantcas_id	defendant_court_case_fk
\rightarrow	darts.event_linked_case	darts.court_casecas_id = darts.event_linked_casecas_id	event_linked_case_court_case_fk
\rightarrow	darts.hearing	darts.court_casecas_id = darts.hearingcas_id	hearing_case_fk
\rightarrow	darts.media_linked_case	darts.court_casecas_id = darts.media_linked_casecas_id	media_linked_case_court_case_fk
\rightarrow	darts.notification	darts.court_casecas_id = darts.notificationcas_id	notification_case_fk
\rightarrow	darts.prosecutor	darts.court_casecas_id = darts.prosecutorcas_id	prosecutor_court_case_fk
\rightarrow	darts.transcription_linked_case	darts.court_casecas_id = darts.transcription_linked_casecas_id	transcription_linked_case_court_case_fk

	Columns	Name / Description
P	cas_id	court_case_pk
Ŷ	case_number, cth_id	cas_case_number_cth_id_unq

13.1.21. Table: darts.courthouse

Columns

		Name	Data type	Description / Attributes
■	1	cth_id	integer	primary key of courthouse
■		courthouse_object_id	character varying(16)	Nullable
■		folder_path	character varying	Nullable
■		courthouse_code	integer	corresponds to the c_crown_court_code found in daily lists Nullable
■	1	courthouse_name	character varying	directly sourced from moj_courthouse_s.c_id
■		display_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.user_account	<pre>darts.courthousecreated_by = darts.user_accountusr_id</pre>	courthouse_created_by_fk
→	darts.user_account	<pre>darts.courthouselast_modified_by = darts.user_accountusr_id</pre>	courthouse_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.court_case	<pre>darts.courthousecth_id = darts.court_casecth_id</pre>	court_case_courthouse_fk
\rightarrow	darts.courthouse_region_ae	<pre>darts.courthousecth_id = darts.courthouse_region_aecth_id</pre>	courthouse_region_courthouse_fk
\rightarrow	darts.courtroom	<pre>darts.courthousecth_id = darts.courtroomcth_id</pre>	courtroom_courthouse_fk
→	darts.security_group_courthouse_ae	darts.courthousecth_id = darts.security_group_courthouse_aect h_id	security_group_courthouse_courthouse_fk

	Columns	Name / Description	
?	cth_id	courthouse_pk	
Ŷ	courthouse_name	courthouse_courthouse_name_key	

13.1.22. Table: darts.courthouse_region_ae

Columns

		Name	Data type	Description / Attributes
▤	1	cth_id	integer	References: darts.courthouse
▤	1	reg_id	integer	References: darts.region

Links to

	Table	Join	Title / Name / Description
-	darts.courthouse	darts.courthouse_region_aecth_id = darts.courthousecth_id	courthouse_region_courthouse_fk
-	darts.region	darts.courthouse_region_aereg_id = darts.regionreg_id	courthouse_region_region_fk

	Columns	Name / Description
9	cth_id, reg_id	courthouse_region_ae_pk

13.1.23. Table: darts.courtroom

Columns

		Name	Data type	Description / Attributes
■	1	ctr_id	integer	primary key of courtroom
■	1	cth_id	integer	foreign key to courthouse References: darts.courthouse
■	1	courtroom_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
>	- darts.courthouse	darts.courtroomcth_id = darts.courthousecth_id	courtroom_courthouse_fk
>	- darts.user_account	darts.courtroomcreated_by = darts.user_accountusr_id	courtroom_created_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.event	darts.courtroomctr_id = darts.eventctr_id	event_courtroom_fk
\rightarrow	darts.hearing	darts.courtroomctr_id = darts.hearingctr_id	hearing_courtroom_fk
\rightarrow	darts.media	darts.courtroomctr_id = darts.mediactr_id	media_courtroom_fk
\rightarrow	darts.node_register	darts.courtroomctr_id = darts.node_registerctr_id	node_register_courtroom_fk
\rightarrow	darts.transcription	darts.courtroomctr_id = darts.transcriptionctr_id	transcription_courtroom_fk

	Columns	Name / Description
?	ctr_id	courtroom_pk
9	cth_id, courtroom_name	ctr_chr_crn_unq

13.1.24. Table: darts.cr_dets

Columns

		Name	Data type	Description / Attributes
■	1	crd_id	integer	Default: nextval('darts.cr_dets_crd_id_seq'::regclass)
■		cas_id	integer	Nullable
		rpt_id	integer	Nullable
■		cmd_id	integer	Nullable
■		total_sentence	character varying(32)	Nullable
■		retain_until_ts	timestamp with time zone	Nullable
■		retain_until_applied_on_ts	timestamp with time zone	Nullable
■		current_state	character varying(32)	Nullable
■		comments	character varying(150)	Nullable
■		confidence_category	integer	Nullable
■		retention_object_id	character varying(16)	Nullable
■		submitted_by	integer	Nullable
■		created_ts	timestamp with time zone	Nullable
■		created_by	integer	Nullable
		last_modified_ts	timestamp with time zone	Nullable
■		last_modified_by	integer	Nullable

Columns	Name / Description
rd_id crd_id	cr_dets_pk

13.1.25. Table: darts.daily_list

Columns

		Name	Data type	Description / Attributes
■	1	dal_id	integer	primary key of daily_list
■		courthouse_code	integer	Nullable
■		listing_courthouse	character varying	
■		daily_list_object_id	character varying(16)	internal Documentum primary key from moj_daily_list_s Nullable
■		unique_id	character varying	directly sourced from moj_daily_list_s, received as part of the XML, used to find duplicate daily lists Nullable
▤		job_status	character varying	directly sourced from moj_daily_list_s
■		published_ts	timestamp with time zone	directly sourced from moj_daily_list_s.c_timestamp Nullable
■		start_dt	date	directly sourced from moj_daily_list_s.c_start_date Nullable
■		end_dt	date	directly sourced from moj_daily_list_s.c_end_date Nullable
		daily_list_id_s	character varying	directly sourced from moj_daily_list_s Nullable
■		daily_list_source	character varying	directly sourced from moj_daily_list_s Nullable
■		daily_list_content_json	character varying	Nullable
▤		daily_list_content_xml	character varying	Nullable
▤		message_id	character varying	Nullable
▤		content_object_id	character varying(16)	Nullable
▤		subcontent_object_id	character varying(16)	Nullable
▤		subcontent_position	integer	Nullable
▤		clip_id	character varying	Nullable
▤		storage_id	character varying(16)	Nullable
■		data_ticket	integer	Nullable
▤		external_location	character varying	Nullable
■		elt_id	integer	Nullable References: darts.external_location_type
		osr_uuid	bigint	Nullable
		created_ts	timestamp with time zone	
B		created_by	integer	References: darts.user_account
B		last_modified_ts	timestamp with time zone	
▤		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.external_location_type	darts.daily_listelt_id = darts.external_location_typeelt_id	daily_list_external_location_type_fk
>	darts.user_account	<pre>darts.daily_listcreated_by = darts.user_accountusr_id</pre>	daily_list_created_by_fk
>	darts.user_account	darts.daily_listlast_modified_by = darts.user_accountusr_id	daily_list_modified_by_fk

	Columns	Name / Description
Ŷ	dal_id	daily_list_pk

13.1.26. Table: darts.data_anonymisation

Columns

		Name	Data type	Description / Attributes
■	1	dan_id	integer	primary key of data_anonymisation
		eve_id	bigint	foreign key to event, unenforced to support deletion of event without reference to this table Nullable References: darts.event
		trc_id	integer	foreign key of transcription_comment, unenforce to support deletion of transcription_comment without reference to this table Nullable References: darts.transcription_comment
■		is_manual_request	boolean	Nullable
■		requested_by	integer	References: darts.user_account
■		requested_ts	timestamp with time zone	
■		approved_by	integer	Nullable References: darts.user_account
■		approved_ts	timestamp with time zone	Nullable

Links to

	Table	Join	Title / Name / Description
-	darts.event	darts.data_anonymisationeve_id = darts.eventeve_id	data_anonymisation_event_fk
>	darts.transcription_comment	darts.data_anonymisationtrc_id = darts.transcription_commenttrc_id	data_anonymisation_transcription_comment_fk
>	darts.user_account	darts.data_anonymisationrequested_b y = darts.user_accountusr_id	data_anonymisation_requested_by_fk
>	darts.user_account	darts.data_anonymisationapproved_by = darts.user_accountusr_id	data_anonymisation_approved_by_fk

	Columns	Name / Description
?	dan_id	data_anonymisation_pk

13.1.27. Table: darts.defence

Columns

		Name	Data type	Description / Attributes
■	1	dfc_id	integer	primary key of defence_name
■	9	cas_id	integer	foreign key from court_case References: darts.court_case
■	1	defence_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.court_case	darts.defencecas_id = darts.court_casecas_id	defence_court_case_fk
>	darts.user_account	<pre>darts.defencecreated_by = darts.user_accountusr_id</pre>	defence_created_by_fk
>	darts.user_account	darts.defencelast_modified_by = darts.user_accountusr_id	defence_modified_by_fk

	Columns	Name / Description
Ŷ	dfc_id	defence_pk
Ŷ	cas_id, defence_name	dfc_cas_id_defence_name_unq

13.1.28. Table: darts.defendant

Columns

		Name	Data type	Description / Attributes
■	1	dfd_id	integer	primary key of defendant_name
■	9	cas_id	integer	foreign key from court_case References: darts.court_case
■	1	defendant_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.court_case	darts.defendantcas_id = darts.court_casecas_id	defendant_court_case_fk
-	darts.user_account	darts.defendantcreated_by = darts.user_accountusr_id	defendant_created_by_fk
>	darts.user_account	<pre>darts.defendantlast_modified_by = darts.user_accountusr_id</pre>	defendant_modified_by_fk

	Columns	Name / Description	
Ŷ	dfd_id	defendant_pk	
Ŷ	cas_id, defendant_name	dfd_cas_id_defendant_name_unq	

13.1.29. Table: darts.event

Columns

		Name	Data type	Description / Attributes
▤	1	eve_id	bigint	primary key of moj_event
■		ctr_id	integer	foreign key from moj_courtroom References: darts.courtroom
		evh_id	integer	foreign key for the moj_event_handler table References: darts.event_handler
■		event_object_id	character varying(16)	internal Documentum primary key from moj_event_s Nullable
■		event_id	integer	directly sourced from moj_event_s Nullable
		event_text	character varying	inherited from moj_annotation_s.c_text Nullable
		event_ts	timestamp with time zone	inherited from moj_annotation_s
■		message_id	character varying	no migration element, records the id of the message that gave rise to this event Nullable
		is_log_entry	boolean	
目		event_status	integer	Nullable
▤		is_current	boolean	Default: true
▤		is_data_anonymised	boolean	Default: false
■		version_label	character varying(32)	inherited from dm_sysobject_r, for r_object_type of moj_event Nullable
▤		chronicle_id	character varying(16)	Nullable
▤		antecedent_id	character varying(16)	Nullable
▤		created_ts	timestamp with time zone	
▤		created_by	integer	References: darts.user_account
▤		last_modified_ts	timestamp with time zone	
▤		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.courtroom	<pre>darts.eventctr_id = darts.courtroomctr_id</pre>	event_courtroom_fk
\rightarrow	darts.event_handler	<pre>darts.eventevh_id = darts.event_handlerevh_id</pre>	event_event_handler_fk
>	darts.user_account	<pre>darts.eventcreated_by = darts.user_accountusr_id</pre>	event_created_by_fk
\rightarrow	darts.user_account	darts.eventlast_modified_by = darts.user_accountusr_id	event_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.case_management_retention	darts.eventeve_id = darts.case_management_retentioneve _id	case_management_retention_event_fk
\rightarrow	darts.data_anonymisation	darts.eventeve_id = darts.data_anonymisationeve_id	data_anonymisation_event_fk
\rightarrow	darts.event_linked_case	darts.eventeve_id = darts.event_linked_caseeve_id	event_linked_case_event_fk
\rightarrow	darts.hearing_event_ae	darts.eventeve_id = darts.hearing_event_aeeve_id	hearing_event_ae_event_fk

Columns	Name / Description
Y eve_id	event_pk

13.1.30. Table: darts.event_handler

content will be derived from TBL_MOJ_DOC_HANDLER in the legacy database, but currently has no primary key and 6 fully duplicated rows

Columns

		Name	Data type	Description / Attributes
■	1	evh_id	integer	primary key of moj_event_type
■		event_type	character varying	directly sourced from doc_type
■		event_sub_type	character varying	directly sourced from doc_sub_type Nullable
■		event_name	character varying	directly sourced from event_name
■		handler	character varying	directly sourced from doc_handler Nullable
■		active	boolean	
■		is_reporting_restriction	boolean	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
→	darts.user_account	<pre>darts.event_handlercreated_by = darts.user_accountusr_id</pre>	event_handler_created_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.court_case	<pre>darts.event_handlerevh_id = darts.court_caseevh_id</pre>	court_case_event_handler_fk
\rightarrow	darts.event	darts.event_handlerevh_id = darts.eventevh_id	event_event_handler_fk

Columns	Name / Description
evh_id	event_handler_pk

13.1.31. Table: darts.event_linked_case

content is to be populated via migration

Columns

		Name	Data type	Description / Attributes
■	1	elc_id	bigint	
■		eve_id	bigint	References: darts.event
■		cas_id	integer	Nullable References: darts.court_case
■		courthouse_name	character varying	Nullable
■		case_number	character varying	Nullable

Links to

	Table	Join	Title / Name / Description
>	- darts.court_case	<pre>darts.event_linked_casecas_id = darts.court_casecas_id</pre>	event_linked_case_court_case_fk
>	- darts.event	<pre>darts.event_linked_caseeve_id = darts.eventeve_id</pre>	event_linked_case_event_fk

	Columns	Name / Description
9	elc_id	event_linked_case_pk

13.1.32. Table: darts.external_location_type

used to record acceptable external locations, found in external_object_directory

Columns

		Name	Data type	Description / Attributes
	1	elt_id	integer	
B		elt_description	character varying	Nullable

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.daily_list	darts.external_location_typeelt_id = darts.daily_listelt_id	daily_list_external_location_type_fk
\rightarrow	darts.external_object_directory	darts.external_location_typeelt_id = darts.external_object_directoryelt_id	eod_external_location_type_fk

	Columns	Name / Description
9	elt_id	external_location_type_pk

13.1.33. Table: darts.external_object_directory

Columns

		Name	Data type	Description / Attributes
■	1	eod_id	bigint	primary key of external_object_directory
目		ado_id	integer	foreign key from annotation_document Nullable References: darts.annotation_document
B		cad_id	integer	Nullable References: darts.case_document
▤		med_id	bigint	foreign key from moj_media Nullable References: darts.media
■		trd_id	integer	foreign key from transcription_document Nullable References: darts.transcription_document
		ors_id	integer	References: darts.object_record_status
B		elt_id	integer	foreign key from external_location_type References: darts.external_location_type
		osr_uuid	bigint	Nullable
■		external_location	character varying	Nullable
		external_file_id	character varying	Nullable
■		external_record_id	character varying	Nullable
■		checksum	character varying	Nullable
■		transfer_attempts	integer	Nullable
		manifest_file	character varying	Nullable
■		event_date_ts	timestamp with time zone	Nullable
■		data_ingestion_ts	timestamp with time zone	Nullable
■		verification_attempts	integer	Nullable
		error_code	character varying	Nullable
		is_response_cleaned	boolean	Default: false
		update_retention	boolean	
B		input_upload_processed_ts	timestamp with time zone	Nullable
		force_response_cleanup	boolean	Nullable
B		is_dets	boolean	Default: false
		created_ts	timestamp with time zone	
B		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
—	darts.annotation_document	darts.external_object_directoryado_id = darts.annotation_documentado_id	eod_annotation_document_fk

	Table	Join	Title / Name / Description
\rightarrow	darts.case_document	darts.external_object_directorycad_id = darts.case_documentcad_id	eod_case_document_fk
\rightarrow	darts.external_location_type	darts.external_object_directoryelt_id = darts.external_location_typeelt_id	eod_external_location_type_fk
\rightarrow	darts.media	darts.external_object_directorymed_id = darts.mediamed_id	eod_media_fk
\rightarrow	darts.object_record_status	darts.external_object_directoryors_id = darts.object_record_statusors_id	eod_object_record_status_fk
\rightarrow	darts.transcription_document	darts.external_object_directorytrd_id = darts.transcription_documenttrd_id	eod_transcription_document_fk
\rightarrow	darts.user_account	darts.external_object_directorylast_mo dified_by = darts.user_accountusr_id	eod_modified_by_fk
\rightarrow	darts.user_account	darts.external_object_directorycreated _by = darts.user_accountusr_id	external_object_directory_created_by_fk

Linked from

	Table	Join	Title / Name / Description
→ (darts.extobjdir_process_detail	<pre>darts.external_object_directoryeod_id = darts.extobjdir_process_detaileod_id</pre>	epd_external_object_directory_fk

Columns	Name / Description
P eod_id	external_object_directory_pk

13.1.34. Table: darts.external_service_auth_token

Columns

		Name	Data type	Description / Attributes
■	1	esa_id	integer	primary key of external_service_auth_token
■		external_service_userid	character varying	userId used by external services OR requestId user by Audio Request
■		token_type	integer	1=soap token, 2=email link token
■		token	character varying	Encrypted Token
■		expiry_ts	timestamp with time zone	Expiry Date & Time of the Token Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
>	- darts.user_account	darts.external_service_auth_tokencreat ed_by = darts.user_accountusr_id	external_service_auth_token_created_by_fk
>	- darts.user_account	darts.external_service_auth_tokenlast_ modified_by = darts.user_accountusr_id	external_service_auth_token_modified_by_fk

	Columns	Name / Description
9	esa_id	external_service_auth_token_pk

13.1.35. Table: darts.extobjdir_process_detail

This table is an extension of external_object_directory.

Columns

		Name	Data type	Description / Attributes
■	1	epd_id	bigint	primary key of extobjdir_process_detail, needed to support Hibernate. Logically eod_id is the PK
■	1	eod_id	bigint	foreign key from external_object_directory References: darts.external_object_directory
▤		event_date_ts	timestamp with time zone	Nullable
▤		update_retention	boolean	
■		input_upload_filename	character varying	Nullable
■		create_record_filename	character varying	Nullable
■		create_record_processed_ts	timestamp with time zone	Nullable
■		upload_file_filename	character varying	Nullable
▤		upload_file_processed_ts	timestamp with time zone	Nullable
▤		create_rec_inv_filename	character varying	Nullable
▤		create_rec_inv_processed_ts	timestamp with time zone	Nullable
▤		upload_file_inv_filename	character varying	Nullable
目		upload_file_inv_processed_ts	timestamp with time zone	Nullable
目		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
—	darts.external_object_directory	darts.extobjdir_process_detaileod_id = darts.external_object_directoryeod_id	epd_external_object_directory_fk
—	darts.user_account	darts.extobjdir_process_detailcreated_ by = darts.user_accountusr_id	epd_created_by_fk
—	darts.user_account	darts.extobjdir_process_detaillast_mod ified_by = darts.user_accountusr_id	epd_last_modified_by_fk

	Columns	Name / Description
Ŷ	epd_id	extobjdir_process_detail_pk
Ŷ	eod_id	extobjdir_process_detail_eod_id_key

13.1.36. Table: darts.hearing

Columns

		Name	Data type	Description / Attributes
■	1	hea_id	integer	primary key of hearing
	1	cas_id	integer	foreign key from case References: darts.court_case
	1	ctr_id	integer	foreign key from courtroom References: darts.courtroom
■	1	hearing_date	date	directly sourced from moj_case_r
■		scheduled_start_time	time without time zone	Nullable
■		hearing_is_actual	boolean	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
—	darts.court_case	darts.hearingcas_id = darts.court_casecas_id	hearing_case_fk
-	darts.courtroom	darts.hearingctr_id = darts.courtroomctr_id	hearing_courtroom_fk
>	darts.user_account	darts.hearingcreated_by = darts.user_accountusr_id	hearing_created_by_fk
—	darts.user_account	darts.hearinglast_modified_by = darts.user_accountusr_id	hearing_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.hearing_annotation_ae	darts.hearinghea_id = darts.hearing_annotation_aehea_id	hearing_annotation_ae_hearing_fk
\rightarrow	darts.hearing_event_ae	darts.hearinghea_id = darts.hearing_event_aehea_id	hearing_event_ae_hearing_fk
\rightarrow	darts.hearing_judge_ae	darts.hearinghea_id = darts.hearing_judge_aehea_id	hearing_judge_ae_hearing_fk
\rightarrow	darts.hearing_media_ae	darts.hearinghea_id = darts.hearing_media_aehea_id	hearing_media_ae_hearing_fk
\rightarrow	darts.hearing_transcription_ae	darts.hearinghea_id = darts.hearing_transcription_aehea_id	hearing_transcription_ae_hearing_fk
\rightarrow	darts.media_request	darts.hearinghea_id = darts.media_requesthea_id	media_request_hearing_fk

	Columns	Name / Description
Ŷ	hea_id	hearing_pk

	Columns	Name / Description
P	cas_id, ctr_id, hearing_date	hea_cas_ctr_hd_unq

13.1.37. Table: darts.hearing_annotation_ae

Columns

		Name	Data type	Description / Attributes
	1	hea_id	integer	foreign key from hearing, part of composite natural key and PK References : darts.hearing
■	1	ann_id	integer	foreign key from annotation, part of composite natural key and PK References : darts.annotation

Links to

	Table	Join	Title / Name / Description
>	darts.annotation	darts.hearing_annotation_aeann_id = darts.annotationann_id	hearing_annotation_ae_annotation_fk
>	· darts.hearing	darts.hearing_annotation_aehea_id = darts.hearinghea_id	hearing_annotation_ae_hearing_fk

	Columns	Name / Description
9	hea_id, ann_id	hearing_annotation_ae_pk

13.1.38. Table: darts.hearing_event_ae

Columns

		Name	Data type	Description / Attributes
■	1	hea_id	integer	foreign key from hearing, part of composite natural key References : darts.hearing
■	1	eve_id	bigint	foreign key from event, part of composite natural key References: darts.event

Links to

	Table	Join	Title / Name / Description
-	darts.event	darts.hearing_event_aeeve_id = darts.eventeve_id	hearing_event_ae_event_fk
-	darts.hearing	darts.hearing_event_aehea_id = darts.hearinghea_id	hearing_event_ae_hearing_fk

	Columns	Name / Description
P	hea_id, eve_id	hearing_event_ae_pk

13.1.39. Table: darts.hearing_judge_ae

Columns

		Name	Data type	Description / Attributes
■	1	hea_id	integer	foreign key from case, part of composite natural key and PK References : darts.hearing
■	1	jud_id	integer	foreign key from judge, part of composite natural key and PK References : darts.judge

Links to

	Table	Join	Title / Name / Description
>	darts.hearing	darts.hearing_judge_aehea_id = darts.hearinghea_id	hearing_judge_ae_hearing_fk
>	· darts.judge	darts.hearing_judge_aejud_id = darts.judgejud_id	hearing_judge_ae_judge_fk

	Columns	Name / Description
9	hea_id, jud_id	hearing_judge_ae_pk

13.1.40. Table: darts.hearing_media_ae

Columns

		Name	Data type	Description / Attributes
B	1	hea_id	integer	foreign key from case, part of composite natural key References : darts.hearing
■	1	med_id	bigint	foreign key from media, part of composite natural key References : darts.media

Links to

	Table	Join	Title / Name / Description
>	darts.hearing	darts.hearing_media_aehea_id = darts.hearinghea_id	hearing_media_ae_hearing_fk
>	darts.media	darts.hearing_media_aemed_id = darts.mediamed_id	hearing_media_ae_media_fk

Columns		Name / Description
9	hea_id, med_id	hearing_media_ae_pk

13.1.41. Table: darts.hearing_transcription_ae

Columns

		Name	Data type	Description / Attributes
	1	hea_id	integer	foreign key from hearing, part of composite natural key and PK References : darts.hearing
■	1	tra_id	integer	foreign key from transcription, part of composite natural key and PK References : darts.transcription

Links to

	Table	Join	Title / Name / Description
-	darts.hearing	darts.hearing_transcription_aehea_id = darts.hearinghea_id	hearing_transcription_ae_hearing_fk
-	darts.transcription	darts.hearing_transcription_aetra_id = darts.transcriptiontra_id	hearing_transcription_ae_transcription_fk

	Columns	Name / Description
9	hea_id, tra_id	hearing_transcription_ae_pk

13.1.42. Table: darts.judge

Columns

		Name	Data type	Description / Attributes
■	1	jud_id	integer	primary key of judge_name
■	1	judge_name	character varying	
■		created_ts	timestamp with time zone	
		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

		Table	Join	Title / Name / Description
:	—	darts.user_account	<pre>darts.judgecreated_by = darts.user_accountusr_id</pre>	judge_created_by_fk
:	—	darts.user_account	<pre>darts.judgelast_modified_by = darts.user_accountusr_id</pre>	judge_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.case_judge_ae	darts.judgejud_id = darts.case_judge_aejud_id	case_judge_ae_judge_fk
\rightarrow	darts.hearing_judge_ae	darts.judgejud_id = darts.hearing_judge_aejud_id	hearing_judge_ae_judge_fk

	Columns	Name / Description
?	jud_id	judge_pk
9	judge_name	judge_judge_name_key

13.1.43. Table: darts.media

Columns

	um	Name	Data type	Description / Attributes
B	1	med_id	bigint	primary key of media
■		ctr_id	integer	foreign key from courtroom References: darts.courtroom
B		media_object_id	character varying(16)	internal Documentum primary key from moj_media_s Nullable
▤		content_object_id	character varying(16)	Nullable
▤		subcontent_object_id	character varying(16)	Nullable
▤		subcontent_position	integer	Nullable
▤		clip_id	character varying(54)	Nullable
▤		storage_id	character varying(16)	Nullable
▤		data_ticket	integer	Nullable
▤		channel	integer	directly sourced from moj_media_s
▤		total_channels	integer	directly sourced from moj_media_s
▤		start_ts	timestamp with time zone	inherited from moj_case_document_s
▤		end_ts	timestamp with time zone	inherited from moj_case_document_s
▤		media_file	character varying	
▤		media_format	character varying	
▤		media_type	character(1)	Default: 'A'::bpchar
目		file_size	bigint	
▤		checksum	character varying	Nullable
■		is_hidden	boolean	Default: false
▤		is_deleted	boolean	Default: false
■		is_current	boolean	Nullable
■		deleted_by	integer	Nullable References: darts.user_account
■		deleted_ts	timestamp with time zone	Nullable
		media_status	character varying	Nullable
B		version_label	character varying(32)	inherited from dm_sysobject_r, for r_object_type of moj_media Nullable
■		chronicle_id	character varying(16)	Nullable
■		antecedent_id	character varying(16)	Nullable
■		retain_until_ts	timestamp with time zone	Nullable
B		ret_conf_score	integer	Nullable
■		ret_conf_reason	character varying	Nullable
		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
▤		last_modified_ts	timestamp with time zone	

	Name	Data type	Description / Attributes
■	last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
>	darts.courtroom	<pre>darts.mediactr_id = darts.courtroomctr_id</pre>	media_courtroom_fk
>	darts.user_account	darts.mediacreated_by = darts.user_accountusr_id	media_created_by_fk
>	darts.user_account	darts.medialast_modified_by = darts.user_accountusr_id	media_modified_by_fk
>	darts.user_account	darts.mediadeleted_by = darts.user_accountusr_id	media_deleted_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.external_object_directory	darts.mediamed_id = darts.external_object_directorymed_id	eod_media_fk
\rightarrow	darts.hearing_media_ae	darts.mediamed_id = darts.hearing_media_aemed_id	hearing_media_ae_media_fk
\rightarrow	darts.media_linked_case	darts.mediamed_id = darts.media_linked_casemed_id	media_linked_case_media_fk
\rightarrow	darts.object_admin_action	darts.mediamed_id = darts.object_admin_actionmed_id	oaa_media_fk
\rightarrow	darts.object_retrieval_queue	darts.mediamed_id = darts.object_retrieval_queuemed_id	object_retrieval_queue_media_fk

	Columns	Name / Description
?	med_id	media_pk

13.1.44. Table: darts.media_linked_case

content is to be populated via migration

Columns

		Name	Data type	Description / Attributes
■	1	mlc_id	bigint	
■		med_id	bigint	References: darts.media
		cas_id	integer	Nullable References: darts.court_case
■		courthouse_name	character varying	Nullable
■		case_number	character varying	Nullable
		source	integer	Nullable Default: 0
■		created_ts	timestamp with time zone	Nullable
		created_by	integer	Nullable References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.court_case	darts.media_linked_casecas_id = darts.court_casecas_id	media_linked_case_court_case_fk
>	darts.media	darts.media_linked_casemed_id = darts.mediamed_id	media_linked_case_media_fk
>	darts.user_account	darts.media_linked_casecreated_by = darts.user_accountusr_id	media_linked_case_created_by_fk

	Columns	Name / Description
?	mlc_id	media_linked_case_pk

13.1.45. Table: darts.media_request

Columns

		Name	Data type	Description / Attributes
■	1	mer_id	integer	primary key of media_request
■		hea_id	integer	foreign key of hearing References: darts.hearing
■		requestor	integer	requestor of the media request, possibly migrated from moj_transformation_request_s References: darts.user_account
▤		current_owner	integer	References: darts.user_account
▤		request_status	character varying	status of the migration request
■		request_type	character varying	
		req_proc_attempts	integer	number of attempts by ATS to process the request Nullable
		start_ts	timestamp with time zone	start time in the search criteria for request, possibly migrated from moj_cached_media_s or moj_transformation_request_s
■		end_ts	timestamp with time zone	end time in the search criteria for request, possibly migrated from moj_cached_media_s or moj_transformation_request_s
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
>	darts.hearing	darts.media_requesthea_id = darts.hearinghea_id	media_request_hearing_fk
>	darts.user_account	darts.media_requestcreated_by = darts.user_accountusr_id	media_request_created_by_fk
>	darts.user_account	darts.media_requestlast_modified_by = darts.user_accountusr_id	media_request_modified_by_fk
>	darts.user_account	darts.media_requestrequestor = darts.user_accountusr_id	media_request_requestor_fk
>	darts.user_account	darts.media_requestcurrent_owner = darts.user_accountusr_id	media_request_current_owner_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.transformed_media	darts.media_requestmer_id = darts.transformed_mediamer_id	trm_media_request_fk

	Columns	Name / Description
9	mer_id	media_request_pk

13.1.46. Table: darts.node_register

corresponds to tbl_moj_node from legacy

Columns

		Name	Data type	Description / Attributes
■	1	node_id	integer	primary key of node_register
■		ctr_id	integer	foreign key from moj_courtroom, legacy stored courthouse and courtroon un-normalised References: darts.courtroom
■		node_type	character varying	Default : 'DAR'::character varying
■		hostname	character varying	
■		ip_address	character varying	
■		mac_address	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account

Links to

Table		Join	Title / Name / Description
\rightarrow	darts.courtroom	darts.node_registerctr_id = darts.courtroomctr_id	node_register_courtroom_fk
\rightarrow	darts.user_account	darts.node_registercreated_by = darts.user_accountusr_id	node_register_created_by_fk

	Columns	Name / Description
P	node_id	node_register_pk

13.1.47. Table: darts.notification

Columns

		Name	Data type	Description / Attributes
■	1	not_id	bigint	primary key of notification
■		cas_id	integer	foreign key to case References: darts.court_case
■		notification_event	character varying	event giving rise to the need for outgoing notification
■		notification_status	character varying	status of the notification, expected to be one of [O]pen, [P]rocessing, [S]end, [F]ailed
■		email_address	character varying	recipient of the notification
■		send_attempts	integer	number of outgoing requests to gov.uk Nullable
■		template_values	character varying	any extra fields not already covered or inferred from the case, in JSON format Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.court_case	darts.notificationcas_id = darts.court_casecas_id	notification_case_fk
>	darts.user_account	darts.notificationcreated_by = darts.user_accountusr_id	notification_created_by_fk
>	darts.user_account	darts.notificationlast_modified_by = darts.user_accountusr_id	notification_modified_by_fk

	Columns	Name / Description
9	not_id	notification_pk

13.1.48. Table: darts.object_admin_action

Columns

		Name	Data type	Description / Attributes
■	1	oaa_id	integer	
		ado_id	integer	Nullable References: darts.annotation_document
		cad_id	integer	Nullable References: darts.case_document
■		med_id	bigint	Nullable References: darts.media
■		trd_id	integer	Nullable References: darts.transcription_document
■		ohr_id	integer	Nullable References: darts.object_hidden_reason
■		hidden_by	integer	Nullable References: darts.user_account
■		hidden_ts	timestamp with time zone	Nullable
■		marked_for_manual_deletion	boolean	Default : false
		marked_for_manual_del_by	integer	Nullable References: darts.user_account
■		marked_for_manual_del_ts	timestamp with time zone	Nullable
■		ticket_reference	character varying	Nullable
■		comments	character varying	Nullable

Links to

	Table	Join	Title / Name / Description
>	darts.annotation_document	darts.object_admin_actionado_id = darts.annotation_documentado_id	oaa_annotation_document_fk
>	darts.case_document		oaa_case_document_fk
>	darts.media	darts.object_admin_actionmed_id = darts.mediamed_id	oaa_media_fk
>	darts.object_hidden_reason	darts.object_admin_actionohr_id = darts.object_hidden_reasonohr_id	object_admin_action_ohr_id_fk
>	darts.transcription_document		oaa_transcription_document_fk
>	darts.user_account	darts.object_admin_actionhidden_by = darts.user_accountusr_id	object_admin_action_hidden_by_fk
—	darts.user_account	darts.object_admin_actionmarked_for_ manual_del_by = darts.user_accountusr_id	object_admin_action_marked_for_manual_del_by_fk

	Columns	Name / Description
P	oaa_id	object_admin_action_pk

13.1.49. Table: darts.object_hidden_reason

used to record acceptable reasons for data to be hidden in tables ADO,CAD, MED, TRD

Columns

		Name	Data type	Description / Attributes
■	1	ohr_id	integer	
■		ohr_reason	character varying	
■		display_name	character varying	
■		display_state	boolean	Default: true
■		display_order	integer	
■		marked_for_deletion	boolean	Default: false

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.object_admin_action	<pre>darts.object_hidden_reasonohr_id = darts.object_admin_actionohr_id</pre>	object_admin_action_ohr_id_fk

	Columns	Name / Description
9	ohr_id	object_hidden_reason_pk

13.1.50. Table: darts.object_record_status

used to record acceptable statuses found in [external/transient]_object_directory

Columns

		Name	Data type	Description / Attributes
■	1	ors_id	integer	
■		ors_description	character varying	Nullable

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.external_object_directory	<pre>darts.object_record_statusors_id = darts.external_object_directoryors_id</pre>	eod_object_record_status_fk
\rightarrow	darts.transient_object_directory	darts.object_record_statusors_id = darts.transient_object_directoryors_id	tod_object_record_status_fk

	Columns	Name / Description
P	ors_id	object_record_status_pk

13.1.51. Table: darts.object_retrieval_queue

Columns

		Name	Data type	Description / Attributes
■	1	orq_id	integer	
=		med_id	bigint	Nullable References: darts.media
■		trd_id	integer	Nullable References: darts.transcription_document
▤		parent_object_id	character varying	Nullable
		content_object_id	character varying	Nullable
		storage_id	character varying(16)	Nullable
		clip_id	character varying	Nullable
		data_ticket	integer	Nullable
		acknowledged_ts	timestamp with time zone	Nullable
		migrated_ts	timestamp with time zone	Nullable
		status	character varying	Nullable
■		created_ts	timestamp with time zone	
		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
B		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.media	darts.object_retrieval_queuemed_id = darts.mediamed_id	object_retrieval_queue_media_fk
\rightarrow	darts.transcription_document	darts.object_retrieval_queuetrd_id = darts.transcription_documenttrd_id	object_retrieval_queue_transcription_document_fk
>	darts.user_account	darts.object_retrieval_queuecreated_b y = darts.user_accountusr_id	object_retrieval_queue_created_by_fk
\rightarrow	darts.user_account	darts.object_retrieval_queuelast_modified_by = darts.user_accountusr_id	object_retrieval_queue_last_modified_by_fk

	Columns	Name / Description
9	orq_id	object_retrieval_queue_pk

13.1.52. Table: darts.object_state_record

Columns

		Name	Data type	Description / Attributes
■	1	osr_uuid	bigint	
■		eod_id	bigint	Nullable
■		arm_eod_id	bigint	Nullable
■		dal_id	integer	Nullable
■		parent_object_id	character varying	Nullable
■		content_object_id	character varying	Nullable
■		id_clip	character varying	Nullable
■		dets_location	character varying	Nullable
■		flag_file_transfer_to_dets	boolean	Nullable
		date_file_transfer_to_dets	timestamp with time zone	Nullable
		md5_doc_transfer_to_dets	character varying	Nullable
		file_size_bytes_centera	bigint	Nullable
▤		file_size_bytes_dets	bigint	Nullable
		flag_file_av_scan_pass	boolean	Nullable
■		date_file_av_scan_pass	timestamp with time zone	Nullable
■		flag_file_transf_toarml	boolean	Nullable
■		date_file_transf_toarml	timestamp with time zone	Nullable
■		md5_file_transf_arml	character varying	Nullable
■		file_size_bytes_arml	bigint	Nullable
■		flag_file_mfst_created	boolean	Nullable
■		date_file_mfst_created	timestamp with time zone	Nullable
■		id_manifest_file	character varying	Nullable
		flag_mfst_transf_to_arml	boolean	Nullable
■		date_mfst_transf_to_arml	timestamp with time zone	Nullable
		flag_rspn_recvd_from_arml	boolean	Nullable
■		date_rspn_recvd_from_arml	timestamp with time zone	Nullable
		flag_file_ingest_status	boolean	Nullable
		date_file_ingest_to_arm	timestamp with time zone	Nullable
		md5_file_ingest_to_arm	character varying	Nullable
		file_size_ingest_to_arm	bigint	Nullable
		id_response_file	character varying	Nullable
		id_response_cr_file	character varying	Nullable
		id_response_uf_file	character varying	Nullable
		flag_file_dets_cleanup_status	boolean	Nullable
		date_file_dets_cleanup	timestamp with time zone	Nullable

	Name	Data type	Description / Attributes
■	object_status	character varying	Nullable
■	storage_id	character varying	Nullable
■	data_ticket	integer	Nullable

	Columns	Name / Description
?	osr_uuid	object_state_record_pk

13.1.53. Table: darts.prosecutor

Columns

		Name	Data type	Description / Attributes
■	1	prn_id	integer	primary key of prosecutor_name
■	9	cas_id	integer	foreign key from court_case References: darts.court_case
■	1	prosecutor_name	character varying	
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.court_case	darts.prosecutorcas_id = darts.court_casecas_id	prosecutor_court_case_fk
>	darts.user_account	darts.prosecutorcreated_by = darts.user_accountusr_id	prosecutor_created_by_fk
>	darts.user_account	darts.prosecutorlast_modified_by = darts.user_accountusr_id	prosecutor_modified_by_fk

	Columns	Name / Description	
Ŷ	prn_id	prosecutor_pk	
Ŷ	cas_id, prosecutor_name	prn_cas_id_prosecutor_name_unq	

13.1.54. Table: darts.region

Columns

		Name	Data type	Description / Attributes
■	1	reg_id	integer	
▤		region_name	character varying	

Linked from

Table	Join	Title / Name / Description
→ Loans counthouse region ae	darts.regionreg_id = darts.courthouse_region_aereg_id	courthouse_region_region_fk

	Columns	Name / Description
9	reg_id	region_pk

13.1.55. Table: darts.report

Columns

		Name	Data type	Description / Attributes
■	1	rep_id	integer	primary key of report
		report_object_id	character varying(16)	internal Documentum primary key from moj_report_s Nullable
		name	character varying	directly sourced from moj_report_s Nullable
		subject	character varying	directly sourced from moj_report_s Nullable
■		report_text	character varying	directly sourced from moj_report_s Nullable
		query	character varying	directly sourced from moj_report_s Nullable
■		recipients	character varying	directly sourced from moj_report_s Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

		Table	Join	Title / Name / Description
}	—	darts.user_account	<pre>darts.reportcreated_by = darts.user_accountusr_id</pre>	report_created_by_fk
}	—	darts.user_account	<pre>darts.reportlast_modified_by = darts.user_accountusr_id</pre>	report_modified_by_fk

	Columns	Name / Description
9	rep_id	report_pk

13.1.56. Table: darts.retention_confidence_category_mapper

Columns

		Name	Data type	Description / Attributes
■	1	rcc_id	integer	
■		ret_conf_score	integer	Nullable
■		ret_conf_reason	character varying	Nullable
■		confidence_category	integer	Nullable
■		description	character varying	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
目		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\leftarrow	darts.user_account	darts.retention_confidence_category_ mappercreated_by = darts.user_accountusr_id	retention_confidence_category_mapper_created_by_fk
—	darts.user_account	darts.retention_confidence_category_ mapperlast_modified_by = darts.user_accountusr_id	retention_confidence_category_mapper_last_modified_by_fk

	Columns	Name / Description
P	rcc_id	retention_confidence_category_mapper_pk

13.1.57. Table: darts.retention_policy_type

Columns

		Name	Data type	Description / Attributes
■	1	rpt_id	integer	
■		fixed_policy_key	character varying	
■		policy_name	character varying	
■		display_name	character varying	
■		duration	character varying	
■		policy_start_ts	timestamp with time zone	
■		policy_end_ts	timestamp with time zone	Nullable
■		description	character varying	
■		retention_policy_object_id	character varying	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
▤		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.user_account	darts.retention_policy_typecreated_by = darts.user_accountusr_id	retention_policy_type_created_by_fk
\rightarrow	darts.user_account	darts.retention_policy_typelast_modifie d_by = darts.user_accountusr_id	retention_policy_type_last_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.case_management_retention	darts.retention_policy_typerpt_id = darts.case_management_retentionrpt_i d	case_management_retention_retention_policy_type_fk
\rightarrow	darts.case_overflow	darts.retention_policy_typerpt_id = darts.case_overflowrpt_id	case_overflow_retention_policy_type_fk
\rightarrow	darts.case_retention	<pre>darts.retention_policy_typerpt_id = darts.case_retentionrpt_id</pre>	case_retention_retention_policy_type_fk
\rightarrow	darts.case_retention_audit_heritage	darts.retention_policy_typerpt_id = darts.case_retention_audit_heritagerpt _id	case_retention_audit_heritage_retention_policy_type_fk
\rightarrow	darts.rps_retainer	darts.retention_policy_typerpt_id = darts.rps_retainerrpt_id	rps_retainer_retention_policy_type_fk

	Columns	Name / Description
9	rpt_id	retention_policy_type_pk

13.1.58. Table: darts.retention_policy_type_heritage_mapping

Columns

		Name	Data type	Description / Attributes
■	1	rhm_id	integer	
■		heritage_policy_name	character varying	
■		heritage_table	character varying	
■		modernised_rpt_id	integer	

	Columns	Name / Description
?	rhm_id	retention_policy_type_heritage_mapping_pk

13.1.59. Table: darts.revinfo

Columns

		Name	Data type	Description / Attributes
■	1	rev	integer	
■		revtstmp	bigint	Nullable
■		audit_user	integer	Nullable References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.user_account	<pre>darts.revinfoaudit_user = darts.user_accountusr_id</pre>	revinfo_audit_user_fk

	Columns	Name / Description
9	rev	revinfo_pkey

13.1.60. Table: darts.rps_retainer

is essentially a legacy table, based on the component tables necessary to derive the dmc_rps_retainer object

Columns

		Name	Data type	Description / Attributes
■	1	rpr_id	integer	primary key of case_rps_retainer
■		rpt_id	integer	References: darts.retention_policy_type
■		rps_retainer_object_id	character varying	
■		case_object_id	character varying	Nullable
■		audio_folder_object_id	character varying	Nullable
▤		is_current	boolean	Nullable
▤		dm_retainer_root_id	character varying	Nullable
■		dm_retention_rule_type	integer	Nullable
■		dm_retention_date	timestamp with time zone	Nullable
■		dmc_current_phase_id	character varying	Nullable
■		dmc_entry_date	timestamp with time zone	Nullable
▤		dmc_parent_ancestor_id	character varying	Nullable
▤		dmc_phase_name	character varying	Nullable
■		dmc_qualification_date	timestamp with time zone	Nullable
■		dmc_retention_base_date	timestamp with time zone	Nullable
■		dmc_retention_policy_id	character varying	Nullable
■		dmc_ultimate_ancestor_id	character varying	Nullable
■		dmc_vdm_retention_rule	integer	Nullable
■		dmc_is_superseded	integer	Nullable
■		dmc_superseded_date	timestamp with time zone	Nullable
■		dmc_superseded_phase_id	character varying	Nullable
▤		dmc_snapshot_retention_rule	integer	Nullable
■		dmc_approval_required	integer	Nullable
■		dmc_approval_status	character varying	Nullable
■		dmc_approved_date	timestamp with time zone	Nullable
▤		dmc_projected_disposition_date	timestamp with time zone	Nullable
■		dmc_is_qualification_suspended	integer	Nullable
■		dmc_suspension_lift_date	timestamp with time zone	Nullable
B		dmc_base_date_override	timestamp with time zone	Nullable
B		dms_object_name	character varying	Nullable
		dms_i_chronicle_id	character varying	Nullable
		dms_r_policy_id	character varying	Nullable
■		dms_r_resume_state	integer	Nullable
		dms_r_current_state	integer	Nullable
		created_ts	timestamp with time zone	

	Name	Data type	Description / Attributes
■	created_by	integer	References: darts.user_account
■	last_modified_ts	timestamp with time zone	
■	last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.retention_policy_type	<pre>darts.rps_retainerrpt_id = darts.retention_policy_typerpt_id</pre>	rps_retainer_retention_policy_type_fk
>	darts.user_account	darts.rps_retainercreated_by = darts.user_accountusr_id	rps_retainer_created_by_fk
>	darts.user_account	darts.rps_retainerlast_modified_by = darts.user_accountusr_id	rps_retainer_last_modified_by_fk

	Columns	Name / Description
?	rpr_id	rps_retainer_pk

13.1.61. Table: darts.security_group

migration columns all sourced directly from dm_group_s, additional attributes may be required from dm_user_s, but data only where dm_user_s.r_is_group=1

Columns

		Name	Data type	Description / Attributes
■	1	grp_id	integer	primary key of security_group
■		rol_id	integer	References: darts.security_role
■		global_access	boolean	Default : false
■		display_state	boolean	
■		display_name	character varying	for purpose of providing a display_name for modernised solution
		dm_group_s_object_id	character varying(16)	internal Documentum primary key from dm_group_s Nullable
■		group_name	character varying	
		group_display_name	character varying	derived directly from dm_group_s.group_display_name Nullable
■		is_private	boolean	Nullable
■		description	character varying	Nullable
■		group_global_unique_id	character varying	Nullable
■		use_interpreter	boolean	Default : false
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.security_role	<pre>darts.security_grouprol_id = darts.security_rolerol_id</pre>	security_group_role_fk
>	darts.user_account	darts.security_groupcreated_by = darts.user_accountusr_id	security_group_created_by_fk
>	darts.user_account	darts.security_grouplast_modified_by = darts.user_accountusr_id	security_group_last_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
-	darts.security_group_courthouse_ae	<pre>darts.security_groupgrp_id = darts.security_group_courthouse_aegr p_id</pre>	security_group_courthouse_group_fk
	darts.security_group_user_account_ ae	<pre>darts.security_groupgrp_id = darts.security_group_user_account_ae grp_id</pre>	security_group_user_account_ae_group_fk

		Columns	Name / Description
9	grp_id		security_group_pk

13.1.62. Table: darts.security_group_courthouse_ae

Columns

		Name	Data type	Description / Attributes
■	1	grp_id	integer	References: darts.security_group
■	1	cth_id	integer	References: darts.courthouse

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.courthouse	darts.security_group_courthouse_aect h_id = darts.courthousecth_id	security_group_courthouse_courthouse_fk
—	darts.security_group	darts.security_group_courthouse_aegr p_id = darts.security_groupgrp_id	security_group_courthouse_group_fk

Columns		Name / Description
?	grp_id, cth_id	security_group_courthouse_ae_pk

13.1.63. Table: darts.security_group_user_account_ae

is the associative entity mapping users to groups, content will be defined by dm_group_r

Columns

		Name	Data type	Description / Attributes
■	1	usr_id	integer	foreign key from user_account References: darts.user_account
B	1	grp_id	integer	foreign key from security_group References: darts.security_group

Links to

	Table	Join	Title / Name / Description
—	darts.security_group	darts.security_group_user_account_ae grp_id = darts.security_groupgrp_id	security_group_user_account_ae_group_fk
—	darts.user_account	darts.security_group_user_account_ae usr_id = darts.user_accountusr_id	security_group_user_account_ae_user_fk

	Columns	Name / Description
?	usr_id, grp_id	security_group_user_account_ae_pk

13.1.64. Table: darts.security_permission

Columns

		Name	Data type	Description / Attributes
■	1	per_id	integer	
■		permission_name	character varying	

Linked from

	Table	Join	Title / Name / Description
_	darts.security_role_permission_ae	<pre>darts.security_permissionper_id = darts.security_role_permission_aeper_i d</pre>	security_role_permission_permission_fk

Columns	Name / Description
P per_id	security_permission_pk

13.1.65. Table: darts.security_role

Columns

		Name	Data type	Description / Attributes
■	1	rol_id	integer	
■		role_name	character varying	
■		display_name	character varying	
■		display_state	boolean	

Linked from

	Table	Join	Title / Name / Description
_	darts.security_group	darts.security_rolerol_id = darts.security_grouprol_id	security_group_role_fk
_	darts.security_role_permission_ae	darts.security_rolerol_id = darts.security_role_permission_aerol_id	security_role_permission_ae_role_fk

	Columns	Name / Description
?	rol_id	security_role_pk

13.1.66. Table: darts.security_role_permission_ae

Columns

		Name	Data type	Description / Attributes
■	1	rol_id	integer	References: darts.security_role
■	1	per_id	integer	References: darts.security_permission

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.security_permission	darts.security_role_permission_aeper_i d = darts.security_permissionper_id	security_role_permission_permission_fk
→	darts.security_role	darts.security_role_permission_aerol_id = darts.security_rolerol_id	security_role_permission_ae_role_fk

	Columns	Name / Description
9	rol_id, per_id	security_role_permission_ae_pk

13.1.67. Table: darts.transcription

Columns

		Name	Data type	Description / Attributes
	1	tra_id	integer	primary key of transcription
		trt_id	integer	foreign key to transcription_type, sourced from moj_transcription_s.c_type References : darts.transcription_type
■		ctr_id	integer	foreign key from courtroom Nullable References: darts.courtroom
		tru_id	integer	foreign key from transcription_urgency Nullable References: darts.transcription_urgency
		trs_id	integer	Nullable References: darts.transcription_status
		transcription_object_id	character varying(16)	internal Documentum primary key from moj_transcription_s Nullable
		transcription_object_name	character varying(255)	Nullable
		requested_by	integer	foreign key from user_account, corresponding to moj_transcription_s.c_requestor Nullable References: darts.user_account
		hearing_date	date	directly sourced from moj_transcription_s Nullable
		start_ts	timestamp with time zone	inherited from moj_case_document_s Nullable
		end_ts	timestamp with time zone	inherited from moj_case_document_s Nullable
		is_manual_transcription	boolean	
		is_current	boolean	Nullable
		hide_request_from_requestor	boolean	
		is_deleted	boolean	Default: false
		deleted_by	integer	Nullable References: darts.user_account
		deleted_ts	timestamp with time zone	Nullable
		version_label	character varying(32)	inherited from dm_sysobject_r, for r_object_type of moj_transcription Nullable
		chronicle_id	character varying(16)	Nullable
		antecedent_id	character varying(16)	Nullable
		c_current_state	character varying	Nullable
		r_current_state	integer	Nullable
		created_ts	timestamp with time zone	
		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.courtroom	darts.transcriptionctr_id = darts.courtroomctr_id	transcription_courtroom_fk
\rightarrow	darts.transcription_status	darts.transcriptiontrs_id = darts.transcription_statustrs_id	transcription_transcription_status_fk
\rightarrow	darts.transcription_type	darts.transcriptiontrt_id = darts.transcription_typetrt_id	transcription_transcription_type_fk
\rightarrow	darts.transcription_urgency	darts.transcriptiontru_id = darts.transcription_urgencytru_id	transcription_urgency_fk
>	darts.user_account	darts.transcription ast_modified_by = darts.user_accountusr_id	transcription_last_modified_by_fk
>	darts.user_account	darts.transcriptionrequested_by = darts.user_accountusr_id	transcription_requested_by_fk
>	darts.user_account	darts.transcriptioncreated_by = darts.user_accountusr_id	transcription_created_by_fk
>	darts.user_account	darts.transcriptiondeleted_by = darts.user_accountusr_id	transcription_deleted_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.case_transcription_ae	darts.transcriptiontra_id = darts.case_transcription_aetra_id	case_transcription_ae_transcription_fk
\rightarrow	darts.hearing_transcription_ae	darts.transcriptiontra_id = darts.hearing_transcription_aetra_id	hearing_transcription_ae_transcription_fk
\rightarrow	darts.transcription_comment	darts.transcriptiontra_id = darts.transcription_commenttra_id	transcription_comment_transcription_fk
\rightarrow	darts.transcription_document	darts.transcriptiontra_id = darts.transcription_documenttra_id	transcription_document_transcription_fk
\rightarrow	darts.transcription_linked_case	darts.transcriptiontra_id = darts.transcription_linked_casetra_id	transcription_linked_case_transcription_fk
\rightarrow	darts.transcription_workflow	darts.transcriptiontra_id = darts.transcription_workflowtra_id	transcription_workflow_transcription_fk

	Columns	Name / Description
9	tra_id	transcription_pk

13.1.68. Table: darts.transcription_comment

Columns

		Name	Data type	Description / Attributes
■	1	trc_id	integer	primary key of transcription_comment
		tra_id	integer	foreign key from transcription References : darts.transcription
■		trw_id	integer	foreign key from transcription_workflow Nullable References: darts.transcription_workflow
■		transcription_object_id	character varying(16)	internal Documentum id from moj_transcription_s acting as foreign key Nullable
■		transcription_comment	character varying	directly sourced from moj_transcription_r Nullable
■		comment_ts	timestamp with time zone	Nullable
		author	integer	Nullable References: darts.user_account
■		is_migrated	boolean	Default : false
■		is_data_anonymised	boolean	Default : false
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
■		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.transcription	darts.transcription_commenttra_id = darts.transcriptiontra_id	transcription_comment_transcription_fk
>	darts.transcription_workflow	darts.transcription_commenttrw_id = darts.transcription_workflowtrw_id	transcription_comment_transcription_workflow_fk
>	darts.user_account	darts.transcription_commentauthor = darts.user_accountusr_id	transcription_comment_author_fk
>	darts.user_account	darts.transcription_commentcreated_b y = darts.user_accountusr_id	transcription_comment_created_by_fk
\rightarrow	darts.user_account	darts.transcription_commentlast_modified_by = darts.user_accountusr_id	transcription_comment_modified_by_fk

Linked from

		Table	Join	Title / Name / Description
-	→	darts.data_anonymisation	darts.transcription_commenttrc_id = darts.data_anonymisationtrc_id	data_anonymisation_transcription_comment_fk

	Columns	Name / Description
9	trc_id	transcription_comment_pk

13.1.69. Table: darts.transcription_document

Columns

		Name	Data type	Description / Attributes
■	1	trd_id	integer	primary key of transcription_document
■		tra_id	integer	foreign key from transcription References : darts.transcription
▤		content_object_id	character varying(16)	Nullable
▤		subcontent_object_id	character varying(16)	Nullable
▤		subcontent_position	integer	Nullable
▤		clip_id	character varying(54)	Nullable
▤		storage_id	character varying(16)	Nullable
目		data_ticket	integer	Nullable
▤		file_name	character varying	
▤		file_type	character varying	
目		file_size	integer	
目		checksum	character varying	Nullable
▤		is_deleted	boolean	Default : false
■		deleted_by	integer	Nullable References: darts.user_account
▤		deleted_ts	timestamp with time zone	Nullable
▤		is_hidden	boolean	Default : false
▤		retain_until_ts	timestamp with time zone	Nullable
▤		ret_conf_score	integer	Nullable
▤		ret_conf_reason	character varying	Nullable
目		uploaded_by	integer	References: darts.user_account
▤		uploaded_ts	timestamp with time zone	
目		last_modified_ts	timestamp with time zone	
目		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.transcription	darts.transcription_documenttra_id = darts.transcriptiontra_id	transcription_document_transcription_fk
>	darts.user_account	darts.transcription_documentdeleted_ by = darts.user_accountusr_id	transcription_document_deleted_by_fk
\rightarrow	darts.user_account	darts.transcription_documentuploade d_by = darts.user_accountusr_id	transcription_document_uploaded_by_fk
\rightarrow	darts.user_account	darts.transcription_documentlast_modi fied_by = darts.user_accountusr_id	transcription_document_last_modified_by_fk

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.external_object_directory	darts.transcription_documenttrd_id = darts.external_object_directorytrd_id	eod_transcription_document_fk
\rightarrow	darts.object_admin_action	darts.transcription_documenttrd_id = darts.object_admin_actiontrd_id	oaa_transcription_document_fk
\rightarrow	darts.object_retrieval_queue	darts.transcription_documenttrd_id = darts.object_retrieval_queuetrd_id	object_retrieval_queue_transcription_document_fk

	Columns	Name / Description
Ŷ	trd_id	transcription_document_pk

13.1.70. Table: darts.transcription_linked_case

Columns

		Name	Data type	Description / Attributes
■	1	tlc_id	integer	primary key of transcription_linked_case
■		tra_id	integer	foreign key from transcription References : darts.transcription
		cas_id	integer	foreign key from court_case, mandatory if either courthouse_name or case_number are null Nullable References: darts.court_case
		courthouse_name	character varying	mandatory if cas_id is null Nullable
■		case_number	character varying	mandatory if cas_id is null Nullable

Links to

	Table	Join	Title / Name / Description
—	darts.court_case	darts.transcription_linked_casecas_id = darts.court_casecas_id	transcription_linked_case_court_case_fk
—	darts.transcription	darts.transcription_linked_casetra_id = darts.transcriptiontra_id	transcription_linked_case_transcription_fk

	Columns	Name / Description
Ŷ	tlc_id	transcription_linked_case_pk

13.1.71. Table: darts.transcription_status

standing data table

Columns

		Name	Data type	Description / Attributes
■	1	trs_id	integer	primary key of transcription_status
■		status_type	character varying	
■		display_name	character varying	

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.transcription	<pre>darts.transcription_statustrs_id = darts.transcriptiontrs_id</pre>	transcription_transcription_status_fk
→	darts.transcription_workflow	darts.transcription_statustrs_id = darts.transcription_workflowtrs_id	transcription_workflow_transcription_status_fk

	Columns	Name / Description
?	trs_id	transcription_status_pk

13.1.72. Table: darts.transcription_type

standing data table, migrated from tbl_moj_transcription_type

Columns

		Name	Data type	Description / Attributes
■	1	trt_id	integer	primary key, but not sequence generated
■		description	character varying	
■		display_state	boolean	

Linked from

	Table	Join	Title / Name / Description
-	→ darts.transcription	<pre>darts.transcription_typetrt_id = darts.transcriptiontrt_id</pre>	transcription_transcription_type_fk

	Columns	Name / Description
9	trt_id	transcription_type_pk

13.1.73. Table: darts.transcription_urgency

will be migrated from tbl_moj_urgency

Columns

		Name	Data type	Description / Attributes
■	1	tru_id	integer	inherited from tbl_moj_urgency.urgency_id
■		description	character varying	inherited from tbl_moj_urgency.description
■		display_state	boolean	
■		priority_order	integer	

Linked from

Table	Join	Title / Name / Description
	<pre>darts.transcription_urgencytru_id = darts.transcriptiontru_id</pre>	transcription_urgency_fk

	Columns	Name / Description
P	tru_id	transcription_urgency_pk

13.1.74. Table: darts.transcription_workflow

Columns

		Name	Data type	Description / Attributes
■	1	trw_id	integer	
		tra_id	integer	References: darts.transcription
■		trs_id	integer	References: darts.transcription_status
■		workflow_actor	integer	References: darts.user_account
■		workflow_ts	timestamp with time zone	

Links to

	Table	Join	Title / Name / Description
\rightarrow	darts.transcription	darts.transcription_workflowtra_id = darts.transcriptiontra_id	transcription_workflow_transcription_fk
—	darts.transcription_status	darts.transcription_workflowtrs_id = darts.transcription_statustrs_id	transcription_workflow_transcription_status_fk
\rightarrow	darts.user_account	darts.transcription_workflowworkflow_ actor = darts.user_accountusr_id	transcription_workflow_workflow_actor_fk

Linked from

Table	Join	Title / Name / Description
- I dans transcription comment	<pre>darts.transcription_workflowtrw_id = darts.transcription_commenttrw_id</pre>	transcription_comment_transcription_workflow_fk

Unique keys

	Columns	Name / Description
9	trw_id	transcription_workflow_pk

Triggers

Name	When	Description
trw_ar_trg	After Insert	

13.1.75. Table: darts.transformed_media

to accommodate the possibility that a single media_request may be fulfilled as more than one resulting piece of media

Columns

		Name	Data type	Description / Attributes
■	1	trm_id	integer	
■		mer_id	integer	References: darts.media_request
■		start_ts	timestamp with time zone	
■		end_ts	timestamp with time zone	
■		last_accessed_ts	timestamp with time zone	Nullable
■		expiry_ts	timestamp with time zone	Nullable
		output_filename	character varying	filename of the requested media object, possibly migrated from moj_transformation_request_s Nullable
■		output_filesize	integer	Nullable
		output_format	character varying	format of the requested media object, possibly migrated from moj_transformation_s Nullable
▤		checksum	character varying	Nullable
目		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
目		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
-	darts.media_request	darts.transformed_mediamer_id = darts.media_requestmer_id	trm_media_request_fk
>	darts.user_account	darts.transformed_mediacreated_by = darts.user_accountusr_id	transformed_media_created_by_fk
>	darts.user_account	darts.transformed_medialast_modified _by = darts.user_accountusr_id	transformed_media_last_modified_by_fk

Linked from

Table	Join	Title / Name / Description
→ I darts transient object directory I	<pre>darts.transformed_mediatrm_id = darts.transient_object_directorytrm_id</pre>	tod_transformed_media_fk

	Columns	Name / Description
?	trm_id	transformed_media_pk

13.1.76. Table: darts.transient_object_directory

Columns

		Name	Data type	Description / Attributes
■	1	tod_id	integer	
■		trm_id	integer	References: darts.transformed_media
■		ors_id	integer	References: darts.object_record_status
■		external_location	character varying	
■		checksum	character varying	Nullable
■		transfer_attempts	integer	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	References: darts.user_account
		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	References: darts.user_account

Links to

	Table	Join	Title / Name / Description
—	darts.object_record_status	darts.transient_object_directoryors_id = darts.object_record_statusors_id	tod_object_record_status_fk
—	darts.transformed_media	darts.transient_object_directorytrm_id = darts.transformed_mediatrm_id	tod_transformed_media_fk
\rightarrow	darts.user_account	darts.transient_object_directorylast_m odified_by = darts.user_accountusr_id	tod_modified_by_fk
\rightarrow	darts.user_account	darts.transient_object_directorycreated _by = darts.user_accountusr_id	transient_object_directory_created_by_fk

	Columns	Name / Description
Ŷ	tod_id	transient_object_directory_pk

13.1.77. Table: darts.user_account

migration columns all sourced directly from dm_user_s, but only for rows where r_is_group = 0

Columns

		Name	Data type	Description / Attributes
■	1	usr_id	integer	primary key of user_account
■		dm_user_s_object_id	character varying(16)	internal Documentum primary key from dm_user_s Nullable
■		user_name	character varying	Nullable
■		user_os_name	character varying	Nullable
目		user_full_name	character varying	directly migrated from dm_user_s.user_name
■		user_email_address	character varying	Nullable
目		user_ldap_dn	character varying	Nullable
■		user_global_unique_id	character varying	Nullable
目		user_login_name	character varying	Nullable
■		user_login_domain	character varying	Nullable
■		user_state	smallint	Nullable
▤		description	character varying	Nullable
目		is_active	boolean	
■		last_login_ts	timestamp with time zone	Nullable
目		is_system_user	boolean	Default : false
■		account_guid	character varying	Nullable
■		created_ts	timestamp with time zone	
■		created_by	integer	
		last_modified_ts	timestamp with time zone	
■		last_modified_by	integer	

Linked from

	Table	Join	Title / Name / Description
\rightarrow	darts.annotation	darts.user_accountusr_id = darts.annotationcurrent_owner	annotation_current_owner_fk
\rightarrow	darts.annotation	darts.user_accountusr_id = darts.annotationcreated_by	annotation_created_by_fk
\rightarrow	darts.annotation	darts.user_accountusr_id = darts.annotationlast_modified_by	annotation_modified_by_fk
\rightarrow	darts.annotation	darts.user_accountusr_id = darts.annotationdeleted_by	annotation_deleted_by_fk
\rightarrow	darts.annotation_document	darts.user_accountusr_id = darts.annotation_documentdeleted_by	annotation_document_deleted_by_fk
→	darts.annotation_document	darts.user_accountusr_id = darts.annotation_documentuploaded_by	annotation_document_uploaded_by_fk
→	darts.annotation_document	darts.user_accountusr_id = darts.annotation_documentlast_modified_by	annotation_document_last_modified_by_fk

	Table	Join	Title / Name / Description
\rightarrow	darts.arm_rpo_execution_detail	<pre>darts.user_accountusr_id = darts.arm_rpo_execution_detailcreated _by</pre>	arm_rpo_execution_detail_created_by_fk
\rightarrow	darts.arm_rpo_execution_detail	darts.user_accountusr_id = darts.arm_rpo_execution_detaillast_mo dified_by	arm_rpo_execution_detail_last_modified_by_fk
\rightarrow	darts.audit	darts.user_accountusr_id = darts.auditusr_id	audit_user_account_fk
\rightarrow	darts.audit	darts.user_accountusr_id = darts.auditcreated_by	audit_created_by_fk
\rightarrow	darts.audit	darts.user_accountusr_id = darts.auditlast_modified_by	audit_modified_by_fk
\rightarrow	darts.audit_activity	darts.user_accountusr_id = darts.audit_activitycreated_by	audit_activity_created_by_fk
\rightarrow	darts.audit_activity	darts.user_accountusr_id = darts.audit_activitylast_modified_by	audit_activity_modified_by_fk
\rightarrow	darts.automated_task	darts.user_accountusr_id = darts.automated_taskcreated_by	automated_task_created_by_fk
\rightarrow	darts.automated_task	darts.user_accountusr_id = darts.automated_tasklast_modified_by	automated_task_modified_by_fk
\rightarrow	darts.case_document	darts.user_accountusr_id = darts.case_documentcreated_by	case_document_created_by_fk
\rightarrow	darts.case_document	darts.user_accountusr_id = darts.case_documentlast_modified_by	case_document_last_modified_by_fk
\rightarrow	darts.case_document	darts.user_accountusr_id = darts.case_documentdeleted_by	case_document_deleted_by_fk
\rightarrow	darts.case_retention	darts.user_accountusr_id = darts.case_retentioncreated_by	case_retention_created_by_fk
\rightarrow	darts.case_retention	darts.user_accountusr_id = darts.case_retentionlast_modified_by	case_retention_last_modified_by_fk
\rightarrow	darts.case_retention	darts.user_accountusr_id = darts.case_retentionsubmitted_by	case_retention_submitted_by_fk
\rightarrow	darts.case_retention_audit_heritage	<pre>darts.user_accountusr_id = darts.case_retention_audit_heritagec_u sername</pre>	case_retention_audit_heritage_c_username_fk
\rightarrow	darts.case_retention_audit_heritage	<pre>darts.user_accountusr_id = darts.case_retention_audit_heritager_c reator_name</pre>	case_retention_audit_heritage_r_creator_name_fk
\rightarrow	darts.case_retention_audit_heritage	darts.user_accountusr_id = darts.case_retention_audit_heritager_modifier	case_retention_audit_heritage_r_modifier_fk
\rightarrow	darts.case_retention_audit_heritage	darts.user_accountusr_id = darts.case_retention_audit_heritageow ner_name	case_retention_audit_heritage_owner_name_fk
\rightarrow	darts.court_case	darts.user_accountusr_id = darts.court_casecreated_by	court_case_created_by_fk
→	darts.court_case	darts.user_accountusr_id = darts.court_caselast_modified_by	court_case_modified_by_fk
\rightarrow	darts.court_case	darts.user_accountusr_id = darts.court_casedeleted_by	court_case_deleted_by_fk

	Table	Join	Title / Name / Description
\rightarrow	darts.court_case	darts.user_accountusr_id = darts.court_casedata_anonymised_by	court_case_data_anonymised_by_fk
\rightarrow	darts.courthouse	darts.user_accountusr_id = darts.courthousecreated_by	courthouse_created_by_fk
\rightarrow	darts.courthouse	darts.user_accountusr_id = darts.courthouselast_modified_by	courthouse_modified_by_fk
\rightarrow	darts.courtroom	darts.user_accountusr_id = darts.courtroomcreated_by	courtroom_created_by_fk
\rightarrow	darts.daily_list	darts.user_accountusr_id = darts.daily_listcreated_by	daily_list_created_by_fk
\rightarrow	darts.daily_list	darts.user_accountusr_id = darts.daily_listlast_modified_by	daily_list_modified_by_fk
\rightarrow	darts.data_anonymisation	darts.user_accountusr_id = darts.data_anonymisationrequested_b y	data_anonymisation_requested_by_fk
\rightarrow	darts.data_anonymisation	darts.user_accountusr_id = darts.data_anonymisationapproved_by	data_anonymisation_approved_by_fk
\rightarrow	darts.defence	darts.user_accountusr_id = darts.defencecreated_by	defence_created_by_fk
\rightarrow	darts.defence	darts.user_accountusr_id = darts.defencelast_modified_by	defence_modified_by_fk
\rightarrow	darts.defendant	darts.user_accountusr_id = darts.defendantcreated_by	defendant_created_by_fk
\rightarrow	darts.defendant	darts.user_accountusr_id = darts.defendantlast_modified_by	defendant_modified_by_fk
\rightarrow	darts.event	darts.user_accountusr_id = darts.eventcreated_by	event_created_by_fk
\rightarrow	darts.event	darts.user_accountusr_id = darts.eventlast_modified_by	event_modified_by_fk
\rightarrow	darts.event_handler	darts.user_accountusr_id = darts.event_handlercreated_by	event_handler_created_by_fk
\rightarrow	darts.external_object_directory	darts.user_accountusr_id = darts.external_object_directorylast_mo dified_by	eod_modified_by_fk
\rightarrow	darts.external_object_directory	darts.user_accountusr_id = darts.external_object_directorycreated _by	external_object_directory_created_by_fk
→	darts.external_service_auth_token	darts.user_accountusr_id = darts.external_service_auth_tokencreat ed_by	external_service_auth_token_created_by_fk
\rightarrow	darts.external_service_auth_token	darts.user_accountusr_id = darts.external_service_auth_tokenlast_modified_by	external_service_auth_token_modified_by_fk
\rightarrow	darts.extobjdir_process_detail	<pre>darts.user_accountusr_id = darts.extobjdir_process_detailcreated_ by</pre>	epd_created_by_fk
\rightarrow	darts.extobjdir_process_detail	darts.user_accountusr_id = darts.extobjdir_process_detaillast_mod ified_by	epd_last_modified_by_fk
\rightarrow	darts.hearing	darts.user_accountusr_id = darts.hearingcreated_by	hearing_created_by_fk

	Table	Join	Title / Name / Description
\rightarrow	darts.hearing	darts.user_accountusr_id = darts.hearinglast_modified_by	hearing_modified_by_fk
\rightarrow	darts.judge	darts.user_accountusr_id = darts.judgecreated_by	judge_created_by_fk
\rightarrow	darts.judge	<pre>darts.user_accountusr_id = darts.judgelast_modified_by</pre>	judge_modified_by_fk
\rightarrow	darts.media	darts.user_accountusr_id = darts.mediacreated_by	media_created_by_fk
\rightarrow	darts.media	<pre>darts.user_accountusr_id = darts.medialast_modified_by</pre>	media_modified_by_fk
\rightarrow	darts.media	darts.user_accountusr_id = darts.mediadeleted_by	media_deleted_by_fk
\rightarrow	darts.media_linked_case	darts.user_accountusr_id = darts.media_linked_casecreated_by	media_linked_case_created_by_fk
\rightarrow	darts.media_request	<pre>darts.user_accountusr_id = darts.media_requestcreated_by</pre>	media_request_created_by_fk
\rightarrow	darts.media_request	darts.user_accountusr_id = darts.media_requestlast_modified_by	media_request_modified_by_fk
\rightarrow	darts.media_request	darts.user_accountusr_id = darts.media_requestrequestor	media_request_requestor_fk
\rightarrow	darts.media_request	darts.user_accountusr_id = darts.media_requestcurrent_owner	media_request_current_owner_fk
\rightarrow	darts.node_register	<pre>darts.user_accountusr_id = darts.node_registercreated_by</pre>	node_register_created_by_fk
\rightarrow	darts.notification	<pre>darts.user_accountusr_id = darts.notificationcreated_by</pre>	notification_created_by_fk
\rightarrow	darts.notification	<pre>darts.user_accountusr_id = darts.notificationlast_modified_by</pre>	notification_modified_by_fk
\rightarrow	darts.object_admin_action	<pre>darts.user_accountusr_id = darts.object_admin_actionhidden_by</pre>	object_admin_action_hidden_by_fk
\rightarrow	darts.object_admin_action	<pre>darts.user_accountusr_id = darts.object_admin_actionmarked_for_ manual_del_by</pre>	object_admin_action_marked_for_manual_del_by_fk
\rightarrow	darts.object_retrieval_queue	<pre>darts.user_accountusr_id = darts.object_retrieval_queuecreated_b y</pre>	object_retrieval_queue_created_by_fk
\rightarrow	darts.object_retrieval_queue	<pre>darts.user_accountusr_id = darts.object_retrieval_queuelast_modifi ed_by</pre>	object_retrieval_queue_last_modified_by_fk
\rightarrow	darts.prosecutor	<pre>darts.user_accountusr_id = darts.prosecutorcreated_by</pre>	prosecutor_created_by_fk
\rightarrow	darts.prosecutor	<pre>darts.user_accountusr_id = darts.prosecutorlast_modified_by</pre>	prosecutor_modified_by_fk
\rightarrow	darts.report	<pre>darts.user_accountusr_id = darts.reportcreated_by</pre>	report_created_by_fk
\rightarrow	darts.report	<pre>darts.user_accountusr_id = darts.reportlast_modified_by</pre>	report_modified_by_fk
→	darts.retention_confidence_categor y_mapper	darts.user_accountusr_id = darts.retention_confidence_category_mappercreated_by	retention_confidence_category_mapper_created_by_fk

	Table	Join	Title / Name / Description
\rightarrow	darts.retention_confidence_categor y_mapper	<pre>darts.user_accountusr_id = darts.retention_confidence_category_ mapperlast_modified_by</pre>	retention_confidence_category_mapper_last_modified_by_fk
\rightarrow	darts.retention_policy_type	<pre>darts.user_accountusr_id = darts.retention_policy_typecreated_by</pre>	retention_policy_type_created_by_fk
→	darts.retention_policy_type	<pre>darts.user_accountusr_id = darts.retention_policy_typelast_modifie d_by</pre>	retention_policy_type_last_modified_by_fk
\rightarrow	darts.revinfo	<pre>darts.user_accountusr_id = darts.revinfoaudit_user</pre>	revinfo_audit_user_fk
\rightarrow	darts.rps_retainer	<pre>darts.user_accountusr_id = darts.rps_retainercreated_by</pre>	rps_retainer_created_by_fk
\rightarrow	darts.rps_retainer	<pre>darts.user_accountusr_id = darts.rps_retainerlast_modified_by</pre>	rps_retainer_last_modified_by_fk
\rightarrow	darts.security_group	<pre>darts.user_accountusr_id = darts.security_groupcreated_by</pre>	security_group_created_by_fk
\rightarrow	darts.security_group	<pre>darts.user_accountusr_id = darts.security_grouplast_modified_by</pre>	security_group_last_modified_by_fk
\rightarrow	darts.security_group_user_account_ ae	<pre>darts.user_accountusr_id = darts.security_group_user_account_ae usr_id</pre>	security_group_user_account_ae_user_fk
\rightarrow	darts.transcription	<pre>darts.user_accountusr_id = darts.transcriptionlast_modified_by</pre>	transcription_last_modified_by_fk
\rightarrow	darts.transcription	<pre>darts.user_accountusr_id = darts.transcriptionrequested_by</pre>	transcription_requested_by_fk
\rightarrow	darts.transcription	<pre>darts.user_accountusr_id = darts.transcriptioncreated_by</pre>	transcription_created_by_fk
\rightarrow	darts.transcription	<pre>darts.user_accountusr_id = darts.transcriptiondeleted_by</pre>	transcription_deleted_by_fk
\rightarrow	darts.transcription_comment	<pre>darts.user_accountusr_id = darts.transcription_commentauthor</pre>	transcription_comment_author_fk
\rightarrow	darts.transcription_comment	<pre>darts.user_accountusr_id = darts.transcription_commentcreated_b y</pre>	transcription_comment_created_by_fk
\rightarrow	darts.transcription_comment	<pre>darts.user_accountusr_id = darts.transcription_commentlast_modif ied_by</pre>	transcription_comment_modified_by_fk
\rightarrow	darts.transcription_document	<pre>darts.user_accountusr_id = darts.transcription_documentdeleted_ by</pre>	transcription_document_deleted_by_fk
\rightarrow	darts.transcription_document	<pre>darts.user_accountusr_id = darts.transcription_documentuploade d_by</pre>	transcription_document_uploaded_by_fk
→	darts.transcription_document	<pre>darts.user_accountusr_id = darts.transcription_documentlast_modi fied_by</pre>	transcription_document_last_modified_by_fk
\rightarrow	darts.transcription_workflow	darts.user_accountusr_id = darts.transcription_workflowworkflow_actor	transcription_workflow_workflow_actor_fk
\rightarrow	darts.transformed_media	<pre>darts.user_accountusr_id = darts.transformed_mediacreated_by</pre>	transformed_media_created_by_fk

	Table	Join	Title / Name / Description	
\rightarrow	darts.transformed_media	darts.user_accountusr_id = darts.transformed_medialast_modified _by	transformed_media_last_modified_by_fk	
→	darts.transient_object_directory	darts.user_accountusr_id = darts.transient_object_directorylast_m odified_by	tod_modified_by_fk	
\rightarrow	darts.transient_object_directory	darts.user_accountusr_id = darts.transient_object_directorycreated _by	transient_object_directory_created_by_fk	

	Columns	Name / Description
P	usr_id	user_account_pk

13.1.78. Table: darts.wk_case_activity_data

Columns

		Name	Data type	Description / Attributes
■	1	cas_id	integer	
■		eve_id	bigint	Nullable
■		evh_id	integer	Nullable
■		closed_date_ts	timestamp with time zone	Nullable
■	1	closed_date_type	character varying(100)	

	Columns	Name / Description
9	cas_id, closed_date_type	wk_case_activity_data_pk

13.1.79. Table: darts.wk_case_best_values_p1

Columns

		Name	Data type	Description / Attributes
■	1	cas_id	integer	
		eve_id	bigint	Nullable
■		evh_id	integer	Nullable
■		closed_date_ts	timestamp with time zone	Nullable
■		closed_date_type	character varying(50)	Nullable
■		rownum	integer	Nullable

	Columns	Name / Description
P	cas_id	wk_case_best_values_p1_pk

13.1.80. Table: darts.wk_case_best_values_post_p1

Columns

		Name	Data type	Description / Attributes
■	1	cas_id	integer	
■		eve_id	bigint	Nullable
■		evh_id	integer	Nullable
■		closed_date_ts	timestamp with time zone	Nullable
■		closed_date_type	character varying(50)	Nullable
■		rownum	integer	Nullable

	Columns	Name / Description
P	cas_id	wk_case_best_values_post_p1_pk

13.1.81. Table: darts.wk_case_confidence_level

Columns

	Name	Data type	Description / Attributes
1	cas_id	integer	
	confidence_level	integer	Nullable

	Columns	Name / Description
9	cas_id	wk_case_confidence_level_pk

13.1.82. Table: darts.wk_case_correction

Columns

		Name	Data type	Description / Attributes
■	1	cas_id	integer	
		category_type	character varying(32)	Nullable
■		case_closed_date_corr	boolean	Nullable
■		case_closed_corr	boolean	Nullable
■		retain_until_ts_corr	boolean	Nullable
■		new_case_closed	boolean	Nullable
■		new_closed_date_ts	timestamp with time zone	Nullable
■		case_old_closed_date_ts	timestamp with time zone	Nullable
■		case_audit_old_closed_date_ts	timestamp with time zone	Nullable
■		closed_date_type	character varying(50)	Nullable
■		eve_id	bigint	Nullable
■		cmr_eve_id	bigint	Nullable
■		current_logic_rpt_id	integer	Nullable
■		current_creation_rpt_id	integer	Nullable
■		case_total_sentence	character varying(16)	Nullable
▤		new_retain_until_ts	timestamp with time zone	Nullable
■		retain_until_applied_on_ts	timestamp with time zone	Nullable
■		current_state	character varying(16)	Nullable
■		old_state	character varying(16)	Nullable
▤		retention_object_id	character varying(16)	Nullable
■		latest_activity_period	character varying(5)	Nullable
▤		best_closed_date_period	character varying(5)	Nullable
■		adjusted_closed_date_ts	timestamp with time zone	Nullable
■		adjusted_closed_date_type	character varying(50)	Nullable
■		adjusted_eve_id	bigint	Nullable
▤		has_warrant	boolean	Nullable
■		warrant_before_sentencing	boolean	Nullable
■		case_closed_before_sentencing	boolean	Nullable

	Columns	Name / Description
9	cas_id	wk_case_correction_pk

13.1.83. Table: darts.wk_crah_is_current_by_creation

Columns

		Name	Data type	Description / Attributes
■	1	cas_id	integer	
■		rah_id	integer	Nullable
■		rpt_id	integer	Nullable
■		c_policy_type	character varying(20)	Nullable
■		c_courthouse	character varying(64)	Nullable
■		c_case_id	character varying(32)	Nullable
■		r_creation_date	timestamp with time zone	Nullable
■		r_modify_date	timestamp with time zone	Nullable
■		c_status	character varying(32)	Nullable
■		c_username	integer	Nullable
■		case_retention_audit_object_id	character varying(16)	Nullable
■		ready_retain_until_date	timestamp with time zone	Nullable
■		is_current	boolean	Nullable

	Columns	Name / Description
?	cas_id	wk_crah_is_current_by_creation_pk

13.1.84. Table: darts.wk_crah_is_current_by_logic

Columns

		Name	Data type	Description / Attributes
■	1	cas_id	integer	
■		rah_id	integer	Nullable
■		rpt_id	integer	Nullable
■		c_policy_type	character varying(20)	Nullable
■		c_courthouse	character varying(64)	Nullable
■		c_case_id	character varying(32)	Nullable
■		r_creation_date	timestamp with time zone	Nullable
■		c_status	character varying(32)	Nullable
■		c_username	integer	Nullable
■		case_retention_audit_object_id	character varying(16)	Nullable
■		ready_retain_until_date	timestamp with time zone	Nullable
■		is_current	boolean	Nullable

	Columns	Name / Description
P	cas_id	wk_crah_is_current_by_logic_pk

13.1.85. Table: darts.wk_rr_is_current_by_creation

Columns

		Name	Data type	Description / Attributes
■	1	cas_id	integer	
■		rpr_id	integer	Nullable
■		rpt_id	integer	Nullable
■		case_object_id	character varying(16)	Nullable
■		dm_retainer_root_id	character varying(16)	Nullable
■		dms_object_name	character varying(64)	Nullable
■		created_ts	timestamp with time zone	Nullable
■		last_modified_ts	timestamp with time zone	Nullable
■		rps_retainer_object_id	character varying(16)	Nullable
■		dm_retention_date	timestamp with time zone	Nullable
■		is_current	boolean	Nullable

	Columns	Name / Description
Ŷ	cas_id	wk_rr_is_current_by_creation_pk

13.1.86. Table: darts.wk_rr_is_current_by_logic

Columns

		Name	Data type	Description / Attributes
■	1	cas_id	integer	
■		rpr_id	integer	Nullable
■		rpt_id	integer	Nullable
■		case_object_id	character varying(16)	Nullable
■		dm_retainer_root_id	character varying(16)	Nullable
■		dms_object_name	character varying(64)	Nullable
■		created_ts	timestamp with time zone	Nullable
■		rps_retainer_object_id	character varying(16)	Nullable
■		dm_retention_date	timestamp with time zone	Nullable
■		is_current	boolean	Nullable

	Columns	Name / Description
9	cas_id	wk_rr_is_current_by_logic_pk

13.2. Procedures

13.2.1. Procedure: dbms_metadata.set_transform_param

Used to customize DDL through configuring session-level transform params.

	Name	Data type	Description
→ @	name	text	
→ @	value	boolean	

13.2.2. Procedure: public.sum_n_product

	Name	Data type	Description
→ @	х	integer	
→ @	у	integer	
- @•	sum	integer	
÷@•	prod	integer	

13.3. Functions

13.3.1. Function: darts.gin_extract_query_trgm

	Name	Data type	Description
-@ •	Returns	internal	
→ @	\$1	text	
→ @	\$2	internal	
→ @	\$3	smallint	
→ @	\$4	internal	
→ @	\$5	internal	
→ @	\$6	internal	
→ @	\$7	internal	

13.3.2. Function: darts.gin_extract_value_trgm

	Name	Data type	Description
-@ •	Returns	internal	
→ @	\$1	text	
→ @	\$2	internal	

13.3.3. Function: darts.gin_trgm_consistent

•	Name	Data type	Description
÷@•	Returns	boolean	
→ @	\$1	internal	
→ @	\$2	smallint	
→ @	\$3	text	
→ @	\$4	integer	
→ @	\$5	internal	
→ @	\$6	internal	
→ @	\$7	internal	
→ @	\$8	internal	

13.3.4. Function: darts.gin_trgm_triconsistent

	Name	Data type	Description
- @•	Returns	"char"	
→ @	\$1	internal	
→ @	\$2	smallint	
→ @	\$3	text	
→ @	\$4	integer	
→ @	\$5	internal	
→ @	\$6	internal	
→ @	\$7	internal	

13.3.5. Function: darts.gtrgm_compress

	Name	Data type	Description
-⁄@•	Returns	internal	
→ @	\$1	internal	

13.3.6. Function: darts.gtrgm_consistent

	Name	Data type	Description
- @•	Returns	boolean	
→ @	\$1	internal	
→ @	\$2	text	
→@	\$3	smallint	
→ @	\$4	oid	
→ @	\$5	internal	

13.3.7. Function: darts.gtrgm_decompress

	Name	Data type	Description
-⁄@•	Returns	internal	
→ @	\$1	internal	

13.3.8. Function: darts.gtrgm_distance

	Name	Data type	Description
- @•	Returns	double precision	
→ @	\$1	internal	
→ @	\$2	text	
→ @	\$3	smallint	
→ @	\$4	oid	
→ @	\$5	internal	

13.3.9. Function: darts.gtrgm_in

	Name	Data type	Description
-⁄@•	Returns	gtrgm	
→ @	\$1	cstring	

13.3.10. Function: darts.gtrgm_options

	Name	Data type	Description
÷@•	Returns	void	
→ @	\$1	internal	

13.3.11. Function: darts.gtrgm_out

	Name	Data type	Description
-⁄@•	Returns	cstring	
→ @	\$1	gtrgm	

13.3.12. Function: darts.gtrgm_penalty

	Name	Data type	Description
-⁄@•	Returns	internal	
→ @	\$1	internal	
→ @	\$2	internal	
→ @	\$3	internal	

13.3.13. Function: darts.gtrgm_picksplit

	Name	Data type	Description
-⁄@>	Returns	internal	
→ @	\$1	internal	
→ @	\$2	internal	

13.3.14. Function: darts.gtrgm_same

	Name	Data type	Description
- @•	Returns	internal	
→ @	\$1	gtrgm	
→ @	\$2	gtrgm	
→ @	\$3	internal	

13.3.15. Function: darts.gtrgm_union

	Name	Data type	Description
-⁄@>	Returns	gtrgm	
→ @	\$1	internal	
→ @	\$2	internal	

13.3.16. Function: darts.set_limit

	Name	Data type	Description
÷@•	Returns	real	
→ @	\$1	real	

13.3.17. Function: darts.show_limit

	Name	Data type	Description
Returns		real	

13.3.18. Function: darts.show_trgm

	Name	Data type	Description
- @•	Returns	ARRAY	
→ @	\$1	text	

13.3.19. Function: darts.similarity

	Name	Data type	Description
-;@>	Returns	real	
→ @	\$1	text	
→ @	\$2	text	

13.3.20. Function: darts.similarity_dist

	Name	Data type	Description
- @•	Returns	real	
→ @	\$1	text	
→ @	\$2	text	

13.3.21. Function: darts.similarity_op

	Name	Data type	Description
-⁄@>	Returns	boolean	
→ @	\$1	text	
→ @	\$2	text	

13.3.22. Function: darts.strict_word_similarity

	Name	Data type	Description
-;@>	Returns	real	
→ @	\$1	text	
→ @	\$2	text	

13.3.23. Function: darts.strict_word_similarity_commutator_op

	Name	Data type	Description
-⁄@>	Returns	boolean	
→ @	\$1	text	
→ @	\$2	text	

13.3.24. Function: darts.strict_word_similarity_dist_commutator_op

	Name	Data type	Description
-⁄@>	Returns	real	
→ @	\$1	text	
→ @	\$2	text	

13.3.25. Function: darts.strict_word_similarity_dist_op

	Name	Data type	Description
-;@>	Returns	real	
→ @	\$1	text	
→ @	\$2	text	

13.3.26. Function: darts.strict_word_similarity_op

	Name	Data type	Description
- @•	Returns	boolean	
→ @	\$1	text	
→ @	\$2	text	

13.3.27. Function: darts.tra_trw_sync_fnc

	Name	Data type	Description
Returns		trigger	

13.3.28. Function: darts.word_similarity

	Name	Data type	Description
- @•	Returns	real	
→ @	\$1	text	
→@	\$2	text	

13.3.29. Function: darts.word_similarity_commutator_op

	Name	Data type	Description
-⁄@>	Returns	boolean	
→ @	\$1	text	
→ @	\$2	text	

13.3.30. Function: darts.word_similarity_dist_commutator_op

	Name	Data type	Description
-;@>	Returns	real	
→ @	\$1	text	
→ @	\$2	text	

13.3.31. Function: darts.word_similarity_dist_op

	Name	Data type	Description
-;@>	Returns	real	
→ @	\$1	text	
→ @	\$2	text	

13.3.32. Function: darts.word_similarity_op

	Name	Data type	Description
-⁄@>	Returns	boolean	
→ @	\$1	text	
→ @	\$2	text	

13.3.33. Function: dbms_metadata.get_check_constraint_ddl

This function retrieves DDL of a check constraint

	Name	Data type	Description
- @•	Returns	text	
→ @	schema_name	text	
→@	constraint_name	text	

13.3.34. Function: dbms_metadata.get_constraint_ddl

This function retrieves DDL of a constraint

	Name	Data type	Description
-;@>	Returns	text	
→ @	schema_name	text	
→ @	constraint_name	text	

13.3.35. Function: dbms_metadata.get_constraints_ddl_of_table

This function retrieves DDL of all constraints of provided table

	Name	Data type	Description
-;@>	Returns	text	
÷@	p_schema	text	
→ @	p_table	text	

13.3.36. Function: dbms_metadata.get_ddl

Retrieves DDL of database objects. Supported object types are TABLE, VIEW, SEQUENCE, PROCEDURE, FUNCTION.

	Name	Data type	Description
÷@•	Returns	text	
→ @	object_type	text	
→ @	name	text	
→@	schema	text	

13.3.37. Function: dbms_metadata.get_dependent_ddl

Retrieves DDL of dependent objects on provided base object. Supported dependent object types are SEQUENCE, CONSTRAINT, INDEX.

	Name	Data type	Description
- @•	Returns	text	
→@	object_type	text	
→@	base_object_name	text	
→ @	base_object_schema	text	

13.3.38. Function: dbms_metadata.get_granted_ddl

Retrieves the SQL statements to recreate granted privileges and roles for a specified grantee.

	Name	Data type	Description
- @•	Returns	text	
→ @	object_type	text	
→ @	grantee	text	

13.3.39. Function: dbms_metadata.get_granted_roles_ddl

This function extracts the SQL statements to recreate roles granted to a specified grantee

	Name	Data type	Description
-;@>	Returns	text	
→ @	p_grantee	text	

13.3.40. Function: dbms_metadata.get_index_ddl

This function retrieves DDL of an index

	Name	Data type	Description
- @•	Returns	text	
→ @	schema_name	text	
→@	index_name	text	

13.3.41. Function: dbms_metadata.get_indexes_ddl_of_table

This function retrieves DDL of all indexes of provided table

	Name	Data type	Description
-;@>	Returns	text	
÷@	p_schema	text	
→ @	p_table	text	

13.3.42. Function: dbms_metadata.get_object_oid

This function returns oid of given object

	Name	Data type	Description
-⁄@>	Returns	oid	
→ @	p_object_type	text	
→ @	p_schema	text	
→ @	p_object_name	text	

13.3.43. Function: dbms_metadata.get_ref_constraint_ddl

This function retrieves DDL of a referential constraint

	Name	Data type	Description
-;@>	Returns	text	
→ @	schema_name	text	
→ @	constraint_name	text	

13.3.44. Function: dbms_metadata.get_ref_constraints_ddl_of_table

This function retrieves DDL of all constraints of provided table

	Name	Data type	Description
-;@>	Returns	text	
÷@	p_schema	text	
→ @	p_table	text	

13.3.45. Function: dbms_metadata.get_routine_ddl

This function retrieves DDL of a procedure/function

	Name	Data type	Description
÷@•	Returns	text	
→ @	schema_name	text	
→@	routine_name	text	
→@	routine_type	text	

13.3.46. Function: dbms_metadata.get_schema_oid

This function returns oid of given schema

	Name	Data type	Description
-;@>	Returns	oid	
→ @	p_schema	text	

13.3.47. Function: dbms_metadata.get_sequence_ddl

This function retrieves DDL of a sequence

	Name	Data type	Description
- @•	Returns	text	
→ @	p_schema	text	
→@	p_sequence	text	

13.3.48. Function: dbms_metadata.get_sequence_ddl_of_table

This function retrieves DDL of all dependent sequences on provided table

	Name	Data type	Description
- @•	Returns	text	
→ @	p_schema	text	
→ @	p_table	text	

13.3.49. Function: dbms_metadata.get_table_ddl

This function retrieves a basic table DDL without constraints and indexes. DDL will include list of columns of the table, along with datatypes, DEFAULT values and NOT NULL constraints, in the order of the attnum. DDL will also include comments on table and columns if any.

	Name	Data type	Description
*@»	Returns	text	
→ @	p_schema	text	
→ @	p_table	text	

13.3.50. Function: dbms_metadata.get_trigger_ddl

This function retrieves DDL of a trigger

	Name	Data type	Description
- @•	Returns	text	
→ @	schema_name	text	
→@	trigger_name	text	

13.3.51. Function: dbms_metadata.get_triggers_ddl_of_table

This function retrieves DDL of all triggers of provided table

	Name	Data type	Description
- @•	Returns	text	
→ @	schema_name	text	
→@	table_name	text	

13.3.52. Function: dbms_metadata.get_type_ddl

This function retrieves DDL of a user defined type

	Name	Data type	Description
- @•	Returns	text	
→ @	p_schema_name	text	
→ @	p_type_name	text	

13.3.53. Function: dbms_metadata.get_view_ddl

This function retrieves DDL of a view

	Name	Data type	Description
- @•	Returns	text	
→ @	view_schema	text	
→@	view_name	text	

13.3.54. Function: dbms_metadata.init_transform_params

	Name	Data type	Description
- @•	Returns	void	

13.3.55. Function: dbms_metadata.set_default_transform_params

Used to set default values to all transform params.

	Name	Data type	Description
-@ •	Returns	void	