


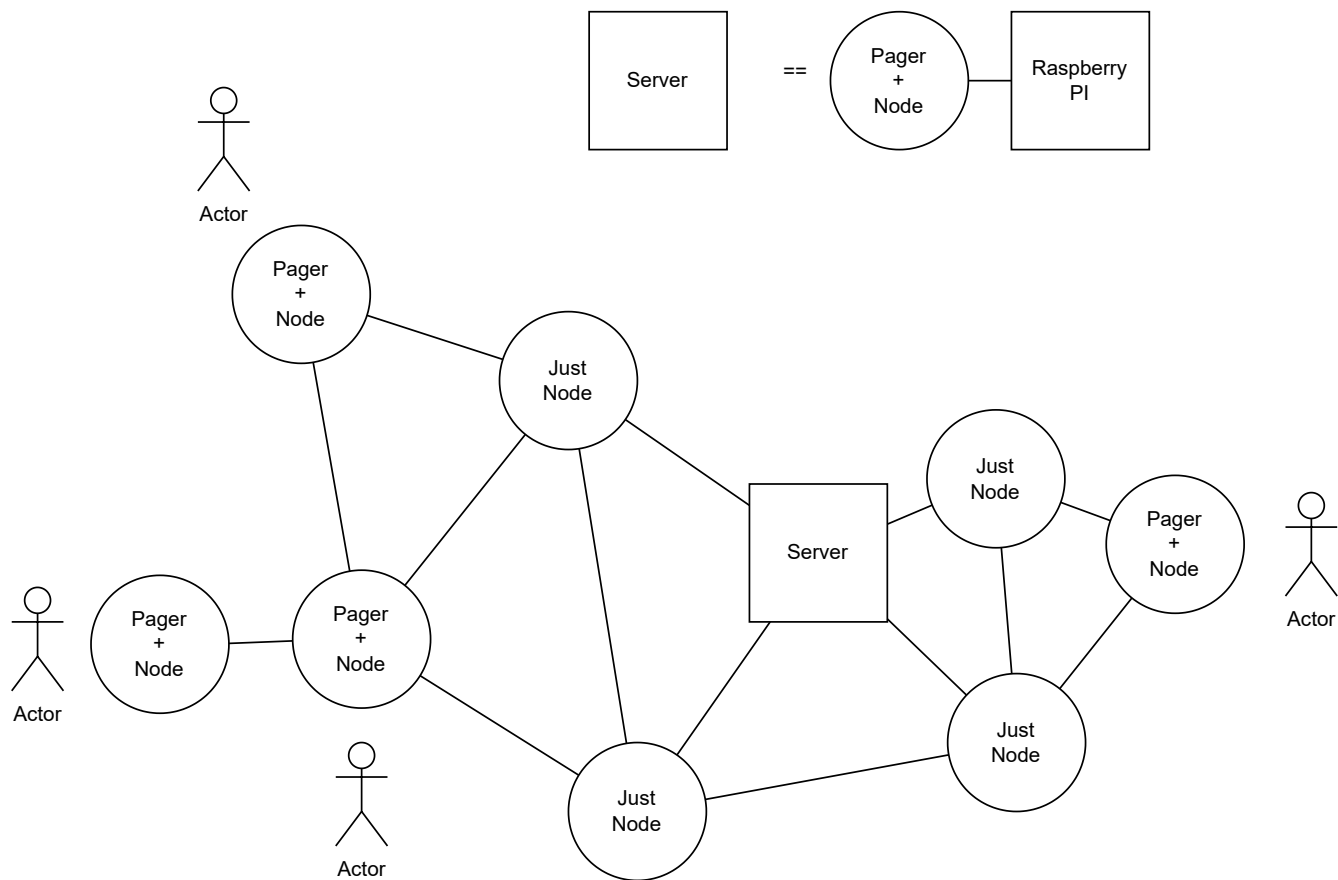

Just Node

- Repeats messages, dropping ones that have been seen before
- Adds nearby devices to peers to receive messages

Pager

- Does everything Nodes do
- Sends messages to target by first sending to server, then server sends to recipient
- Requests info on active users from server

Server

- Tracks active participants, reuploading list every x minutes
- Receives messages & sends them to recipient
- Stores off messages that aren't acked by receiver for later viewing

Enc & Auth

- Pagers / Server will authenticate themselves to the server by providing certificate containing public key and Ephemeral DH pub key signed by that.
- Target will use establish their own eph DH key and send pub version to establish shared secret
- make enc tunnel using shared secret

Acking

- Send Message
- Recipient sends ack
- if no ack recieved, resend message until ack received (with delay)