

Qt Quickstart

Mathias M. Vege

September 5, 2018

Abstract

A short guide to getting started with Qt Creator.

Contents

1	Installing Qt	2
1.1	Mac	2
1.1.1	Prerequisite	2
1.1.2	Installing Qt	2
1.2	Ubuntu	2
1.2.1	Prerequisite	2
1.2.2	Installing Qt	2
1.3	Windows	3
1.3.1	Prerequisite	3
1.3.2	Installing Qt	3
2	Creating your first project	3
3	Project settings	7
3.1	Build settings	7
3.2	Changing build folder	8
3.3	Run settings	9
3.4	Command line arguments	9
4	Expanding your project	10
4.1	The .pro-file	10
4.2	Adding files and classes	10
4.2.1	New header files	11
4.2.2	New Classes	12
4.3	Adding existing files	13
5	Guides to external libraries for Qt	14
5.1	Armadillo	14
5.1.1	Installation	14
5.1.2	Including Armadillo in Qt Creator	14
5.2	OpenMP	15
5.3	MPI	15

6	Profiling your code	15
6.1	Valgrind Memory profiler	15
6.2	Valgrind Function profiler	15

1 Installing Qt

In order to get Qt Creator up and running as an IDE, there are a few requirements. The following is needed,

- **Qt.** The Qt core package containing the core functionality and libraries used by Qt Creator. Contains the kits needed to compile and build projects, as well as libraries for building e.g. [Android and iPhone apps](#).
- **Qt Creator.** The IDE used for programming.
- **A C++compiler.** Needed in order to compile C++files in Qt Creator. The specific compiler needed depend on the OS.

NOTE: it is possible to update your Qt platform after installing it through the Qt Maintenance tool in case you are missing any of the Qt utilities, such as a proper Qt version.

1.1 Mac

1.1.1 Prerequisite

- brew. See <https://brew.sh/> for a guide to installing it.
- Xcode. Download from app-store. Through Xcode you should get a compiler for C++.

1.1.2 Installing Qt

Go to <https://www.qt.io/download>, and follow the instructions. Make sure to select a Qt version under the tab *Qt*, typically you select the newest version Qt.11.1(as of September 5, 2018). For me that is *macOS*. Qt Creator should be automatically selected under *Tools*.

1.2 Ubuntu

1.2.1 Prerequisite

Make sure you have a proper compiler. To install the essential tools for C++, type

```
$ sudo apt install build-essential
```

in the terminal. See [this page](#) for details on how to install a gcc or g++ compiler.

1.2.2 Installing Qt

There are two options for installing Qt on Ubuntu/Linux.

- Go to <https://www.qt.io/download>, and follow the instructions. Make sure to select a Qt version under the tab *Qt*, typically you select the newest version Qt.11.1(as of September 5, 2018). Qt Creator should be automatically selected under *Tools*.

- Simply type

```
$ sudo apt-get install qtcreator
$ sudo apt-get install qt5-default
```

and you should have everything you need.

1.3 Windows

1.3.1 Prerequisite


Make sure you got a C++ compiler. For a quick and easy install, look up the [MinGW 64 bit compiler](#).

1.3.2 Installing Qt


Go to <https://www.qt.io/download>, and follow the instructions. Make sure to select a Qt version under the tab *Qt*, typically you select the newest version Qt.11.1(as of September 5, 2018). For me that is *macOS*, but that may differ on Windows. Qt Creator should be automatically selected under *Tools*.

2 Creating your first project


When starting up Qt Creator for the first time, this should be your starting screen. Start by clicking *New Project*.

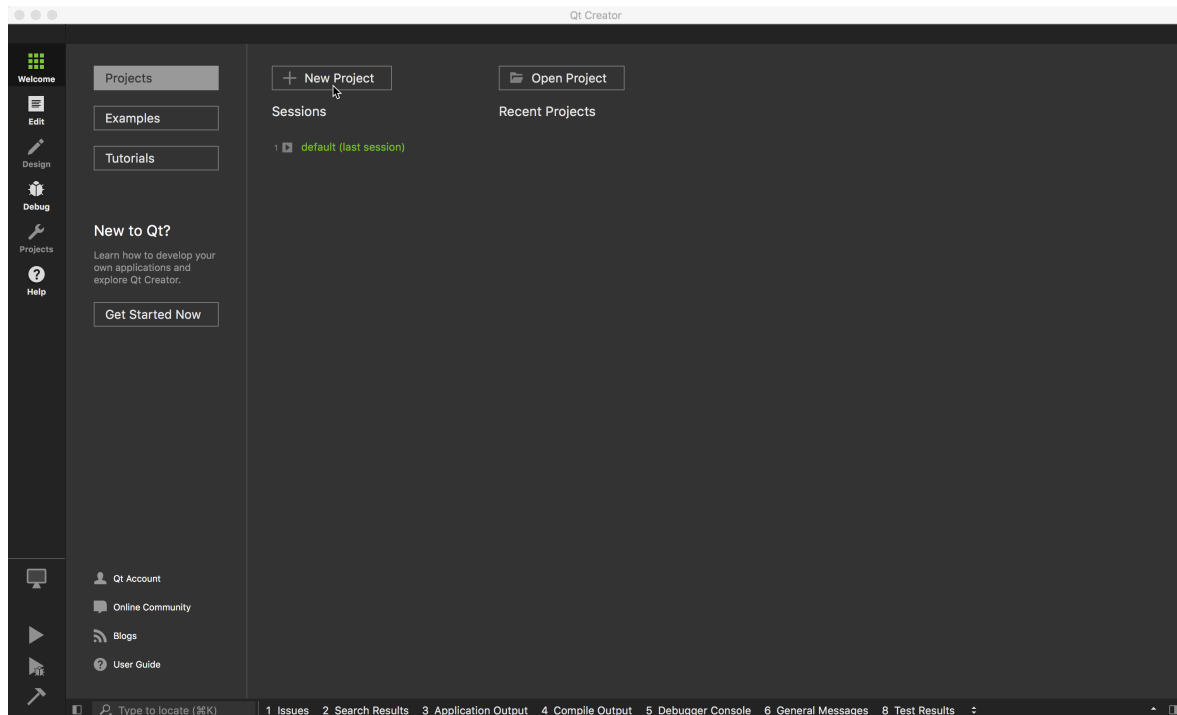


You now choose a template. Select *Non-Qt Project* in the sidebar to the left, then select *Plain C++ Application* and click next.

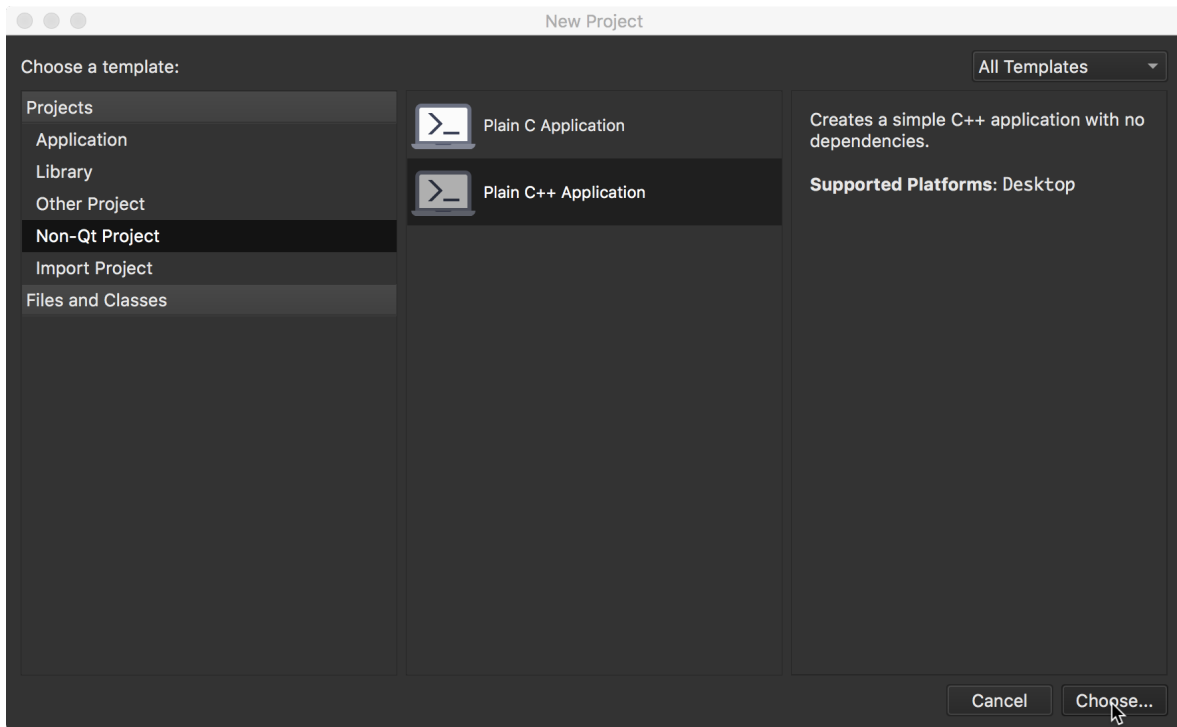


Location. Then you give a name to your project and select its location.

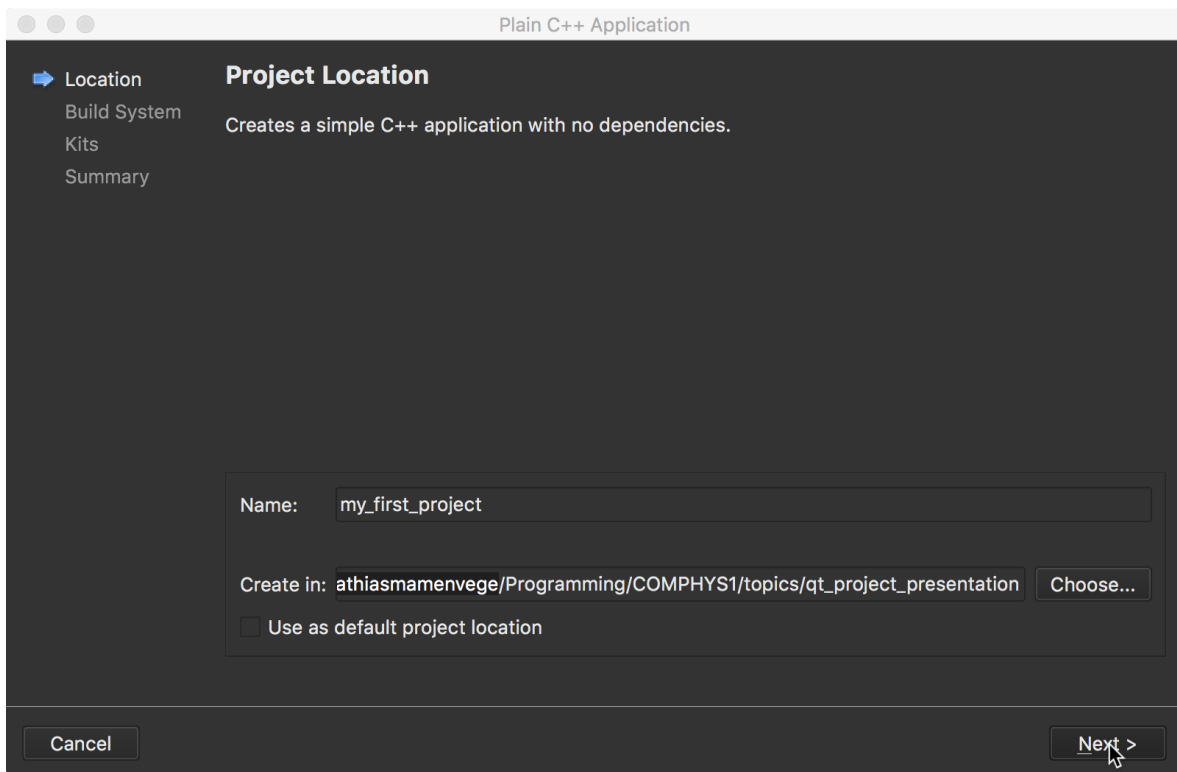


Build System. Default is *qmake*, and is what we recommend.

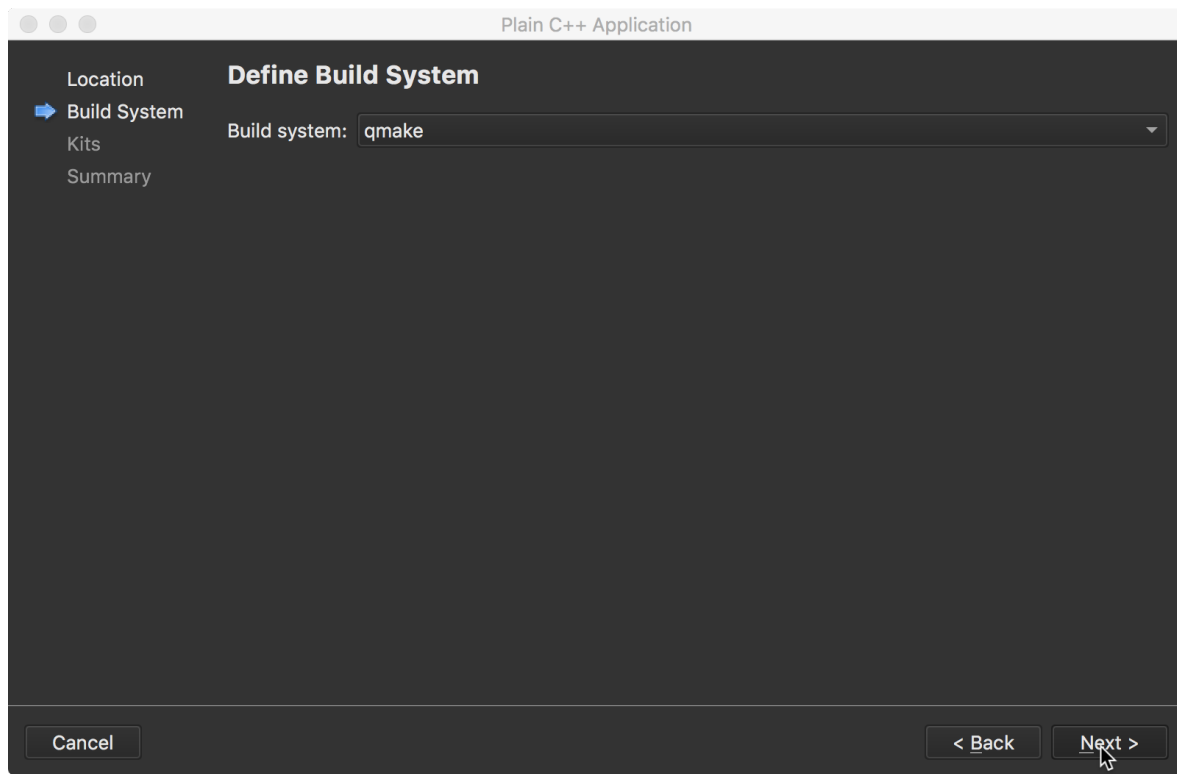


Kit Selection. Select the newest kit available. May appear as *Desktop*(on Ubuntu), *Desktop Qt 5.11.1 clang 64bit*(on Mac) or similar. **Note:** if no kits are available, look back into the *Installing Qt* section¹.

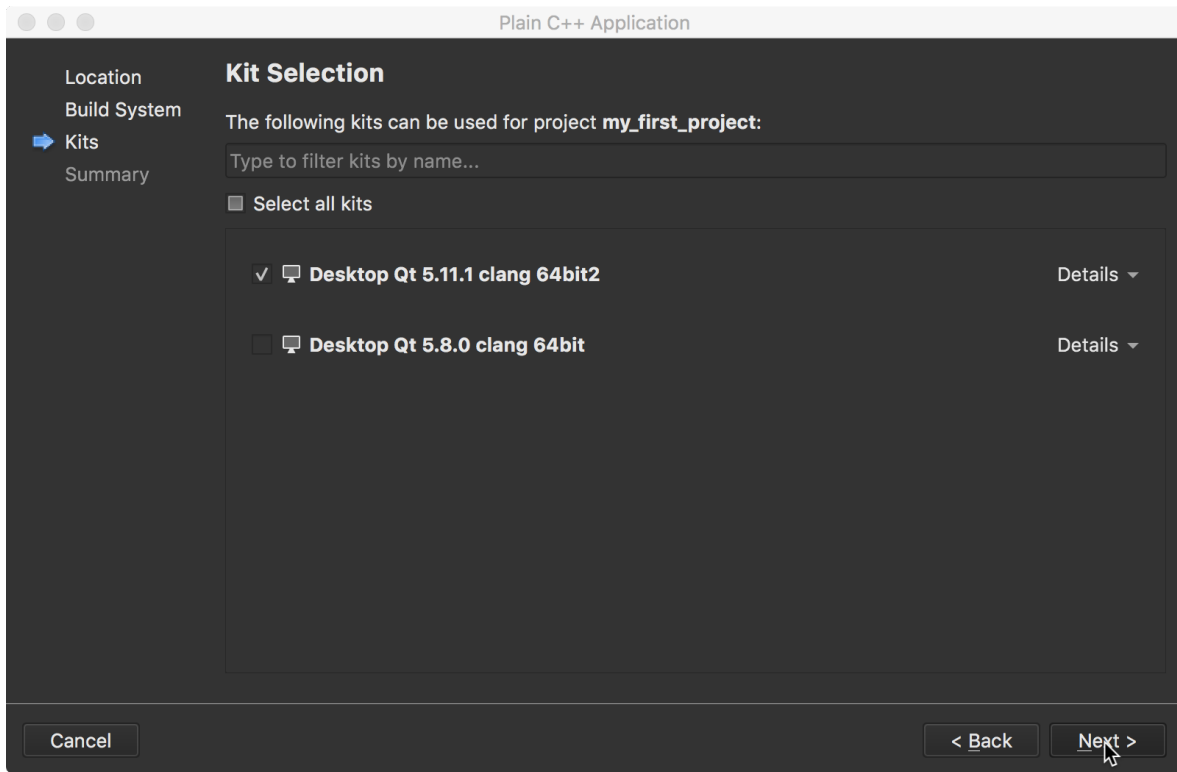

Summary. Everything should now be set up and ready to go, and you can begin programming.

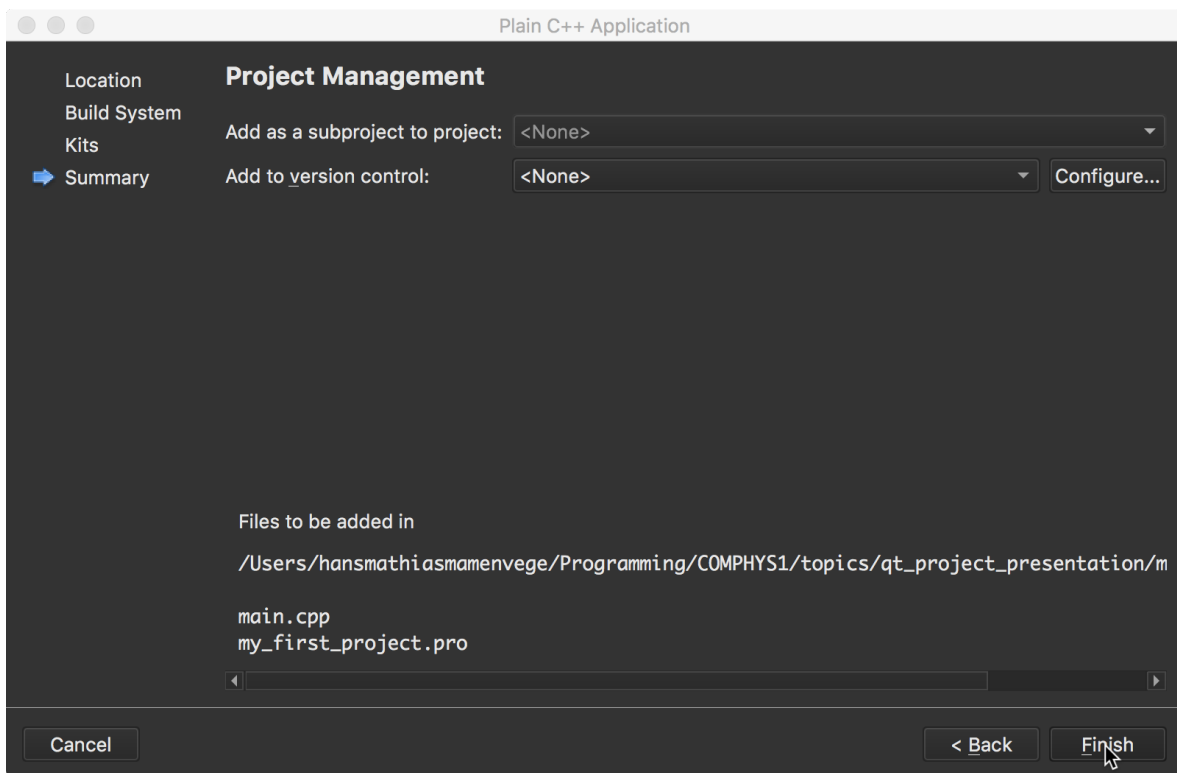

If you are missing a compiler, you might get a lot of errors under the *Issues* panel. Go back to *Installing Qt* section¹ for how to install a compiler for your operating system.

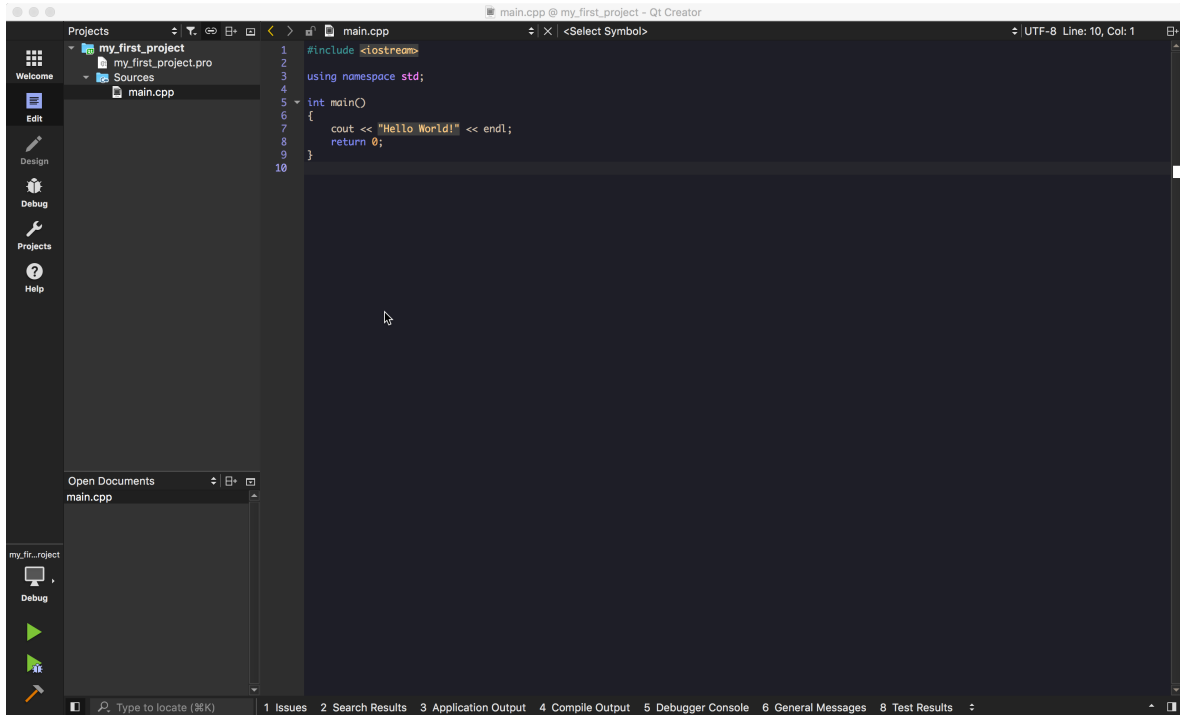

3 Project settings

3.1 Build settings

A plethora of important settings can be accessed from the *Build Settings* panel found in the side bar of Qt Creator.

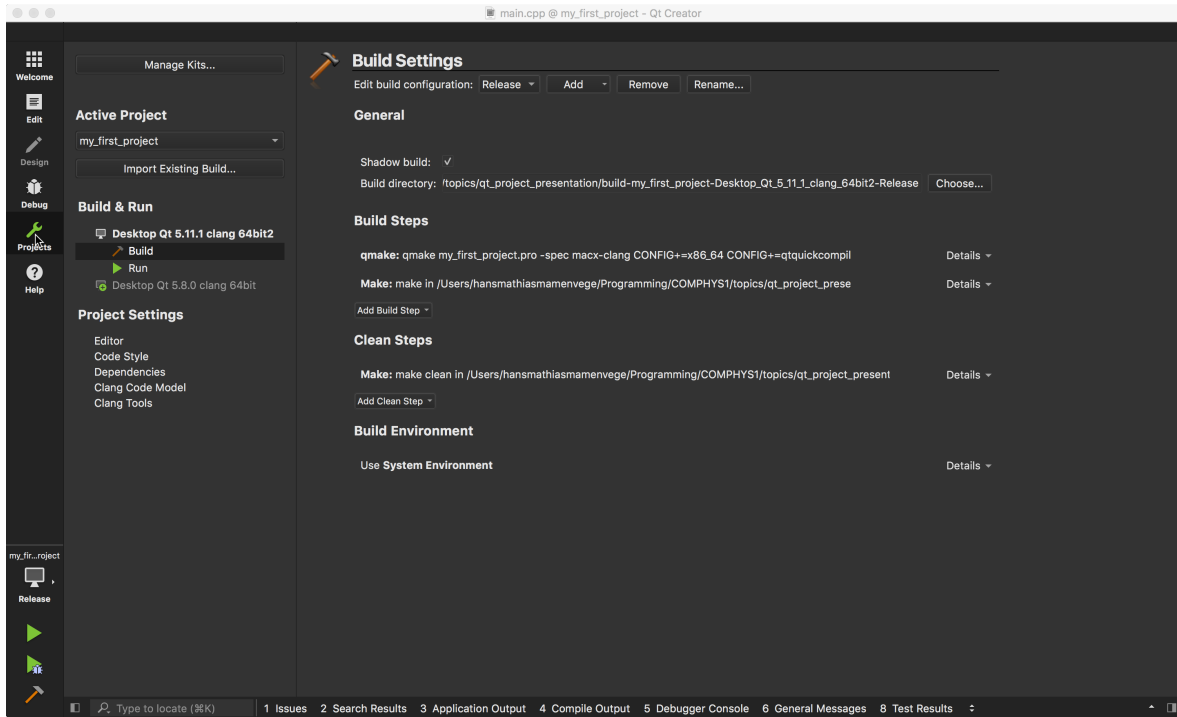


Figure 1: Build settings panel.

3.2 Changing build folder

By default, Qt Creator will create a build folder located one folder above the project folder.

```
\home\<user>\programming\my_project
\home\<user>\programming\build-my_first_project-
  Desktop_Qt_5_11_1_clang_64bit2-Release
\home\<user>\programming\build-my_first_project-
  Desktop_Qt_5_11_1_clang_64bit2-Profiling
\home\<user>\programming\build-my_first_project-
  Desktop_Qt_5_11_1_clang_64bit2-Debug
```

It will typically make on folder for each of the **Release**, **Debug** and **Profiling** builds. If you want to change this go to the settings folder as listed in the figure above 1. This can be changed under the *General* section, by selecting a *build directory* depending on what build you are currently set to,




Figure 2: Build selecting found in the lower left corner.

3.3 Run settings

If we now click the *Run Settings* as seen on the *Build Settings* panel, we get the following screen up,

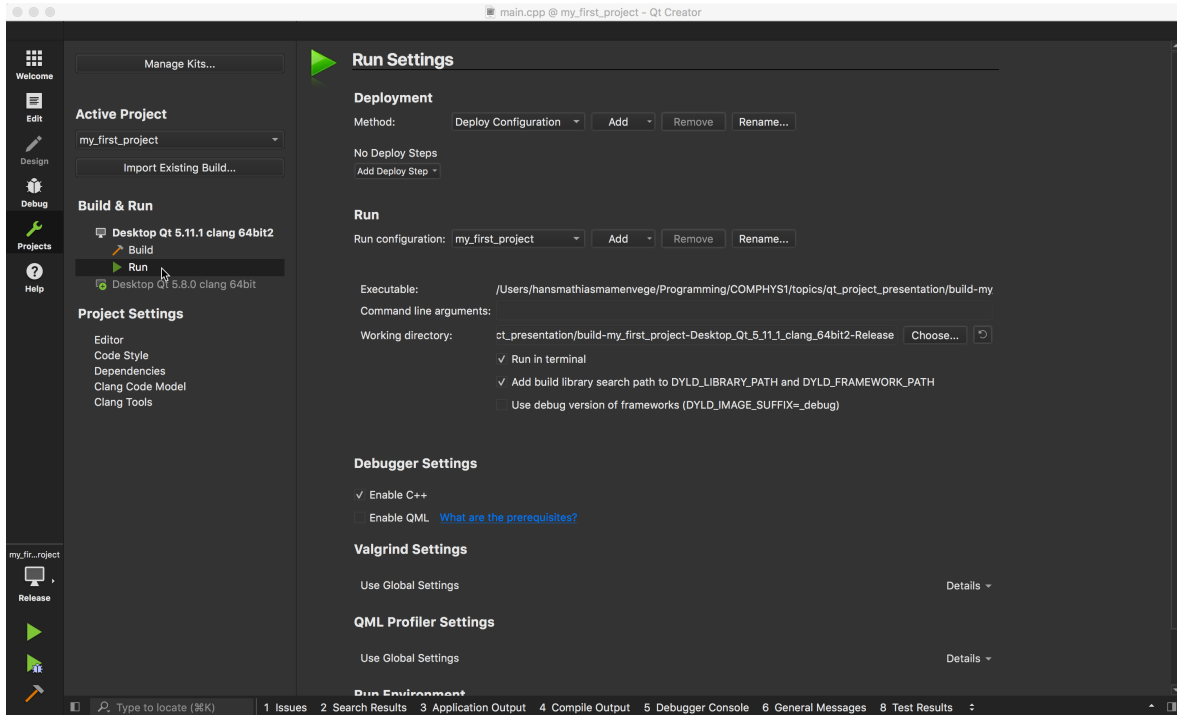



Figure 3: Run settings panel found at under the build settings panel¹.

3.4 Command line arguments

If you want to add command line arguments to your program, there are two ways of doing it. One is to run the program from the terminal in a regular fashion,

```
$ ./my_first_project arg1 arg2 arg3
```

Or, you can add the arguments under *Run* section in the *Command line arguments*,

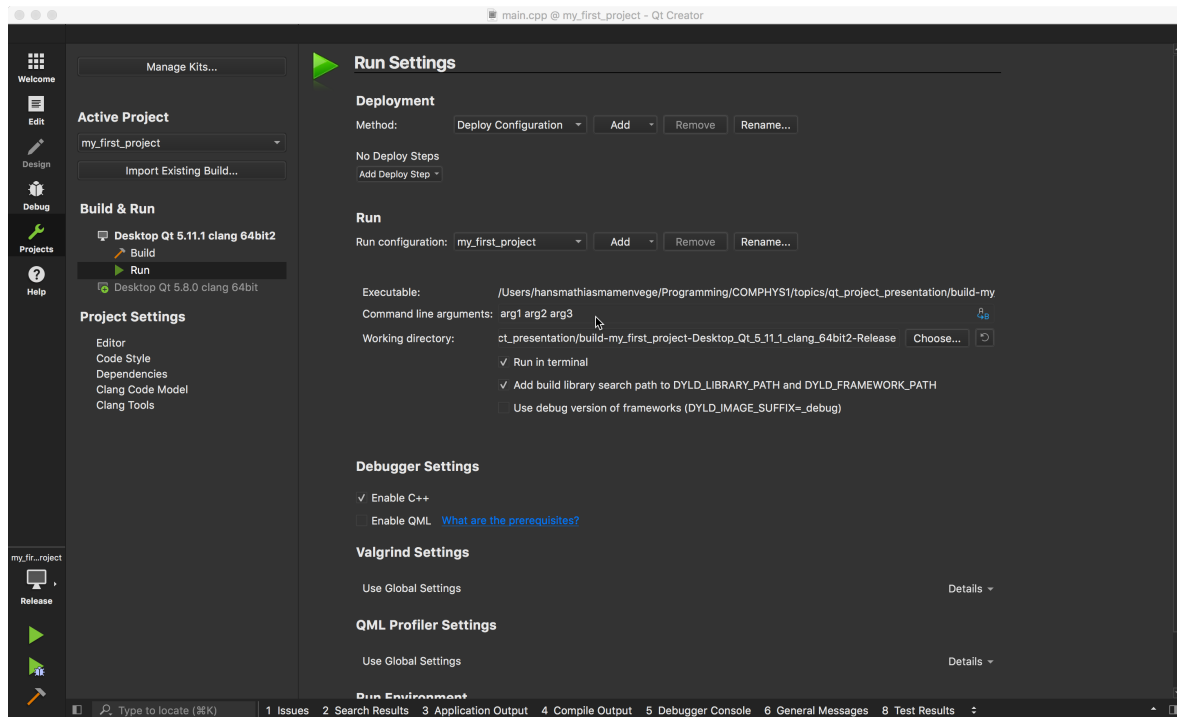

You can also turn of the *Run in terminal* mode by unchecking the box slightly below the *Command line arguments* input.

```
$ ./my_first_project arg1 arg2 arg3
```

4 Expanding your project

4.1 The .pro-file

The `.pro` contains the settings for QMake, which is the compiling tool used by Qt (instead something like cmake). Your `.pro` file will look like this at the beginning of your project,

```
TEMPLATE = app
CONFIG += console c++11
CONFIG -= app_bundle
CONFIG -= qt
```

```
SOURCES += \
    main.cpp
```

From the `.pro` file you can specify what C++-version you are going to use (C++11 should be the default), what optimizations to utilize and what external libraries we are to use.


4.2 Adding files and classes

When adding new files to your project, either

- press `CMD+N`.
- click *New File* under *File*


- right click at the folder you wish to create a new file in the *Projects* tab and select *Add New....*

If you do either of the of the first two you should get up a panel similar to the one you got when starting a new folder. Instead of looking under the *Projects* templates, go beneath that to *Files and Classes* and select *C++*. Then select the type of file you are going to choose,

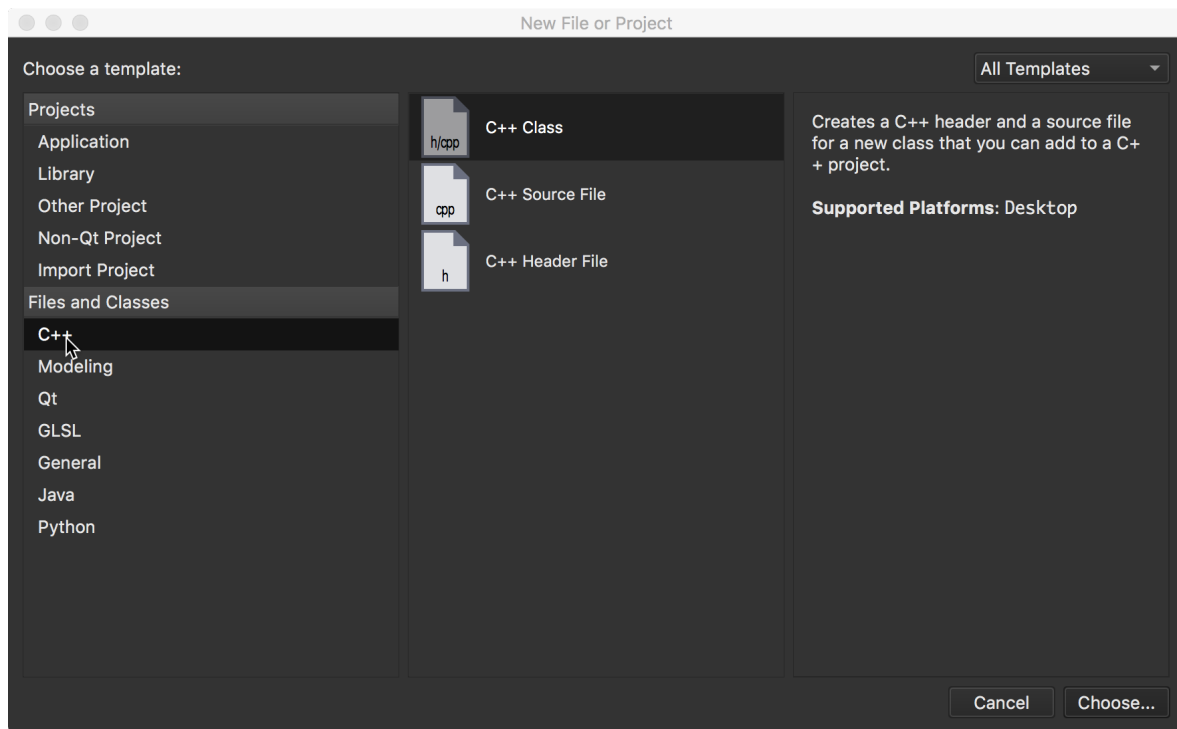


4.2.1 New header files

If you are going to create a header, select that and give it a name and location in the next panel. The summary screen will then look something like this,

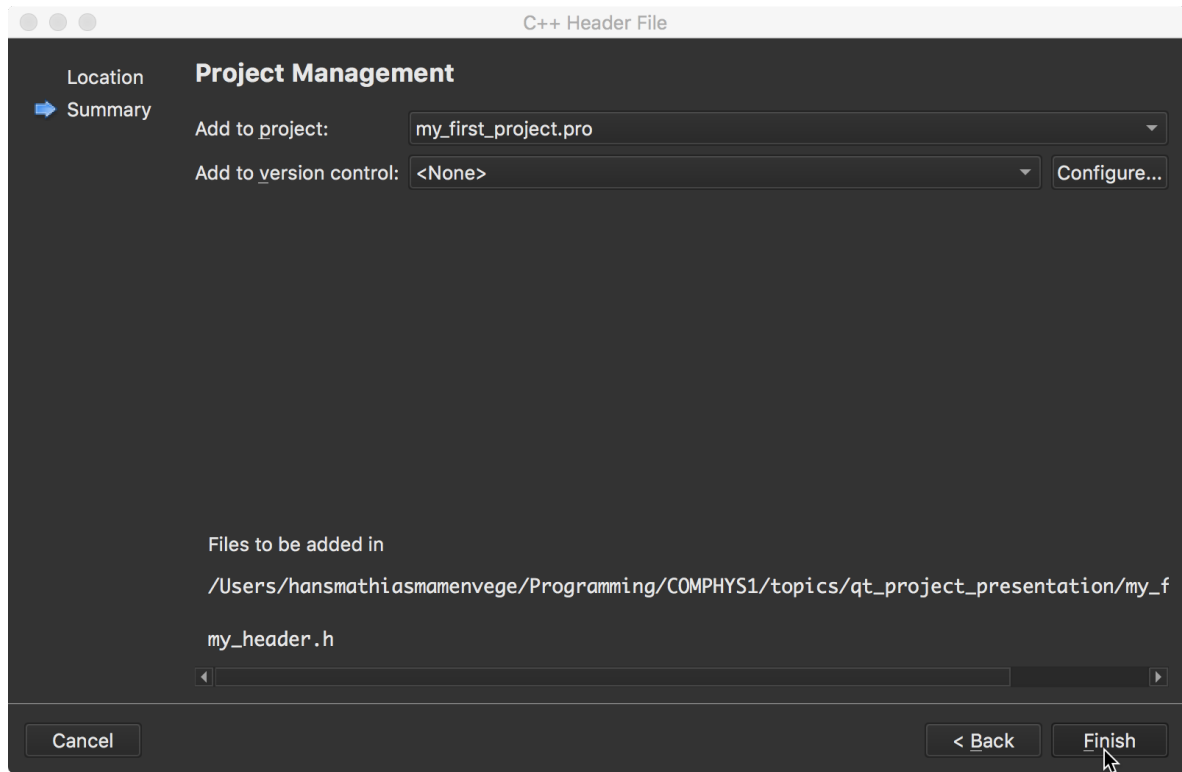

4.2.2 New Classes

If you are setting up a class, select that and give it a name.

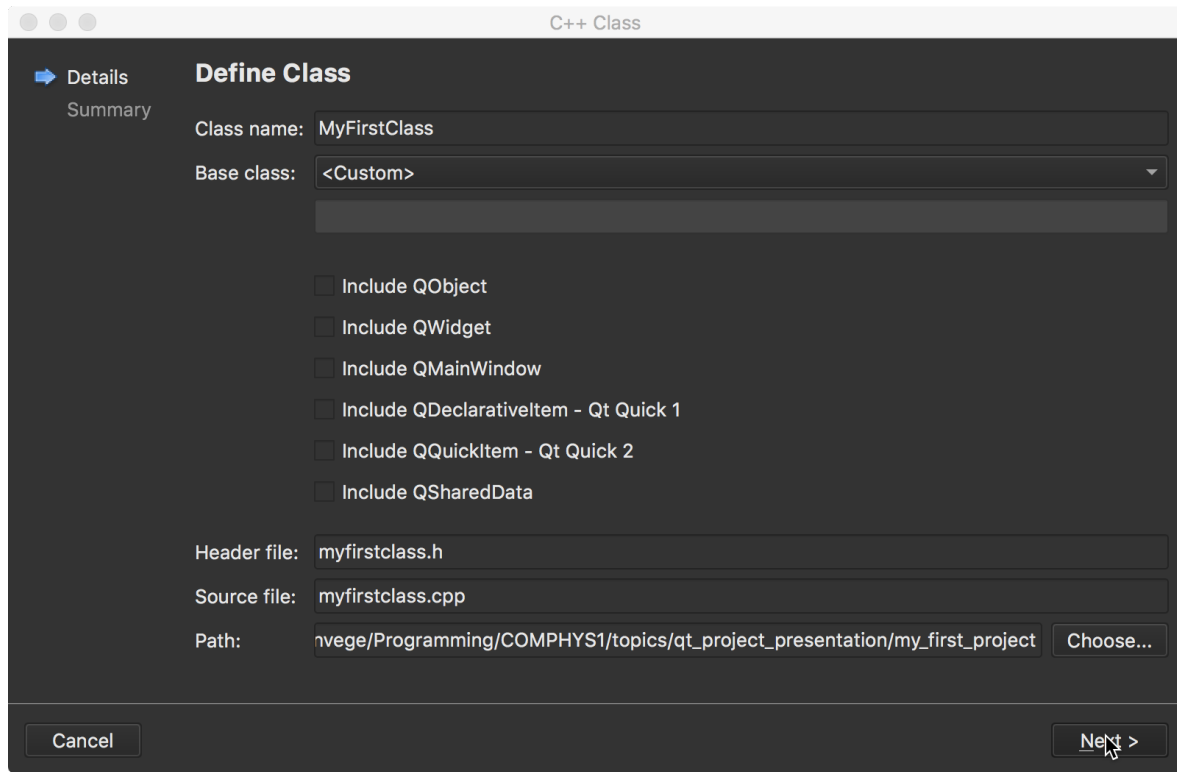

The files you are including will then be added to the `.pro` file automatically, and will now look something like,

```
TEMPLATE = app
CONFIG += console c++11
CONFIG -= app_bundle
CONFIG -= qt

SOURCES += \
    main.cpp \
    firstclass.cpp

HEADERS += \
    firstclass.h \
    firstheader.h
```

4.3 Adding existing files

Say we now want to add a files `"lib.h"` and its functions `"lib.cpp"` to our project. After taking note of their location, you simply add

```
<path_to_lib.h>/lib.h
```

under `HEADERS`, and

```
<path_to_lib.cpp>/lib.cpp
```

under `SOURCES` in the `.pro` file. Then you include the file by writing `#include "lib.h"` in the file you need it in. ¹

¹Go [here](#) for an explanation for why we use `"lib.h"` and not `<lib.h>`.

5 Guides to external libraries for Qt

After introducing the `.pro` file, we can look at how libraries is including. In the `.pro` this is done with primarily two commands:

```
LIBS += -L/<path_to_library> -l<library_name>
INCLUDEPATH += <path_to_search_for_headers_in>
```

5.1 Armadillo

5.1.1 Installation

- **Windows.** Look at [this guide](#) for how to install Armadillo on Windows.
- **Mac.** Install Armadillo by simply typing,

```
$ brew install armadillo
```

in the terminal.

- **Ubuntu.** To install Armadillo on Ubuntu, use

```
$ sudo apt-get install liblapack-dev
$ sudo apt-get install libblas-dev
$ sudo apt-get install libarmadillo-dev
```

5.1.2 Including Armadillo in Qt Creator

- **Mac.** To include Armadillo on Mac in Qt Creator, you have to add following to your `.pro` file. This is assuming Brew linked Armadillo correctly and installed all dependencies.

```
INCLUDEPATH += /usr/local/Cellar/armadillo/7.700.0_1/include
LIBS += -L/usr/local/lib -llapack -lblas -larmadillo
```

The path was used here is the path provided by Brew when typing

```
brew info armadillo
```

After adding the path go to *Build* at the top, and select *Run qmake*.

- **Ubuntu.** After installing the required libraries, simply include

```
LIBS += -llapack -lblas -larmadillo
```

in your `.pro` file.

- **Windows.** See post on Piazza or go to the bottom of the same document listed in under the installation of Armadillo.

To include Armadillo in your C++ program, go to your `.pro` file and add the following,

5.2 OpenMP

5.3 MPI

6 Profiling your code

6.1 Valgrind Memory profiler

6.2 Valgrind Function profiler