

PIZZAHUT SALES ANALYSIS USING SQL



Introduction

This project analyzes Pizza Hut sales data using SQL to identify sales trends, customer preferences, and revenue patterns. The analysis provides valuable insights into business performance and supports data-driven decision-making.



RETRIEVE THE TOTAL NUMBER OF ORDERS
PLACED.

```
SELECT  
    COUNT(order_id) AS total_order  
FROM  
    orders;
```

	total_order
▶	21350

CALCULATE THE TOTAL REVENUE GENERATED FROM PIZZA SALES.

```
select round(sum(quantity*price),2) as total_revenue  
from order_details od  
join pizzas p  
on od.pizza_id=p.pizza_id;
```

	total_revenue
▶	817860.05

IDENTIFY THE HIGHEST-PRICED PIZZA.

```
SELECT
    pt.name, p.price
FROM
    pizza_types pt
    JOIN
    pizzas p ON pt.pizza_type_id = p.pizza_type_id
ORDER BY p.price DESC
LIMIT 1;
```

	name	price
▶	The Greek Pizza	35.95

IDENTIFY THE MOST COMMON PIZZA SIZE ORDERED.

```
SELECT
    COUNT(quantity) AS common_pizza, size
FROM
    order_details od
    JOIN
    pizzas p USING (pizza_id)
GROUP BY size
```

common_pizza	size
15385	M
18526	L
14137	S
544	XL
28	XXL

LIST THE TOP 5 MOST ORDERED PIZZA TYPES ALONG WITH THEIR QUANTITIES.

```
SELECT
    pizza_types.name, SUM(order_details.quantity) AS quantity
FROM
    pizza_types
    JOIN
    pizzas USING (pizza_type_id)
    JOIN
    order_details USING (pizza_id)
GROUP BY pizza_types.name
ORDER BY quantity DESC
LIMIT 5;
```

name	quantity
The Classic Deluxe Pizza	2453
The Barbecue Chicken Pizza	2432
The Hawaiian Pizza	2422
The Pepperoni Pizza	2418
The Thai Chicken Pizza	2371

FIND THE TOTAL QUANTITY OF EACH PIZZA CATEGORY ORDERED.


```
select category, sum(quantity) as quantity
from order_details
join pizzas
using(pizza_id)
join pizza_types
using(pizza_type_id)
group by category;
```

category	quantity
Classic	14888
Veggie	11649
Supreme	11987
Chicken	11050

DETERMINE THE DISTRIBUTION OF ORDERS BY HOUR OF THE DAY.

```
SELECT
    HOUR(orders.order_time) AS hour, COUNT(order_id)
FROM
    orders
GROUP BY HOUR(orders.order_time);
```

hour	count(order_id)
11	1231
12	2520
13	2455
14	1472
15	1468

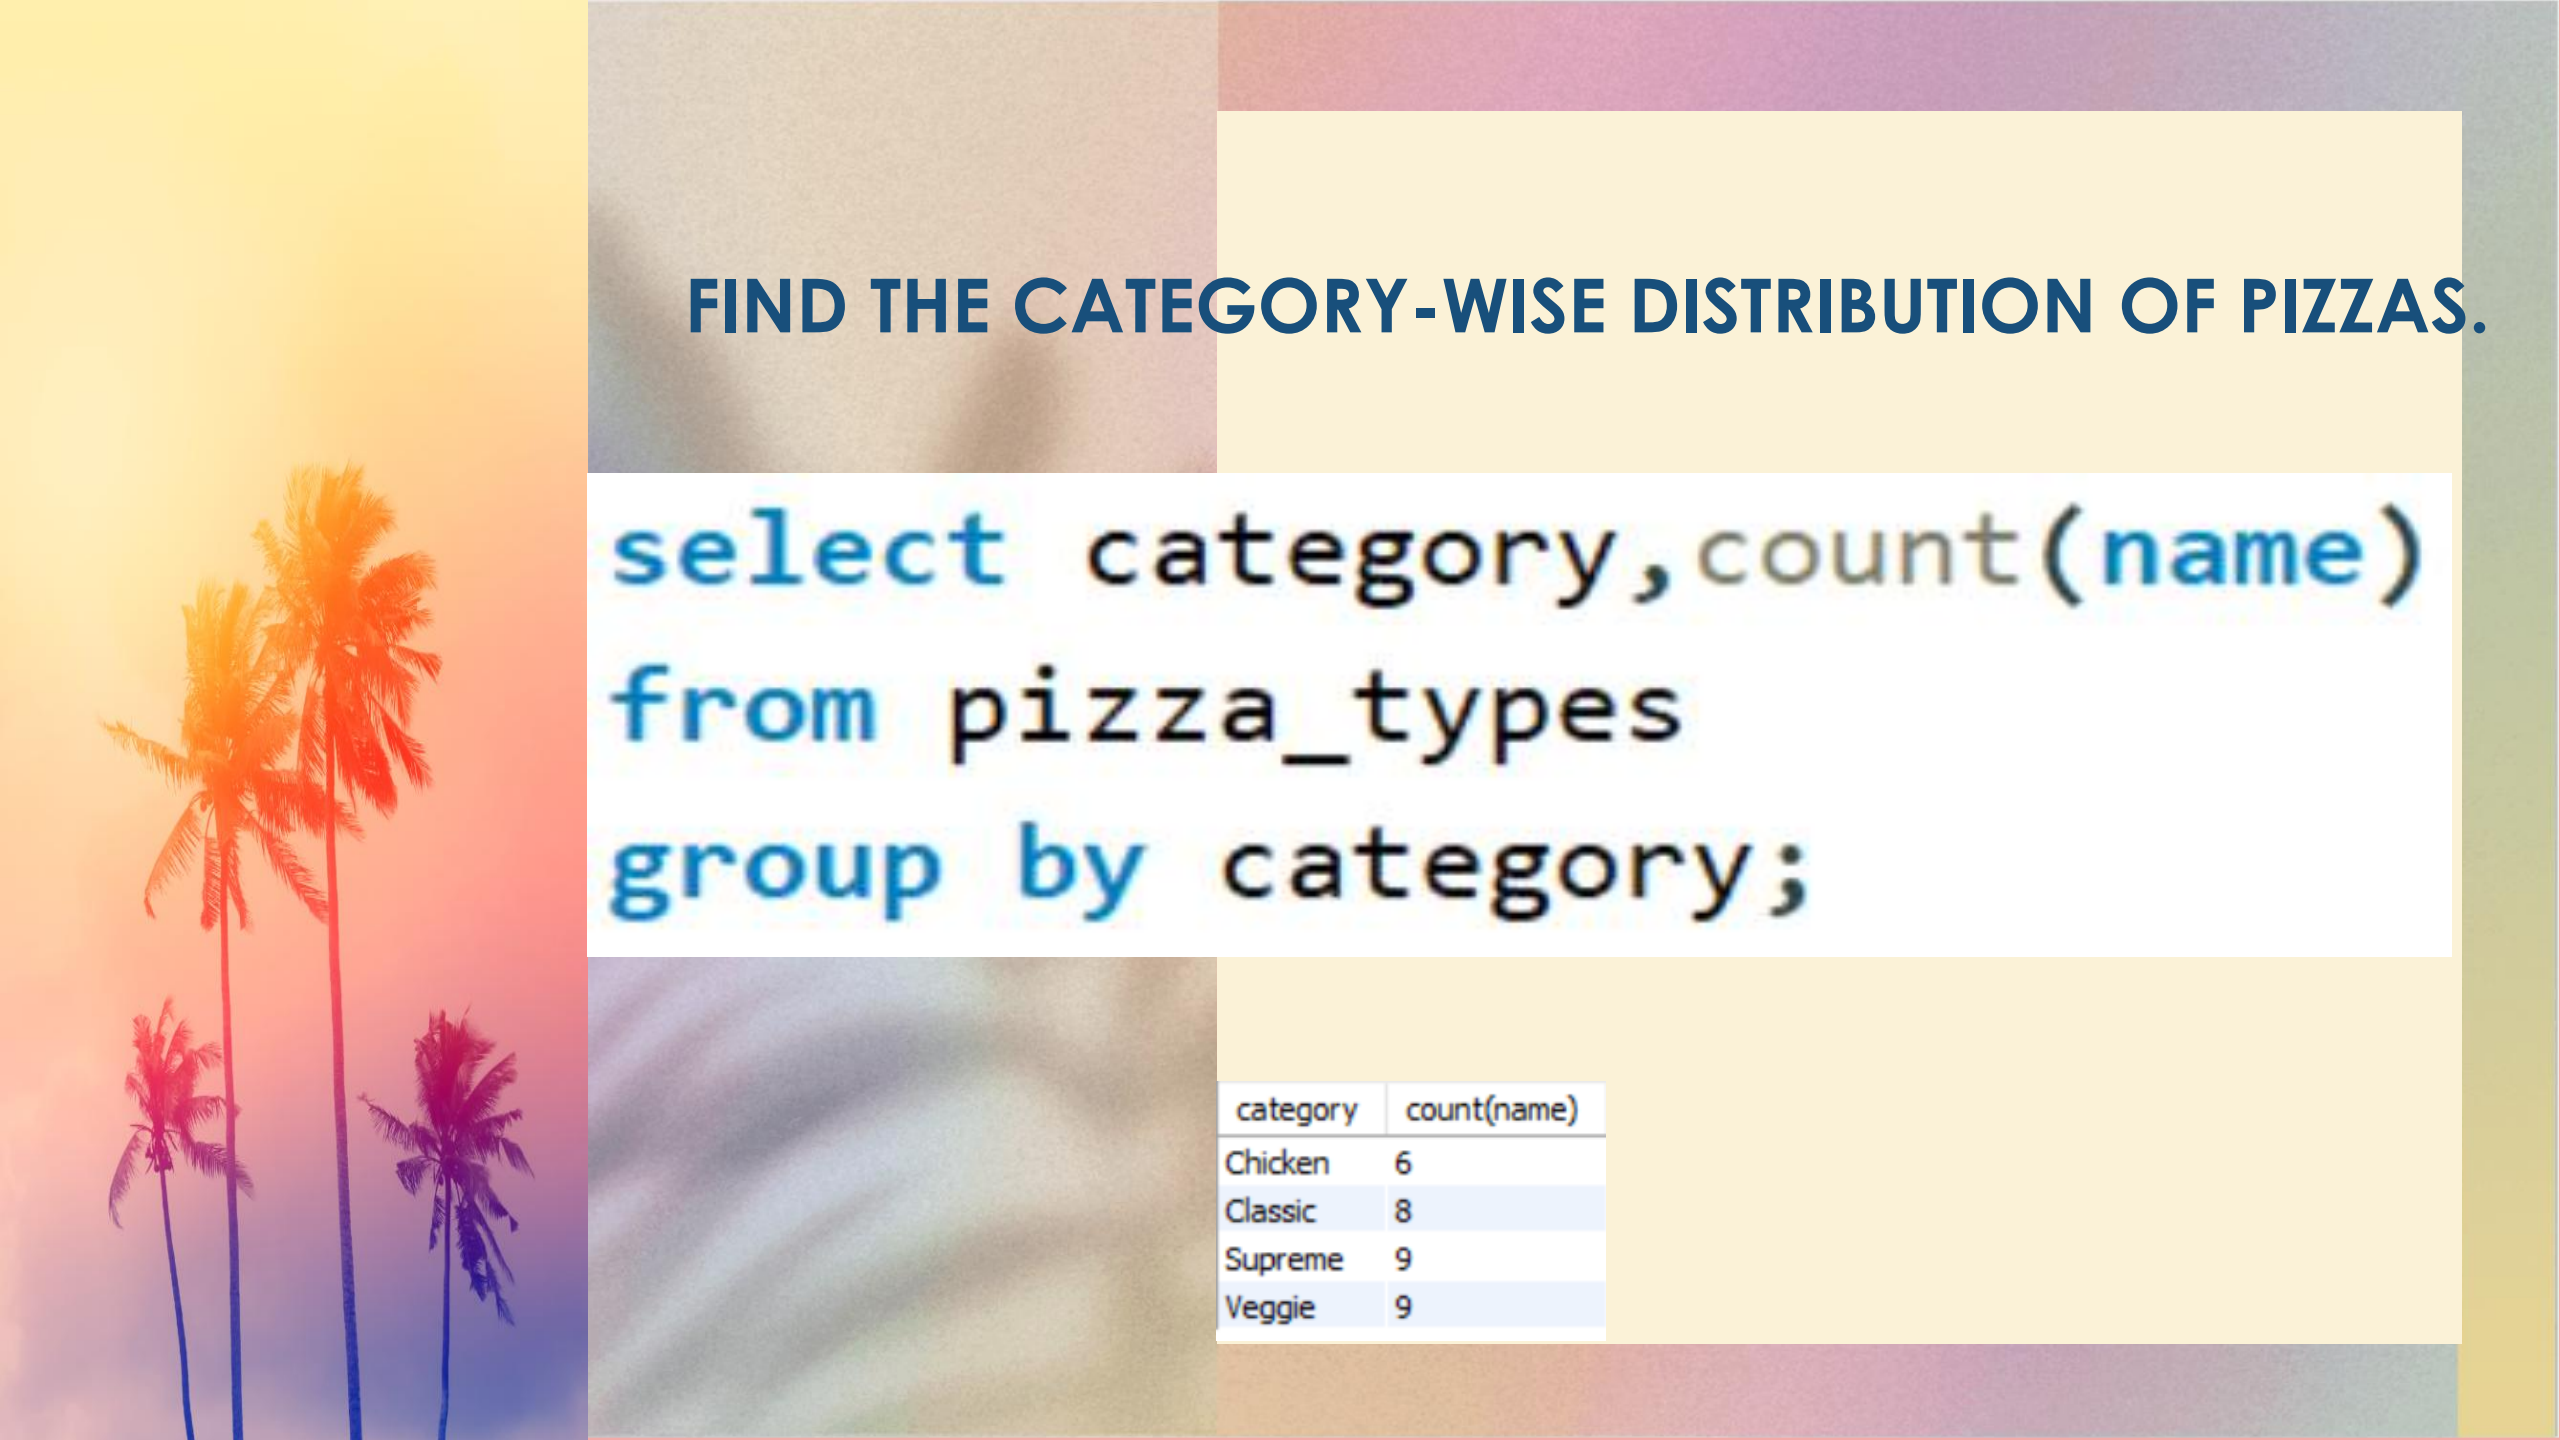

FIND THE CATEGORY-WISE DISTRIBUTION OF PIZZAS.

```
select category, count(name)
from pizza_types
group by category;
```

category	count(name)
Chicken	6
Classic	8
Supreme	9
Veggie	9

GROUP THE ORDERS BY DATE AND CALCULATE THE AVERAGE NUMBER OF PIZZAS ORDERED PER DAY

```
select avg(quantity)
from(select orders.order_date,sum(order_details.quantity)as quantity
from orders
join order_details
using(order_id)
group by orders.order_date)as order_quantity;
```

avg(quantity)
138.4749

DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE.

```
SELECT pizza_types.name,  
sum(order_details.quantity*pizzas.price)as revenue  
from pizza_types  
join pizzas  
on pizzas.pizza_type_id=pizza_types.pizza_type_id  
join order_details  
ON order_details.pizza_id=pizzas.pizza_id  
group by pizza_types.name  
order by revenue  
desc limit 3;
```

name	revenue
The Thai Chicken Pizza	43434.25
The Barbecue Chicken Pizza	42768
The California Chicken Pizza	41409.5

CALCULATE THE PERCENTAGE CONTRIBUTION OF EACH PIZZA TYPE TO TOTAL REVENUE.

```
select pizza_types.category,  
round(sum(order_details.quantity*pizzas.price)  
/  
sum(sum(order_details.quantity*pizzas.price)) over()*100,2) as percentage  
from pizza_types  
join pizzas  
using(pizza_type_id)  
join order_details  
using(pizza_id)  
group by pizza_types.category
```

category	revenue
Classic	26.91
Supreme	25.46
Chicken	23.96
Veggie	23.68

ANALYZE THE CUMULATIVE REVENUE GENERATED OVER TIME.

```
select order_date,  
sum(revenue) over (order by order_date)as cum_revenue  
from  
(select orders.order_date,  
sum(order_details.quantity*pizzas.price)as revenue  
from order_details  
join pizzas  
on order_details.pizza_id=pizzas.pizza_id  
join orders  
on orders.order_id=order_details.order_id  
group by orders.order_date)as sales;
```

order_date	cum_revenue
2015-01-01	2713.8500000000004
2015-01-02	5445.75
2015-01-03	8108.15
2015-01-04	9863.6
2015-01-05	11929.55

DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE FOR EACH PIZZA CATEGORY.

```
select name, revenue from
(select category, name, revenue,
rank() over(partition by category order by revenue desc) as rn
from
(select pizza_types.category, pizza_types.name,
sum((order_details.quantity)*pizzas.price) as revenue
from pizza_types join pizzas
on pizza_types.pizza_type_id=pizzas.pizza_type_id
join order_details
on order_details.pizza_id=pizzas.pizza_id
group by pizza_types.category, pizza_types.name) as a) as b
where rn<=3;
```

name	revenue
The Thai Chicken Pizza	43434.25
The Barbecue Chicken Pizza	42768
The California Chicken Pizza	41409.5
The Classic Deluxe Pizza	38180.5
The Hawaiian Pizza	32273.25

THANK YOU

NAZIR HUSSAIN

[github link](#)

[linkedin](#)