



Technical Specification Document

WhatsApp Business API

PT Dam Korporindo Digital



Version	Date	Author	Reviewer	Description
1.0	29 July 2024	Arfan	Nurul Hidayat	Initial
1.1	4 November 2024	Arfan	Nurul Hidayat	Add Flow & Catalog
1.2	6 November 2025	Arfan	Nurul Hidayat	Add doc filename on send template
1.3	23 Januari 2026	Ma'ruf	Nurul Hidayat	Added errors response scenarios for message sending

—

Table of Contents

Table of Contents	3
Topologi.....	5
Token.....	6
Sample Request.....	7
Response	7
Success (200).....	7
Failed (401)	7
Template.....	7
Template Status	8
Sending Templates	8
Create Template	8
Limitation	8
Request.....	8
Post Body	8
Body Properties.....	8
Template Components.....	9
Header	10
Header Text.....	10
Header Media.....	11
Body.....	12
Footer	12
Buttons	13

Phone Number Buttons.....	13
URL Buttons.....	14
Quick Reply Buttons	15
Response.....	16
Get Template	16
Request.....	17
Response.....	17
Template Messages	17
Text-Based Message Templates.....	18
Sample Request	18
Response.....	19
Media-Based Message Templates (image, document & video).....	19
Sample Request image & video with link	20
Sample Request image & video with media id	20
Sample Request document with link	21
Sample Request document with media id	22
Response.....	23
Interactive Message Templates	24
Sample Request	25
Response.....	26
Authentication Templates	27
Post Body	28
Response.....	28
Catalog Template Messages.....	29
Post Body	30

Sample Response	31
Carousel Templates	32
Post Body	32
Body Properties	34
Sample Response	35
Limited-Time Offer Templates	36
Post Body	36
Body Properties	37
Sample Response	39
Flow Template	39
Post Body	39
Sample Response	40
Send Text Message (non-template)	40
Link Preview	40
Text	40
Request	40
Post Body Parameters	41
Sample Response	41
Document	42
Post Body	42
Post Body Parameters	42
Sample Response	43
Image	43
Post Body	43


Post Body Parameters	43
Sample Response	44
Video	44
Post Body	44
Post Body Parameters	45
Sample Response	45
Interactive Call-to-Action URL Button Messages	46
Post Body	46
Post Body Parameters	46
Sample Response	48
Flow	49
Create Flow	50
Sample Request	50
Sample Response	51
Sample Response	51
Upload Json	52
Sample Request	52
Publish Flow	52
Sample Request	53
Delete Flow	53
Sample Request	53
Deprecate Flow	53
Sample Request	53
Get List Flow	53

Sample Request	54
Sample Response	54
Get Flow Detail	54
Sample Request	55
Sample Response	55
Get Flow Json	56
Sample Request	56
Upload Media	56
Supported Media Types	57
Audio.....	57
Document.....	57
Image	57
Sticker.....	58
Video.....	58
Example Request.....	58
Sample Request.....	59
Response	59
Download Media	59
Request	59
Example Request.....	59
Sample Request.....	60
Response	60
Add Sample Media	60
Sample Request.....	60

Response	60
Catalog.....	61
Insert Product - Batch.....	62
Sample Request	62
Update Product - Batch	63
Sample Request	63
Get Batch Status	63
Sample Request	63
Delete Product	64
Sample Request	65
Create Product Set.....	65
Sample Request	65
Detail Product Set.....	65
Update Product Set.....	65
Sample Request	65
Delete Product Set.....	66
Sample Request	66
Get Catalog	66
Sample Request	66
Get Product List.....	66
Sample Request	66
Get Product List.....	66
Sample Request	66
Webhook	66

Received Format.....	67
Property.....	67
Value Object	68
Messages Object.....	70
Statuses Objects	76
Error Codes.....	79
Error response syntax	79
Error Response Contents.....	79
Error Codes.....	80
Authorization Errors.....	80
Throttling Errors	81
Integrity Errors.....	83
Other Errors	83
Error Response	93
Invalid Parameter	93
Error Response Properties Description – Invalid Parameter :.....	94
Unregistered Template.....	95
Error Response Properties Description – Unregistered Template :.....	96
Missing Required Parameter	96
Error Response Properties Description – Missing Required Parameter :.....	97
Type Mismatch	99
Error Response Properties Description – Type Mismatch :.....	100

Topologi

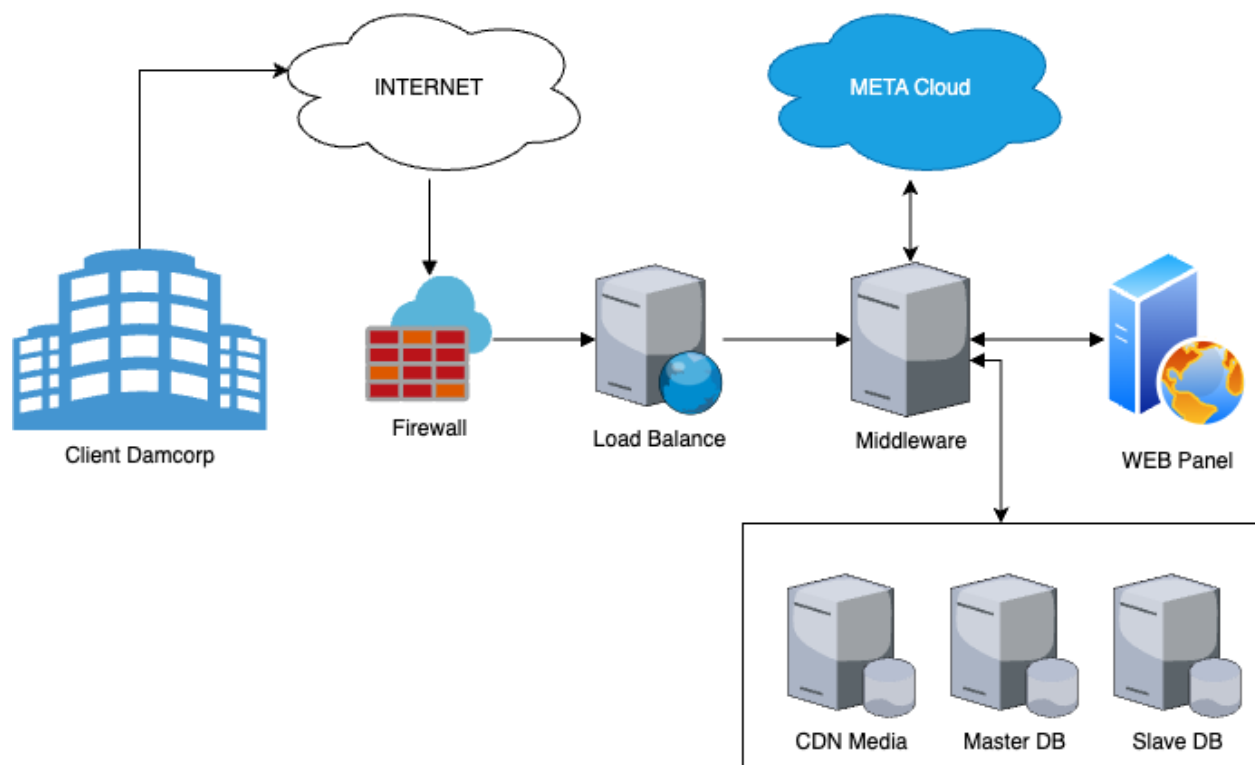

—

Page 10 of 10

Sample Request

```
curl -L -X POST 'https://waba.damcorp.id/v2/users/login' \
-H 'Authorization: Basic VHJpYWwgMThM3cjcm9rJA=='
```

POST

{{URL}}/v2/users/login

Send

Params

Authorization

Headers (9)

Body

Scripts

Settings

Cookies

Auth Type

Basic Auth

The authorization header will be automatically generated when you send the request. Learn more about [Basic Auth](#) authorization.

Heads up! These parameters hold sensitive data. To keep this data secure while working in a collaborative environment, we recommend using variables. Learn more about [variables](#).

Username

{{username}}

Password

{{password}}

Response

Success (200)

```
Body    Cookies    Headers (8)    Test Results (1/1)
```

PrettyRawPreviewVisualizeJSON

```
1  {
2    "users": [
3      {
4        "token": "eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJjbG1bnRjZCI6IkxJUUE4gU3lhcm1haCIsImV4IjoiYm9keS1lc3QwWmJUUqqJkc3IG6cK4",
5        "expires_after": "2023-11-15T03:28:25.696Z"
6      }
7    ],
8    "meta": {
9      "version": "1.5.06"
10   }
11 }
```

Failed (401)

A screenshot of the Chrome DevTools Network tab. The top bar shows the response status as '401 Unauthorized' with a time of '3.21 s' and a size of '195 B'. To the right is a 'Save as example' button. Below the status bar, there are tabs for 'Pretty', 'Raw', 'Preview', and 'Visualize', with 'Pretty' selected. To the right of these tabs is a 'Text' dropdown menu and a red icon. The main content area shows a single line of text: '1'.

Template

Template Status

Based on the outcome of category validation and template review, we set or change your template's `status` to one of the following values

- `APPROVED` — The template has passed template review and been approved, and can now be [sent in template messages](#).
- `PENDING` — The template passed category validation and is undergoing template review.
- `REJECTED` — The template failed category validation or template review. You can request the `rejected_reason` field on the template to get the reason.

Sending Templates

Use the Cloud API to send a template in a template message.

Create Template

Limitation

- The message template name field is limited to 512 characters.
- The message template content field is limited to 1024 characters.

Request

POST https://graph.damcorp.id/message_templates

Post Body

```
{
  "name": "<NAME>",
  "category": "<CATEGORY>",
  "language": "<LANGUAGE>",
  "components": [<COMPONENTS>]
}
```

Body Properties

Placeholder	Description	Sample Value
<code><NAME></code> <i>String</i>	Required. Template name. Maximum 512 characters.	<code>order_confirmation</code>
<code><CATEGORY></code> <i>Enum</i>	Required. Template category. (Marketing / Utility / Authorization	<code>UTILITY</code>
<code><LANGUAGE></code> <i>Enum</i>	Required. Template language and locale code .	<code>en_US</code>
<code><COMPONENTS></code> <i>Array of objects</i>	Required. Components that make up the template. See Template Components below.	See Template Components below.

Template Components

Templates are composed of various text, media, and interactive components, based on your business needs. Refer to the [Template Components](#) document for a list of all possible components and their requirements as well as samples and example queries.

When creating a template, define its components by assigning an array of component objects to the components property in the body of the request.

For example, here's an array containing a text body component with two variables and sample values, a phone number button component, and a URL button component:

```
[
  {
    "type": "BODY",
    "text": "Thank you for your order, {{1}}! Your confirmation number is {{2}}. If you have any questions, please use the buttons below to contact support. Thank you for being a customer!",
    "example": {
      "body_text": [
        [
          "Pablo", "860198-230332"
        ]
      ]
    }
  },
  {
    "type": "BUTTONS",
    "buttons": [
      {
        "type": "PHONE_NUMBER",
        "text": "Call",
        "phone_number": "15550051310"
      },
      {
        "type": "URL",
        "text": "Contact Support",
        "url": "https://www.luckyshrub.com/support"
      }
    ]
  }
]
```

Refer to the [Template Components](#) document for a list of all possible components and their requirements as well as samples and example queries.

Note that templates categorized as [AUTHENTICATION](#) have unique component requirements. See [Authentication Templates](#).

Header

Headers are optional components that appear at the top of template messages. Headers support text, media (images, videos, documents), and locations. Templates are limited to one header component.

Header Text

```
{
  "type": "HEADER",
  "format": "TEXT",
  "text": "<TEXT>",

  # Required if <TEXT> string contains variables
  "example": {
    "header_text": [
      "<HEADER_TEXT>"
    ]
  }
}
```

Properties

Placeholder	Description	Example Value
<HEADER_TEXT>	Sample header text.	Summer Sale
<TEXT>	Text to appear in template header when sent. Supports 1 variable. If the string contains a variable, you must include the example property and a sample variable value. 60 characters maximum.	Our {{1}} is on!

Header Media

Media headers can be an image, video, or a document such as a PDF.

```
{
  "type": "HEADER",
  "format": "<FORMAT>",
  "example": {
    "header_handle": [
      "<HEADER_HANDLE>"
    ]
  }
}
```

Properties

Placeholder	Description	Example Value
<FORMAT>	Indicates media asset type. Set to IMAGE , VIDEO , or DOCUMENT .	IMAGE
<HEADER_HANDLE>	Uploaded media asset handle. Use the Resumable Upload API to generate an asset handle.	4::aW...

Body

Body components are text-only components and are required by all templates. Templates are limited to one body component.

```
{
  "type": "BODY",
  "text": "<TEXT>",

  # Required if <TEXT> string contains variables
  "example": {
    "body_text": [
      [
        <BODY_TEXT>
      ]
    ]
  }
}
```

Properties

Placeholder	Description	Example Value
<BODY_TEXT>	Array of sample strings. Number of strings must match the number of variables included in the string.	"the end of August", "25OFF", "25%"
<TEXT>	Text string. Supports multiple variables. If the string contains variables, you must include the example property and sample variable values. 1024 characters maximum.	Shop now through {{1}} and use code {{2}} to get {{3}} off of all merchandise.

Footer

Footers are optional text-only components that appear immediately after the body component. Templates are limited to one footer component.

```
{
  "type": "FOOTER",
  "text": "<TEXT>"
}
```

Properties

Placeholder	Description	Example Value
<TEXT>	Text to appear in template footer when sent. 60 characters maximum.	Use the buttons below to manage your marketing subscriptions

Buttons

Buttons are optional interactive components that perform specific actions when tapped. Templates can have a mixture of up to 10 button components total, although there are limits to individual buttons of the same type as well as combination limits.

Phone Number Buttons

Phone number buttons call the specified business phone number when tapped by the app user. Templates are limited to one phone number button.

```
{
  "type": "PHONE_NUMBER",
  "text": "<TEXT>",
  "phone_number": "<PHONE_NUMBER>"
}
```

Properties

Placeholder	Description	Example Value
<PHONE_NUMBER>	Alphanumeric string. Business phone number to be (display phone number) called when the user taps the button. 20 characters maximum.	15550051310
<TEXT>	Button label text. 25 characters maximum.	Call

URL Buttons

URL buttons load the specified URL in the device's default web browser when tapped by the app user. Templates are limited to two URL buttons.

```
{
  "type": "URL",
  "text": "<TEXT>",
  "url": "<URL>",

  # Required if <URL> contains a variable
  "example": [
    "<EXAMPLE>"
  ]
}
```

Properties

Placeholder	Description	Example Value
<EXAMPLE>	URL of website. Supports 1 variable. If using a variable, add sample variable property to the end of the URL string. The URL loads in the device's default mobile web browser when the customer taps the button. 2000 characters maximum.	https://www.luckyshrub.com/shop?promo=summer2023
<TEXT>	Button label text. Supports 1 variable.	Shop Now

	If using a variable, must include the example property and a sample value. 25 characters maximum.	
<URL>	URL of website that loads in the device's default mobile web browser when the button is tapped by the app user. Supports 1 variable, appended to the end of the URL string. 2000 characters maximum.	https://www.luckyshrub.com/shop?promo={{1}}

Quick Reply Buttons

Quick reply buttons are custom text-only buttons that immediately message you with the specified text string when tapped by the app user. A common use case is a button that allows your customer to easily opt-out of any marketing messages.

Templates are limited to 10 quick reply buttons. If using quick reply buttons with other buttons, buttons must be organized into two groups: quick reply buttons and non-quick reply buttons. If grouped incorrectly, the API will return an error indicating an invalid combination.

Examples of valid groupings:

- Quick Reply, Quick Reply
- Quick Reply, Quick Reply, URL, Phone
- URL, Phone, Quick Reply, Quick Reply

Examples of invalid groupings:

- Quick Reply, URL, Quick Reply
- URL, Quick Reply, URL

When using the Cloud API or On-Premises API to send a template that has multiple quick reply buttons, you can use the index property to designate the order in which buttons appear in the template message.

```
{
  "type": "QUICK_REPLY",
  "text": "<TEXT>"
}
```

Properties

Placeholder	Description	Example Value
<TEXT>	Button label text. 25 characters maximum.	Unsubscribe

Response

Upon success, the API responds with the newly created template's ID, status, and category. There are three possible outcomes:

1. We agreed with the category you designated and the template is now undergoing template review (status is PENDING).
2. We disagreed with the category you designated (status is REJECTED)
3. We automatically approved the template (status is APPROVED). This is only possible for authentication templates with one-time password buttons.

```
{  
  "id": "<ID>",  
  "status": "<STATUS>",  
  "category": "<CATEGORY>"  
}
```

Response Properties

Placeholder	Description	Sample Value
<ID>	Template ID.	572279198452421
<STATUS>	Template status.	PENDING
<CATEGORY>	The template category that you designated, or that we assigned.	MARKETING

Get Template

Request

```
curl -L
'https://graph.damcorp.id/message_templates?name={{Template_Name}}' \
-H 'Authorization: Bearer {{TOKEN}}'
```

Response

```
{
  "data": [
    {
      "name": "tokoapp_dld",
      "components": [
        {
          "type": "HEADER",
          "format": "IMAGE"
        },
        {
          "type": "BODY",
          "text": "Welcome DBO Toko App versi Terbaru! Sekarang Toko Anda
dapat melakukan order bahan bangunan dengan cepat dan mudah."
        }
      ],
      "language": "id",
      "status": "REJECTED",
      "category": "MARKETING",
      "id": "890791741748514"
    }
  ],
  "paging": {
    "cursors": {
      "before": "MAZDZD",
      "after": "MjQZD"
    }
  }
}
```

Template Messages

Currently, you can send the following template types:

1. Text-based message templates
2. Media-based message templates
3. Interactive message templates
4. Location-based message templates
5. Authentication templates with one-time password buttons
6. Multi-Product Message templates

Text-Based Message Templates

Sample Request

```
curl -X POST \
  'https://waba.damcorp.id/v2/messages' \
  -H 'Authorization: Bearer ACCESS_TOKEN' \
  -H 'Content-Type: application/json' \
  -d '{
    "messaging_product": "whatsapp",
    "recipient_type": "individual",
    "to": "PHONE_NUMBER",
    "type": "template",
    "template": {
      "name": "TEMPLATE_NAME",
      "language": {
        "code": "LANGUAGE_AND_LOCALE_CODE"
      },
      "components": [
        {
          "type": "body",
          "parameters": [
            {
              "type": "text",
              "text": "text-string"
            },
            {
              "type": "currency",
              "currency": {
                "fallback_value": "VALUE",
                "code": "USD",
                "amount_1000": NUMBER
              }
            }
          ]
        }
      ]
    }
  }
```



```
    },
    {
      "type": "date_time",
      "date_time": {
        "fallback_value": "DATE"
      }
    }
  ]
}
]
```

Response

Use the ID listed to track your message status.

```
{
  "messaging_product": "whatsapp",
  "contacts": [{
    "input": "PHONE_NUMBER",
    "wa_id": "WHATSAPP_ID",
  }]
  "messages": [{
    "id": "ID",
  }]
}
```

Media-Based Message Templates (image, document & video)

To reduce the likelihood of errors and avoid unnecessary requests to your public server, we recommend that you upload your media assets and use their IDs when sending messages. You can use either link or media ID for Media.

Sample Request image & video with link

```
curl -X POST \
  'https://waba.damcorp.id/v2/messages' \
  -H 'Authorization: Bearer ACCESS_TOKEN' \
  -H 'Content-Type: application/json' \
  -d '{
    "messaging_product": "whatsapp",
    "recipient_type": "individual",
    "to": "PHONE_NUMBER",
    "type": "template",
    "template": {
      "name": "TEMPLATE_NAME",
      "language": {
        "code": "LANGUAGE_AND_LOCALE_CODE"
      },
      "components": [
        {
          "type": "header",
          "parameters": [
            {
              "type": "image/video",
              "image": {
                "link": "https://URL"
              }
            }
          ]
        },
        {
          "type": "body",
          "parameters": [
            {
              "type": "text",
              "text": "TEXT-STRING"
            },
            {
              "type": "currency",
              "currency": {
                "fallback_value": "VALUE",
                "code": "USD",
                "amount_1000": NUMBER
              }
            },
            {
              "type": "date_time",
              "date_time": {
                "fallback_value": "MONTH DAY, YEAR"
              }
            }
          ]
        }
      ]
    }
  }'
```

Sample Request image & video with media id

```
curl -X POST \
'https://waba.damcorp.id/v2/messages' \
-H 'Authorization: Bearer ACCESS_TOKEN' \
-H 'Content-Type: application/json' \
-d '{
  "messaging_product": "whatsapp",
  "recipient_type": "individual",
  "to": "PHONE_NUMBER",
  "type": "template",
  "template": {
    "name": "TEMPLATE_NAME",
    "language": {
      "code": "LANGUAGE_AND_LOCALE_CODE"
    },
    "components": [
      {
        "type": "header",
        "parameters": [
          {
            "type": "image/video",
            "image": {
              "id": "mediaid"
            }
          }
        ]
      },
      {
        "type": "body",
        "parameters": [
          {
            "type": "text",
            "text": "TEXT-STRING"
          },
          {
            "type": "currency",
            "currency": {
              "fallback_value": "VALUE",
              "code": "USD",
              "amount_1000": NUMBER
            }
          },
          {
            "type": "date_time",
            "date_time": {
              "fallback_value": "MONTH DAY, YEAR"
            }
          }
        ]
      }
    ]
  }
}'
```

Sample Request document with link

```
curl -X POST \
  'https://waba.damcorp.id/v2/messages' \
  -H 'Authorization: Bearer ACCESS_TOKEN' \
  -H 'Content-Type: application/json' \
  -d '{
    "messaging_product": "whatsapp",
    "recipient_type": "individual",
    "to": "PHONE_NUMBER",
    "type": "template",
    "template": {
      "name": "TEMPLATE_NAME",
      "language": {
        "code": "LANGUAGE_AND_LOCALE_CODE"
      },
      "components": [
        {
          "type": "header",
          "parameters": [
            {
              "type": "document",
              "document": {
                "link": "https://URL",
                "filename": "file name"
              }
            }
          ]
        },
        {
          "type": "body",
          "parameters": [
            {
              "type": "text",
              "text": "TEXT-STRING"
            },
            {
              "type": "currency",
              "currency": {
                "fallback_value": "VALUE",
                "code": "USD",
                "amount_1000": NUMBER
              }
            },
            {
              "type": "date_time",
              "date_time": {
                "fallback_value": "MONTH DAY, YEAR"
              }
            }
          ]
        }
      ]
    }
  }'
```

Sample Request document with media id

```
curl -X POST \
  'https://waba.damcorp.id/v2/messages' \
  -H 'Authorization: Bearer ACCESS_TOKEN' \
  -H 'Content-Type: application/json' \
  -d '{
    "messaging_product": "whatsapp",
    "recipient_type": "individual",
    "to": "PHONE_NUMBER",
    "type": "template",
    "template": {
      "name": "TEMPLATE_NAME",
      "language": {
        "code": "LANGUAGE_AND_LOCALE_CODE"
      },
      "components": [
        {
          "type": "header",
          "parameters": [
            {
              "type": "document",
              "document": {
                "id": "media id",
                "filename": "file name"
              }
            }
          ]
        },
        {
          "type": "body",
          "parameters": [
            {
              "type": "text",
              "text": "TEXT-STRING"
            },
            {
              "type": "currency",
              "currency": {
                "fallback_value": "VALUE",
                "code": "USD",
                "amount_1000": NUMBER
              }
            },
            {
              "type": "date_time",
              "date_time": {
                "fallback_value": "MONTH DAY, YEAR"
              }
            }
          ]
        }
      ]
    }
  }'
```

Response

Use the ID listed to track your message status.

```
{
  "messaging_product": "whatsapp",
  "contacts": [{
    "input": "PHONE_NUMBER",
    "wa_id": "WHATSAPP_ID",
  }]
  "messages": [{
    "id": "ID",
  }]
}
```

Interactive Message Templates

Interactive message templates expand the content you can send recipients beyond the standard message template and media messages template types to include interactive buttons using the components object. There are two types of predefined buttons:

Call-to-Action — Allows your customer to call a phone number and visit a website.

Quick Reply — Allows your customer to return a simple text message.

Sample Request

```
curl -X POST \
  'https://waba.damcorp.id/v2/messages' \
  -H 'Authorization: Bearer ACCESS_TOKEN' \
  -H 'Content-Type: application/json' \
  -d '{
    "messaging_product": "whatsapp",
    "recipient_type": "individual",
    "to": "PHONE_NUMBER",
    "type": "template",
    "template": {
      "name": "TEMPLATE_NAME",
      "language": {
        "code": "LANGUAGE_AND_LOCALE_CODE"
      },
      "components": [
        {
          "type": "header",
          "parameters": [
            {
              "type": "image",
              "image": {
                "link": "http(s)://URL"
              }
            }
          ]
        },
        {
          "type": "body",
          "parameters": [
            {
              "type": "text",
              "text": "TEXT_STRING"
            },
            {
              "type": "currency",
              "currency": {
                "fallback_value": "VALUE",
                "code": "USD",
```

```

        "amount_1000": NUMBER
    }
},
{
    "type": "date_time",
    "date_time": {
        "fallback_value": "MONTH DAY, YEAR"
    }
}
]
},
{
    "type": "button",
    "sub_type": "quick_reply",
    "index": "0",
    "parameters": [
        {
            "type": "payload",
            "payload": "PAYLOAD"
        }
    ]
},
{
    "type": "button",
    "sub_type": "quick_reply",
    "index": "1",
    "parameters": [
        {
            "type": "payload",
            "payload": "PAYLOAD"
        }
    ]
}
]
}
}'

```


Response

Use the ID listed to track your message status.

```
{
  "messaging_product": "whatsapp",
  "contacts": [{
    "input": "PHONE_NUMBER",
    "wa_id": "WHATSAPP_ID",
  }]
  "messages": [{
    "id": "ID",
  }]
}
```

Authentication Templates

Post Body

```
{
  "messaging_product": "whatsapp",
  "recipient_type": "individual",
  "to": "<CUSTOMER_PHONE_NUMBER>",
  "type": "template",
  "template": {
    "name": "<TEMPLATE_NAME>",
    "language": {
      "code": "<TEMPLATE_LANGUAGE_CODE>"
    },
    "components": [
      {
        "type": "body",
        "parameters": [
          {
            "type": "text",
            "text": "<ONE-TIME PASSWORD>"
          }
        ]
      },
      {
        "type": "button",
        "sub_type": "url",
        "index": "0",
        "parameters": [
          {
            "type": "text",
            "text": "<ONE-TIME PASSWORD>"
          }
        ]
      }
    ]
  }
}
```

Response

```
{
  "messaging_product": "whatsapp",
  "contacts": [
    {
      "input": "<INPUT>",
      "wa_id": "<WA_ID>"
    }
  ],
  "messages": [
    {
      "id": "<ID>"
    }
  ]
}
```

Response Content

Placeholder	Description	Sample Value
<code><INPUT></code> <i>String</i>	The customer phone number that the message was sent to. This may not match <code>wa_id</code> .	+16315551234
<code><WA_ID></code> <i>String</i>	WhatsApp ID of the customer who the message was sent to. This may not match <code>input</code> .	+16315551234
<code><ID></code> <i>String</i>	WhatsApp message ID. You can use the ID listed to track your message status.	HBgLMTY1MDM4Nzk0MzkVAgARGB I3N0EyQUJDMjFEQzZCQUMzODMA

Catalog Template Messages

Post Body

```
{
  "messaging_product": "whatsapp",
  "recipient_type": "individual",
  "to": "<TO>",
  "type": "template",
  "template": {
    "name": "<NAME>",
    "language": {
      "code": "<CODE>"
    },
    "components": [

      /* Body component required if template uses variables, otherwise
omit */
      {
        "type": "body",
        "parameters": [
          {
            "type": "<TYPE>",
            "text": "<TEXT>"
          }
        ]
      },
      {
        "type": "button",
        "sub_type": "CATALOG",
        "index": 0,
        "parameters": [
          {
            "type": "action",
            "action": {
              "thumbnail_product_retailer_id":
"<THUMBNAIL_PRODUCT_RETAILER_ID>"
            }
          }
        ]
      }
    ]
  }
}
```

Properties

Placeholder	Description	Sample Value
<code><CODE></code> <i>String</i>	Required. Template language and locale code .	<code>en_US</code>
<code><NAME></code> <i>String</i>	Required. Template name.	<code>intro_catalog_offer</code>
<code><THUMBNAIL_PRODUCT_RETAILER_ID></code> <i>String</i>	Optional. Item SKU number. Labeled as Content ID in the Commerce Manager. The thumbnail of this item will be used as the message's header image. If the <code>parameters</code> object is omitted, the product image of the first item in your catalog will be used.	<code>21c20305pt</code>
<code><TEXT></code> <i>String</i>	Required if template uses variables. Template variable.	<code>100</code>
<code><TO></code> <i>String</i>	Required. Customer phone number.	<code>+16505551234</code>
<code><TYPE></code> <i>String</i>	Required if template uses variables. Template variable type.	<code>text</code>

Sample Response

```
{
  "messaging_product": "whatsapp",
  "contacts": [
    {
      "input": "+16505551234",
      "wa_id": "16505551234"
    }
  ],
  "messages": [
    {
```

```

    "id": "HBgLMTY1MDM4Nzk0MzkVAgARGBI5RkEwM0EyODFEQzQ2NDYzQTMA"
  }
]
}

```

Carousel Templates

Post Body

```

{
  "messaging_product": "whatsapp",
  "recipient_type": "individual",
  "to": "<TO>",
  "type": "template",
  "template": {
    "name": "<TEMPLATE_NAME>",
    "language": {
      "code": "<TEMPLATE_LANGUAGE_CODE>"
    },
    "components": [

      /* Message bubble; can omit if template message bubble has no
      variables */
      {
        "type": "BODY",
        "parameters": [
          {
            "type": "TEXT",
            "text": "<BUBBLE_TEXT_VARIABLE>"
          }
        ]
      },

      /* Carousel cards */
      {
        "type": "CAROUSEL",
        "cards": [

          /* Card one */
          {
            "card_index": <CARD_INDEX>,
            "components": [
              {
                "type": "HEADER",
                "parameters": [
                  {
                    /* Required if template uses image header,
                    otherwise omit */

```

```

        "type": "IMAGE",
        "image": {
            "id": "<HEADER_ASSET_ID>"
        }

        /* Required if template uses video header,
otherwise omit */
        "type": "VIDEO",
        "video": {
            "id": "<HEADER_ASSET_ID>"
        }
    }
    ],
},
/* Can be omitted if card body text in template has no
variables */
{
    "type": "BODY",
    "parameters": [
        {
            "type": "text",
            "text": "<CARD_BODY_VARIABLE>"
        }
    ]
},
{
    "type": "BUTTON",
    "sub_type": "QUICK_REPLY",
    "index": "<BUTTON_INDEX>",
    "parameters": [
        {
            "type": "PAYLOAD",
            "payload": "<QUICK_REPLY_BUTTON_PAYLOAD>"
        }
    ]
},
{
    "type": "BUTTON",
    "sub_type": "URL",
    "index": "BUTTON_INDEX",
    "parameters": [
        {
            "type": "PAYLOAD",
            "payload": "<URL_BUTTON_PAYLOAD>"
        }
    ]
}
}

```

```

    ],
    },
    ],
    },
    /* Addt'l cards would follow, using the same structure as the
    card above. Must
    define a card for every card that the template uses. */

    ]
}
}
}

```

Body Properties

Placeholder	Description	Example Value
<BUBBLE_TEXT_VARIABLE> <i>String</i>	Required if the message bubble uses variables. Message bubble text variable. There is no maximum character limit on this value, but counts against the message bubble limit of 1024 characters.	200FF
<BUTTON_INDEX> <i>Integer</i>	Required. Zero-indexed order in which button appears at the bottom of the template message. 0 indicates the first button, 1 indicates second button, etc.	0
<CARD_INDEX> <i>Integer</i>	Required. Zero-indexed order in which card appears within the card carousel. 0 indicates first card, 1 indicates second card, etc.	0
<CARD_BODY_VARIABLE> <i>String</i>	Required if card body text uses a variable. Card body text variable. There is no maximum character limit on this value, but counts against the card body text limit of 160 characters.	200FF
<HEADER_ASSET_ID> <i>Media asset handle</i>	Required.	24230790383178626

	Uploaded media asset ID. Use the /media endpoint to generate an ID.	
<code><QUICK_REPLY_BUTTON_PAYLOAD></code> <i>String</i>	Optional. Value to be included in messages webhooks (<code>messages.button.payload</code>) when the button is tapped.	59NqSd
<code><TEMPLATE_LANGUAGE_CODE></code> <i>Enum</i>	Required. Language and locale code of the template to be sent in the template message.	en_US
<code><TEMPLATE_NAME></code> <i>String</i>	Required. Name of the template to be sent in the template message.	summer_carousel_promo_2023
<code><TO></code> <i>String</i>	Required. Phone number of customer who the template message should be sent to.	16505555555
<code><URL_BUTTON_PAYLOAD></code> <i>String</i>	Required if the URL button uses a variable. URL button variable value.	last_chance_2023

Sample Response

```
{
  "messaging_product": "whatsapp",
  "contacts": [
    {
      "input": "16505555555",
      "wa_id": "1650555555"
    }
  ],
}
```

```

    "messages": [
      {
        "id": "HBgLMTY1MDUwNzY1MjAVAgARGBI5QTNDQTVCM0Q0Q0Q2RTY3RTcA"
      }
    ]
  }
}

```

Limited-Time Offer Templates

Post Body

```

{
  "messaging_product": "whatsapp",
  "recipient_type": "individual",
  "to": "<CUSTOMER_PHONE_NUMBER>",
  "type": "template",
  "template": {
    "name": "<TEMPLATE_NAME>",
    "language": {
      "code": "<TEMPLATE_LANGUAGE_CODE>"
    },
    "components": [

      /* Required if template uses header, otherwise omit */
      {
        "type": "header",
        "parameters": [
          {
            "type": "<HEADER_TYPE>",
            "<HEADER_TYPE>": {
              "id": "<HEADER_ASSET_ID>"
            }
          }
        ]
      },

      /* Body and params required if templates uses body params,
      otherwise omit */
      {
        "type": "body",
        "parameters": [
          <BODY_VARIABLES>
        ]
      },

      /* Required if template uses offer expiration details, otherwise
      omit */
      {

```

```

    "type": "limited_time_offer",
    "parameters": [
      {
        "type": "limited_time_offer",
        "limited_time_offer": {
          "expiration_time_ms": <EXPIRATION_TIME>
        }
      }
    ]
  },

  /* Copy code button optional */
  {
    "type": "button",
    "sub_type": "copy_code",
    "index": 0,
    "parameters": [
      {
        "type": "coupon_code",
        "coupon_code": "<OFFER_CODE>"
      }
    ]
  },

  /* Required */
  {
    "type": "button",
    "sub_type": "url",
    "index": <URL_BUTTON_INDEX>,
    "parameters": [
      {
        "type": "text",
        "text": "<URL_VARIABLE>"
      }
    ]
  }
]
}
}'

```

Body Properties

Placeholder	Description	Example Value
<BODY_VARIABLES> <i>Array of objects</i>	Required if template body text uses variables.	<pre>{ "type": "text", "text": "Pablo" }, { "type": "text", "text": "Pablo" }</pre>

	Body text variable values. Define each variable as an individual object.	<code>e": "text", "text": "CARIBE25"}</code>
<code><CUSTOMER_PHONE_NUMBER></code> <i>String</i>	Required. Phone number of customer who the template message should be sent to.	<code>+16505555555</code>
<code><EXPIRATION_TIME></code> <i>Unix timestamp</i>	Required. Offer code expiration time as a UNIX timestamp in milliseconds.	<code>1698562800000</code>
<code><HEADER_ASSET_ID></code> <i>Media asset ID</i>	Required. Uploaded media asset ID. Use the /media endpoint to generate an ID.	<code>1602186516975000</code>
<code><HEADER_TYPE></code> <i>String</i>	Required. Header type used by the template. Values can be <code>image</code> or <code>video</code>.	<code>image</code>
<code><OFFER_CODE></code> <i>String</i>	Required if template uses a copy code button. Offer code. Maximum 15 characters.	<code>CARIBE25</code>
<code><TEMPLATE_LANGUAGE_CODE></code> <i>Enum</i>	Required. The template's language and locale code.	<code>en_US</code>
<code><TEMPLATE_NAME></code> <i>String</i>	Required. The template's name.	<code>limited_time_offer_caribbean_pkg_2023</code>
<code><URL_BUTTON_INDEX></code> <i>Integer</i>	Required. URL button index. If the template uses a copy code button, value must be <code>1</code>. If the template does not use a copy code button, the value must be <code>0</code>.	<code>1</code>
<code><URL_VARIABLE></code> <i>String</i>	Required if URL uses a variable. URL variable value.	<code>n3mtql</code>

	No maximum but value counts against URL string maximum of 2000 characters.	
--	--	--

Sample Response

```
{
  "messaging_product": "whatsapp",
  "contacts": [
    {
      "input": "16505555555",
      "wa_id": "16505555555"
    }
  ],
  "messages": [
    {
      "id": "HBgLMTY1MDUwNzY1MjAVAgARGBI5QTNDQTVCM0Q0Q0Q2RTY3RTcA"
    }
  ]
}
```

Flow Template

Post Body

```
{
  "messaging_product": "whatsapp",
  "recipient_type": "individual",
  "to": "PHONE_NUMBER",
  "type": "template",
  "template": {
    "name": "TEMPLATE_NAME",
    "language": {
      "code": "LANGUAGE_AND_LOCALE_CODE"
    },
    "components": [
      {
        "type": "button",
        "sub_type": "flow",
        "index": "0",
        "parameters": [
          {
            "type": "action",
            "action": {
              "flow_token": "FLOW_TOKEN",    //optional, default is
"unused"
              "flow_action_data": {
                ...
              }    // optional, json object with the data payload for
the first screen
            }
          }
        ]
      }
    ]
  }
}
```

```

    }
  ]
}
]
}
}

```

Sample Response

```

{
  "messaging_product": "whatsapp",
  "contacts": [
    {
      "input": "<phone-number>",
      "wa_id": "<phone-number>"
    }
  ],
  "messages": [
    {
      "id": "<message-id>"
    }
  ]
}

```

Send Text Message (non-template)

Link Preview

You can have the WhatsApp client attempt to render a preview of the first URL in the body text string, if it contains one. URLs must begin with <http://> or <https://>. If multiple URLs are in the body text string, only the first URL will be rendered.

If omitted, or if unable to retrieve a link preview, a clickable link will be rendered instead.

Text

A text message can be a max of 4096 characters long.

Request

```

{
  "messaging_product": "whatsapp",
  "recipient_type": "individual",
  "to": "<WHATSAPP_USER_PHONE_NUMBER>",
  "type": "text",
  "text": {
    "preview_url": <ENABLE_LINK_PREVIEW>,

```

```

    "body": "<BODY_TEXT>"
  }
}

```

Post Body Parameters

Placeholder	Description	Example Value
<BODY_TEXT> <i>String</i>	Required. Message body text. Supports URLs. Maximum 4096 characters.	As requested, here's the link to our latest product: https://www.meta.com/quest/quest-3/
<ENABLE_LINK_PREVIEW> <i>Boolean</i>	Optional. Set to <code>true</code> to have the WhatsApp client attempt to render a link preview of any URL in the body text string. See Link Preview below.	<code>true</code>
<WHATSAPP_USER_PHONE_NUMBER> <i>String</i>	Required. WhatsApp user phone number.	<code>+16505551234</code>

Sample Response

```

{
  "messaging_product": "whatsapp",
  "contacts": [
    {
      "input": "+16505551234",
      "wa_id": "16505551234"
    }
  ],
  "messages": [
    {
      "id": "HBgLMTY0NjcwNDMlOTUVAgARGBI1RjQyNUE3NEYxMzAzMzQ5MkEA"
    }
  ]
}

```

Document

Post Body

```

{
  "messaging_product": "whatsapp",
  "recipient_type": "individual",

```

```

    "to": "<WHATSAPP_USER_PHONE_NUMBER>",
    "type": "document",
    "document": {
      "id" : "<MEDIA_ID>", /* Only if using uploaded media */
      "link": "<MEDIA_URL>", /* Only if linking to your media */
      "caption": "<DOCUMENT_CAPTION>",
      "filename": "<DOCUMENT_FILENAME>"
    }
  }
}

```

Post Body Parameters

Placeholder	Description	Example Value
<DOCUMENT_CAPTION> <i>String</i>	Optional. Document caption text.	Lucky Shrub Invoice
<DOCUMENT_FILENAME> <i>String</i>	Optional. Document filename, with extension. The WhatsApp client will use an appropriate file type icon based on the extension.	lucky-shrub-invoice.pdf
<MEDIA_ID> <i>String</i>	Required if using an uploaded media asset (recommended). Uploaded media asset ID.	430519053060512
<DOCUMENT_FILENAME> <i>String</i>	Optional. Document filename, with extension. The WhatsApp client will use an appropriate file type icon based on the extension.	lucky-shrub-invoice.pdf
<MEDIA_URL> <i>String</i>	Required if linking to your media asset (not recommended). URL of image asset on your public server. For better performance, we recommend that you upload your media asset instead.	https://www.luckyshrub.com/invoices/FmOzfD9cKf/lucky-shrub-invoice.pdf.png
<WHATSAPP_USER_PHONE_NUMBER> <i>String</i>	Required. WhatsApp user phone number.	+16505551234

Sample Response

```
{
  "messaging_product": "whatsapp",
  "contacts": [
    {
      "input": "+16505551234",
      "wa_id": "16505551234"
    }
  ],
  "messages": [
    {
      "id": "HBgLMTY0NjcwNDM1OTUVAgARGBI1RjQyNUE3NEYxMzAzMzQ5MkEA"
    }
  ]
}
```

Image

Post Body

```
{
  "messaging_product": "whatsapp",
  "recipient_type": "individual",
  "to": "<WHATSAPP_USER_PHONE_NUMBER>",
  "type": "image",
  "image": {
    "id" : "<MEDIA_ID>", /* Only if using uploaded media */
    "link": "<MEDIA_URL>", /* Only if linking to your media */
    "caption": "<IMAGE_CAPTION_TEXT>"
  }
}
```

Post Body Parameters

Placeholder	Description	Example Value
<code><IMAGE_CAPTION_TEXT></code> <i>String</i>	Optional. Image caption text. Maximum 1024 characters.	The best succulent ever?
<code><MEDIA_ID></code> <i>String</i>	Required if using an uploaded media asset (recommended). Uploaded media asset ID.	1479537139650973

<code><MEDIA_URL></code> <i>String</i>	Required if linking to your media asset (not recommended) URL of image asset on your public server. For better performance, we recommend that you upload your media asset instead.	https://www.luckyshrub.com/assets/succulents/aloe.png
<code><WHATSAPP_USER_PHONE_NUMBER></code> <i>String</i>	Required. WhatsApp user phone number.	+16505551234

Sample Response

```
{
  "messaging_product": "whatsapp",
  "contacts": [
    {
      "input": "+16505551234",
      "wa_id": "16505551234"
    }
  ],
  "messages": [
    {
      "id": "HBgLMTY0NjcwNDM1OTUVAgARGBI1RjQyNUE3NEYxMzAzMzQ5MkEA"
    }
  ]
}
```

Video

Video messages display a thumbnail preview of a video image with an optional caption. When the WhatsApp user taps the preview, it loads the video and displays it to the user.

Post Body

```
{
  "messaging_product": "whatsapp",
  "recipient_type": "individual",
  "to": "{{wa-user-phone-number}}",
  "type": "video",
  "video": {
    "id": "<MEDIA_ID>", /* Only if using uploaded media */
    "link": "<MEDIA_URL>", /* Only if linking to your media */
    "caption": "<VIDEO_CAPTION_TEXT>"
  }
}
```

Post Body Parameters

Placeholder	Description	Example Value
<code><VIDEO_CAPTION_TEXT></code> <i>String</i>	Optional. Video caption text. Maximum 1024 characters.	<code>A succulent eclipse!</code>
<code><MEDIA_ID></code> <i>String</i>	Required if using an uploaded media asset (recommended). Uploaded media asset ID.	<code>1166846181421424</code>
<code><MEDIA_URL></code> <i>String</i>	Required if linking to your media asset (not recommended) URL of video asset on your public server. For better performance, we recommend that you upload your media asset instead.	<code>https://www.luckyshrub.com/assets/lucky-shrub-eclipse-viewing.mp4</code>
<code><WHATSAPP_USER_PHONE_NUMBER></code> <i>String</i>	Required. WhatsApp user phone number.	<code>+16505551234</code>

Sample Response

```
{
  "messaging_product": "whatsapp",
  "contacts": [
    {
      "input": "+16505551234",
      "wa_id": "16505551234"
    }
  ],
  "messages": [
    {
      "id": "HBgLMTY0NjcwNDMlOTUVAgARGBI1RjQyNUE3NEYxMzAzMzQ5MkEA"
    }
  ]
}
```

Interactive Call-to-Action URL Button Messages

Post Body

```
{
  "messaging_product": "whatsapp",
  "recipient_type": "individual",
```

```

    "to": "<CUSTOMER_PHONE_NUMBER>",
    "type": "interactive",
    "interactive": {
      "type": "cta_url",

      /* Header optional */
      "header": {
        "type": "text",
        "text": "<HEADER_TEXT>"
      },

      /* Body optional */
      "body": {
        "text": "<BODY_TEXT>"
      },

      /* Footer optional */
      "footer": {
        "text": "<FOOTER_TEXT>"
      },
      "action": {
        "name": "cta_url",
        "parameters": {
          "display_text": "<BUTTON_TEXT>",
          "url": "<BUTTON_URL>"
        }
      }
    }
  }
}

```

Post Body Parameters

Placeholder	Description	Sample Value
<CUSTOMER_PHONE_NUMBER> <i>String</i>	Required. The WhatsApp ID or phone number of the customer the message is being sent to.	+15558543153
<HEADER_TEXT> <i>String</i>	Optional. Header text.	Available Dates

<code><BODY_TEXT></code> <i>String</i>	Required. Message body text.	Tap the button below to see available dates.
<code><FOOTER_TEXT></code> <i>String</i>	Optional. Message footer text.	Dates subject to change.
<code><BUTTON_TEXT></code> <i>String</i>	Required. Button text.	See Dates
<code><BUTTON_URL></code> <i>String</i>	Required. URL to load in the device's default web browser when tapped by the WhatsApp user.	https://www.luckyshrub.com?clickID=kqDGWd24Q5TRwoEQTICY7W1JKoXvaZOXWAS7h1P76s0R7Paec4

—

Sample Response

```
{
  "messaging_product": "whatsapp",
  "contacts": [
    {
      "input": "+16505551234",
      "wa_id": "16505551234"
    }
  ],
  "messages": [
    {
      "id": "HBgLMTY0NjcwNDM1OTUVAgARGBI1RjQyNUE3NEYxMzAzMzQ5MkEA"
    }
  ]
}
```

Flow

Create Flow

New Flows are created in **DRAFT** status. You can then make changes to the Flow by uploading an updated JSON file.

Sample Request

```
curl --location 'https://graph.damcorp.id/flows/' \
--header 'Authorization: Bearer {{TOKEN-V2}}' \
--header 'Content-Type: application/json' \
--data '{
  "name": "exchange register 6",
  "categories": [
    "SIGN_UP"
  ],
  "endpoint_uri": "https://flow-endpoint.damcorp.id"
}'
```

Parameter	Description	Optional
<code>name</code>	Flow name	
<code>string</code>		

<code>categories</code> <i>array</i>	A list of Flow categories. Multiple values are possible, but at least one is required. Choose the values which represent your business use case. The list of values: • <code>SIGN_UP</code> • <code>SIGN_IN</code> • <code>APPOINTMENT_BOOKING</code> • <code>LEAD_GENERATION</code> • <code>CONTACT_US</code> • <code>CUSTOMER_SUPPORT</code> • <code>SURVEY</code> • <code>OTHER</code>	
<code>clone_flow_id</code> <i>string</i>	ID of source Flow to clone. You must have permission to access the specified Flow.	✓
<code>endpoint_uri</code> <i>string</i>	The URL of the WA Flow Endpoint. Starting from Flow JSON version 3.0 this property should be specified only via API. Do not provide this field if you are cloning a Flow with Flow JSON version below 3.0.	✓

Sample Response

```
{
  "id": "<Flow-ID>"
}
```

Sample Response

Every update request will return validation errors in the Flow JSON, if any.

```
{
  "success": true,
  "validation_errors": [
    {
      "error": "INVALID_PROPERTY",
      "error_type": "JSON_SCHEMA_ERROR",
      "message": "The property \"initial-text\" cannot be specified at
\\\"$root/screens/0/layout/children/2/children/0\\\".",
      "line_start": 46,
      "line_end": 46,
      "column_start": 17,
      "column_end": 30
    }
  ]
}
```

Upload Json

Sample Request

```
curl --location
'https://graph.damcorp.id/flows/910292587462530/assets' \
--header 'Authorization: Bearer {{TOKEN-V2}}' \
--header 'Content-Type: application/json' \
--data-binary '@/Users/damcorp/Downloads/test.json'
```

Publish Flow

This request updates the status of the Flow to "PUBLISHED". You can either edit this flow in the future and turn it back to the "DRAFT" state, or create a new flow by specifying the existing Flow ID as the `clone_flow_id` parameter.

You can publish your Flow once you have ensured that:

- All validation errors and [publishing checks](#) have been resolved.
- The Flow meets the [design principles](#) of WhatsApp Flows
- The Flow complies with [WhatsApp Terms of Service](#), the [WhatsApp Business Messaging Policy](#) and, if applicable, the [WhatsApp Commerce Policy](#)

Sample Request

```
curl --location --request POST
'https://graph.damcorp.id/flows/778553170270164/publish' \
```

```
--header 'Authorization: Bearer {{TOKEN-V2}}' \
--data ''
```

Delete Flow

While a Flow is in **DRAFT** status, it can be deleted. Use this request for that purpose.

Sample Request

```
curl --location --request DELETE
'https://graph.damcorp.id/flows/910292587462530' \
--header 'Authorization: Bearer {{TOKEN-V2}}' \
--data ''
```

Deprecate Flow

Once a Flow is published, it cannot be modified or deleted, but can be marked as deprecated.

Sample Request

```
curl -X POST '{BASE-URL}/{FLOW-ID}/deprecate' \
--header 'Authorization: Bearer {ACCESS-TOKEN}'
```

Get List Flow

To retrieve a list of Flows under a WhatsApp Business Account (WABA), use the following request.

Sample Request

```
curl --location 'https://graph.damcorp.id/flows' \
--header 'Authorization: Bearer {{TOKEN-V2}}'
```

Sample Response

```
{
  "data": [
    {
      "id": "flow-1",
      "name": "flow 1",
      "status": "DRAFT",
      "categories": [ "CONTACT_US" ],
      "validation_errors": []
    },
    {
      "id": "flow-2",
      "name": "flow 2",
```

```

    "status": "PUBLISHED",
    "categories": [ "SURVEY" ],
    "validation_errors": []
  },
  {
    "id": "flow-3",
    "name": "flow 3",
    "status": "DRAFT",
    "categories": [ "LEAD_GENERATION" ],
    "validation_errors": []
  }
],
"paging": {
  "cursors": {
    "before": "QVFI...",
    "after": "QVFI..."
  }
}
}

```

Get Flow Detail

Sample Request

```

curl --location 'https://graph.damcorp.id/flows/356312947280273' \
--header 'Authorization: Bearer {{TOKEN-V2}}'

```

Sample Response

```

{
  "id": "<Flow-ID>",
  "name": "<Flow-Name>",
  "status": "DRAFT",
  "categories": [ "LEAD_GENERATION" ],
  "validation_errors": [],
  "json_version": "3.0",
  "data_api_version": "3.0",
  "endpoint_uri": "https://example.com",
  "preview": {
    "preview_url":
"https://business.facebook.com/wa/manage/flows/55000..../preview/?toke
n=b9d6.....",
    "expires_at": "2023-05-21T11:18:09+0000"
  },
  "whatsapp_business_account": {
    ...
  },
  "application": {

```

```

...
},
"health_status": {
  "can_send_message": "BLOCKED",
  "entities": [
    {
      "entity_type": "FLOW",
      "id": "<Flow-ID>",
      "can_send_message": "BLOCKED",
      "errors": [
        {
          "error_code": 131000,
          "error_description": "endpoint_uri: You need to set the
endpoint URI before you can send or publish a flow.",
          "possible_solution":
"https://developers.facebook.com/docs/whatsapp/flows/reference/flowjson#top-level-flow-json-properties"
        },
        {
          "error_code": 131000,
          "error_description": "app_check: You need to connect a
Meta app to the flow before you can send or publish it.",
          "possible_solution":
"https://developers.facebook.com/docs/development/create-an-app"
        }
      ]
    },
    {
      "entity_type": "WABA",
      "id": "<WABA-ID>",
      "can_send_message": "AVAILABLE"
    },
    {
      "entity_type": "BUSINESS",
      "id": "<Business-ID>",
      "can_send_message": "AVAILABLE"
    },
    {
      "entity_type": "APP",
      "id": "<App-ID>",
      "can_send_message": "LIMITED",
      "additional_info": [
        "Your app is not subscribed to the message webhook. This
means you will not receive any messages sent to your phone number."
      ]
    }
  ]
}

```

Get Flow Json

Sample Request

```
curl --location  
'https://graph.damcorp.id/flows/1536747533562850/assets' \  
--header 'Authorization: Bearer {{TOKEN-V2}}'
```

Upload Media

To upload media, make a **POST** call to `/media` and include the parameters listed below. All media files sent through this endpoint are encrypted and persist for 30 days, unless they are deleted earlier.

Endpoint	Authentication
<code>/media</code>	Developers can authenticate their API calls with the access token generated in Login for Get Token API .

Supported Media Types

Audio

Audio Type	Extension	MIME Type	Max Size
AAC	.aac	audio/aac	16 MB
AMR	.amr	audio/amr	16 MB
MP3	.mp3	audio/mpeg	16 MB
MP4 Audio	.m4a	audio/mp4	16 MB
OGG Audio	.ogg	audio/ogg (OPUS codecs only; base audio/ogg not supported.)	16 MB

Document

Document Type	Extension	MIME Type	Max Size
Text	.txt	text/plain	100 MB

Microsoft Excel	.xlsx	application/vnd.openxmlformats-officedocument.spreadsheetml.sheet	100 MB
Microsoft Word	.doc	application/msword	100 MB
Microsoft Word	.docx	application/vnd.openxmlformats-officedocument.wordprocessingml.document	100 MB
Microsoft PowerPoint	.pptx	application/vnd.openxmlformats-officedocument.presentationml.presentation	100 MB
PDF	.pdf	application/pdf	100 MB

Image

Images must be 8-bit, RGB or RGBA.

Image Type	Extension	MIME Type	Max Size
JPEG	.jpeg	image/jpeg	5 MB
PNG	.png	image/png	5 MB

Sticker

WebP images can only be sent in [sticker messages](#).

Sticker Type	Extension	MIME Type	Max Size
Animated sticker	.webp	image/webp	500 KB
Static sticker	.webp	image/webp	100 KB

Video

Only H.264 video codec and AAC audio codec supported. Single audio stream or no audio stream only.

Example Request

```
curl -X POST 'https://waba.damcorp.id/v2/media' \
-H 'Authorization: Bearer {{TOKEN}}' \
-H 'Content-Type: {{MIME_Type}}' \
-d '@Users/ariefpratama/Pictures/Image - Icon/profile.jpeg'
```

Sample Request

```
curl -X POST 'https://waba.damcorp.id/v2/media' \
-H 'Authorization: Bearer xxxxxxxxxxxxxxxx' \
-H 'Content-Type: image/jpeg' \
-d '@Users/ariefpratama/Pictures/Image - Icon/profile.jpeg'
```

Response

A successful response returns an object with the uploaded media's ID:

```
{
  "media": [
    {
      "id": "<MEDIA_ID>"
    }
  ],
  "meta": {
    "version": "1.5.12"
  }
}
```

Download Media

Request

To download media, make a [GET](#) call to your media's URL. All media URLs expire after 5 minutes — you need to retrieve the media URL again if it expires. If you directly click on the URL you get from a [/MEDIA/MEDIA_ID GET](#) call, you get an access error.

Endpoint	Description	Example Value
/MEDIA_ID	You can get the ID after the media is uploaded .	1707162086690029

Example Request

Sample request:

```
curl -X GET 'https://waba.damcorp.id/v2/media/{{MEDIA-ID}}' \
-H 'Authorization: Bearer {{TOKEN}}' \
```

Sample Request

```
curl -X GET 'https://waba.damcorp.id/v2/media/1707162086690029' \
-H 'Authorization: Bearer {{TOKEN}}' \
```

Response

If successful, you will receive the binary data of media saved in `media_file`, response headers contain a content-type header to indicate the mime type of returned data. Check [supported media types](#) for more information.

Add Sample Media

If you create a template with a header media, you need to put a sample on create template payload. Use this API to put a media ID to create template Payload.

Sample Request

```
curl -X POST 'https://graph.damcorp.id/message_templates/upload_sample' \
-H 'Authorization: Bearer {{TOKEN}}' \
-F 'media=@"Users/ariefpratama/Downloads/sample1.pdf"'
```

Response

```
{
  "h": "<UPLOADED_FILE_HANDLE>"
}
```

—

Catalog

Insert Product - Batch

Sample Request

```
curl --location 'https://waba.damcorp.id/catalog/batch' \
--header 'Authorization: Bearer {{TOKEN-V2}}' \
--header 'Content-Type: application/json' \
--data '{
  "requests": [
    {
      "method": "CREATE",
      "retailer_id": "retailerdata2",
      "data": {
        "availability": "in stock",
        "brand": "nila",
        "category": "t-shirts",
        "description": "product description",
        "image_url": "https://localist-
images.azureedge.net/photos/38634324197092/original/4a37e2cbf36ca098de
ee95971abe9166a2841952.png",
        "name": "sepatu lari",
        "price": 100000,
        "currency": "IDR",
        "shipping": [
          {
            "country": "ID",
            "region": "CA",
            "service": "service",
            "price_value": 18000,
            "price_currency": "IDR"
          }
        ],
        "condition": "new",
        "url": "https://localist-
images.azureedge.net/photos/38634324197092/original/4a37e2cbf36ca098de
ee95971abe9166a2841952.png",
        "retailer_product_group_id": "product-group-1"
      },
      "applinks": {
        "android": [{
          "app_name": "Electronic Example Android",
          "package": "com.electronic",
          "url": "example-android://electronic"
        }],
        "ios": [{
          "app_name": "Electronic Example iOS",
```

```

        "app_store_id": 2222,
        "url": "example-ios://electronic"
    }]
}
]
}'

```

Update Product - Batch

Sample Request

```

curl --location 'https://waba.damcorp.id/catalog/batch' \
--header 'Authorization: Bearer {{TOKEN-V2}}' \
--header 'Content-Type: application/json' \
--data '{
  "requests": [
    {
      "method": "UPDATE",
      "retailer_id": "retailerda",
      "data": {
        "availability": "out of stock"
      }
    }
  ]
}'

```

Get Batch Status

Sample Request

```

curl --location
'https://waba.damcorp.id/catalog/check_batch_request_status?handle=Acy
BNfAcomzRf40z3W3IBTEj_u2r6zWkXrJBQGH7qkbIjvbyX1pRrx1T03K0JElGMAdo9EdVA
wpBpa_vxwPNQsvL' \
--header 'Authorization: Bearer {{TOKEN-V2}}'

```

—

Delete Product

Sample Request

```
curl --location 'https://waba.damcorp.id/catalog/batch' \
--header 'Authorization: Bearer {{TOKEN-V2}}' \
--header 'Content-Type: application/json' \
--data '{
  "requests": [
    {
      "method": "DELETE",
      "retailer_id": "retailerda2"
    }
  ]
}'
```

Create Product Set

Sample Request

```
curl --location 'https://waba.damcorp.id/catalog/product_sets' \
--header 'Authorization: {{token}}' \
--header 'Content-Type: application/json' \
--data '{
  "name": "nurul product set test",
  "filter": {
    "retailer_id": {
      "is_any": ["SKU0001", "1y3tm4siby", "55s66pcc4o"]
    }
  }
}'
```

Detail Product Set

Sample Request

```
curl --location --globoff
'{{host}}/catalog/product_set_id/939476553833446?fields=[%22id%22%2C%22filter%22%2C%22name%22%2C%22product_catalog%22%2C%22product_count%22%2C%22retailer_id%22]' \
--header 'Authorization: {{token}}'
```

Update Product Set

Sample Request

```
curl --location
'https://waba.damcorp.id/catalog/product_set_id/939476553833446' \
--header 'Authorization: {{token}}' \
```

```
--header 'Content-Type: application/json' \
--data '{
  "name": "nurul product set update nurul",
  "filter": {
    "retailer_id": {
      "is_any": ["SKU0001", "1y3tm4siby"]
    }
  }
}'
```

Delete Product Set

Sample Request

```
curl --location --request DELETE
'https://waba.damcorp.id/catalog/product_set_id/939476553833446' \
--header 'Authorization: {{token}}'
```

Get Catalog

Sample Request

```
curl --location 'https://waba.damcorp.id/catalog/list' \
--header 'Authorization: {{TOKEN-V2}}'
```

Get Product List

Sample Request

```
curl --location --globoff
'https://waba.damcorp.id/catalog/products?summary=true&fields=[%22cont
ent_id%22%2C%22category%22%2C%22name%22%2C%22errors%22%2C%22currency%2
%2C%22condition%22%2C%22image_url%22%2C%22price%22%2C%22visibility%22
%2C%22error_type%22%2C%22brand%22%2C%22color%22%2C%22material%22%2C%22
origin_country%22%2C%22product_type%22%2C%22custom_data%22%2C%22retail
er_id%22%2C%22retailer_product_group_id%22%2C%22additional_variant_att
ributes%22%2C%22size%22%2C%22id%22]&limit=100' \
--header 'Authorization: Bearer {{TOKEN-V2}}' \
--header 'Content-Type: application/json'
```

Get Product List

Sample Request

```
curl --location 'https://waba.damcorp.id/catalog/product_sets' \
--header 'Authorization: Bearer {{TOKEN-V2}}'
```

Webhook

Webhooks to get notifications about messages your business receives. Webhooks are triggered when a customer performs an action. Before you can start receiving notifications you will need to create an endpoint on your server to receive notifications.

Your endpoint must be able to process two types of HTTPS requests: Verification Requests and Event Notifications. Since both requests use HTTPS, your server must have a valid TLS or SSL certificate correctly configured and installed. Self-signed certificates are not supported.

Received Format

All Webhooks have the following generic format:

```
{
  "object": "whatsapp_business_account",
  "entry": [{
    "id": "WHATSAPP_BUSINESS_ACCOUNT_ID",
    "changes": [{
      "value": {
        "messaging_product": "whatsapp",
        "metadata": {
          "display_phone_number": "PHONE_NUMBER",
          "phone_number_id": "PHONE_NUMBER_ID"
        },
        # specific Webhooks payload
      },
      "field": "messages"
    }]
  }]
}
```

Property

Name	Description
<code>object</code> <i>string</i>	The specific webhook a business is subscribed to. The webhook is <code>whatsapp_business_account</code> .
<code>entry</code>	An array of entry objects. Entry objects have the following properties:

array of objects

- **id** — *String*. The WhatsApp Business Account ID for the business that is subscribed to the webhook.
- **changes** — *Array of objects*. An array of change objects. Change objects have the following properties:
 - **value** — *Object*. A value object. See [Value Object](#).
 - **field** — *String*. Notification type. Value will be **messages**.

Value Object

Name	Description
contacts <i>array of objects</i>	Array of contact objects with information for the customer who sent a message to the business. Contact objects have the following properties: • wa_id — <i>String</i>. The customer's WhatsApp ID. A business can respond to a customer using this ID. This ID may not match the customer's phone number, which is returned by the API as input when sending a message to the customer. • user_id — <i>String</i>. Additional unique, alphanumeric identifier for a WhatsApp user. • profile — <i>Object</i>. A customer profile object. Profile objects have the following properties: • name — <i>String</i>. The customer's name.
errors <i>array of objects</i>	An array of error objects describing the error. Error objects have the following properties, which map to their equivalent properties in API error response payloads. Webhooks triggered by v15.0 and older requests: • code — <i>Integer</i>. Example: 130429. • title — <i>String</i>. Error code title. Example: Rate limit hit. Webhooks triggered by v16.0 and newer requests: • code — <i>Integer</i>. Error code. Example: 130429. • title — <i>String</i>. Error code title. Example: Rate limit hit. • message — <i>String</i>. Error code message. This value is the same as the title value. For example: Rate limit hit. Note that the message property in API error response payloads pre-pends this value with the a # symbol and the error code in parenthesis. For example: (#130429) Rate limit hit. • error_data — <i>Object</i>. An error data object with the following properties:

	<code>details</code> — <i>String</i>. Describes the error. Example: Message failed to send because there were too many messages sent from this phone number in a short period of time.
<code>messaging_product</code> <i>string</i>	Product used to send the message. Value is always <code>whatsapp</code> .
<code>messages</code> <i>array of objects</i>	Information about a message received by the business that is subscribed to the webhook. See Messages Object .
<code>metadata</code> <i>object</i>	A metadata object describing the business subscribed to the webhook. Metadata objects have the following properties: <code>display_phone_number</code> — <i>String</i>. The phone number that is displayed for a business. <code>phone_number_id</code> — <i>String</i>. ID for the phone number. A business can respond to a message using this ID.
<code>statuses</code> <i>array of objects</i>	Status object for a message that was sent by the business that is subscribed to the webhook. See Statuses Object .

—

Messages Object

Name	Description
<code>audio</code> <i>object</i>	When the <code>messages type</code> is set to <code>audio</code>, including voice messages, this object is included in the <code>messages</code> object: • <code>id</code> — <i>String</i>. ID for the audio file. • <code>mime_type</code> — <i>String</i>. Mime type of the audio file.
<code>button</code> <i>object</i>	When the <code>messages type</code> field is set to <code>button</code>, this object is included in the <code>messages</code> object: • <code>payload</code> — <i>String</i>. The payload for a button set up by the business that a customer clicked as part of an interactive message. • <code>text</code> — <i>String</i>. Button text.
<code>context</code> <i>object</i>	Context object. Only included when a user replies or interacts with one of your messages. Context objects can have the following properties: • <code>forwarded</code> — <i>Boolean</i>. Set to <code>true</code> if the message received by the business has been forwarded. • <code>frequently_forwarded</code> — <i>Boolean</i>. Set to <code>true</code> if the message received by the business has been forwarded more than 5 times. • <code>from</code> — <i>String</i>. The WhatsApp ID for the customer who replied to an inbound message. • <code>id</code> — <i>String</i>. The message ID for the sent message for an inbound reply. • <code>referred_product</code> — <i>Object</i>. Referred product object describing the product the user is requesting information about. You must parse this value if you support Product Enquiry Messages. See Receive Response From Customers. Referred product objects have the following properties: • <code>catalog_id</code> — <i>String</i>. Unique identifier of the Meta catalog linked to the WhatsApp Business Account. • <code>product_retailer_id</code> — <i>String</i>. Unique identifier of the product in a catalog.
<code>document</code> <i>object</i>	A document object. When <code>messages type</code> is set to <code>document</code>, this object is included in the <code>messages</code> object. Document objects can have the following properties: • <code>caption</code> — <i>String</i>. Caption for the document, if provided. • <code>filename</code> — <i>String</i>. Name for the file on the sender's device. • <code>sha256</code> — <i>String</i>. SHA 256 hash. • <code>mime_type</code> — <i>String</i>. Mime type of the document file. • <code>id</code> — <i>String</i>. ID for the document.

`errors`
array of objects

An array of error objects describing the error. Error objects have the following properties, which map to their equivalent properties in [API error response payloads](#).

Webhooks triggered by v15.0 and older requests:

- `code` — *Integer*. Example: 130429.
- `title` — *String*. Error code title. Example: Rate limit hit.

Webhooks triggered by v16.0 and newer requests:

- `code` — *Integer*. Error code. Example: 130429.
- `title` — *String*. Error code title. Example: Rate limit hit.
- `message` — *String*. Error code message. This value is the same as the `title` value. For example: Rate limit hit. Note that the message property in API error response payloads pre-pends this value with the a # symbol and the error code in parenthesis. For example: (#130429) Rate limit hit.
- `error_data` — *Object*. An error data object with the following properties:
 - `details` — *String*. Describes the error. Example: Message failed to send because there were too many messages sent from this phone number in a short period of time.

`from`
string

The customer's WhatsApp ID. A business can respond to a customer using this ID. This ID may not match the customer's phone number, which is returned by the API as `input` when sending a message to the customer.

`id`
string

The ID for the message that was received by the business. You could use [messages endpoint](#) to mark this specific message as read.

`identity`
object

An identity object. Webhook is triggered when a customer's phone number or profile information has been updated. See [messages system identity](#). Identity objects can have the following properties:

- `acknowledged` — State of acknowledgment for the [messages system customer_identity_changed](#).
- `created_timestamp` — *String*. The time when the WhatsApp Business Management API detected the customer may have changed their profile information.
- `hash` — *String*. The ID for the [messages system customer_identity_changed](#)

image
object

When `messages.type` is set to `image`, this object is included in the `messages` object.

- `caption` — *String*. Caption for the image, if provided.
- `sha256` — *String*. Image hash.
- `id` — *String*. ID for the image.
- `mime_type` — *String*. Mime type for the image.

interactive
object

When a customer has interacted with your message, this object is included in the `messages` object. Interactive objects have the following properties:

- `type` — Object with the following properties:
 - `button_reply` — Sent when a customer clicks a button. Object with the following properties:
 - `id` — *String*. Unique ID of a button.
 - `title` — *String*. Title of a button.
 - `list_reply` — Sent when a customer selects an item from a list. Object with the following properties:
 - `id` — *String*. Unique ID of the selected list item.
 - `title` — *String*. Title of the selected list item.
 - `description` — *String*. Description of the selected row.

order
object

Included in the `messages` object when a customer has placed an order. Order objects have the following properties:

- `catalog_id` — *String*. ID for the catalog the ordered item belongs to.
- `text` — *String*. Text message from the user sent along with the order.
- `product_items` — Array of product item objects containing the following fields:
 - `product_retailer_id` — *String*. Unique identifier of the product in a catalog.
 - `quantity` — *String*. Number of items.
 - `item_price` — *String*. Price of each item.
 - `currency` — *String*. Price currency.

referral
object

Referral object. When a customer clicks an ad that redirects to WhatsApp, this object is included in the `messages` object. Referral objects have the following properties:

- `source_url` — *String*. The Meta URL that leads to the ad or post clicked by the customer. Opening this url takes you to the ad viewed by your customer.
- `source_type` — *String*. The type of the ad's source; `ad` or `post`.
- `source_id` — *String*. Meta ID for an ad or a post.

	• <code>headline</code> – <i>String</i>. Headline used in the ad or post. • <code>body</code> – <i>String</i>. Body for the ad or post. • <code>media_type</code> – <i>String</i>. Media present in the ad or post; <code>image</code> or <code>video</code>. • <code>image_url</code> – <i>String</i>. URL of the image, when <code>media_type</code> is an image. • <code>video_url</code> – <i>String</i>. URL of the video, when <code>media_type</code> is a video. • <code>thumbnail_url</code> – <i>String</i>. URL for the thumbnail, when <code>media_type</code> is a video. • <code>ctwa_clid</code> – <i>String</i>. Click ID generated by Meta for ads that click to WhatsApp. The referral object can be included in the following types of message: text, location, contact, image, video, document, voice, and sticker.
<code>sticker</code> object	When <code>messages type</code> is set to <code>sticker</code>, this object is included in the <code>messages</code> object. Sticker objects have the following properties: • <code>mime_type</code> – <i>String</i>. image/webp. • <code>sha256</code> – <i>String</i>. Hash for the sticker. • <code>id</code> – <i>String</i>. ID for the sticker. • <code>animated</code> – <i>Boolean</i>. Set to <code>true</code> if the sticker is animated; <code>false</code> otherwise.
<code>system</code> object	When <code>messages type</code> is set to <code>system</code>, a customer has updated their phone number or profile information, this object is included in the <code>messages</code> object. System objects have the following properties: • <code>body</code> – <i>String</i>. Describes the change to the customer's identity or phone number. • <code>identity</code> – <i>String</i>. Hash for the identity fetched from server. • <code>new_wa_id</code> – <i>String</i>. New WhatsApp ID for the customer when their phone number is updated. Available on webhook versions v11.0 and earlier. • <code>wa_id</code> – <i>String</i>. New WhatsApp ID for the customer when their phone number is updated. Available on webhook versions v12.0 and later. • <code>type</code> – <i>String</i>. Type of system update. Will be one of the following: • <code>customer_changed_number</code> – A customer changed their phone number. • <code>customer_identity_changed</code> – A customer changed their profile information. • <code>customer</code> – <i>String</i>. The WhatsApp ID for the customer prior to the update.
<code>text</code> object	When <code>messages type</code> is set to <code>text</code>, this object is included. Text objects have the following properties:

	<code>body</code> — <i>String</i>. The text of the message.
<code>timestamp</code> <i>string</i>	Unix timestamp indicating when the WhatsApp server received the message from the customer.
<code>type</code> <i>string</i>	The type of message that has been received by the business that has subscribed to Webhooks. Possible value can be one of the following: <code>audio</code> <code>button</code> <code>document</code> <code>text</code> <code>image</code> <code>interactive</code> <code>order</code> <code>sticker</code> <code>system</code> – for customer number change messages <code>unknown</code> <code>video</code>
<code>video</code> <i>object</i>	When <code>messages.type</code> is set to <code>video</code> , this object is included in <code>messages</code> object. Video objects have the following properties: <code>caption</code> – <i>String</i>. The caption for the video, if provided. <code>filename</code> – <i>String</i>. The name for the file on the sender's device. <code>sha256</code> – <i>String</i>. The hash for the video. <code>id</code> – <i>String</i>. The ID for the video. <code>mime_type</code> – <i>String</i>. The mime type for the video file.

—

Statuses Objects

Name	Description
<code>biz_opaque_callback_data</code> <i>string</i>	Arbitrary string included in sent message. See Message object.
<code>conversation</code> <i>object</i>	Information about the conversation. <code>id</code> – Represents the ID of the conversation the given status notification belongs to. <code>origin</code><i>object</i> – Describes conversation category <code>type</code> – Indicates conversation category. This can also be referred to as a conversation entry point <code>authentication</code> – Indicates the conversation was opened by a business sending template categorized as <code>AUTHENTICATION</code> to the customer. This applies any time it has been more than 24 hours since the last customer message. <code>marketing</code> – Indicates the conversation was opened by a business sending template categorized as <code>MARKETING</code> to the customer. This applies any time it has been more than 24 hours since the last customer message. <code>utility</code> – Indicates the conversation was opened by a business sending template categorized as <code>UTILITY</code> to the customer. This applies any time it has been more than 24 hours since the last customer message. <code>service</code> – Indicates that the conversation opened by a business replying to a customer within a customer service window. <code>referral_conversion</code> – Indicates a free entry point conversation. <code>expiration_timestamp</code> – Date when the conversation expires. This field is only present for messages with a `status` set to `sent`.
<code>errors</code> <i>array of objects</i>	An array of error objects describing the error. Error objects have the following properties, which map to their equivalent properties in API error response payloads. Webhooks triggered by v15.0 and older requests: <code>code</code> — <i>Integer</i>. Example: <code>130429</code>. <code>title</code> — <i>String</i>. Error code title. Example: <code>Rate limit hit</code>. Webhooks triggered by v16.0 and newer requests: <code>code</code> — <i>Integer</i>. Error code. Example: <code>130429</code>. <code>title</code> — <i>String</i>. Error code title. Example: <code>Rate limit hit</code>.

	<code>message</code> — <i>String</i>. Error code message. This value is the same as the <code>title</code> value. For example: <code>Rate limit hit</code>. Note that the message property in API error response payloads pre-pends this value with the a # symbol and the error code in parenthesis. For example: <code>(#130429) Rate limit hit</code>. <code>error_data</code> — <i>Object</i>. An error data object with the following properties: <code>details</code> — <i>String</i>. Describes the error. Example: <code>Message failed to send because there were too many messages sent from this phone number in a short period of time</code>.
<code>id</code> <i>string</i>	The ID for the message that the business that is subscribed to the webhooks sent to a customer
<code>pricing</code> <i>object</i>	An object containing pricing information. <code>billable</code> — Indicates if the given message or conversation is billable. Default is <code>true</code> for all conversations, including those inside your free tier limit, except those initiated from free entry points. Free entry point conversations are not billable, <code>false</code>. You will not be charged for free tier limit conversations, but they are considered billable and will be reflected on your invoice. Deprecated. Visit the WhatsApp Changelog for more information. <code>category</code> — Indicates the conversation category: <code>authentication</code> — Indicates an authentication conversation. <code>authentication-international</code> — Indicates an <code>authentication-international</code> conversation. <code>marketing</code> — Indicates an marketing conversation. <code>utility</code> — Indicates a utility conversation. <code>service</code> — Indicates an service conversation. <code>referral_conversion</code> — Indicates a <code>free entry point conversation</code>. <code>pricing_model</code> — Type of pricing model used by the business. Current supported value is <code>CBP</code> See Conversations for more information about conversations and conversation categories.
<code>recipient_id</code> <i>string</i>	The customer's WhatsApp ID. A business can respond to a customer using this ID. This ID may not match the customer's phone number, which is returned by the API as <code>input</code> when sending a message to the customer.
<code>status</code> <i>string</i>	<code>delivered</code> — A webhook is triggered when a message sent by a business has been delivered <code>read</code> — A webhook is triggered when a message sent by a business has been read

	<code>sent</code> – A webhook is triggered when a business sends a message to a customer
<code>timestamp</code> <i>Unix timestamp</i>	Date for the status message

Error Codes

Error response syntax

```
{
  "error": {
    "message": "<MESSAGE>",
    "type": "<TYPE>",
    "code": <CODE>,
    "error_data": {
      "messaging_product": "whatsapp",
      "details": "<DETAILS>"
    },
    "error_subcode": <ERROR_SUBCODE>
    "fbtrace_id": "<FBTRACE_ID>"
  }
}
```

Error Response Contents

Property	Value Type	Description
<code>code</code>	Integer	Error code . We recommend that you build your app's error handling around error codes instead of subcodes or HTTP response status codes.
<code>details</code>	String	Error description and a description of the most likely reason for the error. May also contain information on how to address the error, such as which parameter is invalid or what values are acceptable.
<code>error_subcode</code>	Integer	Deprecated. Will not be returned in v16.0+ responses. Graph API subcode. Not all responses will include a subcode, so we recommend that you build your error handling logic around code and details properties instead.

<code>fbtrace_id</code>	String	Trace ID you can include when contacting Direct Support . The ID may help us debug the error.
<code>message</code>	String	Combination of the error code and its title. For example: <code>(#130429) Rate limit hit.</code>
<code>messaging_product</code>	String	Messaging product. This will always be the string <code>whatsapp</code> for Cloud API responses.
<code>type</code>	String	Error type.

Error Codes

Authorization Errors

Code	Description	Possible Solutions	HTTP Status Code
<code>0</code> AuthException	We were unable to authenticate the app user.	Typically this means the included access token has expired, been invalidated, or the app user has changed a setting to prevent all apps from accessing their data. We recommend that you get a new access token .	<code>401</code> Unauthorized
<code>3</code> API Method	Capability or permissions issue.	Use the access token debugger to verify that your app has been granted the permissions required by the endpoint. See Troubleshooting .	<code>500</code> Internal Server Error
<code>10</code> Permission Denied	Permission is either not granted or has been removed.	Use the access token debugger to verify that your app has been granted the permissions required by the endpoint. See Troubleshooting . Ensure that the phone number used to set the business public key is allowlisted.	<code>403</code> Forbidden
<code>190</code> Access token has expired	Your access token has expired.	Get a new access token .	<code>401</code> Unauthorized
<code>200–299</code> API Permission	Permission is either not granted or has been removed.	Use the access token debugger to verify that your app has been granted the permissions required by the endpoint. See Troubleshooting .	<code>403</code> Forbidden

Throttling Errors

Code	Description	Possible Solutions	HTTP Status Code
------	-------------	--------------------	------------------

4 API Too Many Calls	The app has reached its API call rate limit.	Load the app in the App Dashboard and view the Application Rate Limit section to verify that the app has reached its rate limit . If it has, try again later or reduce the frequency or amount of API queries the app is making.	400 Bad Request
80007 Rate limit issues	The WhatsApp Business Account has reached its rate limit.	See WhatsApp Business Account Rate Limits . Try again later or reduce the frequency or amount of API queries the app is making.	400 Bad Request
130429 Rate limit hit	Cloud API message throughput has been reached.	The app has reached the API's throughput limit. See Throughput . Try again later or reduce the frequency with which the app sends messages.	400 Bad Request
131048 Spam rate limit hit	Message failed to send because there are restrictions on how many messages can be sent from this phone number. This may be because too many previous messages were blocked or flagged as spam.	Check your quality status in the WhatsApp Manager and see the Quality-Based Rate Limits documentation for more information.	400 Bad Request
131056 (Business Account, Consumer Account) pair rate limit hit	Too many messages sent from the sender phone number to the same recipient phone number in a short period of time.	Wait and retry the operation, if you intend to send messages to the same phone number. You can still send messages to a different phone number without waiting	400 Bad Request
133016 Account register deregister rate limit exceeded	Registration or Deregistration failed because there were too many attempts for this phone number in a short period of time	The business phone number is being blocked because it has reached its registration/deregistration attempt limit. Try again once the number is unblocked. See "Limitations" in the Registration document.	400 Bad Request

Integrity Errors

Code	Description	Possible Solutions	HTTP Status Code
368 Temporarily blocked	The WhatsApp Business Account associated with the app	See the Policy Enforcement document to learn about policy violations and how to resolve them.	403 Forbidden

for policies violations	has been restricted or disabled for violating a platform policy.		
131031 Account has been locked	The WhatsApp Business Account associated with the app has been restricted or disabled for violating a platform policy, or we were unable to verify data included in the request against data set on the WhatsApp Business Account (e.g, the two-step pin included in the request is incorrect).	See the Policy Enforcement document to learn about policy violations and how to resolve them. You can also use the Health Status API , which may provide additional insight into the reason or reasons for the account lock.	403 Forbidden

Other Errors

Code	Description	Possible Solutions	HTTP Status Code
1 API Unknown	Invalid request or possible server error.	Check the WhatsApp Business Platform Status page to see API status information. If there are no server outages, check the endpoint reference and verify that your request is formatted correctly and meets all endpoint requirements.	400 Bad Request
2 API Service	Temporary due to downtime or due to being overloaded.	Check the WhatsApp Business Platform Status page to see API status information before trying again.	503 Service Unavailable
33 Parameter value is not valid	The business phone number has been deleted.	Verify that the business phone number is correct.	400 Bad Request
100 Invalid parameter	The request included one or more unsupported or misspelled parameters.	See the endpoint's reference to determine which parameters are supported and how they are spelled. Ensure when setting the business public key, it is a valid 2048-bit RSA public key in PEM format . Ensure there is no mismatch between the phone number id you are registering and a previously stored phone number id. Ensure your parameter is under any length restriction for the type.	400 Bad Request

130472 User's number is part of an experiment	Message was not sent as part of an experiment .	See Marketing Message Experiment .	400 Bad Request
131000 Something went wrong	Message failed to send due to an unknown error. When setting a business public key , it either failed to calculate the signature, call the GraphQL endpoint, or the GraphQL endpoint returned an error.	Try again. If the error persists, open a Direct Support ticket.	500 Internal Server Error
131005 Access denied	Permission is either not granted or has been removed.	Use the access token debugger to verify that your app has been granted the permissions required by the endpoint. See Troubleshooting .	403 Forbidden
131008 Required parameter is missing	The request is missing a required parameter.	See the endpoint's reference to determine which parameters are required.	400 Bad Request
131009 Parameter value is not valid	One or more parameter values are invalid.	See the endpoint's reference to determine which values are supported for each parameter, and see Phone Numbers to learn how to add a phone number to a WhatsApp Business Account.	400 Bad Request
131016 Service unavailable	A service is temporarily unavailable.	Check the WhatsApp Business Platform Status page to see API status information before trying again.	500 Internal Server Error
131021 Recipient cannot be sender	Sender and recipient phone number is the same.	Send a message to a phone number different from the sender.	400 Bad Request

131026 Message Undeliverable	Unable to deliver message. Reasons can include: • The recipient phone number is not a WhatsApp phone number. • Sending an authentication template to a WhatsApp user who has a +91 country calling code (India). Authentication templates currently cannot be sent to WhatsApp users in India. • Recipient has not accepted our new Terms of Service and Privacy Policy. • Recipient using an old WhatsApp version; must use the following WhatsApp version or greater: • Android: 2.21.15.15 • SMBA: 2.21.15.15 • iOS: 2.21.170.4 • SMBI: 2.21.170.4 • KaiOS: 2.2130.10 • Web: 2.2132.6 • The message was not delivered to create a high quality user experience. See Per-User Marketing Template Message Limits.	Using a non-WhatsApp communication method, ask the WhatsApp user to: • Confirm that they can actually send a message to your WhatsApp business phone number. • Confirm that they have accepted our latest Terms of Service (Settings > Help, or Settings > Application information will prompt them to accept the latest terms/policies if they haven't done so already) • Update to the latest version of the WhatsApp client.	400 Bad Request
131042 Business eligibility payment issue	There was an error related to your payment method.	See About Billing For Your WhatsApp Business Account and verify that you have set up billing correctly. Common problems: • Payment account is not attached to a WhatsApp Business Account • Credit line is over the limit • Credit line (Payment Account) not set or active • WhatsApp Business Account is deleted • WhatsApp Business Account is suspended	400 Bad Request

		• Timezone not set • Currency not set • MessagingFor request (On Behalf Of) is pending or declined • Exceeded conversation free tier threshold without a valid payment method	
131045 Incorrect certificate	Message failed to send due to a phone number registration error.	Register the phone number before trying again.	500 Internal Server Error
131047 Re-engagement message	More than 24 hours have passed since the recipient last replied to the sender number.	Send the recipient a business-initiated message using a message template instead.	400 Bad Request
131051 Unsupported message type	Unsupported message type.	See Messages for supported message types before trying again with a supported message type.	400 Bad Request
131052 Media download error	Unable to download the media sent by the user.	We were unable to download the media for one or more reasons, such as an unsupported media type. Refer to the <code>error.error_data.details</code> value for more information about why we were unable to download the media. Ask the WhatsApp user to send you the media file using a non-WhatsApp method.	400 Bad Request
131053 Media upload error	Unable to upload the media used in the message.	We were unable to upload the media for one or more reasons, such as an unsupported media type. Refer to the <code>error.error_data.details</code> value for more information about why we were unable to upload the media. We recommend that you inspect any media files that are causing errors and confirm that they are in fact supported. For example, in UNIX you can use file inspection via the command line to determine its MIME type:	400 Bad Request

		<pre>file -I rejected-file.mov</pre> You can then confirm if its MIME type is listed in our list of supported media types. For more reliable performance when sending media, refer to Media HTTP Caching and uploading the media.	
131057 Account in maintenance mode	Business Account is in maintenance mode	The WhatsApp Business Account is in maintenance mode. One reason for this could be that the account is undergoing a throughput upgrade.	500 Bad Request
132000 Template Param Count Mismatch	The number of variable parameter values included in the request did not match the number of variable parameters defined in the template.	See Message Template Guidelines and make sure the request includes all of the variable parameter values that have been defined in the template.	400 Bad Request
132001 Template does not exist	The template does not exist in the specified language or the template has not been approved.	Make sure your template has been approved and the template name and language locale are correct. Please ensure you follow message template guidelines .	404 Not Found
132005 Template Hydrated Text Too Long	Translated text is too long.	Check the WhatsApp Manager to verify that your template has been translated. See Quality Rating and Template Status .	400 Bad Request
132007 Template Format Character Policy Violated	Template content violates a WhatsApp policy.	See Rejection Reasons to determine possible reasons for violation.	400 Bad Request
132012 Template Parameter Format Mismatch	Variable parameter values formatted incorrectly.	The variable parameter values included in the request are not using the format specified in the template. See Message Template Guidelines .	400 Bad Request
132015 Template is Paused	Template is paused due to low quality so it cannot be sent in a template message.	Edit the template to improve its quality and try again once it is approved.	400 Bad Request

132016 Template is Disabled	Template has been paused too many times due to low quality and is now permanently disabled.	Create a new template with different content.	400 Bad Request
132068 Flow is blocked	Flow is in blocked state.	Correct the Flow	400 Bad Request
132069 Flow is throttled	Flow is in throttled state and 10 messages using this flow were already sent in the last hour.	Correct the Flow	400 Bad Request
133000 Incomplete Deregistration	A previous deregistration attempt failed.	Deregister the number again before registering .	500 Internal Server Error
133004 Server Temporarily Unavailable	Server is temporarily unavailable.	Check the WhatsApp Business Platform Status page to see API status information and check the response details value before trying again.	503 Service Unavailable
133005 Two step verification PIN Mismatch	Two-step verification PIN incorrect.	Verify that the two-step verification PIN included in the request is correct. To reset the two-step verification PIN: 1. Disable two-step verification. 2. Send a POST request that includes the new PIN to the Phone Number endpoint.	400 Bad Request
133006 Phone number re-verification needed	Phone number needs to be verified before registering.	Verify the phone number before registering it.	400 Bad Request
133008 Too Many two step verification PIN Guesses	Too many two-step verification PIN guesses for this phone number.	Try again after the amount of time specified in the details response value.	400 Bad Request
133009 Two step verification PIN Guessed Too Fast	Two-step verification PIN was entered too quickly.	Check the details response value before trying again.	400 Bad Request

133010 Phone number Not Registered	Phone number not registered on the WhatsApp Business Platform.	Register the phone number before trying again.	400 Bad Request
133015 Please wait a few minutes before attempting to register this phone number	The phone number you are attempting to register was recently deleted, and deletion has not yet completed.	Wait 5 minutes before re-trying the request.	400 Bad Request
135000 Generic user error	Message failed to send because of an unknown error with your request parameters.	See the endpoint's reference to determine if you are querying the endpoint using the correct syntax. Contact customer support if you continue receiving this error code in response.	400 Bad Request

Error Response

This error response is used as part of negative testing to ensure that parameter validation and error handling mechanisms are functioning correctly and return consistent and informative error responses.

Invalid Parameter

The system is expected to reject the request and return an error response indicating that the provided parameter is invalid. The response must include a clear error message, appropriate error code, and detailed error information.

```
{
  "error": {
    "message": "(#132000) Number of parameters does not match the expected number of params",
    "type": "OAuthException",
    "code": 132000,
    "error_data": {
      "messaging_product": "whatsapp",
```

```

    "details": "body: number of localizable_params (1) does not match the
expected number of params (2)"

    },

    "fbtrace_id": "AKzvEtYnSgbFzYQ1G41-kgx"

  },

  "errors": [

    {

      "code": 132000,

      "title": "(#132000) Number of parameters does not match the expected
number of params",

      "details": "body: number of localizable_params (1) does not match the
expected number of params (2)"

    }

  ],

  "meta": {

    "version": "1.5.32"

  }

}

```

Error Response Properties Description – Invalid Parameter :

Property	Value Type	Description
error	Object	Contains detailed information about the error that occurred during message sending.
errors	Array of Object	A simplified list of error details used for error summary and validation purposes.
meta	Object	Contains metadata information related to the API response.

error.message	String	Human-readable error message describing the reason for the failure.
error.type	String	Type or category of the error returned by the API.
error.code	Integer	Numeric error code representing the specific error condition.
error.error_data	Object	Additional data providing more detailed error context.
error.fbtrace_id	String	Unique identifier used for tracing and debugging the request.
error.error_data.messaging_product	String	Messaging platform associated with the error (e.g., WhatsApp).
error.error_data.details	String	Detailed explanation of the error, including the specific validation failure.
errors[].code	Integer	Error code corresponding to the failure scenario.
errors[].title	String	Short title or summary of the error.
errors[].details	String	Detailed description explaining the cause of the error.
meta.version	String	API version used when processing the request.

Unregistered Template

The system is expected to reject the request and return an error response with error code **725**, indicating that the template is not bound yet. The response must include a clear error title and details, along with API version information.

```
{
  "errors": [
    {
      "code": 725,
      "title": "Template is not bound yet",
      "details": "Template is not bound yet"
    }
  ],
  "meta": {
    "version": "1.5.32"
  }
}
```

Error Response Properties Description – Unregistered Template :

Property	Value Type	Description
errors	Array of Object	Contains a list of error objects returned when the request fails.
errors[].code	Integer	Numeric error code indicating that the template is not registered or not bound.
errors[].title	String	Short title describing the error condition.
errors[].details	String	Detailed explanation stating that the template is not bound yet.
meta.version	String	API version used when processing the request.

Missing Required Parameter

The system is expected to reject the request and return an error response with error code **131008**, indicating that a required parameter is missing. The response must include a clear error message, detailed error information, and API version data.

```
{
  "error": {
    "message": "(#131008) Required parameter is missing",
    "type": "OAuthException",
    "code": 131008,
    "error_data": {
      "messaging_product": "whatsapp",
      "details": "Parameter of type text is missing text value"
    },
    "fbtrace_id": "ArxK3d6YKaDYYigM3EGXdbo"
  },
  "errors": [
    {
      "code": 131008,
      "title": "(#131008) Required parameter is missing",
      "details": "Parameter of type text is missing text value"
    }
  ],
  "meta": {
    "version": "1.5.32"
  }
}
```

Error Response Properties Description – Missing Required Parameter :

Property	Value Type	Description
error	Object	Contains detailed information about the error that occurred due to a missing required parameter.
error.message	String	Human-readable error message indicating that a required parameter is missing.
error.type	String	Type or category of the error returned by the API.
error.code	Integer	Numeric error code representing a missing mandatory parameter.
error.error_data	Object	Additional data providing detailed context about the missing parameter.
error.error_data.messaging_product	String	Messaging platform associated with the error (e.g., WhatsApp).
error.error_data.details	String	Detailed explanation specifying which parameter value is missing.
error.fbtrace_id	String	Unique identifier used for request tracing and debugging.
errors	Array of Object	Contains a summarized list of error information for the failed request.
errors[].code	Integer	Error code indicating a required parameter is missing.
errors[].title	String	Short title describing the missing parameter error.

errors[].details	String	Detailed description explaining the missing parameter condition.
meta.version	String	API version used when processing the request.

Type Mismatch

The system is expected to reject the request and return an error response with error code **100**, indicating an invalid parameter due to a message type mismatch. The response must include a clear error message, detailed error information, and API version data.

```
{
  "error": {
    "message": "(#100) Invalid parameter",
    "type": "OAuthException",
    "code": 100,
    "error_data": {
      "messaging_product": "whatsapp",
      "details": "Parameter 'text' is mandatory for type 'text'"
    },
    "fbtrace_id": "AdLqWTim2hIZAiNSUpggTQh"
  },
  "errors": [
    {
      "code": 100,
      "title": "(#100) Invalid parameter",
      "details": "Parameter 'text' is mandatory for type 'text'"
    }
  ],
  "meta": {
    "version": "1.5.32"
  }
}
```

```

    }
}

```

Error Response Properties Description – Type Mismatch :

Property	Value Type	Description
error	Object	Contains detailed information about the error caused by an incompatible message type.
error.message	String	Human-readable error message indicating an invalid parameter for the specified message type.
error.type	String	Type or category of the error returned by the API.
error.code	Integer	Numeric error code representing a type mismatch or invalid parameter.
error.error_data	Object	Additional data providing detailed context about the missing or incompatible parameter.
error.error_data.messaging_product	String	Messaging platform associated with the error.
error.error_data.details	String	Detailed explanation specifying which parameter is mandatory for the given message type.
error.fbtrace_id	String	Unique identifier used for request tracing and debugging.
errors	Array of Object	Contains a summarized list of error information for the failed request.
errors[].code	Integer	Error code indicating an invalid parameter due to type mismatch.



errors[].title	String	Short title describing the type mismatch error.
errors[].details	String	Detailed description explaining the type mismatch condition.
meta.version	String	API version used when processing the request.