

# COPYRIGHT NOTICE / THÔNG BÁO BẢN QUYỀN

© 2026 Duc A. Hoang (Hoàng Anh Đức)

## COPYRIGHT (English):

This document is licensed under Creative Commons Attribution-ShareAlike 4.0 International (CC-BY-SA 4.0). You are free to share and adapt this material with appropriate attribution and under the same license.

This document is not up to date and may contain several errors or outdated information.

Last revision date: 2026-01-22

## BẢN QUYỀN (Tiếng Việt):

Tài liệu này được cấp phép theo Giấy phép Quốc tế Creative Commons Attribution-ShareAlike 4.0 (CC-BY-SA 4.0). Bạn được tự do chia sẻ và chỉnh sửa tài liệu này với điều kiện ghi nguồn phù hợp và sử dụng cùng loại giấy phép.

Tài liệu này không được cập nhật và có thể chứa nhiều lỗi hoặc thông tin cũ.

Ngày sửa đổi cuối cùng: 2026-01-22



Creative Commons Attribution-ShareAlike 4.0 International

# VNU-HUS MAT1206E/3508: Introduction to AI

## Reasoning with Uncertainty In-class Discussion

Hoàng Anh Đức

Bộ môn Tin học, Khoa Toán-Cơ-Tin học  
Đại học KHTN, ĐHQG Hà Nội  
hoanganhduc@hus.edu.vn



# Contents



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

Additional Materials

Introduction

Computing with Probabilities

The Principle of Maximum Entropy

Reasoning with Bayesian Networks

# Additional Materials



Prof. Ertel's Lectures at Ravensburg-Weingarten University in 2011

- <https://youtu.be/IW-HIOPqgsk&t=4455> (Computing with Probabilities)
- <https://youtu.be/wbbAA8og4D8> (Computing with Probabilities, The Principle of Maximum Entropy)
- <https://youtu.be/MWAWjCUuDU5> (The Maximum Entropy Method)
- <https://youtu.be/sQLzN6zWosY> (The Maximum Entropy Method, LEXMED)
- <https://youtu.be/xfv8xIk1-x4> (LEXMED, Reasoning with Bayesian Networks)
- <https://youtu.be/z-WrA1xbkdY> (Reasoning with Bayesian Networks)
- <https://youtu.be/gMjuL5vMo04> (Reasoning with Bayesian Networks)

Reasoning with  
Uncertainty

Hoàng Anh Đức

## 2 Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

# Introduction

Recall: The Flying Penguin Example



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

## 3 Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

References

1. Tweety is a penguin
2. Penguins are birds
3. Birds can fly

Formalized in PL1, the  
*knowledge base KB* is:

*penguin(tweety)*

*penguin(x) ⇒ bird(x)*

*bird(x) ⇒ fly(x)*



- It can be derived (for example, by resolution): *fly(tweety)*.
- If *penguin(x) ⇒ ¬fly(x)* (= “Penguins cannot fly”) is added to the knowledge base *KB*, then *¬fly(tweety)* can also be derived.

# Introduction

Recall: The Flying Penguin Example



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

4

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

References

⇒ *The knowledge base is inconsistent*. (Because the logic is monotonic; i.e., new knowledge can not void old knowledge.)

⇒ Require *different kinds of logic*!

- This example illustrates problems with traditional (classical) logic.
- It shows how standard logic struggles with exceptions and uncertain knowledge.
- Key idea: Logic derives that a penguin can fly, which is absurd!
- Leads to the need for *probabilistic* or *non-monotonic* logic.

# Introduction



Additionally, *reasoning with uncertain or incomplete knowledge* is important

- In everyday situations and also in many technical applications of AI, *heuristic processes are very important*.
  - Example: Use heuristic techniques when looking for a parking space in city traffic.
- *Heuristics alone are often not enough*, especially when *a quick decision is needed given incomplete knowledge*.



Let's just sit back  
and think about  
what to do!

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

5 Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

# Introduction

## Reasoning with conditional probabilities



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

6 Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

- *Conditional probabilities instead of implication* (as it is known in logic)
  - Significantly better in modeling everyday causal reasoning.
- *Subjective probabilities*
  - For example, if you are in the middle of the street and do not know whether you should turn left or right. (That is, the probabilities of turning left and turning right are unknown.)
  - From mathematical viewpoint, if you don't know the probabilities, you do nothing.
  - From AI viewpoint, you need to make a decision. So (even if you don't know anything) you "assume" that turning left and right have the same probability 0.5 and make a decision based on this "assumption".
  - *The "assumption" you made may not be true but it is subjective to you.*
- *Probability theory* is well-founded.
- Reasoning with uncertain and incomplete knowledge.
  - Maximum entropy method (MaxEnt) and the medical expert system LEXMED.
  - Bayesian networks.



# Computing with Probabilities



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

7 Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

## Definition

- **Sample space  $\Omega$ :** the finite set of *all possible outcomes* for an experiment.
- **Event:** subset of  $\Omega$ .
  - If the outcome of an experiment is included in an event  $E$ , then event  $E$  has occurred.
  - $A$  and  $B$  are events  $\Rightarrow A \cup B$  is an event.
- **Elementary event:** subset of  $\Omega$  containing exactly one element.
- **Sure event:**  $\Omega$ .
- **Impossible event:**  $\emptyset$ .

# Computing with Probabilities



## Example 1

- **Experiment:** Rolling a fair six-sided die.
- **Sample space:**  $\Omega = \{1, 2, 3, 4, 5, 6\}$ .
- Let  $E$  be the **event** “rolling an even number,” so  $E = \{2, 4, 6\}$  (a subset of  $\Omega$ ).
- If the die shows 4 (which is in  $E$ ), then  $E$  has occurred.
- Let  $A = \{1, 3, 5\}$  (odd numbers) and  $B = \{4, 5, 6\}$  (numbers greater than 3).
- Then  $A \cup B = \{1, 3, 4, 5, 6\}$  (union of the subsets), which is also an event meaning “rolling an odd number or a number greater than 3.”
- **Elementary event:** The event “rolling a 3” is  $\{3\}$ . This is the smallest possible non-empty event, representing a single specific outcome.
- **Sure event:**  $\Omega$ . This is the entire sample space,  $\{1, 2, 3, 4, 5, 6\}$ , which always occurs no matter what the die shows—you’re guaranteed to roll one of these numbers.
- **Impossible event:**  $\emptyset$  (the empty set). This represents something that can never happen, like “rolling a 7” on a six-sided die. The subset is empty because no outcome in  $\Omega$  satisfies it.

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

8 Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

# Computing with Probabilities



We will use *propositional logic notation for set operations*.

Set notation	Propositional logic	Description
$A \cap B$	$A \wedge B$	intersection / and
$A \cup B$	$A \vee B$	union / or
$\overline{A}$	$\neg A$	complement / negation
$\Omega$	$t$	certain event / true
$\emptyset$	$f$	impossible event / false

- $A, B$ , etc.: *random variables*.
- We consider only *discrete random variables with finite value range*.
- Example:
  - The variable *face\_number* for a dice roll is discrete with the values 1, 2, 3, 4, 5, 6.
  - The probability of rolling a five or a six is equal to  $1/3$ .

$$\begin{aligned}P(\text{face\_number} \in \{5, 6\}) \\&= P(\text{face\_number} = 5 \vee \text{face\_number} = 6) = 1/3.\end{aligned}$$

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

9 Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

References

# Computing with Probabilities



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

10 Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

## Definition

Let  $\Omega = \{\omega_1, \omega_2, \dots, \omega_n\}$  be finite. There is no preferred elementary event, which means that we assume a symmetry related to the frequency of how often each elementary event appears. The **probability**  $P(A)$  of the event  $A$  is then

$$P(A) = \frac{|A|}{|\Omega|} = \frac{\text{Number of favorable cases for } A}{\text{Number of possible cases}}.$$

## Example 2

Throwing a die, the probability for an even number is

$$P(\text{face\_number} \in \{2, 4, 6\}) = \frac{|\{2, 4, 6\}|}{|\{1, 2, 3, 4, 5, 6\}|} = \frac{3}{6} = \frac{1}{2}.$$

# Computing with Probabilities



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

11 Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

References

- Any elementary event has the probability  $1/|\Omega|$  (*Laplace assumption*).
- Applicable only at *finite event sets*.
- To *describe events* we use *variables with the appropriate number of values*.
  - Example: Variable *eye\_color* can take on the values *green*, *blue*, *brown*.
  - *eye\_color = blue* then describes an event because we are dealing with a proposition with the truth values *t* or *f*.
- *Binary (boolean) variables* (i.e., variables that can take on the values *t* and *f*) are propositions themselves.
  - Write  $P(\text{JohnCalls})$  instead of  $P(\text{JohnCalls} = t)$ .

# Computing with Probabilities



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

12 Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

## Theorem 1

- (1)  $P(\Omega) = 1$ .
- (2)  $P(\emptyset) = 0$ , which means that the impossible event has a probability of 0.
- (3) For pairwise exclusive events  $A$  and  $B$ , it is true that  $P(A \vee B) = P(A) + P(B)$ .
- (4) For two complementary events  $A$  and  $\neg A$ , it is true that  $P(A) + P(\neg A) = 1$ .
- (5) For arbitrary events  $A$  and  $B$ , it is true that  $P(A \vee B) = P(A) + P(B) - P(A \wedge B)$ .
- (6) For  $A \subseteq B$ , it is true that  $P(A) \leq P(B)$ .
- (7) If  $A_1, A_2, \dots, A_n$  are the elementary events, then
$$\sum_{i=1}^n P(A_i) = 1 \text{ (normalization condition).}$$

# Computing with Probabilities



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

13 Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation of  
Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

For binary variables  $A, B$ ,

- $P(A \wedge B) = P(A, B)$  stands for the probability of the event  $A \wedge B$ .
- *Distribution* or *joint probability distribution*  $\mathbf{P}(A, B)$  of the variables  $A$  and  $B$  is the vector

$$(P(A, B), P(A, \neg B), P(\neg A, B), P(\neg A, \neg B))$$

- Distribution in matrix form

$\mathbf{P}(A, B)$	$B = t$	$B = f$
$A = t$	$P(A, B)$	$P(A, \neg B)$
$A = f$	$P(\neg A, B)$	$P(\neg A, \neg B)$

# Computing with Probabilities



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

14 Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

In general,

- $d$  variables  $X_1, X_2, \dots, X_d$  with  $n$  values each
- The distribution contains the values  
 $P(X_1 = x_1, \dots, X_d = x_d)$
- $x_1, \dots, x_d$  each may have  $n$  different values
- The distribution can therefore be represented as a  
 $d$ -dimensional matrix with a total of  $n^d$  elements.
- By the normalization condition, one of these  $n^d$  values is  
redundant.
- Thus, the distribution is characterized by  $n^d - 1$  unique  
values.



# Computing with Probabilities

## Conditional Probability



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

15 Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

### Definition

For two events  $A$  and  $B$ , the probability  $P(A \mid B)$  for  $A$  under the condition  $B$  (*conditional probability*) is defined by

$$P(A \mid B) = \frac{P(A \wedge B)}{P(B)}$$

$P(A \mid B)$  = probability of  $A$  regarding event  $B$  only, i.e.

$$P(A \mid B) = \frac{|A \wedge B|}{|B|}.$$

Indeed, this can be proved as follows.

$$P(A \mid B) = \frac{P(A \wedge B)}{P(B)} = \frac{\frac{|A \wedge B|}{|\Omega|}}{\frac{|B|}{|\Omega|}} = \frac{|A \wedge B|}{|B|}.$$

# Computing with Probabilities

## Conditional Probability



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

16 Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

### Definition

If, for two events  $A$  and  $B$ ,  $P(A \mid B) = P(A)$ , then these events are called *independent*. In other words,  $A$  and  $B$  are independent if *the probability of the event  $A$  is not influenced by the event  $B$* .

## Theorem 2

*For independent events  $A$  and  $B$ , it follows from the definition that  $P(A \wedge B) = P(A) \cdot P(B)$ .*

# Computing with Probabilities

## Conditional Probability



- **Product Rule:** For two events  $A$  and  $B$ ,  
 $P(A \wedge B) = P(A | B) \cdot P(B)$ .
- **Chain Rule:** For random variables  $X_1, \dots, X_n$ ,

$$\begin{aligned} P(X_1, \dots, X_n) &= P(X_n | X_1, \dots, X_{n-1}) \cdot P(X_1, \dots, X_{n-1}) \\ &= P(X_n | X_1, \dots, X_{n-1}) \cdot P(X_{n-1} | X_1, \dots, X_{n-2}) \cdot P(X_1, \dots, X_{n-2}) \\ &= P(X_n | X_1, \dots, X_{n-1}) \cdot P(X_{n-1} | X_1, \dots, X_{n-2}) \\ &\quad \cdot P(X_1, \dots, X_{n-2}) \cdot \dots \cdot P(X_n | X_1) \cdot P(X_1) \\ &= \prod_{i=1}^n P(X_i | X_1, \dots, X_{i-1}). \end{aligned}$$

(Because the chain rule holds for all values of the (random) variables  $X_1, \dots, X_n$ , it has been formulated for the distribution using the symbol  $P$ .)

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

References

# Computing with Probabilities

## Conditional Probability



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

18 Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

- Since  $A \leftrightarrow (A \wedge B) \vee (A \wedge \neg B)$  is true for binary variables  $A$  and  $B$ , we also have

$$\begin{aligned} P(A) &= P((A \wedge B) \vee (A \wedge \neg B)) \\ &= P(A \wedge B) + P(A \wedge \neg B). \end{aligned}$$

$A \wedge B$  and  $A \wedge \neg B$  are pairwise exclusive

- In general,

$$\begin{aligned} P(X_1 = x_1, \dots, X_{d-1} = x_{d-1}) \\ = \sum_{x_d} P(X_1 = x_1, \dots, X_{d-1} = x_{d-1}, X_d = x_d) \end{aligned}$$

The application of this formula is called *marginalization*.

- Marginalization can also be applied to distribution  $\mathbf{P}(X_1, \dots, X_d)$ . The resulting distribution  $\mathbf{P}(X_1, \dots, X_{d-1})$  is called the *marginal distribution*.

# Computing with Probabilities

## Conditional Probability



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

19 Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

$$P(A \mid B) = \frac{P(A \wedge B)}{P(B)} \text{ as well as } P(B \mid A) = \frac{P(A \wedge B)}{P(A)}.$$

## Theorem 3 (Bayes' Theorem)

$$P(A \mid B) = \frac{P(B \mid A) \cdot P(A)}{P(B)}$$

# Computing with Probabilities

## Conditional Probability



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

20 Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

## Example 3

*Leuko* Leukocyte value higher than 10000

*App* Patient has appendicitis (appendix inflammation)

$P(App, Leuko)$	<i>App</i>	$\neg App$	Total
<i>Leuko</i>	0.23	0.31	0.54
$\neg Leuko$	0.05	0.41	0.46
Total	0.28	0.72	1

For example, it holds:

$$P(Leuko) = P(App, Leuko) + P(\neg App, Leuko) = 0.54$$

$$P(Leuko | App) = \frac{P(Leuko, App)}{P(App)} = \frac{0.23}{0.28} \approx 0.82.$$

# Computing with Probabilities

## Conditional Probability



### Example 3 (continued)

$$P(App | Leuko) = \frac{P(Leuko | App) \cdot P(App)}{P(Leuko)} = \frac{0.82 \cdot 0.28}{0.54} \approx 0.43.$$

- Assuming that *appendicitis affects the biology of all humans the same*, regardless of ethnicity.
- $P(Leuko | App)$  is a universal value that is *valid worldwide*.
- $P(App | Leuko)$ , on the other hand, is not universal, because this value is *influenced by the a priori probabilities  $P(App)$  and  $P(Leuko)$* . Each of these can *vary according to one's life circumstances*.
  - For example,  $P(Leuko)$  is dependent on whether a population has a high or low rate of exposure to infectious diseases. In the tropics, this value can differ significantly from that of cold regions.
- *Bayes' theorem*, however, makes it easy for us to *take the universally valid value  $P(Leuko | App)$* , and *compute  $P(App | Leuko)$  which is useful for diagnosis*.

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

21 Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation of  
Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

# Computing with Probabilities

## Conditional Probability



### Example 4

- Sales representative: “**Very reliable burglar alarm, reports any burglar with 99% certainty**”
- $A$ : Alarm,  $B$ : Burglar. The seller claims  $P(A | B) = 0.99$
- Thus with high certainty: *If alarm then burglary!*

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

22 Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References



# Computing with Probabilities

## Conditional Probability



### Example 4

- Sales representative: “**Very reliable burglar alarm, reports any burglar with 99% certainty**”
- $A$ : Alarm,  $B$ : Burglar. The seller claims  $P(A | B) = 0.99$
- Thus with high certainty: *If alarm then burglary!*
- *No! Be careful!*
- What does this mean when we hear the alarm go off?
  - Suppose we (the buyer) live in a relatively safe area in which break-ins are rare, with  $P(B) = 0.001$ .
  - Assume that the alarm system is triggered not only by burglars, but also by animals, such as birds or cats in the yard, which results in  $P(A) = 0.1$ .
  - Thus,  $P(B | A) = (P(A | B) \cdot P(B)) / P(A) \approx 0.01 \Rightarrow$  *There will be too many false alarms!*

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

22 Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

# Computing with Probabilities

## Conditional Probability



### Example 4

- Sales representative: “**Very reliable burglar alarm, reports any burglar with 99% certainty**”
- $A$ : Alarm,  $B$ : Burglar. The seller claims  $P(A | B) = 0.99$
- Thus with high certainty: *If alarm then burglary!*
- *No! Be careful!*
- What does this mean when we hear the alarm go off?
  - Suppose we (the buyer) live in a relatively safe area in which break-ins are rare, with  $P(B) = 0.001$ .
  - Assume that the alarm system is triggered not only by burglars, but also by animals, such as birds or cats in the yard, which results in  $P(A) = 0.1$ .
  - Thus,  $P(B | A) = (P(A | B) \cdot P(B)) / P(A) \approx 0.01 \Rightarrow$  *There will be too many false alarms!*
- Additionally, we have  $P(A) = P(A | B) \cdot P(B) + P(A | \neg B) \cdot P(\neg B) = 0.00099 + P(A | \neg B) \cdot 0.999 = 0.1$ , which implies  $P(A | \neg B) \approx 0.1 \Rightarrow$  The alarm will be triggered roughly every tenth day that there is not a break-in

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

22 Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

# The Principle of Maximum Entropy



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

23 The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

- A *calculus for reasoning under uncertainty* can be realized using probability theory.
- Often too little knowledge for solving the necessary equations  $\Rightarrow$  new ideas are needed.
- Idea from E.T. Jaynes (Physicist): **Given missing knowledge, one can maximize the entropy of the desired probability distribution.**
  - More precisely,
    - Take the precisely stated prior data or testable information about a probability distribution. *[What you already know.]*
    - Consider the set of all candidate probability distributions that satisfy those constraints. *[What are the possibilities given what you know?]*
    - Choose the distribution from this set that maximizes the (information) entropy. *[What is the least biased choice given what you know?]*
  - Intuition: MaxEnt picks the distribution that agrees with what you know and is otherwise as uniform as possible – it does not introduce any extra (unjustified) structure.
- Application to the LEXMED project.

# The Principle of Maximum Entropy



Let  $X$  be a discrete random variable with possible values  $x_1, x_2, \dots, x_n$  and probability distribution  $\mathbf{P}(X) = (p_1, p_2, \dots, p_n)$ , where  $p_i = P(X = x_i)$ .

## Definition

The *(information) entropy*  $H$  of the distribution  $\mathbf{P}(X)$  is defined as

$$H(\mathbf{P}) = - \sum_{i=1}^n p_i \log p_i$$

- Entropy is a *measure of the uncertainty* associated with a random variable.
  - The *higher the entropy*, the *more uncertain or unpredictable the variable* is.
  - If one outcome has probability 1 and all others 0, then the entropy is 0 (no uncertainty).
  - If all outcomes are equally likely, then the entropy is maximized (maximum uncertainty).
- Entropy is measured in *nats* when using the natural logarithm ( $\ln$ ) and in *bits* when using the base-2 logarithm ( $\log_2$ ). (The choice of base for  $\log$  depends on the context and application.)

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

24 The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables  
Graphical Representation  
of Knowledge as a  
Bayesian Network  
Conditional Independence  
Practical Application

Development of Bayesian  
Networks  
Semantics of Bayesian  
Networks

61 References

# The Principle of Maximum Entropy

An Inference Rule for Probabilities



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

25

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables  
Graphical Representation of  
Knowledge as a  
Bayesian Network

Conditional Independence  
Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61

References

## ■ Modus Ponens

$$\frac{A, A \Rightarrow B}{B}$$

## ■ Generalization to probability rules

$$\frac{P(A) = \alpha, P(B | A) = \beta}{P(B) = ?}$$

**Given:** two probability values  $\alpha, \beta$ ,      **Find:**  $P(B)$ .

## ■ Marginalization

$$\begin{aligned} P(B) &= P(A, B) + P(\neg A, B) \\ &= P(B | A) \cdot P(A) + P(B | \neg A) \cdot P(\neg A) \end{aligned}$$

The values of  $P(A)$ ,  $P(\neg A)$ , and  $P(B | A)$  are known. But  $P(B | \neg A)$  *is unknown*.

- We cannot make an exact statement about  $P(B)$  with classical probability theory, but at the most we can *estimate*  $P(B) \geq P(B | A) \cdot P(A)$ .

# The Principle of Maximum Entropy

An Inference Rule for Probabilities



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

26

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables  
Graphical Representation  
of Knowledge as a  
Bayesian Network  
Conditional Independence  
Practical Application  
Development of Bayesian  
Networks  
Semantics of Bayesian  
Networks

61

References

## ■ Distribution

$$\mathbf{P}(A, B) = (P(A, B), P(A, \neg B), P(\neg A, B), P(\neg A, \neg B))$$

## ■ Abbreviation

$$p_1 = P(A, B)$$

$$p_2 = P(A, \neg B)$$

$$p_3 = P(\neg A, B)$$

$$p_4 = P(\neg A, \neg B)$$

- These four parameters (unknowns)  $p_1, \dots, p_4$  define the distribution.
- Out of it, any probability for  $A$  and  $B$  can be calculated.
- Four equations are required to calculate these unknowns.

# The Principle of Maximum Entropy

## An Inference Rule for Probabilities



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

27

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61

References

- Normalization condition:  $p_1 + p_2 + p_3 + p_4 = 1$ .
- From the given values  $P(A) = \alpha$  and  $P(B | A) = \beta$  we calculate

$$P(A, B) = P(B | A) \cdot P(A) = \alpha\beta$$

$$P(A) = P(A, B) + P(A, \neg B).$$

- So far, we have the following system of three equations

$$p_1 + p_2 + p_3 + p_4 = 1$$

$$p_1 = \alpha\beta$$

$$p_1 + p_2 = \alpha$$

- Solve it as far as is possible, we get

$$p_1 = \alpha\beta$$

$$p_2 = \alpha(1 - \beta)$$

$$p_3 + p_4 = 1 - \alpha$$

One equation is missing!

# The Principle of Maximum Entropy

## An Inference Rule for Probabilities



- To come to a definite solution despite this missing knowledge, we change our point of view. **We use the given equation as a constraint for the solution of an optimization problem.**
- **Find:** Distribution  $\mathbf{p} = (p_3, p_4)$  which maximizes the entropy

$$H(\mathbf{p}) = - \sum_{i=1}^n p_i \ln p_i = -p_3 \ln p_3 - p_4 \ln p_4$$

under the constraint  $p_3 + p_4 = 1 - \alpha$ .

- **Why should the entropy function be maximized?**
  - The *entropy measures the uncertainty of a distribution* up to a constant factor.
  - *Negative entropy* is then a *measure of the amount of information a distribution contains*.
  - *Maximizing the entropy minimizes the information content of the distribution*.
  - Because *we are missing information about the distribution*, it must somehow be added in. We could fix an ad hoc value, for example  $p_3 = 0.1$ . Yet *it is better to determine the values  $p_3$  and  $p_4$  such that the information added is minimal*.

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

28

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation of  
Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61

References



# The Principle of Maximum Entropy

## An Inference Rule for Probabilities



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

29 An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables  
Graphical Representation  
of Knowledge as a  
Bayesian Network  
Conditional Independence  
Practical Application  
Development of Bayesian  
Networks  
Semantics of Bayesian  
Networks

61 References

- **Problem:** Maximizing  $H(\mathbf{p}) = -p_3 \ln p_3 - p_4 \ln p_4$  w.r.t the constraint  $p_3 + p_4 - 1 + \alpha = 0$ .
- Method of Lagrange multipliers.
- Lagrange function:

$$\begin{aligned} L &= H(\mathbf{p}) + \lambda(p_3 + p_4 - 1 + \alpha) \\ &= -p_3 \ln p_3 - p_4 \ln p_4 + \lambda(p_3 + p_4 - 1 + \alpha) \end{aligned}$$

- Taking the partial derivatives with respect to  $p_3$  and  $p_4$

$$\begin{aligned} \frac{\partial L}{\partial p_3} &= -\ln p_3 - 1 + \lambda = 0 \\ \frac{\partial L}{\partial p_4} &= -\ln p_4 - 1 + \lambda = 0 \end{aligned}$$

- These two equations along with the constraint give us a system of three equations and three unknowns  $p_3, p_4, \lambda$ . Solving it, we have  $p_3 = p_4 = (1 - \alpha)/2$ .

# The Principle of Maximum Entropy

## An Inference Rule for Probabilities



A *set of probabilistic equations* is called *consistent* if *there is at least one solution*, that is, one distribution which satisfies all equations.

### Theorem 4

*Let there be a consistent set of linear probabilistic equations. Then there exists a unique maximum for the entropy function with the given equations as constraints. The MaxEnt distribution thereby defined has minimum information content under the constraints.*

- It follows from this theorem that *there is no distribution which satisfies the constraints and has higher entropy than the MaxEnt distribution.*
- A calculus, which leads to distributions with a higher entropy is adding informations ad hoc, which again is not justified.

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

30

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables  
Graphical Representation  
of Knowledge as a  
Bayesian Network  
Conditional Independence  
Practical Application  
Development of Bayesian  
Networks  
Semantics of Bayesian  
Networks

61

References

# The Principle of Maximum Entropy

## An Inference Rule for Probabilities



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

31

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61

References

- $p_3$  and  $p_4$  always occur symmetrically.
- Therefore,  $p_3 = p_4$  (indifference).

### Definition

If an arbitrary exchange of two or more variables in the Lagrange equations results in equivalent equations, these variables are called *indifferent*.

## Theorem 5

*If a set of variables  $\{p_{i_1}, p_{i_2}, \dots, p_{i_k}\}$  is indifferent, then the maximum of the entropy under the given constraints is at the point where  $p_{i_1} = p_{i_2} = \dots = p_{i_k}$ .*

# The Principle of Maximum Entropy

## Maximum Entropy Without Explicit Constraints



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

32

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables  
Graphical Representation  
of Knowledge as a  
Bayesian Network  
Conditional Independence  
Practical Application  
Development of Bayesian  
Networks  
Semantics of Bayesian  
Networks

61

References

- No knowledge given  $\Rightarrow$  All variables are indifferent.  
(*Indifference Principle*.)
- No constraints beside the normalization condition  
$$p_1 + p_2 + \dots + p_n = 1.$$
- We can set  $p_1 = \dots = p_n = \frac{1}{n}.$
- Given a complete lack of knowledge, all worlds are equally probable. That is, the distribution is uniform.

# The Principle of Maximum Entropy

## Conditional Probability Versus Material Implication



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

33 Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

## Exercise 1

Do your own research on the relationship between *conditional probability* and *material implication* in the context of modeling reasoning.

# The Principle of Maximum Entropy

## MaxEnt-Systems



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

34

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61

References

- Often, MaxEnt optimization has no symbolic solution.
- Therefore: *numerical entropy maximization*.
- **SPIRIT** (Symmetrical Probabilistic Intensional Reasoning in Inference Networks in Transition, [www.xspirit.de](http://www.xspirit.de)): Fernuniversität Hagen.
- **PIT** (Probability Induction Tool, <http://www.maxent.de>): Munich Technical University.

## Exercise 2

Do your own research on the application of MaxEnt systems in the medical expert system LEXMED.

# Reasoning with Bayesian Networks



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

35 Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

- $d$  variables  $X_1, \dots, X_d$  with  $n$  values each
- Probability distribution has  $n^d - 1$  values.
- In practice *the distribution contains many redundancies*.  
⇒ It can be heavily reduced with the appropriate methods.
- *Bayesian networks* utilize knowledge about the independence of variables to simplify the model.

# Reasoning with Bayesian Networks

## Independent Variables



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

36 Independent Variables

Graphical Representation of  
Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

- Simplest case: all variables are pairwise independent

$$\mathbf{P}(X_1, X_2, \dots, X_d) = \mathbf{P}(X_1) \cdot \mathbf{P}(X_2) \cdot \dots \cdot \mathbf{P}(X_d)$$

- Conditional probabilities become trivial:<sup>1</sup>

$$P(A \mid B) = \frac{P(A, B)}{P(B)} = \frac{P(A)P(B)}{P(B)} = P(A).$$

- The situation becomes more interesting when *only a portion of the variables are independent or independent under certain conditions*. For reasoning in AI, the dependencies between variables happen to be important and must be utilized.

<sup>1</sup> In the naive Bayes method, the independence of all attributes is assumed, and this method has been successfully applied to text classification.



# Reasoning with Bayesian Networks

## Independent Variables



### Example 5 (Alarm-Example, [Pearl 1988]; [Russell and Norvig 2010])

- **Bob**: single, has an alarm system in his house.
- **John and Mary**: neighbors of Bob in the houses next door to the left and right, respectively.
- Bob asks John and Mary to call him at his office if they hear the alarm.

#### ■ *Knowledge Base*:

- Variables:  $J$  = “John calls”,  $M$  = “Mary calls”,  $Al$  = “Alarm siren sounds”,  $Bur$  = “Burglary”,  $Ear$  = “Earthquake”
- Calling behaviors of John and Mary

$$P(J | Al) = 0.90$$

$$P(M | Al) = 0.70$$

$$P(J | \neg Al) = 0.05$$

$$P(M | \neg Al) = 0.01$$

- The alarm is triggered by a burglary, but can also be triggered by a (weak) earthquake, which can lead to a false alarm.

$$P(Al | Bur, Ear) = 0.95$$

$$P(Al | \neg Bur, Ear) = 0.29$$

$$P(Al | Bur, \neg Ear) = 0.94$$

$$P(Al | \neg Bur, \neg Ear) = 0.001$$

- A priori probabilities:  $P(Bur) = 0.001$ ,  $P(Ear) = 0.002$ . ( $Bur$  and  $Ear$  are independent.)

- *Requests*:  $P(Bur | J \vee M)$ ,  $P(J | Bur)$ ,  $P(M | Bur)$

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

37

Independent Variables

Graphical Representation of  
Knowledge as a  
Bayesian Network

Conditional Independence  
Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61

References

# Reasoning with Bayesian Networks

## Graphical Representation of Knowledge as a Bayesian Network



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

38 Graphical Representation of  
Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61 References

- A *Bayesian network* is a directed acyclic graph (DAG) in which
  - each node represents a random variable,
  - each edge  $X_i \rightarrow X_j$  represents a *direct influence* of variable  $X_i$  on variable  $X_j$ , and
  - each node is associated with a conditional probability table (CPT) that quantifies the effects that the parents have on the node.
- The structure of the graph encodes *conditional independence* assumptions that can be exploited to simplify the representation of the joint probability distribution.
- The joint probability distribution over all variables  $X_1, \dots, X_d$  can be expressed as

$$\mathbf{P}(X_1, X_2, \dots, X_d) = \prod_{i=1}^d \mathbf{P}(X_i \mid \text{Parents}(X_i)),$$

where  $\text{Parents}(X_i)$  denotes the set of parent nodes of  $X_i$  in the graph.

# Reasoning with Bayesian Networks

## Graphical Representation of Knowledge as a Bayesian Network



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network


Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

References

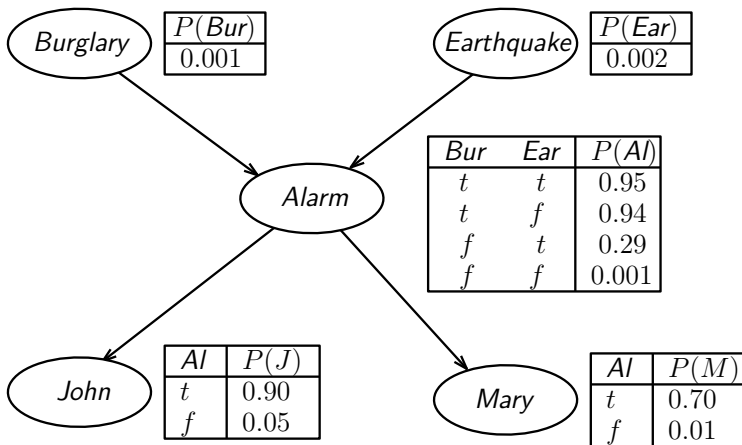

**Figure:** Bayesian network for the alarm example with the associated CPTs (conditional probability tables). The CPT of a node lists all the conditional probabilities of the node's variable conditioned on all the nodes connected by incoming edges.

# Reasoning with Bayesian Networks

## Conditional Independence



### Definition

Two variables  $A$  and  $B$  are called *conditionally independent*, given  $C$  if

$$\mathbf{P}(A, B \mid C) = \mathbf{P}(A \mid C) \cdot \mathbf{P}(B \mid C).$$

(This equation is *true for all combinations of values for all three variables* (that is, for the distribution).)

### Remark

- independent  $\nRightarrow$  conditional independent.
- conditional independent  $\nRightarrow$  independent.
- *$A$  and  $B$  are independent events* means knowing that  $A$  happened would not tell you anything about whether  $B$  happened (or vice versa).
- *$A$  and  $B$  are conditionally independent events, given  $C$*  means that if you already knew that  $C$  happened, then knowing that  $A$  happened would not tell you further information about whether  $B$  happened.

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

40

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61

References

# Reasoning with Bayesian Networks

## Conditional Independence



### Example 6 (Alarm-Example (cont.))

- John and Mary independently react to an alarm.  
 $P(J, M \mid A) = P(J \mid A) \cdot P(M \mid A)$ .
- Thus, *given an alarm, two variables  $J$  and  $M$  are independent*.
- (Without any condition,)  $J$  and  $M$  are not independent, that is,  $P(J, M) \neq P(J) \cdot P(M)$ . **[Why?]**
  - **Hint:** It suffices to show that the equation does not hold for one combination of values of  $J$  and  $M$ , say  $P(J, M) \neq P(J) \cdot P(M)$ . (More precisely,  $P(J = t, M = t) \neq P(J = t) \cdot P(M = t)$ .)
  - Calculate  $P(A)$  using the given probabilities, marginalization, and independence of *Bur* and *Ear*.  
(Result:  $P(A) \approx 0.00252$ .)
  - Then calculate  $P(J)$  and  $P(M)$  using conditional probabilities and the computed  $P(A)$ .  
(Result:  $P(J) = 0.052$  and  $P(M) = 0.0117$ .)
  - Similarly, calculate  $P(J, M)$  using conditional probabilities, conditional independence of  $J$  and  $M$  given  $A$ .  
(Result:  $P(J, M) \approx 0.002086$ .)
  - Compare  $P(J, M)$  and  $P(J) \cdot P(M)$ .

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

41

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61

References

# Reasoning with Bayesian Networks

## Conditional Independence



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

42

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61

References

## Example 7 (Alarm-Example (cont.))

- John react to an alarm, but does not react to a burglary.  
(This could be, for example, because of a high wall that blocks his view on Bob's property, but he can still hear the alarm.)

$$P(J, Bur | Al) = P(J | Al) \cdot P(Bur | Al).$$

- Given an alarm, the variables  $J$  and  $Ear$ ,  $M$  and  $Bur$ , as well as  $M$  and  $Ear$  are also independent.

$$P(J, Ear | Al) = P(J | Al) \cdot P(Ear | Al)$$

$$P(M, Bur | Al) = P(M | Al) \cdot P(Bur | Al)$$

$$P(M, Ear | Al) = P(M | Al) \cdot P(Ear | Al)$$

# Reasoning with Bayesian Networks

## Conditional Independence



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

43

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61

References

## Theorem 6

*The following equations are pairwise equivalent, which means that each individual equation describes the conditional independence for the variables  $A$  and  $B$  given  $C$ .*

$$\mathbf{P}(A, B \mid C) = \mathbf{P}(A \mid C) \cdot \mathbf{P}(B \mid C) \quad (1)$$

$$\mathbf{P}(A \mid B, C) = \mathbf{P}(A \mid C) \quad (2)$$

$$\mathbf{P}(B \mid A, C) = \mathbf{P}(B \mid C) \quad (3)$$

# Reasoning with Bayesian Networks

## Practical Application



Now we turn again to the *alarm example* and show *how the Bayesian network can be used for reasoning*.

$$P(J \mid Bur) = \frac{P(J, Bur)}{P(Bur)} = \frac{P(J, Bur, Al) + P(J, Bur, \neg Al)}{P(Bur)}$$

$$\begin{aligned} P(J, Bur, Al) &= P(J \mid Bur, Al)P(Al \mid Bur)P(Bur) \\ &= P(J \mid Al)P(Al \mid Bur)P(Bur) \end{aligned}$$

Chain rule  
*J* and *Bur*  
are independent  
given *Al*

$$\begin{aligned} P(J \mid Bur) &= \frac{P(J \mid Al)P(Al \mid Bur)P(Bur)}{P(Bur)} \\ &+ \frac{P(J \mid \neg Al)P(\neg Al \mid Bur)P(Bur)}{P(Bur)} \\ &= P(J \mid Al)P(Al \mid Bur) + P(J \mid \neg Al)P(\neg Al \mid Bur) \end{aligned}$$

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation of  
Knowledge as a  
Bayesian Network

Conditional Independence

44

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61

References



# Reasoning with Bayesian Networks

## Practical Application



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

References

$$\begin{aligned}P(AI | Bur) &= \frac{P(AI, Bur)}{P(Bur)} = \frac{P(AI, Bur, Ear) + P(AI, Bur, \neg Ear)}{P(Bur)} \\&= \frac{P(AI | Bur, Ear)P(Bur, Ear)}{P(Bur)} \\&\quad + \frac{P(AI | Bur, \neg Ear)P(Bur, \neg Ear)}{P(Bur)} \\&= \frac{P(AI | Bur, Ear)P(Bur)P(Ear)}{P(Bur)} \\&\quad + \frac{P(AI | Bur, \neg Ear)P(Bur)P(\neg Ear)}{P(Bur)} \\&= P(AI | Bur, Ear)P(Ear) + P(AI | Bur, \neg Ear)P(\neg Ear) \\&= 0.95 \cdot 0.002 + 0.94 \cdot 0.998 = 0.94\end{aligned}$$

Similarly,  $P(\neg AI | Bur) = 0.06$ .

45

61

# Reasoning with Bayesian Networks

## Practical Application



Therefore,

$$\begin{aligned}P(J \mid Bur) &= P(J \mid AI)P(AI \mid Bur) + P(J \mid \neg AI)P(\neg AI \mid Bur) \\&= 0.9 \cdot 0.94 + 0.05 \cdot 0.06 = 0.849.\end{aligned}$$

Analogously,  $P(M \mid Bur) = 0.659$ .

Similar to  $P(J \mid Bur)$ , we can calculate

$$\begin{aligned}P(J, M \mid Bur) &= P(J, M \mid AI)P(AI \mid Bur) \\&\quad + P(J, M \mid \neg AI)P(\neg AI \mid Bur) \\&= P(J \mid AI)P(M \mid AI)P(AI \mid Bur) \\&\quad + P(J \mid \neg AI)P(M \mid \neg AI)P(\neg AI \mid Bur) \\&= 0.9 \cdot 0.7 \cdot 0.94 + 0.05 \cdot 0.01 \cdot 0.06 = 0.5922.\end{aligned}$$

John calls for about 85% of all break-ins and Mary for about 66% of all break-ins. Both of them call for about 59% of all break-ins.

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation of  
Knowledge as a  
Bayesian Network

Conditional Independence

46

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61

References

# Reasoning with Bayesian Networks

## Practical Application



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

47

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61

References

$$P(J \vee M \mid Bur) = P(\neg(\neg J \wedge \neg M) \mid Bur)$$

$$= 1 - P(\neg J, \neg M \mid Bur)$$

$$P(\neg J, \neg M \mid Bur) = P(\neg J \mid Al)P(\neg M \mid Al)P(Al \mid Bur)$$

$$+ P(\neg J \mid \neg Al)P(\neg M \mid \neg Al)P(\neg Al \mid Bur)$$

$$= 0.1 \cdot 0.3 \cdot 0.94 + 0.95 \cdot 0.99 \cdot 0.06 = 0.085.$$

$$P(J \vee M \mid Bur) = 1 - P(\neg J, \neg M \mid Bur)$$

$$= 1 - 0.085 = 0.915.$$

Bob thus receives a notification from either John or Mary for about 92% of all burglaries

# Reasoning with Bayesian Networks

## Practical Application



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation of  
Knowledge as a  
Bayesian Network

Conditional Independence

48

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

61

References

$$P(Bur | J) = \frac{P(J | Bur)P(Bur)}{P(J)} = \frac{0.849 \cdot 0.001}{0.052} = 0.016$$
$$P(Bur | M) = \frac{P(M | Bur)P(Bur)}{P(M)} = \frac{0.659 \cdot 0.001}{0.0117} = 0.056$$
$$P(Bur | J, M) = \frac{P(J, M | Bur)P(Bur)}{P(J, M)}$$
$$= \frac{0.5922 \cdot 0.001}{0.002086} = 0.284.$$

- If John calls, the probability of a burglary is 1.6%. If Mary calls, it is 5.6%, which is about five times higher than John.  
⇒ Significantly higher confidence given a call from Mary.
- Bob should only be seriously concerned about his home if both of them call, as the probability of a burglary in that case is 28.4%.

# Reasoning with Bayesian Networks

## Development of Bayesian Networks



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

References

### Construction of a Bayesian network

- (1) Design of the network structure (usually performed manually)
- (2) Entering the probabilities in the CPTs (usually automated)

Construction of the network in the alarm example.

- **Causes:** *burglary* and *earthquake*
- **Symptoms:** *John* and *Mary*
- **Alarm:** hidden variable
  - Because John and Mary do not directly react to a burglar or earthquake, rather only to the alarm, it is appropriate to add this as an additional variable which is not observable by Bob.
- Considering causality: *going from cause to effect*

# Reasoning with Bayesian Networks

## Graphical Representation of Knowledge as a Bayesian Network



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence  
Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

References

### Design of a Bayesian network structure

1. **Nodes:** Determine the set of random variables required to model the domain and fix an ordering  $\{X_1, \dots, X_n\}$ , where, if possible, *causes precede effects* to obtain a more compact network.
2. **Links:** For each  $i = 1, \dots, n$  do:
  - (a) Select a minimal parent set  $\text{Parents}(X_i) \subseteq \{X_1, \dots, X_{i-1}\}$  such that the conditional independence constraint holds:

$$P(X_i \mid X_1, \dots, X_{i-1}) = P(X_i \mid \text{Parents}(X_i)).$$

Minimality means no proper subset of  $\text{Parents}(X_i)$  satisfies the equality.

- (b) For each  $X_j \in \text{Parents}(X_i)$  insert the directed edge  $X_j \rightarrow X_i$ .
- (c) Specify the conditional probability table (CPT) for  $X_i$ :

$$P(X_i \mid \text{Parents}(X_i)),$$

i.e., list  $P(X_i = x \mid \text{Parents}(X_i) = p)$  for every value  $x$  of  $X_i$  and every combination  $p$  of values of  $\text{Parents}(X_i)$ .

# Reasoning with Bayesian Networks

## Development of Bayesian Networks



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network


Conditional Independence

Practical Application


Development of Bayesian  
Networks

Semantics of Bayesian  
Networks


References



$A$  and  $B$  are  
independent



$A$  and  $B$  are  
independent given  $C$



**Figure:** There is no edge between  $A$  and  $B$  if they are independent (left) or conditionally independent (middle, right).

# Reasoning with Bayesian Networks

## Development of Bayesian Networks



Cause

*Burglary*

*Earthquake*

Hidden

*Alarm*

Effect

*John*

*Mary*

**Figure:** Stepwise construction of the alarm network considering causality

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence  
Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

52

61

References



# Reasoning with Bayesian Networks

## Development of Bayesian Networks



Cause

*Burglary*

*Earthquake*

Hidden

*Alarm*

Effect

*John*

*Mary*

**Figure:** Stepwise construction of the alarm network considering causality

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

52

61

References

# Reasoning with Bayesian Networks


## Development of Bayesian Networks



Cause

Hidden

Effect

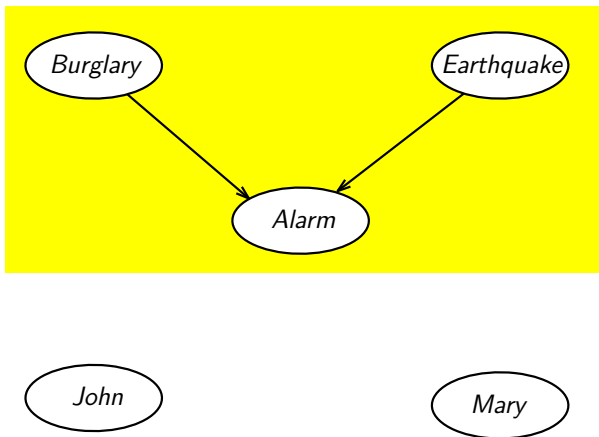

**Figure:** Stepwise construction of the alarm network considering causality

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

52

61

References

# Reasoning with Bayesian Networks


## Development of Bayesian Networks



Cause

Hidden

Effect

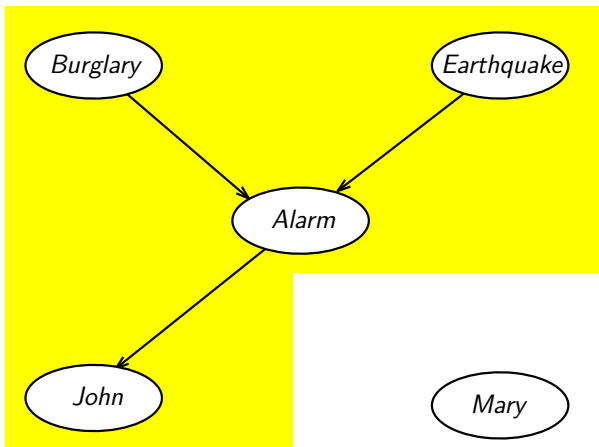

**Figure:** Stepwise construction of the alarm network considering causality

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

52

61

References

# Reasoning with Bayesian Networks

## Development of Bayesian Networks



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence  
Practical Application

Development of Bayesian  
Networks


Semantics of Bayesian  
Networks

References

Cause

Hidden

Effect

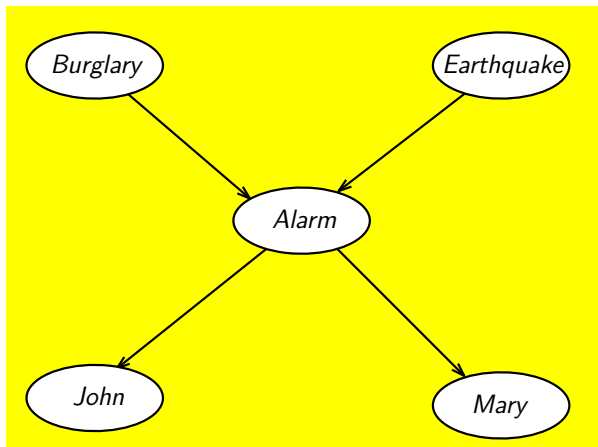

**Figure:** Stepwise construction of the alarm network considering causality

# Reasoning with Bayesian Networks

## Development of Bayesian Networks



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

53

61

References

- A Bayesian network is often *far more compact than the full joint distribution*. This compactness makes it *feasible to handle domains with many variables*.
- **Locally structured (sparse) systems:** *each subcomponent interacts directly with only a bounded number of other components, independent of the total number of components*. This typically yields linear rather than exponential growth in complexity.
- If each random variable is *directly influenced* by *at most  $k$  others* (for some constant  $k$ ) and we assume  $n$  Boolean variables, then:
  - each conditional probability table (CPT) needs at most  $2^k$  numbers,
  - the whole network can be specified by at most  $n2^k$  numbers,
  - whereas the full joint distribution requires  $2^n$  numbers.
  - Concrete example:  $n = 30$ ,  $k = 5$ :

$$n2^k = 30 \cdot 2^5 = 30 \cdot 32 = 960, \quad 2^n = 2^{30} \approx 1.07 \times 10^9.$$

- If a network is *fully connected* (every variable directly influenced by all others) the CPT specification cost approaches that of the joint distribution.
- **Practical tradeoff:** small, tenuous dependencies can be omitted to avoid large increases in model complexity. Example: one might add edges  $\text{Ear} \rightarrow J$  and  $\text{Ear} \rightarrow M$ , but only if the gain in accuracy justifies the extra parameters.

# Reasoning with Bayesian Networks

## Development of Bayesian Networks



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence  
Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

References

- The *structure of the Bayesian network* heavily *depends on the chosen variable ordering*.
- If the order of variables is chosen to reflect the causal relationship *beginning with the causes and proceeding to the diagnosis variables*, then the result will be *a simple network*.
- *Otherwise* the network may contain *significantly more edges*. Such non-causal networks are *often very difficult to understand* and have a *higher complexity for reasoning*.

# Reasoning with Bayesian Networks

## Semantics of Bayesian Networks



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

55

Semantics of Bayesian  
Networks

61

References

### Requirements

- Bayesian network has *no cycles*.
- The *variables are numbered* such that *no variable has a lower index than any variable that predecessor*.

It holds

$$\mathbf{P}(X_n \mid X_1, \dots, X_{n-1}) = \mathbf{P}(X_n \mid \text{Parent}(X_n))$$

$\Leftrightarrow$  An arbitrary variable  $X_i$  in a Bayesian network is conditionally independent of its ancestors, given its parents.

# Reasoning with Bayesian Networks

## Semantics of Bayesian Networks




More generally,

### Theorem 7

*A node in a Bayesian network is conditionally independent from all non-successor nodes, given its parents.*

Example of conditional independence in a Bayesian network. If the parent nodes  $E_1$  and  $E_2$  are given, then all non-successor nodes  $B_1, \dots, B_8$  are independent of  $A$ .

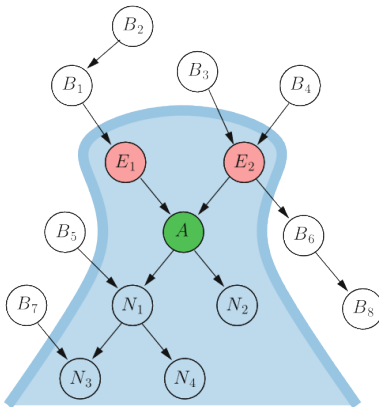

Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

56

Semantics of Bayesian  
Networks

61

References



# Reasoning with Bayesian Networks

## Semantics of Bayesian Networks



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation of  
Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

57

Semantics of Bayesian  
Networks

61

References

### ■ Chain rule for Bayesian network

$$\begin{aligned}\mathbf{P}(X_1, \dots, X_n) &= \prod_{i=1}^n \mathbf{P}(X_i \mid X_1, \dots, X_{i-1}) \\ &= \prod_{i=1}^n \mathbf{P}(X_i \mid \text{Parent}(X_i))\end{aligned}$$

### ■ Using this rule in the alarm example,

$$\mathbf{P}(J, Bur, Al) = \mathbf{P}(J \mid Al) \mathbf{P}(Al \mid Bur) \mathbf{P}(Bur)$$

# Reasoning with Bayesian Networks

## Semantics of Bayesian Networks



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication

MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

58

Semantics of Bayesian  
Networks

61

References

### Basics of Bayesian Networks

- A *Bayesian network* is defined by:
  - A set of variables and a set of directed edges between these variables.
  - Each variable has finitely many possible values.
  - The variables together with the edges form a directed acyclic graph (DAG). A DAG is a graph without cycles, that is, without paths of the form  $(A, \dots, A)$ .
  - For every variable  $A$  the CPT (that is, the table of conditional probabilities  $P(A \mid \text{Parents}(A))$ ) is given.
- Two variables  $A$  and  $B$  are called *conditionally independent* given  $C$  if  $\mathbf{P}(A, B \mid C) = \mathbf{P}(A \mid C)\mathbf{P}(B \mid C)$  or, equivalently, if  $\mathbf{P}(A \mid B, C) = \mathbf{P}(A \mid C)$ .

# Reasoning with Bayesian Networks

## Semantics of Bayesian Networks



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

59

Semantics of Bayesian  
Networks

61

References

### Basics of Bayesian Networks (cont.)

- Besides the foundational rules of computation for probabilities, the following rules are also true:

**Bayes' Theorem** 
$$P(A | B) = \frac{P(B | A)P(A)}{P(B)}.$$

**Marginalization** 
$$P(B) = P(A, B) + P(\neg A, B) = P(B | A)P(A) + P(B | \neg A)P(\neg A).$$

**Conditioning** 
$$P(A | B) = \sum_c P(A | B, C = c)P(C = c | B).$$

# Reasoning with Bayesian Networks

## Semantics of Bayesian Networks



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks

60

61

References

### Basics of Bayesian Networks (cont.)

- *A variable in a Bayesian network is conditionally independent of all non-successor variables given its parent variables.* If  $X_1, \dots, X_{n-1}$  are no successors of  $X_n$ , we have

$P(X_n | X_1, \dots, X_{n-1}) = P(X_n | \text{Parents}(X_n))$ . This condition must be honored during the construction of a network.

- During construction of a Bayesian network *the variables should be ordered according to causality*. First the causes, then the hidden variables, and the diagnosis variables last.

- *Chain rule:*  $P(X_1, \dots, X_n) = \prod_{i=1}^n P(X_i | \text{Parent}(X_i))$ .

# References



Reasoning with  
Uncertainty

Hoàng Anh Đức

Additional Materials

Introduction

Computing with  
Probabilities

Conditional Probability

The Principle of  
Maximum Entropy

An Inference Rule for  
Probabilities

Maximum Entropy Without  
Explicit Constraints

Conditional Probability  
Versus Material Implication  
MaxEnt-Systems

Reasoning with  
Bayesian Networks

Independent Variables

Graphical Representation  
of Knowledge as a  
Bayesian Network

Conditional Independence

Practical Application

Development of Bayesian  
Networks

Semantics of Bayesian  
Networks



Russell, Stuart J. and Peter Norvig (2010). *Artificial Intelligence: A Modern Approach*. 3rd. Pearson.



Pearl, Judea (1988). *Probabilistic Reasoning in Intelligent Systems: Networks of Plausible Inference*. Elsevier. DOI: 10.1016/C2009-0-27609-4.