


After using command `grep -c \".*\\(.\\.*Linux.*\\).\\.\\.\" access.log` , we could find out that there is 15 IP addresses, like in the picture below:

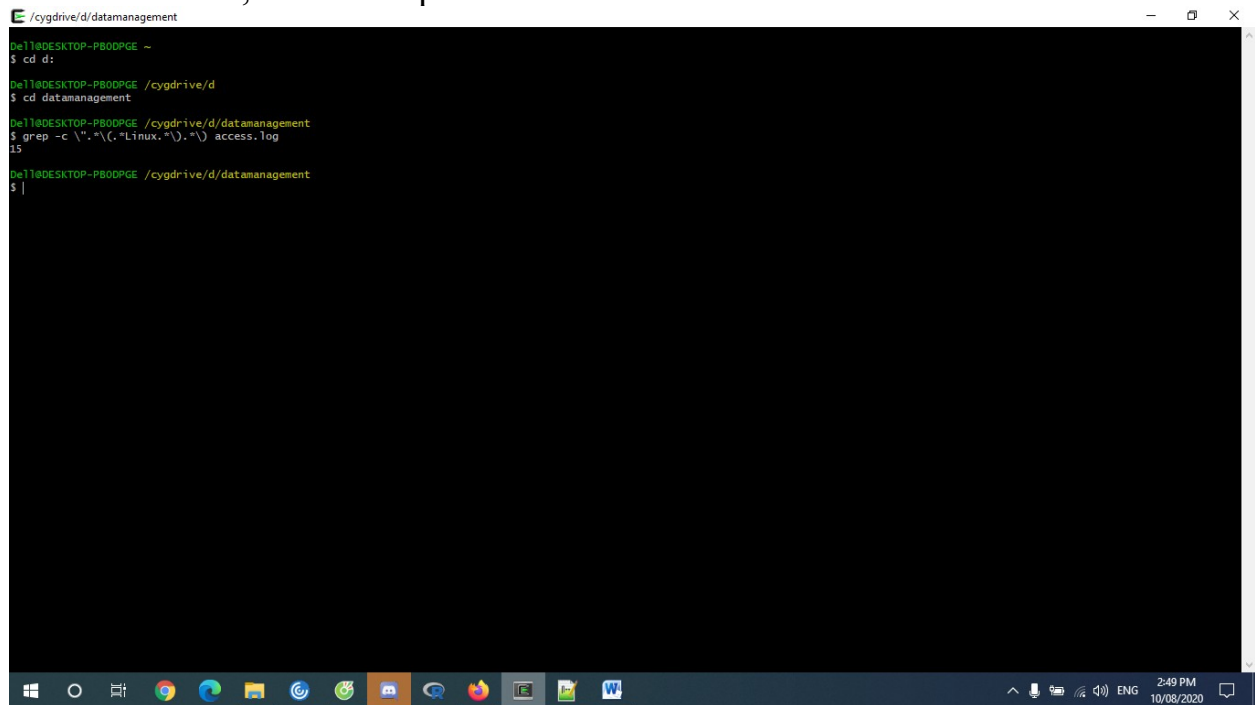

```
De118DESKTOP-P80DPGE /cygdrive/d/datanagement
$ cd d:
De118DESKTOP-P80DPGE /cygdrive/d
$ cd datanagement
De118DESKTOP-P80DPGE /cygdrive/d/datanagement
$ grep -c \".*\\(.\\.*Linux.*\\).\\.\\.\" access.log
15
De118DESKTOP-P80DPGE /cygdrive/d/datanagement
$ |
```