

JS

METHOD

Obj

- toString
- toLocaleString
- valueOf
- hasOwnProperty
- isPrototypeOf
- propertyIsEnumerable

Str

- charAt
- charCodeAt
- fromCharCode
- concat
- indexOf
- localeCompare
- match
- replace
- search
- slice
- split
- substring
- substr
- toLowerCase
- toUpperCase
- toLocaleLowerCase
- toLocaleUpperCase

Reg

- Test
- Match
- exec

Date


- Parse
- toDateString
- toTimeString
- getDate
- getDay
- getFullYear
- getHours
- getMilliseconds
- getMinutes
- getMonth
- getSeconds
- getTime
- getTimezoneOffset - getYear
- setDate - setHours - setMilliseconds
- setMinutes - setMonth - setSeconds
- setYear - toLocaleTimeString


Num

- toFixed
- toExponential
- toPrecision

Arr

- Concat
- Join
- Push
- Pop
- Reverse
- Shift
- Slice
- Sort
- Splice
- Unshift

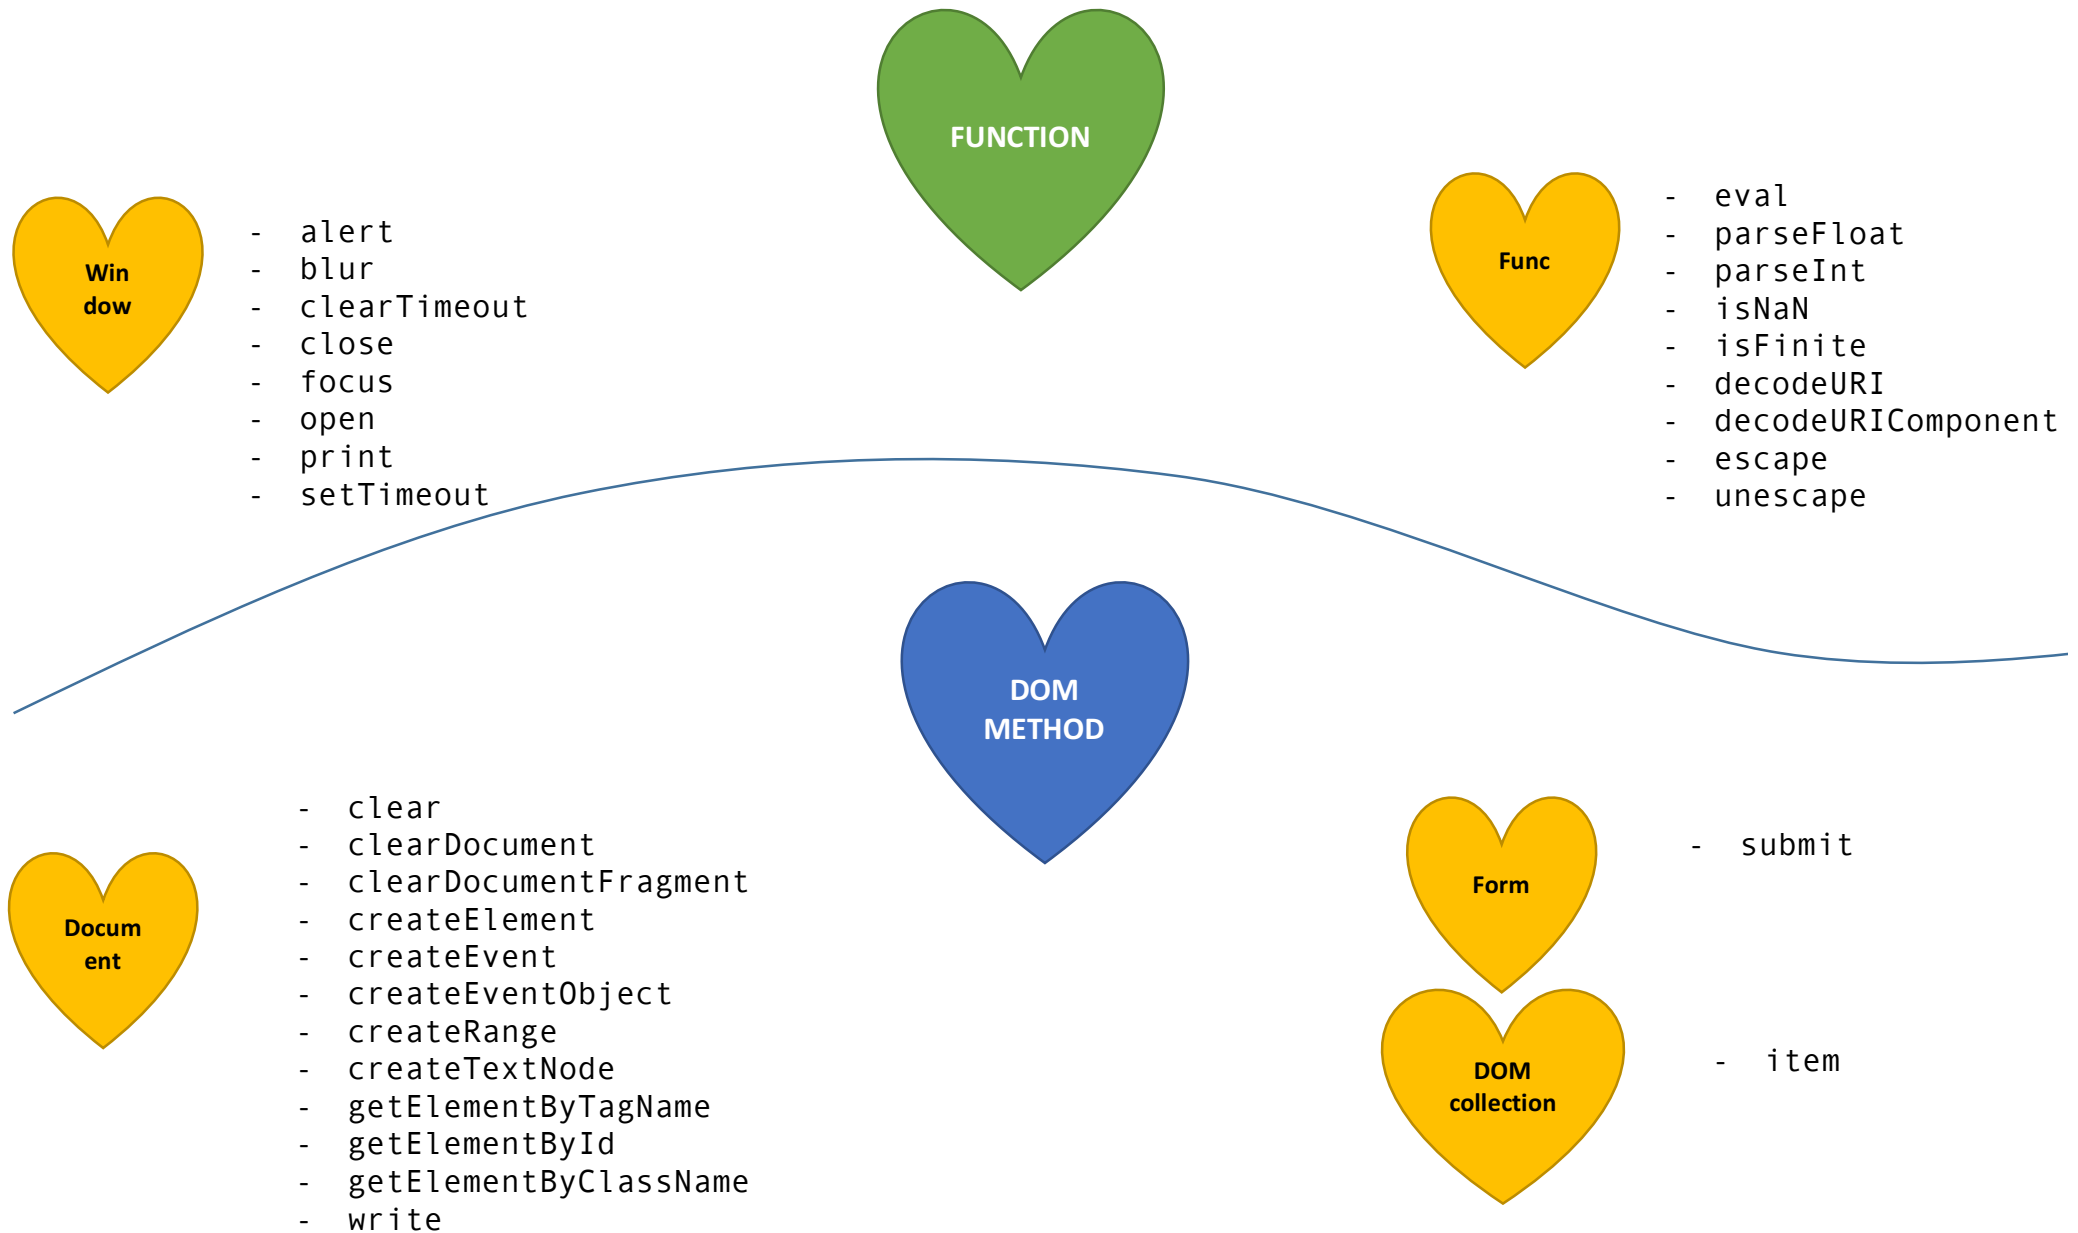




Node

- addEventListener
- appendChild
- attachEvent
- cloneNode
- createTextRange
- detachEvent
- dispatchEvent
- fireEvent
- getAttributeNS
- getAttributeNode
- hasChildNodes
- hasAttribute
- hasAttributes
- insertBefore
- removeChild
- removeEventListener
- replaceChild
- scrollIntoView



**XML
Serializer**

- toString



**DOM
METHOD**



**XML
DOM**

- loadXML



**DOM
parser**

- parseFromString



Range

- collapse
- createContextualFragment
- moveEnd
- moveStart
- parentElement
- select
- setStartBefore



Style

- getPropertyValue
- setProperty



Event

- initEvent
- preventDefault
- stopPropagation



**XMLHT
TP**

- open
- send



Regex Modifier

- /g: global matching
- /i: case insensitive
- /s: single line mode
- /m : multi line mode



Regex Patterns

- ^: Start of string
- \$: End of String
- .: Any single character
- (a|b) : a or b
- (...): group section
- [abc]: Item in range (a or b or c)
- [^abc] : Not in range (Not a or b or c)
- a?: zero or none of a
- a* :
- a+ : One or more of a
- a{3} : Exactly 3 of a
- a{3,} : 3 or more of a
- a{3,6} : Between 3 or 6 of a
- !(pattern): "Not" prefix. Apply rule when URL does not match pattern



Event Handler

- | | |
|--------------|---------------|
| - onAbort | - onMouseDown |
| - onBlur | - onMouseMove |
| - onClick | - onMouseOut |
| - onDbClick | - onMouseOver |
| - onDragDrop | - onMouseUp |
| - onError | - onMove |
| - onFocus | - onReset |
| - onKeyDown | - onResize |
| - onKeyPress | - onSelect |
| - onKeyUp | - onSubmit |
| - onLoad | - onUnload |
| - onChange | |

XMLHttpRequest
Object Methods

- abort()
- getAllResponseHeaders()
- getResponseHeader(header)
- open(method, URL)
- send(body)
- setRequestHeader(header, value)

XMLHttpRequest
Object
Properties

- onreadystatechange
- readyState
- responseText
- status
- statusText

XMLHttpRequest
readyState
Values

- 0 Uninitiated
- 1 Loading
- 2 Loaded
- 3 Interactive
- 4 Complete