

物件導向程式設計實習第一次作 業

班級：五專資工二甲

姓名：薛羽涵

學號：5B3G0001

指導老師：吳建中

一・題目

輸入兩個整數，分別是 a, b

顯示

假設

輸入

$a=10$

$b=5$

輸出

$a+b=10+5=15$

$a-b=10-5=5$

$a*b=10*5=50$

$a/b=10/5=2$

至少附上三組不同 a, b 正確的測試數據

二・程式

```
#include <iostream>

using namespace std;

int main()
{
    int a=10;
    int b=5;
    cout << "a+b=" << a << "+" << b << "=" << a+b << endl;
    cout << "a-b=" << a << "-" << b << "=" << a-b << endl;
    cout << "a*b=" << a << "*" << b << "=" << a*b << endl;
    cout << "a/b=" << a << "/" << b << "=" << a/b << endl;

    return 0;
}

#include <iostream>

using namespace std;
```

```

int main()
{
    int a=15;
    int b=5;
    cout << "a+b=" << a << "+" << b << "=" << a+b << endl;
    cout << "a-b=" << a << "-" << b << "=" << a-b << endl;
    cout << "a*b=" << a << "*" << b << "=" << a*b << endl;
    cout << "a/b=" << a << "/" << b << "=" << a/b << endl;

    return 0;
}

```

```

#include <iostream>

using namespace std;

int main()
{
    int a=20;
    int b=5;
    cout << "a+b=" << a << "+" << b << "=" << a+b << endl;
    cout << "a-b=" << a << "-" << b << "=" << a-b << endl;
    cout << "a*b=" << a << "*" << b << "=" << a*b << endl;
    cout << "a/b=" << a << "/" << b << "=" << a/b << endl;

    return 0;
}

```


三・程式說明

設兩個變數 **a**、**b**，假設數字，並用加減乘除分別計算。

因題目要求須多次驗證程式是否有錯誤，因此我分別更改 **b** 變數，確認程式執行無誤。


四 · 執行結果

```
1  #include <iostream>
2
3  using namespace std;
4
5  int main()
6  {
7      int a=10;
8      int b=5;
9      cout << "a+b=" << a << "+" << b << "=" << a+b << endl;
10     cout << "a-b=" << a << "-" << b << "=" << a-b << endl;
11     cout << "a*b=" << a << "*" << b << "=" << a*b << endl;
12     cout << "a/b=" << a << "/" << b << "=" << a/b << endl;
13
14     return 0;
15 }
16
```

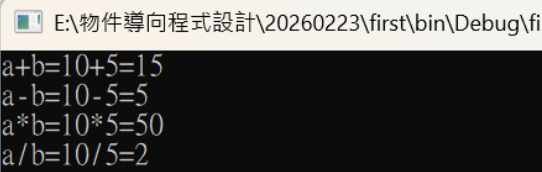


E:\物件導向程式設計\20260223\first\bin\Debug\fi
a+b=10+5=15
a-b=10-5=5
a*b=10*5=50
a/b=10/5=2

```
1  #include <iostream>
2
3  using namespace std;
4
5  int main()
6  {
7      int a=15;
8      int b=5;
9      cout << "a+b=" << a << "+" << b << "=" << a+b << endl;
10     cout << "a-b=" << a << "-" << b << "=" << a-b << endl;
11     cout << "a*b=" << a << "*" << b << "=" << a*b << endl;
12     cout << "a/b=" << a << "/" << b << "=" << a/b << endl;
13
14     return 0;
15 }
16
```

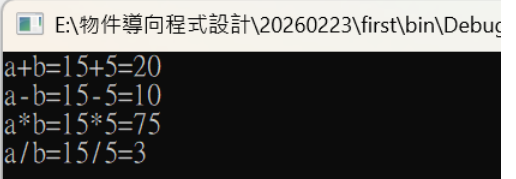

E:\物件導向程式設計\20260223\first\bin\Debug
a+b=15+5=20
a-b=15-5=10
a*b=15*5=75
a/b=15/5=3

```
1  #include <iostream>
2
3  using namespace std;
4
5  int main()
6  {
7      int a=20;
8      int b=5;
9      cout << "a+b=" << a << "+" << b << "=" << a+b << endl;
10     cout << "a-b=" << a << "-" << b << "=" << a-b << endl;
11     cout << "a*b=" << a << "*" << b << "=" << a*b << endl;
12     cout << "a/b=" << a << "/" << b << "=" << a/b << endl;
13
14     return 0;
15 }
16
```

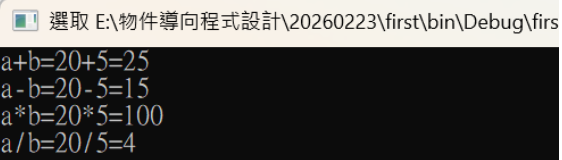

E:\物件導向程式設計\20260223\first\bin\Debug\first
a+b=20+5=25
a-b=20-5=15
a*b=20*5=100
a/b=20/5=4