

PROJECT DOCUMENTATION

SwiftShip Tracker: Parcel Tracking and Delivery Management System

Book parcels, track deliveries and get status by Parcel ID, using Agentforce.

OUR TEAM

Hobika Mn

TEAM LEADER

NM ID: 89F5F40E81CE63E884A4DB81C938D3B3 | Reg. No: 821923243020

Gowmidha C

TEAM MEMBER

NM ID: 688286753926f6e9617403cd0b902680 | Reg. No: 821923243020

Kanimozhi M

TEAM MEMBER

NM ID: 4AAA164C0B9DE728DD2472E65FD42986 | Reg. No: 821923243024

Abinaya M

TEAM MEMBER

NM ID: 6f9d6750fa91b79b26d451dc2ec83578 | Reg. No: 821923243002

Contents

01 Why We Built This

02 Goals and Choices

03 A Parcel's Journey

04 Requirements

05 Solution Design

06 Data Model

07 Flow Logic

08 Agentforce Setup

09 Build Log

10 Testing

11 Plan and Schedule

12 Strengths and Limits

13 Conclusion and Roadmap

A Appendix

3

3

3

4

4

5

6

8

9

12

13

14

14

15

The project at a glance

4 team members	42 story points	6 sprints
4 custom objects	1 Auto-Launched Flow	1 Agentforce agent

Customers lose time calling support or switching between apps just to find where a parcel is. Our solution moves that into Salesforce. Four custom objects hold the parcel, sender, receiver and delivery details, an Auto-Launched Flow fetches a parcel by its Parcel ID, a Prompt Template formats the answer, and an Agentforce agent lets a user get the full status just by typing the Parcel ID.

01

Why We Built This

The problem, and who feels it

Booking, tracking and managing parcels often needs a phone call to support or more than one app. This causes delays, repeated queries and confusion about where a parcel is. We looked at the problem from four points of view.

VOICE	WHAT HURTS	WHAT OUR SYSTEM DOES
Customer / sender	Has to call support or use several apps to know where a parcel is.	Asks the agent with a Parcel ID and gets status, weight and delivery date.
Delivery agent	Parcel and delivery details are scattered.	Keeps parcel, sender, receiver and delivery records linked in one place.
Support team	Many repeated 'where is my parcel' queries.	The agent answers status queries automatically.
Admin	Needs controlled access and visibility of records.	A permission set controls access; objects allow reports and field history.

02

Goals and Choices

What we aimed for and how we picked the approach

- Store parcel, sender, receiver and delivery details in custom objects.
- Fetch the details of a parcel from its **Parcel ID**.
- Show status, weight and estimated delivery date in a fixed, readable format.
- Let users ask in **plain conversation** through Agentforce.
- Control access to the data with a permission set.

Tools chosen. Salesforce Developer Edition for the data and security model, Flow Builder for automation, Prompt Builder for the response format and Agentforce for the conversational layer.

Decision

Salesforce with Agentforce. It keeps the data, the automation and the AI assistant on one platform, so a parcel can be looked up without any extra app or manual search.

03

A Parcel's Journey

From booking to delivery

#	STEP	WHAT THE CUSTOMER DOES	WHAT HAPPENS IN SALESFORCE
1	Book	Gives parcel, sender and receiver details.	Parcel record is created with a Parcel ID.
2	Link	Waits for confirmation.	Parcel is linked to Sender, Receiver and Delivery records.
3	Update	Receives status updates.	Agent updates status: Booked, In Transit, Out for Delivery, Delivered.
4	Ask	Types the Parcel ID to the agent.	Agent routes the request to the Parcel Tracker subagent.

#	STEP	WHAT THE CUSTOMER DOES	WHAT HAPPENS IN SALESFORCE
5	Retrieve	No customer action.	Flow finds the parcel and the prompt template formats the details.
6	Deliver	Receives the parcel.	Status becomes Delivered.

Highlighted rows (Ask and Retrieve) are the steps our solution automates.

04

Requirements

What the solution must do and how well

ID	FUNCTIONAL REQUIREMENT
FR-1	Create and manage parcel records
FR-2	Link parcels with sender, receiver and delivery details
FR-3	Track status (Booked, In Transit, Out for Delivery, Delivered)
FR-4	Retrieve parcel details using the Parcel ID
FR-5	Show the details in a fixed format using a Prompt Template
FR-6	Offer conversational tracking through Agentforce

QUALITY	EXPECTATION
Usability	Clear conversation and an easy-to-read tracking message.
Reliability	The same Parcel ID always returns the details stored in the record.
Security	Access to objects and the flow is controlled by a permission set.
Maintainability	The flow and the prompt template can be edited without writing code.
Scalability	Grows with parcel volume on the Salesforce platform.

05

Solution Design

Architecture, data flow and technology

Requests enter through Agentforce. The Flow does the work, and Salesforce records hold both the inputs and the results.

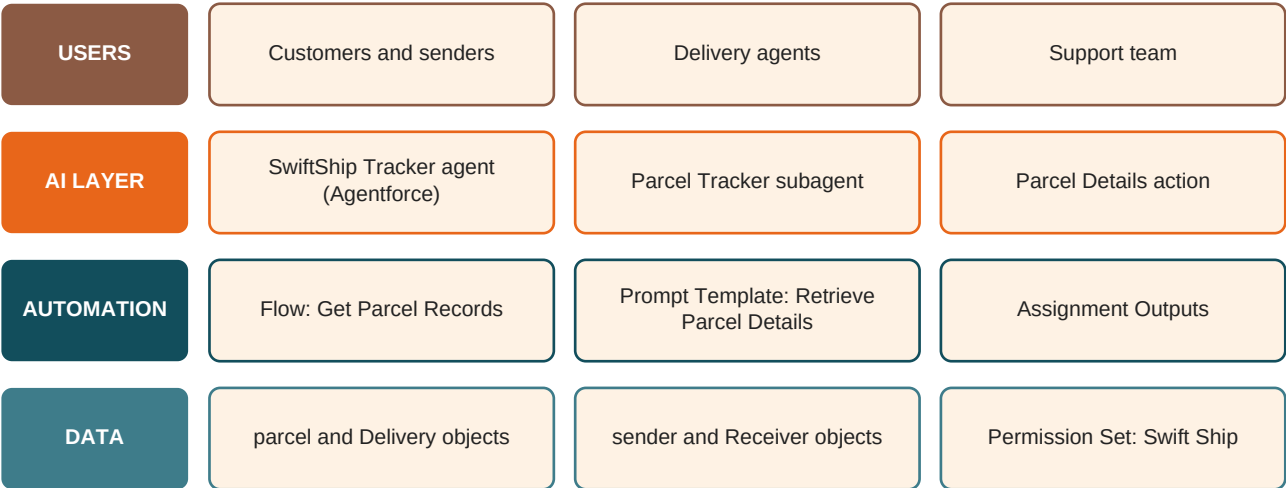


Figure 1. Four-layer architecture of the solution.

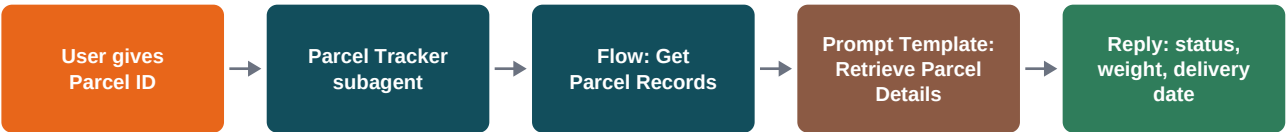


Figure 2. Path of one request through the solution.

LAYER	TECHNOLOGY
Platform	Salesforce Developer Edition org
Data	Custom objects parcel, Delivery, sender and Receiver
Logic	Auto-Launched Flow (Get Records, Action, Assignment)
AI	Prompt Builder template and Agentforce agent with a subagent and a Flow action
Security	Permission set Swift Ship (Einstein Agent license) and flow access

06

Data Model

The four custom objects and their fields

OBJECT	API NAME	PLURAL LABEL	PURPOSE
parcel	parcel__c	parcels	Core parcel details: ID, status, weight, delivery date
Delivery	Delivery__c	Deliveries	Delivery location and date, linked to a parcel and sender
sender	sender__c	senders	Sender address, contact and email
Receiver	Receiver__c	Receivers	Receiver address, contact and email

All four objects have **Allow Reports**, **Track Activities** and **Track Field History** enabled, and their deployment status is Deployed.

OBJECT	FIELD	TYPE	NOTES
parcel	Parcel ID	Auto Number	Unique ID, for example P-002
	Status	Picklist	Booked, In Transit, Out for Delivery, Delivered
	Weight	Number	Weight of the parcel

OBJECT	FIELD	TYPE	NOTES
	Estimate Delivery	Date	Expected delivery date (Estimate_Delivery__c)
	sender	Lookup (sender)	Gets details from the sender
	Current Location	Geolocation	Where the parcel is now
Delivery	Estimate Delivery	Date	Expected delivery date
	parcel / sender	Lookup	Links the delivery to its parcel and sender
sender	Sender Address	Geolocation	Location in longitude and latitude
	Sender Contact	Phone	To contact the sender
	Sender Email	Email	To send email notifications
Receiver	Receiver Address	Geolocation	Location in longitude and latitude
	Receiver Contact	Phone	To contact the receiver
	Receiver Email	Email	To send email notifications
	sender / Receiver	Lookup	Links the receiver to the sender

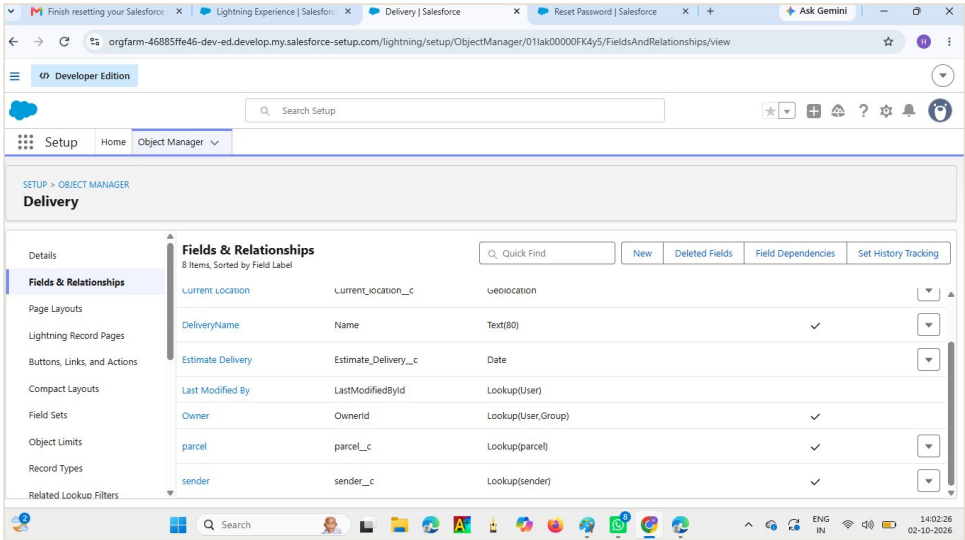


Figure 3. Delivery object: Fields and Relationships list.

07

Flow Logic

How the Auto-Launched Flow works

The flow **Parcel Updates** has no trigger, so Agentforce can call it as an action. It takes a Parcel ID and returns the formatted parcel details.

VARIABLE	TYPE	DIRECTION	HOLDS
Ids	Text	Input	Parcel ID passed by the agent, for example P-002
Output	Text	Output	Parcel tracking details returned to the agent

#	ELEMENT	WHAT IT DOES
1	Start (Autolaunched Flow)	No trigger; started by the Agentforce action.
2	Get Records: Get Parcel Records	Finds the parcel where Parcel_ID__c equals Ids.
3	Action: Parcel Updates	Runs the Retrieve Parcel Details prompt template on the parcel found.
4	Assignment: Assignment Outputs	Stores the prompt response in the Output variable.
5	End	Returns Output to the agent.

Prompt template. Retrieve Parcel Details (Prompt Builder) uses the parcel record and returns: Parcel Name, Parcel ID, Status, Weight and Estimated Delivery Date.

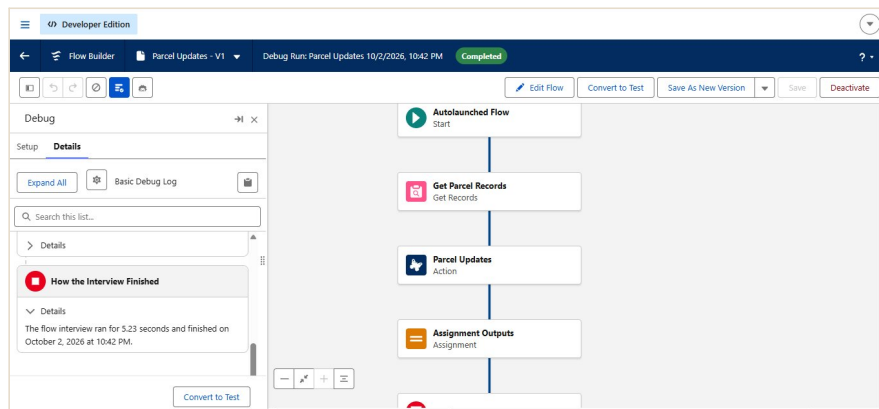


Figure 4. Flow debug run of Parcel Updates: Get Parcel Records, Parcel Updates action, Assignment Outputs. The run completed in 5.23 seconds.

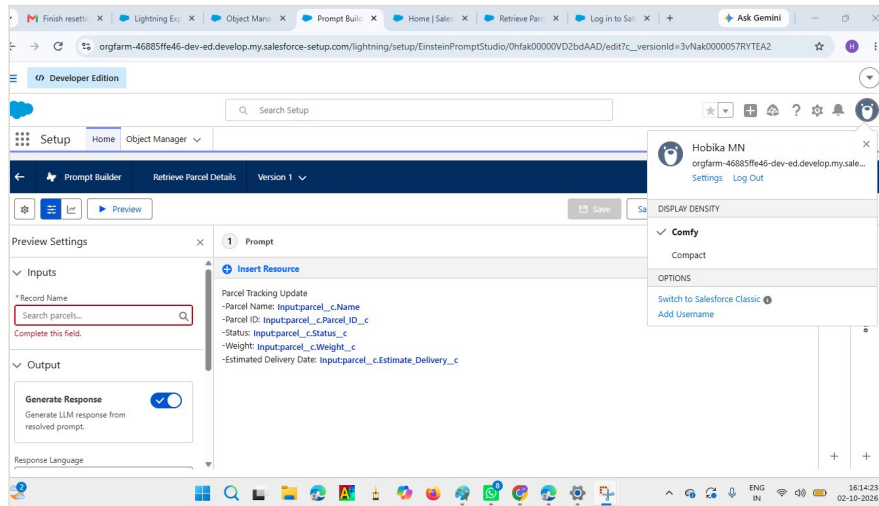


Figure 5. Prompt Builder: Retrieve Parcel Details template with the parcel fields mapped.

08 Agentforce Setup

Agent, subagent, action and permissions

PROPERTY	VALUE
Agent	SwiftShip Tracker (Agentforce Service agent, Version 1, Active)
Subagent	Parcel Tracker: tracks the parcel based on the Parcel ID
Action	Parcel Details (Reference Action Type: Flow, using Parcel Updates)
Action input / output	Input: Ids (Parcel ID). Output: Output (parcel details text)
Permission set	Swift Ship (Einstein Agent license), assigned to EinsteinAgentUser, with Read, Create and Edit on parcel, Delivery, sender and Receiver, and access to the Parcel Updates flow

Instruction for the subagent. When the user asks for parcel details and gives a Parcel ID, show all the parcel information returned by the action.

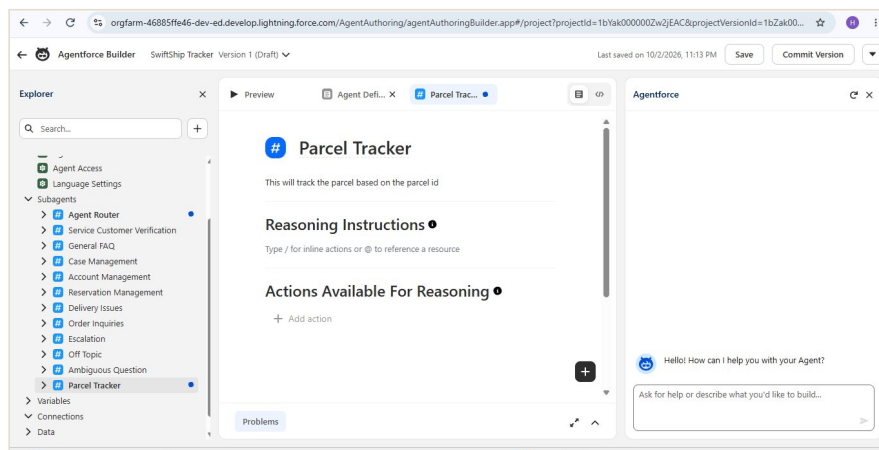


Figure 6. Agentforce Builder: SwiftShip Tracker agent with the Parcel Tracker subagent.

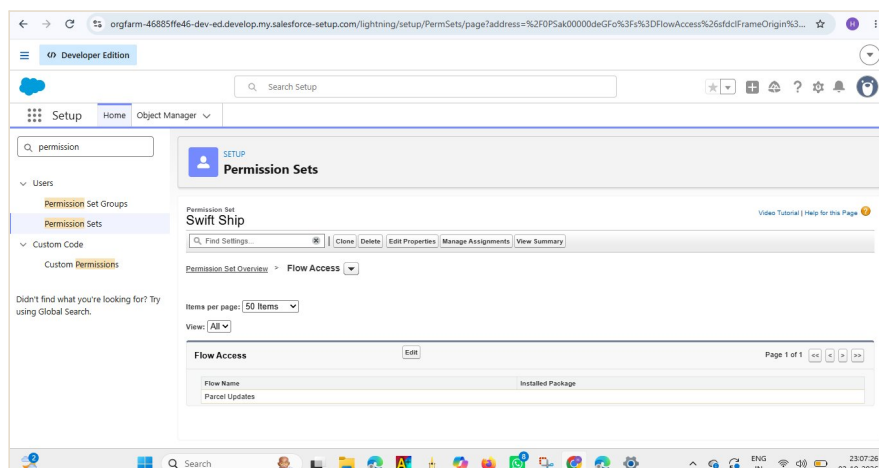


Figure 7. Permission set Swift Ship: Flow Access lists the Parcel Updates flow.

09 Build Log

How we set it up, milestone by milestone

Milestone 1 - Environment. Sign up for a Salesforce Developer Edition org, verify the account and open Setup.

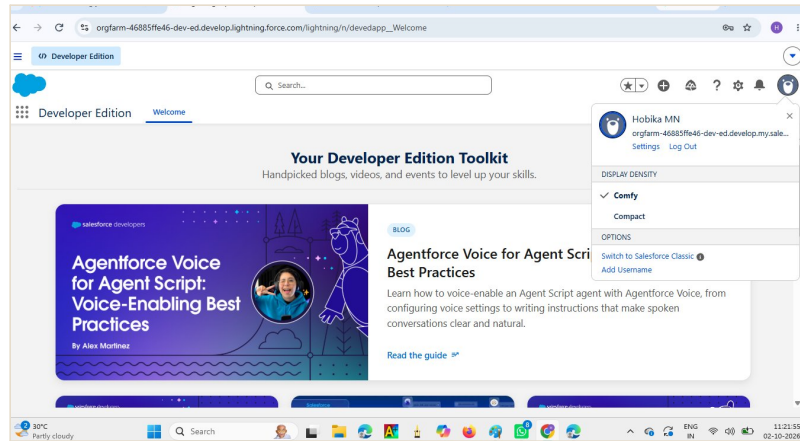


Figure 8. Developer Edition org home page.

Milestone 2 - Objects. Create the custom objects parcel, Delivery, sender and Receiver with Allow Reports, Allow Search and Track Field History.

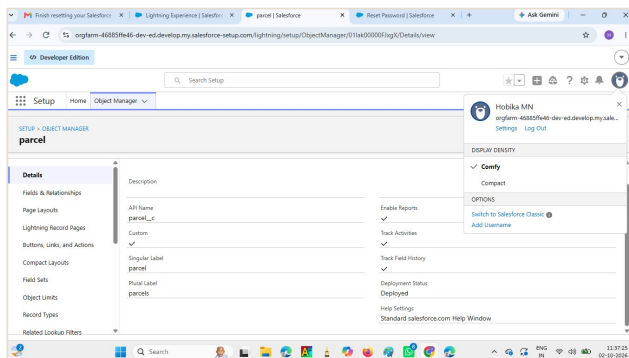


Figure 9. parcel object details.

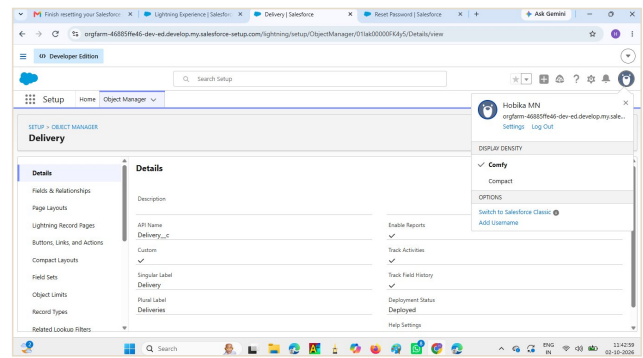


Figure 10. Delivery object details.

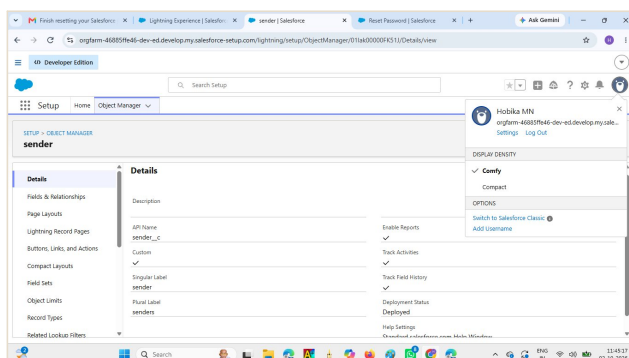


Figure 11. sender object details.

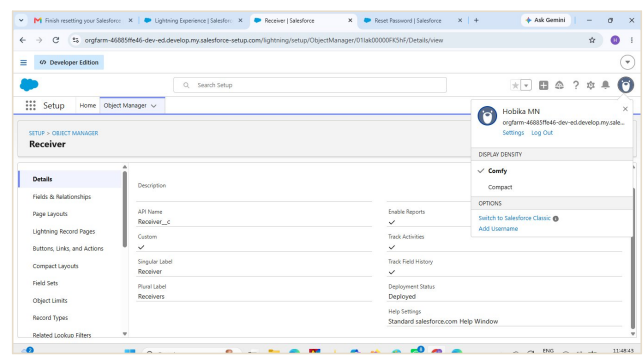


Figure 12. Receiver object details.

Milestone 3 - Tabs. Create a custom object tab for each object.

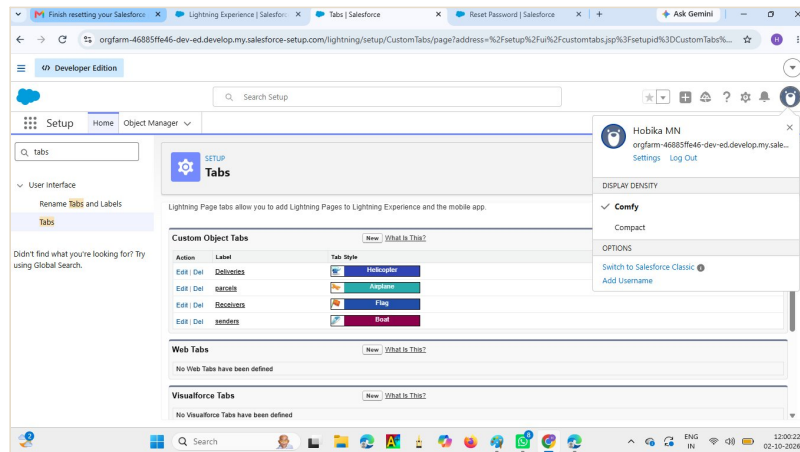


Figure 13. Custom Object Tabs: Deliveries, parcels, Receivers and senders.

Milestone 4 - Fields and relationships. Create the fields from Section 06 and the lookup relationships. The screenshots are below.

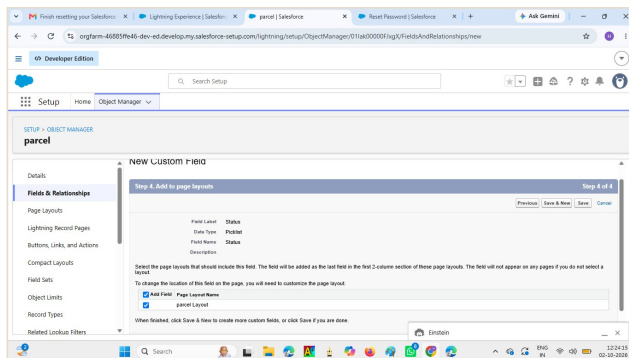


Figure 14. parcel: Status (Picklist).

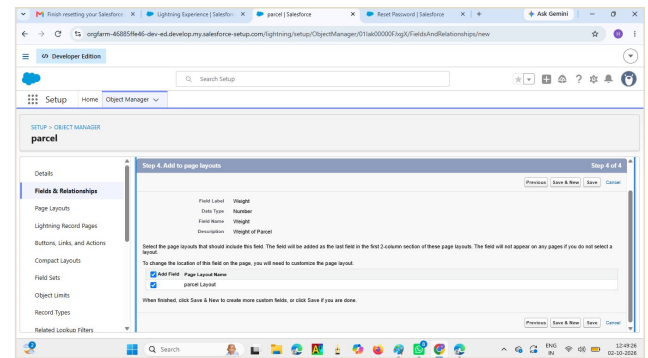


Figure 15. parcel: Weight (Number).

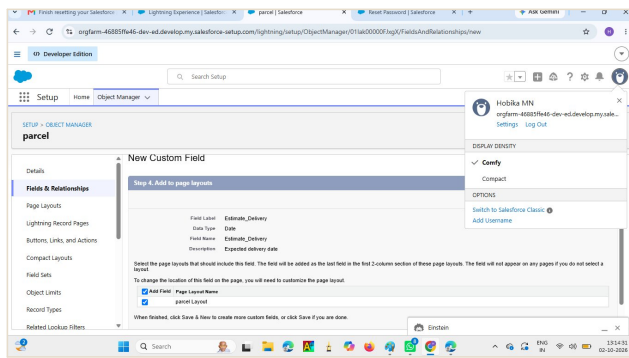


Figure 16. parcel: Estimate Delivery (Date).

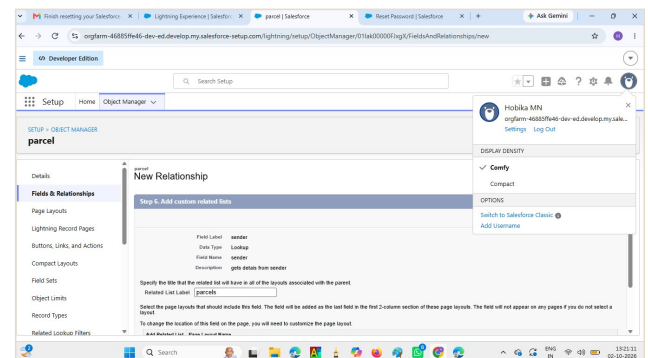


Figure 17. parcel: sender (Lookup).

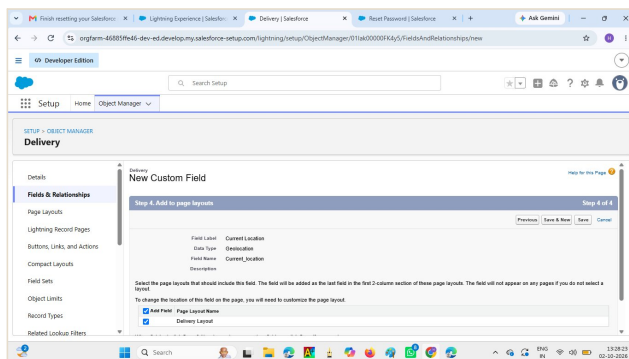


Figure 18. Delivery: Current Location (Geolocation).

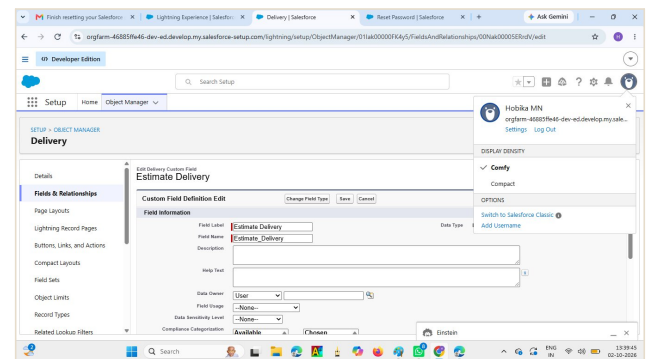


Figure 19. Delivery: Estimate Delivery (Date).

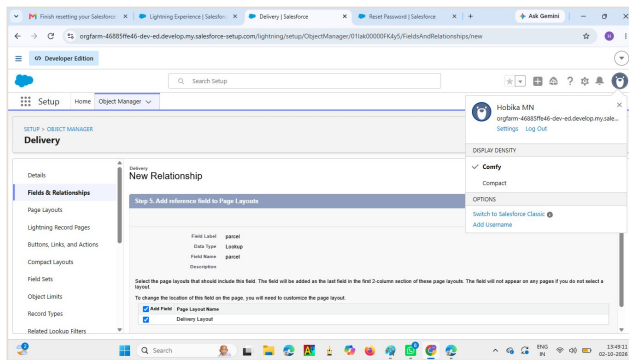


Figure 20. Delivery: parcel (Lookup).

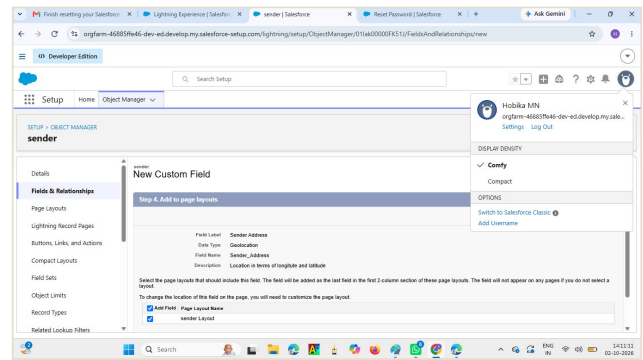


Figure 21. sender: Sender Address (Geolocation).

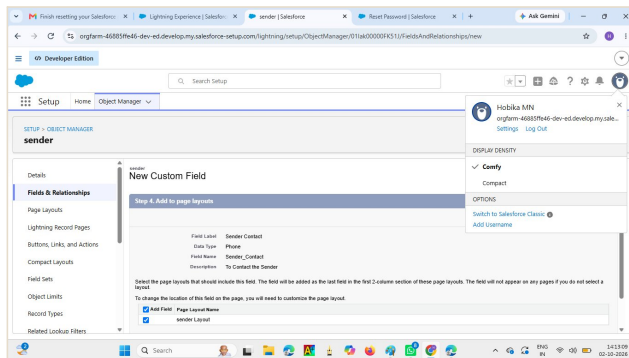


Figure 22. sender: Sender Contact (Phone).

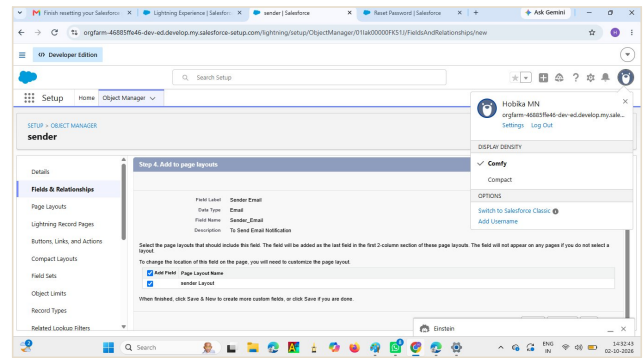


Figure 23. sender: Sender Email (Email).

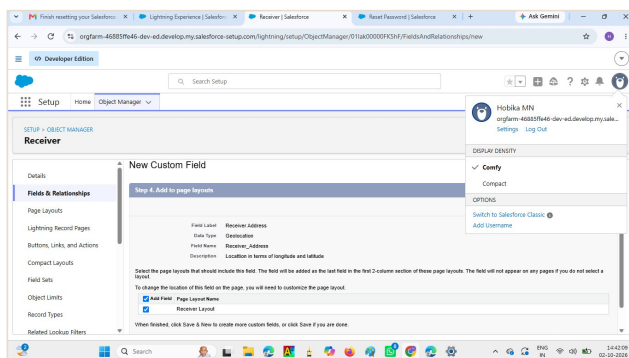


Figure 24. Receiver: Receiver Address (Geolocation).

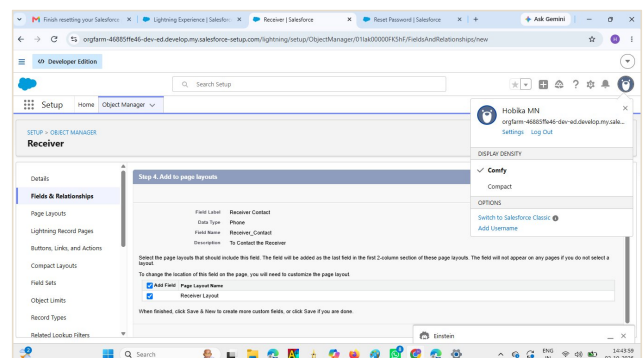


Figure 25. Receiver: Receiver Contact (Phone).

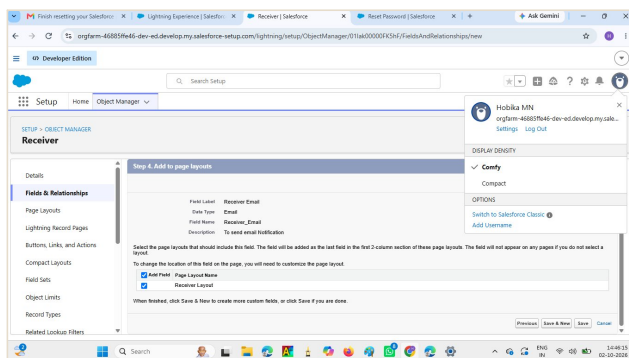


Figure 26. Receiver: Receiver Email (Email).

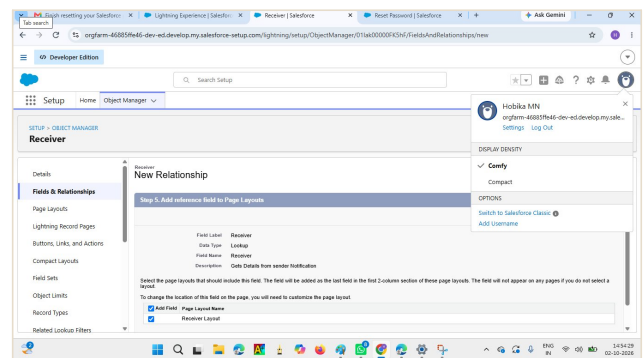


Figure 27. Receiver: Receiver (Lookup).

Milestone 5 - Prompt Builder. Create the Retrieve Parcel Details template, insert the parcel fields as resources, save and activate.

Milestone 6 - Flow. Build the Auto-Launched Flow Parcel Updates (Section 07), activate it and give access through the permission set.

Milestone 7 - Agentforce. Enable the default agent and Einstein, create the SwiftShip Tracker agent, add the Parcel Tracker subagent and the Parcel Details action, assign the Swift Ship permission set to EinsteinAgentUser, then commit and activate.

10 Testing

Checks we ran

Tests were run in Flow Builder (debug) and in the Agentforce Builder preview with the sample parcel **P-002**.

TEST	INPUT	EXPECTED RESULT	ACTUAL RESULT	RESULT
TC-01	Debug run of flow Parcel Updates	Flow completes without error.	Run completed in 5.23 seconds.	Pass
TC-02	'please provide parcel information about parcel id = P-002'	Agent returns the parcel details.	Sandwood, P-002, Out for Delivery, weight 5, estimated delivery 09/26/2026.	Pass
TC-03	Same request, trace view	Request routed to the Parcel Tracker subagent and Parcel Details action.	Transition to Parcel Tracker, action Parcel Details with Ids = P-002, output grounded.	Pass

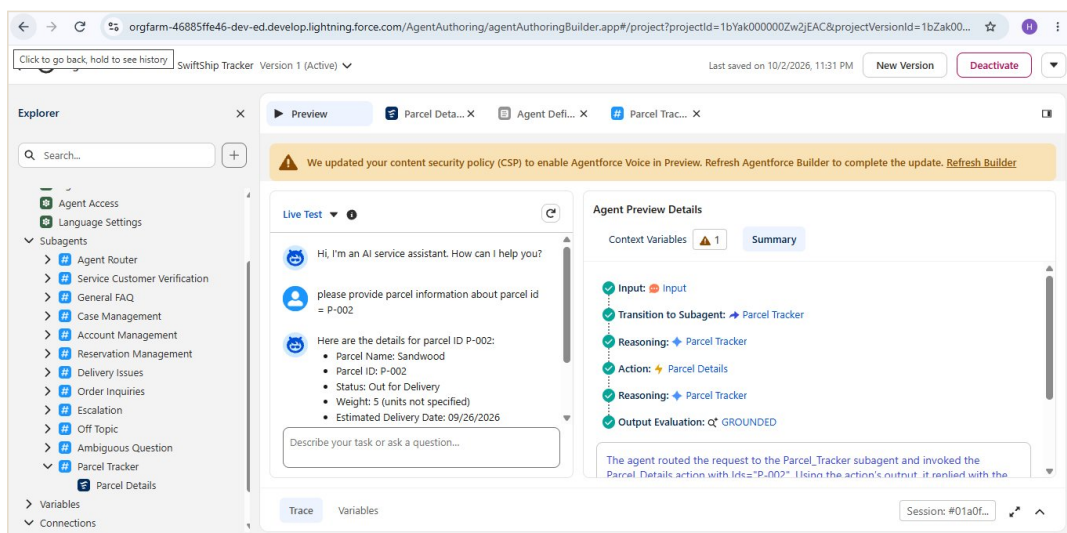


Figure 28. Agent preview: parcel request, subagent transition and action trace.

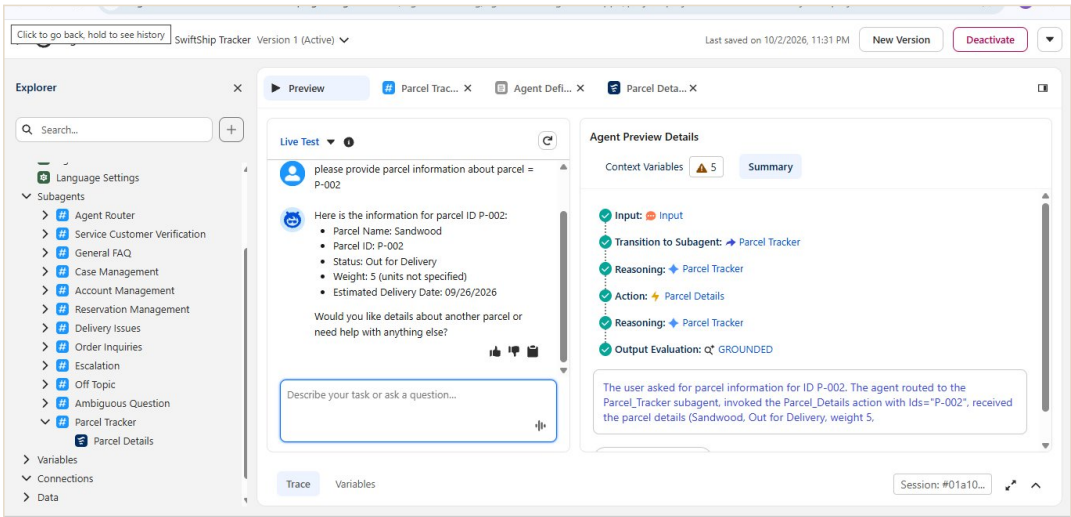


Figure 29. Agent preview: parcel details returned for P-002.

11

Plan and Schedule

Agile sprints and story points

We worked in six short sprints. Work was split into user stories, each sized in story points.

SPRINT	USER STORY	PTS	OWNER
1	USN-1: Configure the Salesforce developer environment.	3	Hobika Mn
2	USN-2: Create the four custom objects and their tabs.	5	Gowmidha C
2	USN-3: Create fields and relationships.	5	Kanimozhi M
3	USN-4: Build the Retrieve Parcel Details prompt template.	5	Abinaya M
3	USN-5: Build the Auto-Launched Flow (Parcel Updates).	5	Hobika Mn
4	USN-6: Create the Agentforce agent, subagent and action.	8	Gowmidha C
4	USN-7: Permission set and flow access for the agent user.	3	Kanimozhi M
5	USN-8: Test the flow and the agent with sample parcels.	5	Abinaya M
6	USN-9: Documentation and final review.	3	Hobika Mn

Story points planned per sprint (peak load in orange)

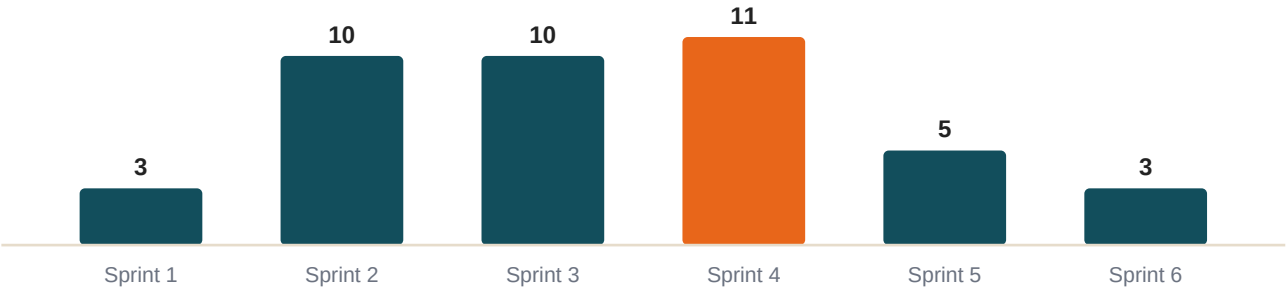


Figure 30. Planned story points per sprint (total 42).

Velocity. 42 points over 6 sprints is about **7.0 points per sprint**.

12

Strengths and Limits

An honest look at what we built

Strengths

- Parcel details are fetched from just a Parcel ID.
- Answers come in a fixed, readable format.
- Parcel, sender, receiver and delivery records are linked.
- Flow and prompt can be changed without code.
- Access is controlled through a permission set.
- Grows with parcel volume on Salesforce.

Limits

- The agent currently looks up status only; booking and updates are done in Salesforce.
- Email notifications, Experience Cloud portal and dashboards are planned, not built.
- Weight is shown without a unit.
- Tested only in a Developer Edition org, with no sandbox or UAT stage.
- A wrong or missing Parcel ID has no custom fault message yet.

13

Conclusion and Roadmap

SwiftShip Tracker brings parcel records, a Flow, a Prompt Template and an Agentforce agent together on Salesforce. Given only a Parcel ID, the agent finds the parcel and replies in plain language with its status, weight and estimated delivery date. The outcome is less manual searching, fewer support calls and clearer communication with the customer.

Where we would take it next

AREA	NEXT STEP
Notifications	Send email alerts to sender and receiver at every status change.
Customer portal	Give customers self-service tracking through Experience Cloud.
Agent actions	Let the agent book parcels and update delivery status.
Insight	Add reports and dashboards for parcel trends and delivery performance.
Richer answers	Show weight units and the current location from the Delivery record.
Reliability	Add a fault path with a clear message when a Parcel ID is not found.

A

Appendix

Reference items and team

REF	ITEM	DESCRIPTION
A	Custom objects	parcel__c, Delivery__c, sender__c, Receiver__c
B	Flow	Parcel Updates (Auto-Launched Flow)
C	Prompt template	Retrieve Parcel Details
D	Agent	SwiftShip Tracker, subagent Parcel Tracker, action Parcel Details
E	Permission set	Swift Ship

TEAM MEMBER	ROLE	NM ID	REGISTER NO.
Hobika Mn	Team Leader	89F5F40E81CE63E884A4DB81C938D3B3	821923243020
Gowmidha C	Team Member	688286753926f6e9617403cd0b902680	821923243020
Kanimozhi M	Team Member	4AAA164C0B9DE728DD2472E65FD42986	821923243024
Abinaya M	Team Member	6f9d6750fa91b79b26d451dc2ec83578	821923243002