
How agentlore works

Your AI coding tools already write every session to disk. agentlore reads those files, removes secrets, and keeps one local search index. Any agent can then look up what another agent learned in another repo or another tool, and only when the task needs it.

From transcripts to a shared index

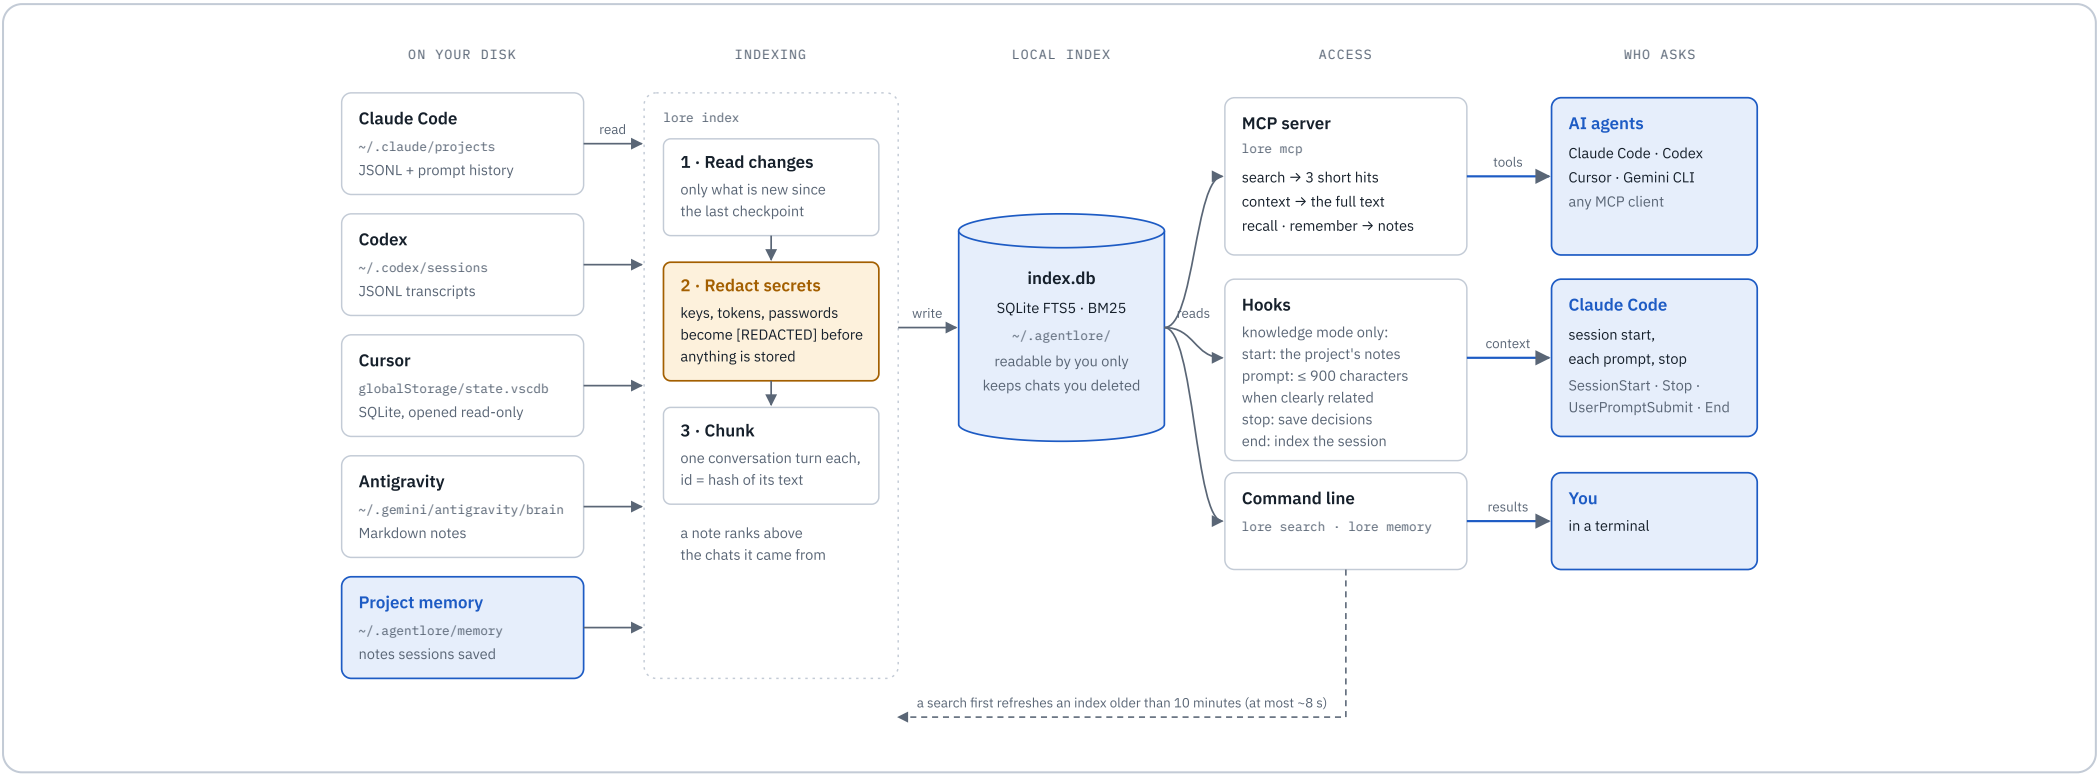

No background service runs. `lore index` fills the index once; after that, any search notices a stale index and reads only what changed. Secrets are removed in step 2, before anything reaches the index.

Local only

No network calls and no LLM, unless you opt into semantic search or nightly consolidation. Delete `~/.agentlore` and everything is gone.


Read-only on your tools

Transcript folders and Cursor's database are never written to.

Fast


7.9 GB of transcripts indexed in about 15 s; a search takes 1–90 ms.

One question, two small calls

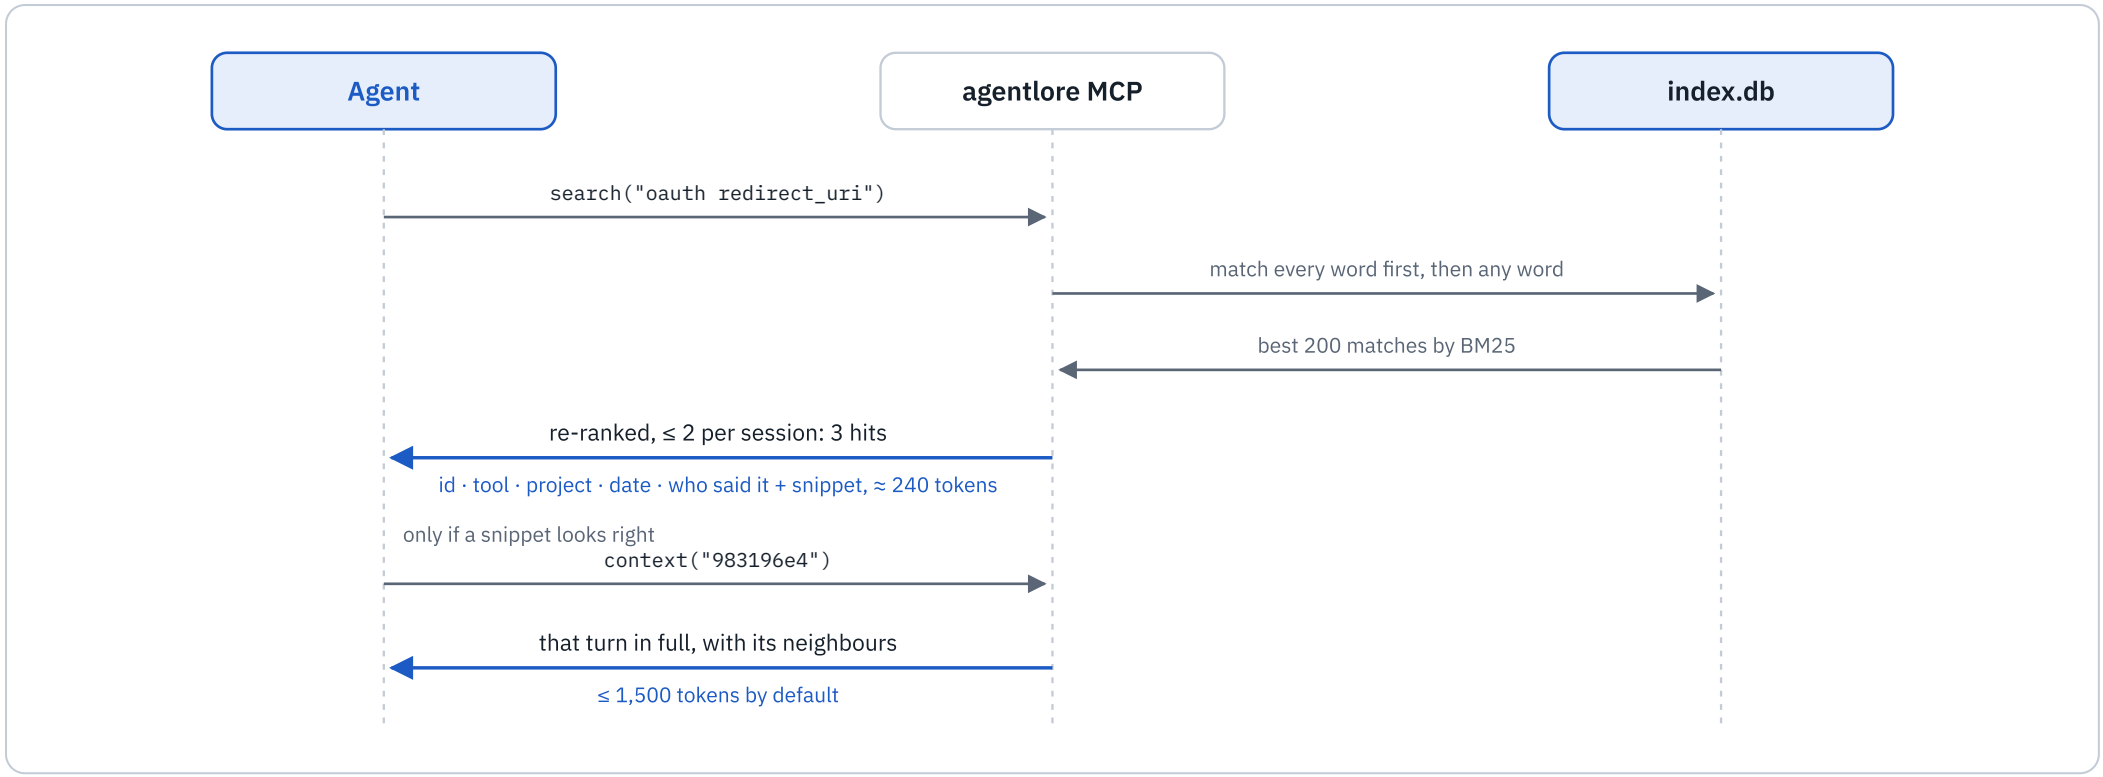


Agents call agentlore only when a task involves earlier work or another repo. Results are framed as untrusted data and every line is quoted, so text in an old transcript cannot act as an instruction.

Knowledge mode: when a prompt gets context

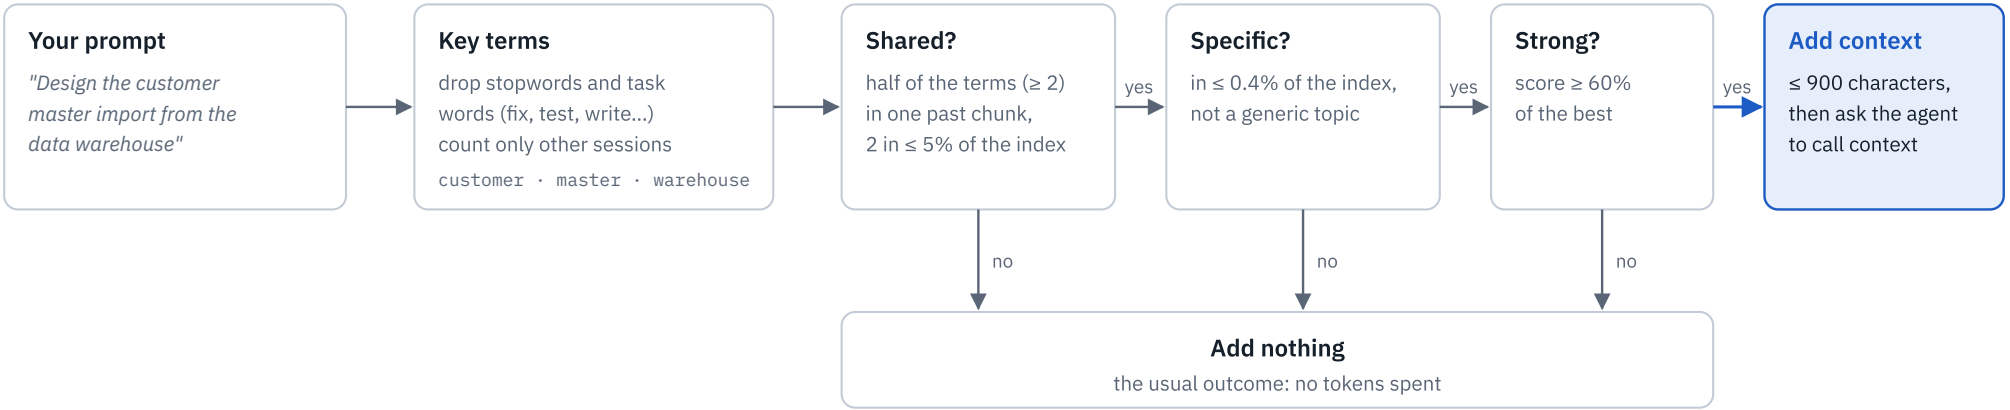

Off by default. Turn it on with `lore mode on --here` for one folder or `lore mode on` everywhere. Adding nothing is the usual outcome, because an unrelated excerpt would cost tokens on every prompt.

Project memory: what every session already knows

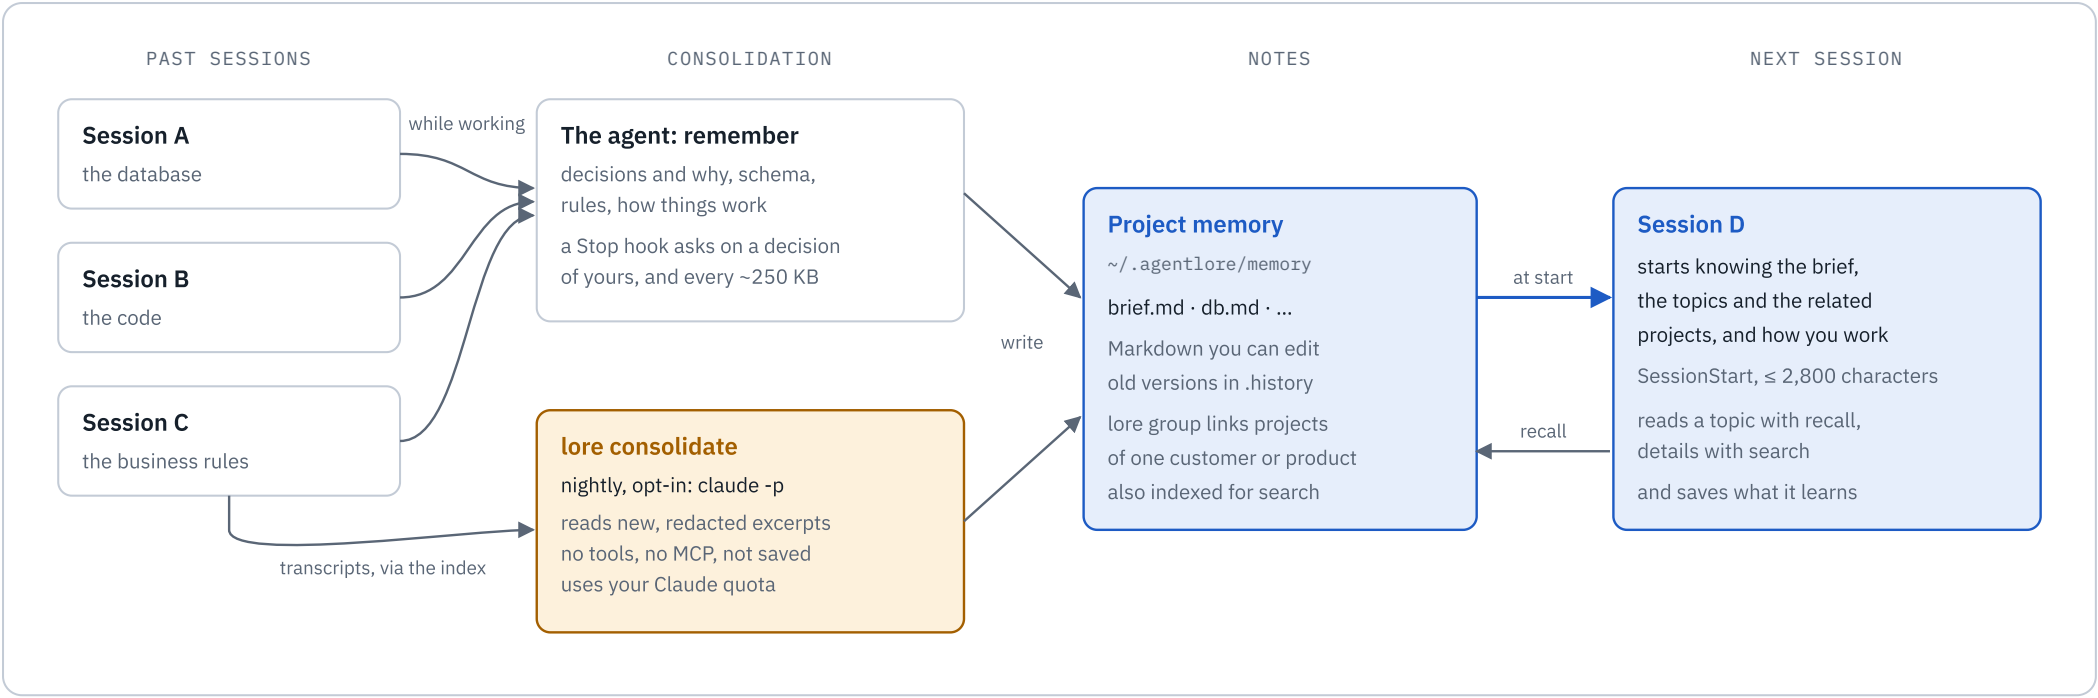

No session has to be the one that knows everything. Each saves what it learned; a nightly pass you turn on with `lore schedule install --consolidate` catches the rest. Notes are written by agents, so they are labelled with who wrote them and when, and agents are told to check them against the code.

---

agentlore is open source (MIT). Claude Code, Codex, Cursor and Antigravity history is indexed today; Gemini CLI and Windsurf are not yet.