

Measured-data training (C=4)

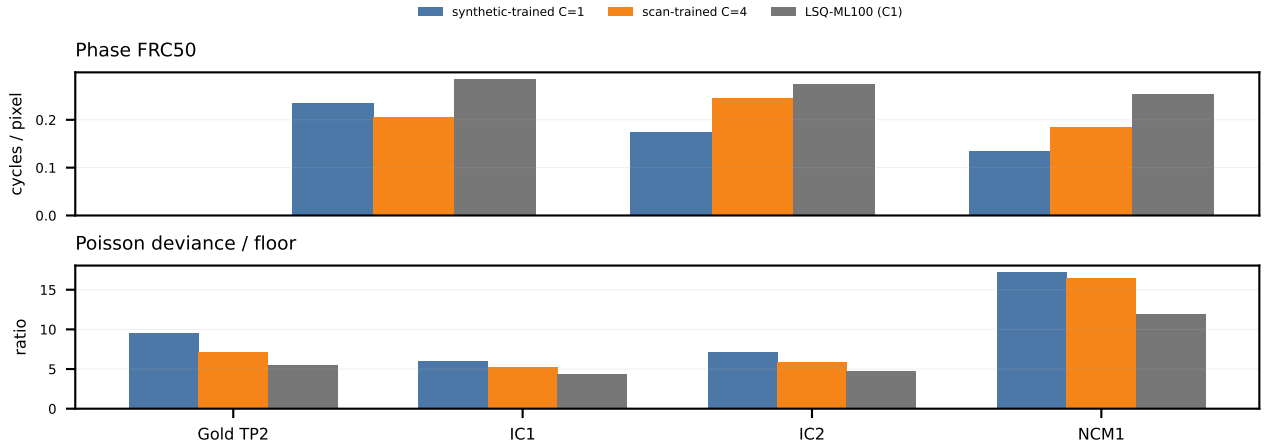

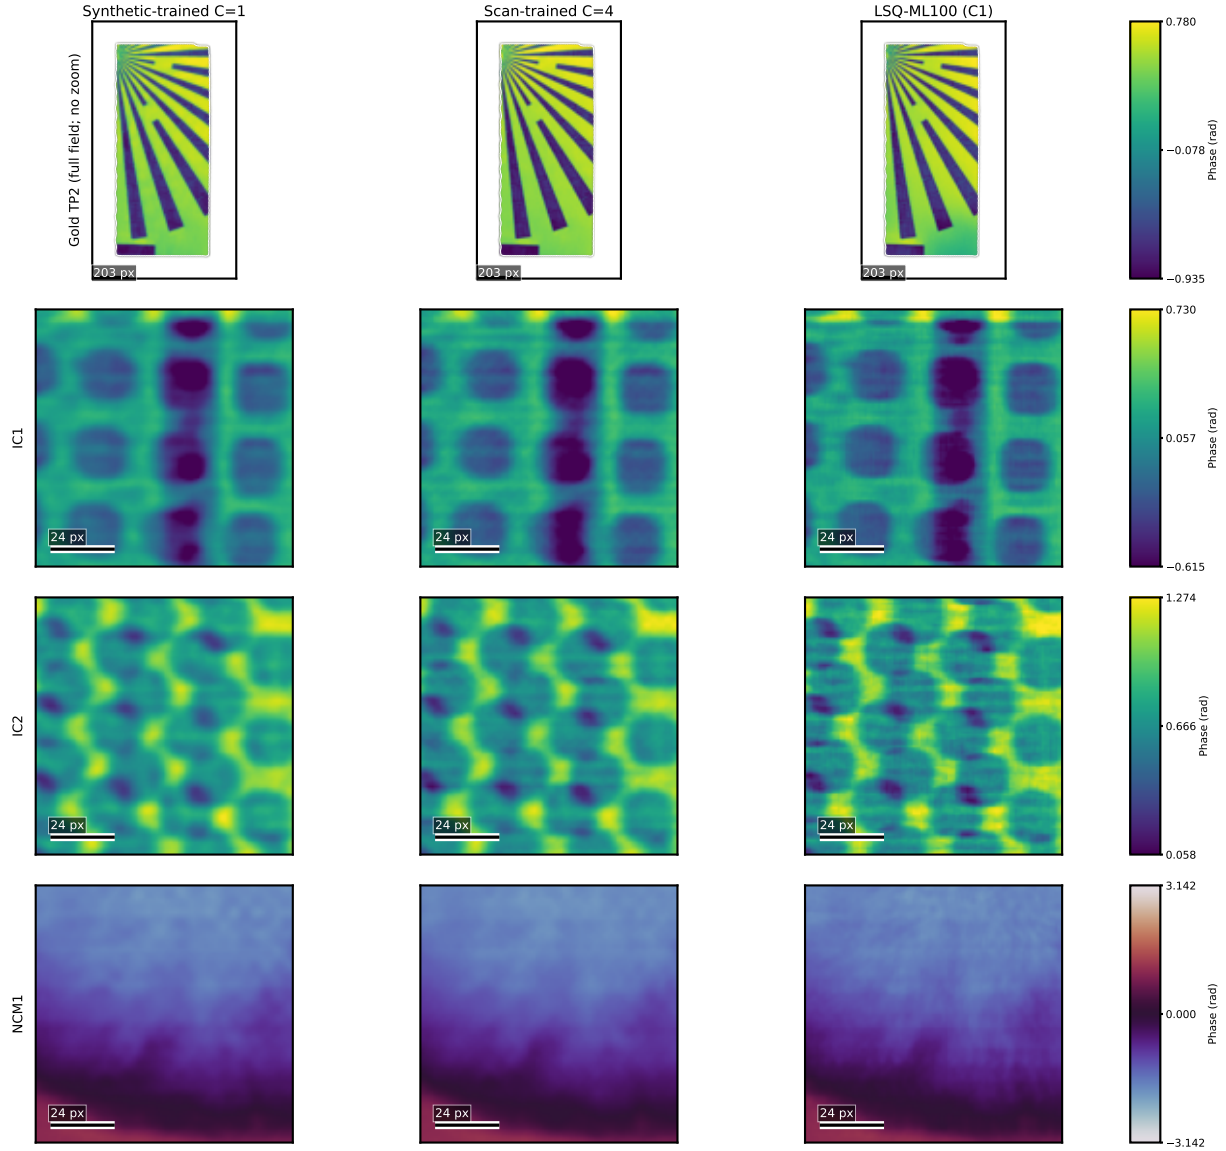

C4 is selected per dataset only when polished phase MAE is lower and phase SSIM is higher than matched C1. C4 training used 10× oversampling: ten four-pattern groups per training center. C denotes grouped input/output channels. Synthetic-trained and LSQ-ML comparators are C1, so grouping and training source differ and the comparison does not isolate training source. LSQ-ML100 is C1; the supplied reference is shown in the supplement. Gold TP2 FRC excluded because of scan-grid artefacts; historical source values preserved. TP2 is full-field with no zoom.