

@holokai/neuron-sdk

SDK for building neurons — processes that connect to the BigBrain gateway and execute tasks on behalf of workflows.

A neuron advertises one or more **capabilities** (typed task handlers), opens a persistent connection to the gateway, and receives work via a pluggable `Transport`. Two transports ship in the SDK:

- **HttpTransport** — SSE for inbound, HTTPS POST for outbound. The default for any neuron talking to a remote BigBrain gateway. Re-exported from the package root.
- **IpcTransport** — Electron renderer ↔ main IPC. For neurons running inside an app that embeds BigBrain in main; no network hop, no JWT in the renderer. Imported from the `/ipc` subpath.

The gateway routes tasks to the right neuron based on capability type and scope. The built-in `apps/worker` uses this SDK over HTTP; the in-process Holokai Desktop renderer uses it over IPC; both share the same `Neuron` class and handler API.

Installation

```
pnpm add @holokai/neuron-sdk
# or: npm install @holokai/neuron-sdk
# or: yarn add @holokai/neuron-sdk
```

Runs in **Node 20+** (uses the global `fetch` and `ReadableStream`) and **modern browsers** (Chromium, Firefox, Safari latest). The package has no `node:*` imports — Holokai Desktop / Electron and the in-browser neuron-tester both consume the same SDK build.

Quick start

```
import { Neuron } from '@holokai/neuron-sdk';

const neuron = new Neuron({
  gatewayUrl: 'https://api.example.com',
  neuronId: 'my-worker-001', // stable per process/device
  auth: () => process.env.GATEWAY_TOKEN!, // or an async refresh function
});

neuron.handle(
  { type: 'core/script.python', scope: 'any', concurrency: 4 },
  async (input, ctx) => {
    ctx.log.info({}, 'running python script');
    const result = await runPython(input as { code: string }, ctx.signal);
    return { output: result };
  },
);

await neuron.start();

process.on('SIGTERM', () => neuron.stop({ drain: true, timeoutMs: 30_000 }));
```

Core concepts

Capability

A capability is a named contract a neuron can fulfill. It has:

Field	Type	Description
type	string	Namespaced identifier: {owner}/{package}/{name}[.{variant}]
scope	'any' { onBehalfOf: userId }	Who this handler serves
concurrency	number	Max parallel tasks for this capability

Examples:

- core/script.python — server-side Python execution, any user
- desktop/mcp/drive.read — user's Google Drive, scoped to that user
- org/01HBQ8ZK/custom-tool — org-specific capability

Namespace authorization

The gateway enforces which identities may advertise which namespaces:

Namespace prefix	Permitted advertisers	Required scope
core/*	Server service identities	any
desktop/*	Attested desktop binaries	{ onBehalfOf: userId }
org/{orgId}/*	Tenant-installed extensions	any within org
user/{userId}/*	Personal extensions	{ onBehalfOf: userId }

Registration is rejected (HTTP 403) if the JWT is not authorized for the namespace.

Scope

- **'any'** — the neuron handles tasks for any user. Shared queue; no per-user binding.
- **{ onBehalfOf: userId }** — the neuron handles tasks for that specific user only. The JWT's user binding must match; the gateway enforces this at registration time.

One neuron may advertise mixed-scope capabilities:

```
neuron.handle({ type: 'desktop/mcp/drive.read', scope: { onBehalfOf: 'user:abc' }, concurrency: 1 })
neuron.handle({ type: 'core/script.python', scope: 'any', concurrency: 1 })
```

Lease

A lease is how the gateway delivers a task. When the broker dispatches a task to a neuron, the gateway:

1. Writes a DB row with `leaseId` and expiry.
2. Sends a `lease` frame over SSE.

The SDK validates input, invokes your handler, and sends either `ack` (success) or `nack` (failure) over HTTPS POST. Until the ack arrives, the message remains unacknowledged in the broker — if the neuron disconnects, the broker redelivers automatically.

Handlers must be idempotent. A task that completed a side effect but failed to ack will be retried. Use capability-native idempotency keys (e.g., Google Drive `requestId`, HTTP `Idempotency-Key`).

Neuron ID

`neuronId` must be **stable across restarts** for the same process/device. The gateway uses it to correlate reconnects. Pick something meaningful and persistent:

```
// Server process
neuronId: `worker-${process.env.HOSTNAME}-${process.pid}`

// Desktop app – persist a UUID to disk
neuronId: await readOrCreateStoredId('/var/lib/myapp/neuron-id')
```

API reference

`new Neuron(opts: NeuronOptions)`

`NeuronOptions` is a discriminated union — pick the convenience shape (HTTP) or pass a transport explicitly.

```
type NeuronOptions = NeuronOptionsWithHttp | NeuronOptionsWithTransport;

interface NeuronCommonOptions {
  neuronId: string; // Stable per process/device
  logger?: NeuronLogger; // Plug in pino, console, etc. Default: silent
  heartbeatIntervalMs?: number; // Default 10_000 (10s)
}

// Convenience: SDK builds an HttpTransport for you. Most common path.
interface NeuronOptionsWithHttp extends NeuronCommonOptions {
  gatewayUrl: string; // Base URL, e.g. 'https://api.example.com'
  auth: AuthCallback; // Token provider (see below)
  initialReconnectDelayMs?: number; // Default 500ms
  maxReconnectDelayMs?: number; // Default 30_000 (30s)
  fetch?: typeof fetch; // Override for tests
}

// Power-user: bring your own Transport. Used for IpcTransport, custom
// transports, or HttpTransport instances built explicitly.
interface NeuronOptionsWithTransport extends NeuronCommonOptions {
  transport: Transport;
}
```

See the [Transports](#) section for `HttpTransport`, `IpcTransport`, and the `Transport` interface.

`neuron.handle(reg, handler)`

Register a handler for a capability. Must be called **before** `neuron.start()`.

```
neuron.handle(reg: CapabilityRegistration, handler: Handler): void
```

```
interface CapabilityRegistration {
  type: string; // Namespaced capability type
  scope: 'any' | { onBehalfOf: string };
  concurrency: number; // Max parallel executions
  inputSchema?: JsonSchema; // Optional; validated before invoking handler
  outputSchema?: JsonSchema; // Optional; validated before acking
}

type Handler<TInput = unknown, TOutput = unknown> = (
  input: TInput,
  ctx: HandlerContext,
) => Promise<TOutput> | TOutput;
```

If `inputSchema` is provided and the lease input fails validation, the handler is never called — the SDK sends a `schema-mismatch` nack automatically. Same for `outputSchema` on the return value.

`neuron.start()`

Opens the SSE stream, posts `register` with all advertised capabilities, and starts the heartbeat loop.

```
await neuron.start(): Promise<void>
```

Throws if no handlers have been registered. Subsequent calls are no-ops.

`neuron.stop(opts?)`

Graceful shutdown: refuse new leases, drain in-flight handlers, disconnect.

```
await neuron.stop({ drain?: boolean, timeoutMs?: number }): Promise<void>
```

Option	Default	Description
<code>drain</code>	<code>true</code>	Wait for in-flight handlers to finish
<code>timeoutMs</code>	<code>30_000</code>	After this, abort remaining in-flight tasks

Queued leases (received but not yet started due to concurrency limits) are nacked `retryable` on shutdown so the broker redelivers immediately.

`neuron.updateCapability(reg)`

Change concurrency for an already-registered capability at runtime. Useful when available resources change (e.g., desktop plugged into power).

```
await neuron.updateCapability({ type: string, concurrency: number }): Promise<void>
```

Notifies the gateway via `update-capability` so it can tune AMQP prefetch. Safe to call while tasks are in flight — in-flight tasks finish at the old concurrency; new slots open at the new limit.

HandlerContext

The second argument to every handler:

```
interface HandlerContext {  
  task: TaskPayload; // Full task metadata  
  leaseId: string; // Gateway lease ID (for logging/debugging)  
  signal: AbortSignal; // Fires on gateway cancel or SDK shutdown  
  log: NeuronLogger; // Logger scoped to this lease  
  progress(update: { percent?: number; message?: string; data?: unknown }): void;  
  fail(reason: string, opts?: { code?: string }): never;  
}
```

ctx.signal

Pass this to any fetch/HTTP calls so they abort cleanly:

```
const resp = await fetch(url, { signal: ctx.signal });
```

When the gateway sends a `cancel` frame (workflow was cancelled by the user), `ctx.signal` fires and your handler should throw/return promptly. An `AbortError` from a cancelled signal is treated as `nack(kind='cancelled')` — benign, not counted as a failure.

ctx.progress()

Report progress for long-running tasks. Non-blocking; safe to call many times.

```
ctx.progress({ percent: 50, message: 'halfway done' });  
ctx.progress({ data: { rowsProcessed: 1200 } });
```

ctx.fail()

Terminal failure — nacks the lease with `kind='terminal'` (no retry). Use when the task can never succeed regardless of retries.

```
if (!validApiKey) {
  ctx.fail('invalid API key', { code: 'INVALID_API_KEY' });
  // unreachable – fail() throws internally
}
```

AuthCallback

```
type AuthCallback = () => Promise<string> | string;
```

Called on every POST and SSE open. The SDK retries once on 401, so implement token refresh inside the callback:

```
let token = await fetchInitialToken();

const auth = async () => {
  if (isExpired(token)) {
    token = await refreshToken();
  }
  return token.accessToken;
};
```

NeuronLogger

```
interface NeuronLogger {
  debug(meta: Record<string, unknown>, msg?: string): void;
  info(meta: Record<string, unknown>, msg?: string): void;
  warn(meta: Record<string, unknown>, msg?: string): void;
  error(meta: Record<string, unknown>, msg?: string): void;
}
```

Matches pino's call signature directly. To use pino:

```
import pino from 'pino';
const logger = pino({ level: 'info' });
const neuron = new Neuron({ ..., logger });
```

defineCapability()

A typed helper that produces a capability definition from zod schemas, with handler inputs/outputs fully inferred:

```
import { defineCapability, Neuron } from '@holokai/neuron-sdk';
import { z } from 'zod';

const pythonCap = defineCapability({
  type: 'core/script.python',
  description: 'Run a Python script in a sandbox',
  input: z.object({ code: z.string(), args: z.record(z.unknown()).optional() }),
  output: z.object({ stdout: z.string(), exitCode: z.number() }),
  scope: 'any', // optional default; overridable at handle() time
  concurrency: 4, // optional default; overridable at handle() time
});

// Handler input/output inferred — no manual type annotations:
neuron.handle(pythonCap, async (input, ctx) => {
  // input: { code: string; args?: Record<string, unknown> }
  return { stdout: '...', exitCode: 0 };
});

// Or override defaults per deployment:
neuron.handle(pythonCap, { scope: { onBehalfOf: 'user-123' }, concurrency: 8 }, fn);
```

Validation uses the **original zod schemas** (so `.refine()`, `.transform()`, `.preprocess()`, `.brand()` all run as expected). The JSON Schema produced by `zod-to-json-schema` is shipped on the wire to the gateway and planner but is not used as the runtime validator — that avoids silently dropping zod features that don't translate.

The fall-back `neuron.handle(registration, fn)` shape (raw JSON Schema + capability fields) is still accepted for low-level callers that don't have zod schemas on hand.

Events

Neuron extends `EventEmitter` from `eventemitter3` — a browser-clean, type-safe drop-in for Node's `EventEmitter`. Subscribe with `.on()`, `.once()`, or `.off()`:

```
const off = neuron.on('frame', (frame) => {
  log.append(frame); // see every parsed SSE frame
});
off(); // unsubscribe

neuron.once('connection:registered', ({ sessionId }) => {
  console.log(`registered as ${sessionId}`);
});

neuron.on('connection:reconnecting', ({ attempt, delayMs, reason }) => {
  statusBar.show(`reconnecting (attempt ${attempt}, ${delayMs}ms)`, reason);
});
```

The full event map:

Event	Payload	When
connection:open	<i>none</i>	SSE handshake succeeded; before <code>register</code> is posted
connection:registered	{ sessionId: string; capabilities: number }	Gateway accepted the register frame
connection:close	reason: string	SSE stream ended (clean shutdown or transient error)
connection:reconnecting	{ attempt, delayMs, reason }	Reconnect scheduled, before backoff delay
error	err: Error	Transport / parse error (reconnect handling is automatic)
frame	frame: ServerToNeuronFrame	Pass-through of every parsed inbound SSE frame

The `frame` event is a firehose mirror of the gateway's `/neuron/events` SSE stream. It fires for **every** frame including ones the SDK handles internally (`lease` , `cancel`) — useful for debug UIs, observability, and audit logs. The high-level `neuron.handle()` API is implemented as a `frame` listener filtered to `lease` frames, so `handle()` and direct `frame` subscribers compose without conflict.

Subscribe **before** calling `neuron.start()` if you care about events that fire as part of the connection sequence (`connection:open` , the initial `registered` frame). Late subscribers will still see subsequent events.

The event surface is designed to grow — future entries (e.g. `'workflow:task-completed'` for cross-neuron notifications) slot in without breaking subscribers.

Transports

A `Transport` is the wire-level abstraction the rest of the SDK builds on. It carries typed frames in both directions: inbound `ServerToNeuronFrame`s via callbacks, outbound `ClientFrame`s via `post(...)`. The `Neuron` class only ever talks to a `Transport` — adding a new transport (e.g. WebSocket, native messaging) means implementing one interface.

```
interface Transport {
  subscribe(callbacks: TransportCallbacks): void;
  start(): Promise<void>;
  stop(): Promise<void>;
  post<T extends ClientFrame>(path: PostPath, frame: T): Promise<unknown>;
  isConnected(): boolean;
}

interface TransportCallbacks {
  onOpen?: () => void;
  onClose?: (reason: string) => void;
  onFrame?: (frame: ServerToNeuronFrame) => void;
  onError?: (err: Error) => void;
  onReconnecting?: (info: { attempt: number; delayMs: number; reason: string }) => void;
}
```

Both `Transport` and `TransportCallbacks` are exported from the package root.

HttpTransport

Default transport. SSE for inbound, HTTPS POST for outbound. Reconnects with exponential backoff (default: 500ms → 30s ceiling). Refreshes the auth token via your `AuthCallback` and retries once on 401.

```
import { Neuron, HttpTransport } from '@holokai/neuron-sdk';

const transport = new HttpTransport({
  gatewayUrl: 'https://api.example.com',
  neuronId: 'my-worker-001',
  auth: () => process.env.GATEWAY_TOKEN!,
  // optional:
  initialReconnectDelayMs: 500,
  maxReconnectDelayMs: 30_000,
});

const neuron = new Neuron({ neuronId: 'my-worker-001', transport });
```

In practice you rarely construct `HttpTransport` directly — passing `gatewayUrl` + `auth` to `Neuron` builds it for you. Construct explicitly when you want to share a fetch implementation, swap the auth strategy, or instrument the transport in tests.

```
interface HttpTransportOptions {
  gatewayUrl: string;
  neuronId: string;
  auth: AuthCallback;
  logger?: NeuronLogger;
  initialReconnectDelayMs?: number; // default 500ms
  maxReconnectDelayMs?: number;    // default 30_000ms
  fetch?: typeof fetch;
}
```

Ipctransport

For renderer-process neurons running inside an Electron app that hosts BigBrain in the main process. Leases arrive over Electron IPC, not over the network. Imported from the `/ipc` subpath so non-Electron consumers don't pay for it:

```
import { Neuron } from '@holokai/neuron-sdk';
import { Ipctransport } from '@holokai/neuron-sdk/ipc';

// `bridge` comes from the renderer's preload — see below.
const transport = new Ipctransport({ bridge: window.bigbrainNeuron, neuronId });
const neuron = new Neuron({ neuronId, transport });

neuron.handle({ type: 'desktop/local-tool', scope: { onBehalfOf: userId }, concurrency: 1 },
await neuron.start());
```

Differences from `HttpTransport` :

- **No reconnect logic** — IPC has no transient socket. If the bridge throws, the failure surfaces via `onError` and the consumer decides what to do.
- **No auth callback** — the renderer never sees the JWT. The Electron main process attaches `Authorization` headers when it forwards POSTs to the embedded Fastify gateway.
- **No keep-alive** — IPC channels are process-local; nothing to time out.

The SDK does **not** depend on Electron. The renderer's preload script is responsible for constructing a concrete bridge that satisfies the `NeuronIpcBridge` shape and exposing it via `contextBridge` :

```
interface NeuronIpcBridge {
  attach(neuronId: string): Promise<{ channel: string }>;
  detach(neuronId: string): Promise<void>;
  subscribe(channel: string, cb: (frame: ServerToNeuronFrame) => void): () => void;
  invoke<T extends ClientFrame>(path: PostPath, frame: T): Promise<unknown>;
}
```

Typical preload wiring (Electron-side, app code — not part of the SDK):

```
// preload.ts
import { contextBridge, ipcRenderer } from 'electron';

contextBridge.exposeInMainWorld('bigbrainNeuron', {
  attach: (neuronId) => ipcRenderer.invoke('bigbrain:attach', neuronId),
  detach: (neuronId) => ipcRenderer.invoke('bigbrain:detach', neuronId),
  subscribe: (channel, cb) => {
    const listener = (_e, frame) => cb(frame);
    ipcRenderer.on(channel, listener);
    return () => ipcRenderer.off(channel, listener);
  },
  invoke: (path, frame) => ipcRenderer.invoke('bigbrain:post', path, frame),
});
```

```
interface IpcTransportOptions {
  bridge: NeuronIpcBridge;
  neuronId: string;
  logger?: NeuronLogger;
}
```

Examples

Simple any-scoped capability

```
import { Neuron } from '@holokai/neuron-sdk';

const neuron = new Neuron({
  gatewayUrl: process.env.GATEWAY_URL!,
  neuronId: `worker-${process.env.HOSTNAME}`,
  auth: () => process.env.GATEWAY_TOKEN!,
});

neuron.handle(
  { type: 'core/http', scope: 'any', concurrency: 8 },
  async (input, ctx) => {
    const { url, method = 'GET', headers = {}, body } = input as {
      url: string;
      method?: string;
      headers?: Record<string, string>;
      body?: string;
    };

    const resp = await fetch(url, { method, headers, body, signal: ctx.signal });
    const text = await resp.text();

    return { status: resp.status, body: text };
  },
);

await neuron.start();
```

User-scoped capability (desktop / MCP)

```
const userId = await getUserIdFromToken(authToken);

neuron.handle(
  { type: 'desktop/mcp/drive.read', scope: { onBehalfOf: userId }, concurrency: 1 },
  async (input, ctx) => {
    const { fileId } = input as { fileId: string };
    ctx.progress({ message: 'fetching file metadata' });

    const file = await driveClient.files.get({ fileId, signal: ctx.signal });
    ctx.progress({ percent: 50, message: 'downloading content' });

    const content = await driveClient.files.download({ fileId, signal: ctx.signal });
    return { name: file.name, mimeType: file.mimeType, content };
  },
);
```

Long-running task with progress

```
neuron.handle(  
  { type: 'core/data.transform', scope: 'any', concurrency: 2 },  
  async (input, ctx) => {  
    const { rows } = input as { rows: unknown[] };  
    const results: unknown[] = [];  
  
    for (let i = 0; i < rows.length; i++) {  
      if (ctx.signal.aborted) break; // respect cancellation  
  
      results.push(await processRow(rows[i]));  
      ctx.progress({ percent: Math.round(((i + 1) / rows.length) * 100) });  
    }  
  
    return { results };  
  },  
);
```

Error handling

```
neuron.handle(  
  { type: 'core/llm', scope: 'any', concurrency: 4 },  
  async (input, ctx) => {  
    const { prompt, model } = input as { prompt: string; model: string };  
  
    let response;  
    try {  
      response = await llmClient.complete({ prompt, model, signal: ctx.signal });  
    } catch (err) {  
      if ((err as Error).name === 'AbortError') {  
        throw err; // let the SDK handle cancellation  
      }  
      if ((err as any).status === 400) {  
        // Bad request – no point retrying  
        ctx.fail(`invalid LLM request: ${err as Error}.message`, { code: 'INVALID_REQUEST' })  
      }  
      // Anything else: throw to get a retryable nack  
      throw err;  
    }  
  
    return { text: response.text, tokensUsed: response.usage.total };  
  },  
);
```

Graceful shutdown

```
await neuron.start();

const shutdown = async (signal: string) => {
  console.log(`${signal} received - draining...`);
  await neuron.stop({ drain: true, timeoutMs: 30_000 });
  process.exit(0);
};

process.on('SIGTERM', () => shutdown('SIGTERM'));
process.on('SIGINT', () => shutdown('SIGINT'));
```

Runtime concurrency update

```
import { powerMonitor } from 'electron'; // or any power/resource API

powerMonitor.on('on-ac', async () => {
  await neuron.updateCapability({ type: 'core/script.python', concurrency: 8 });
});

powerMonitor.on('on-battery', async () => {
  await neuron.updateCapability({ type: 'core/script.python', concurrency: 1 });
});
```

Configuration reference

Option	Default	Applies to	Notes
<code>neuronId</code>	—	both	Stable per device/process; reused on reconnect
<code>logger</code>	silent no-op	both	Plug in pino or console
<code>heartbeatIntervalMs</code>	<code>10_000</code>	both	Sent every 10s; renews lease expiries
<code>transport</code>	—	with-transport shape	Pre-built <code>Transport</code> (e.g. <code>IpcTransport</code> or a custom <code>HttpTransport</code>)
<code>gatewayUrl</code>	—	with-http shape	Base URL, no trailing slash
<code>auth</code>	—	with-http shape	Called on every POST + SSE open
<code>initialReconnectDelayMs</code>	<code>500</code>	with-http shape	First reconnect delay (HTTP only — IPC doesn't reconnect)
<code>maxReconnectDelayMs</code>	<code>30_000</code>	with-http shape	Reconnect delay ceiling (exponential backoff)
<code>fetch</code>	<code>global fetch</code>	with-http shape	Override for tests

Protocol details

This section covers enough to debug; the wire-level frame schemas are bundled into the SDK and exported alongside the public types.

Transport

The SDK abstracts the wire as a `Transport` (see [Transports](#) above). The frame types below are the same regardless of transport — only the carrier differs.

`HttpTransport` (default):

- **Server** → **Neuron**: SSE stream at `GET /neuron/events?neuronId={id}`
- **Neuron** → **Server**: HTTPS POST endpoints (one per frame type)
- No WebSockets — SSE + HTTPS POST traverses enterprise proxies cleanly.

`IpcTransport` (Electron renderer):

- **Server** → **Neuron**: per-neuron Electron IPC channel obtained from `bridge.attach()` .
- **Neuron** → **Server**: `bridge.invoke(path, frame)` , which the main process forwards to the embedded Fastify gateway via `app.inject(...)` — same auth and validation chain as HTTP.
- No reconnect, no auth callback, no keep-alive.

Frame types

Neuron → Server (POST):

Frame	Path	When
register	/neuron/register	On SSE open
update-capability	/neuron/update-capability	On concurrency change
heartbeat	/neuron/heartbeat	Every 10s while connected
ack	/neuron/ack	Handler succeeded
nack	/neuron/nack	Handler failed
progress	/neuron/progress	During handler execution

Server → Neuron (SSE):

Frame	When
registered	Gateway accepted the register frame; effective capabilities returned
lease	Task to execute
cancel	Gateway cancels a specific lease (workflow cancelled)
capability-revoked	A capability was deauthorized mid-session
disconnect	Gateway is closing the connection cleanly


Heartbeat

Every ~10s the SDK posts:

```
{
  "type": "heartbeat",
  "neuronId": "worker-host-1234",
  "inFlight": [
    { "leaseId": "01HB...", "taskId": "task-abc", "startedAt": "2024-01-01T12:00:00Z" }
  ],
  "sentAt": "2024-01-01T12:00:10Z"
}
```

The gateway renews lease expiries for every `leaseId` in `inFlight` in a single DB round-trip. **Only running leases appear in `inFlight`** — queued leases (admitted but waiting for a concurrency slot) are excluded so the reaper doesn't mistakenly extend their TTL.

Lease lifecycle

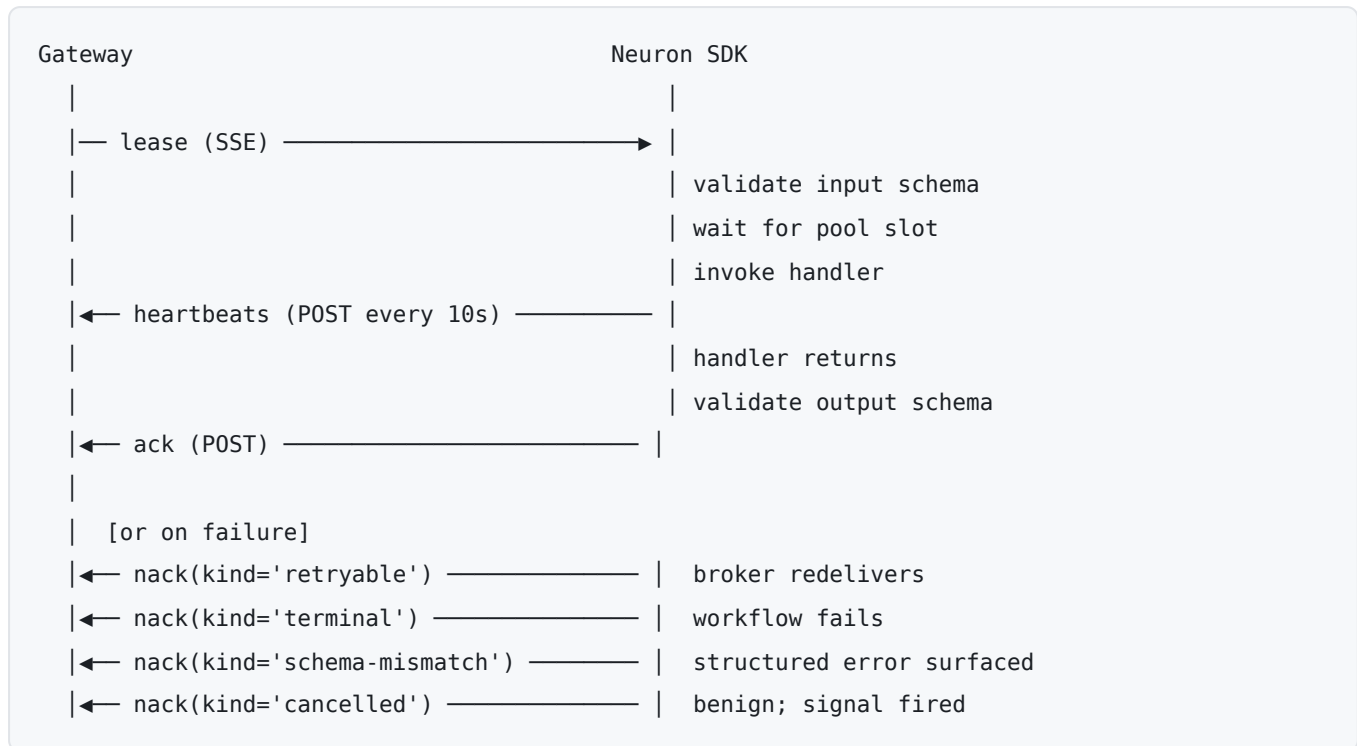

Reconnection

The SDK uses exponential backoff (default: 500ms initial, doubling, 30s ceiling). On reconnect:

1. SSE stream re-opens.
2. `register` is posted with the full capability list.
3. Heartbeat loop resumes.

In-flight leases from before the disconnect were never acked — the broker redelivers them. The reaper flips stale `assigned` DB rows back to `pending`. Your handlers will receive the same task again; make them idempotent.

Troubleshooting

`Neuron.handle()` must be called before `start()`

Register all capabilities before calling `start()`. For runtime changes, use `updateCapability()`.

`Neuron.start()` requires at least one handler

You must call `neuron.handle(...)` at least once before `start()`.

Registration rejected with HTTP 403

Your JWT is not authorized for the namespace you're trying to advertise. Check:

- The capability type uses the correct namespace prefix (`core/*` requires a service identity, not a user JWT).
- For user-scoped capabilities, the `onBehalfOf` value matches the user in your JWT.

Tasks not being received

1. Check the `registered` log line — it shows the **effective** capabilities after the gateway's policy/auth filters. If a capability is missing, the gateway filtered it.
2. Check `neuronId` — if it changes across restarts, the gateway may have stale session state.
3. Check heartbeat logs — if heartbeats are failing, the lease reaper may be reclaiming tasks faster than they're running.

Handler keeps getting re-delivered

The handler completed but the `ack` POST failed (gateway returned 4xx or 5xx). Look for `ack POST rejected by gateway` in logs. Root causes:

- Output failed the `outputSchema` check — fix your handler's return shape.
- Gateway was restarting — the next delivery will succeed once it's back.

Tasks stuck in `assigned` state

Heartbeats aren't reaching the gateway, so the reaper hasn't reclaimed them. Check:

- Is the SSE stream still connected? (`transport reconnecting` log entries)
- Are heartbeat POSTs failing? (`heartbeat post failed` log entries)
- Is `heartbeatIntervalMs` misconfigured to a very large value?

Auth 401 on every request

The `auth` callback isn't returning a valid token. If using a refresh flow, ensure the callback fetches a fresh token on each call (the SDK caches nothing — it's your callback's job).