



Server PC

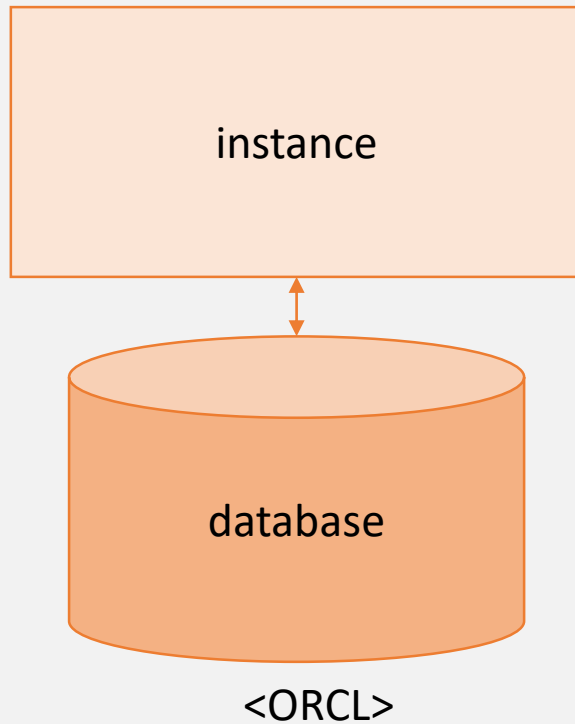

1. Linux 설치
2. Oracle Software 설치
3. Database 생성

Server PC

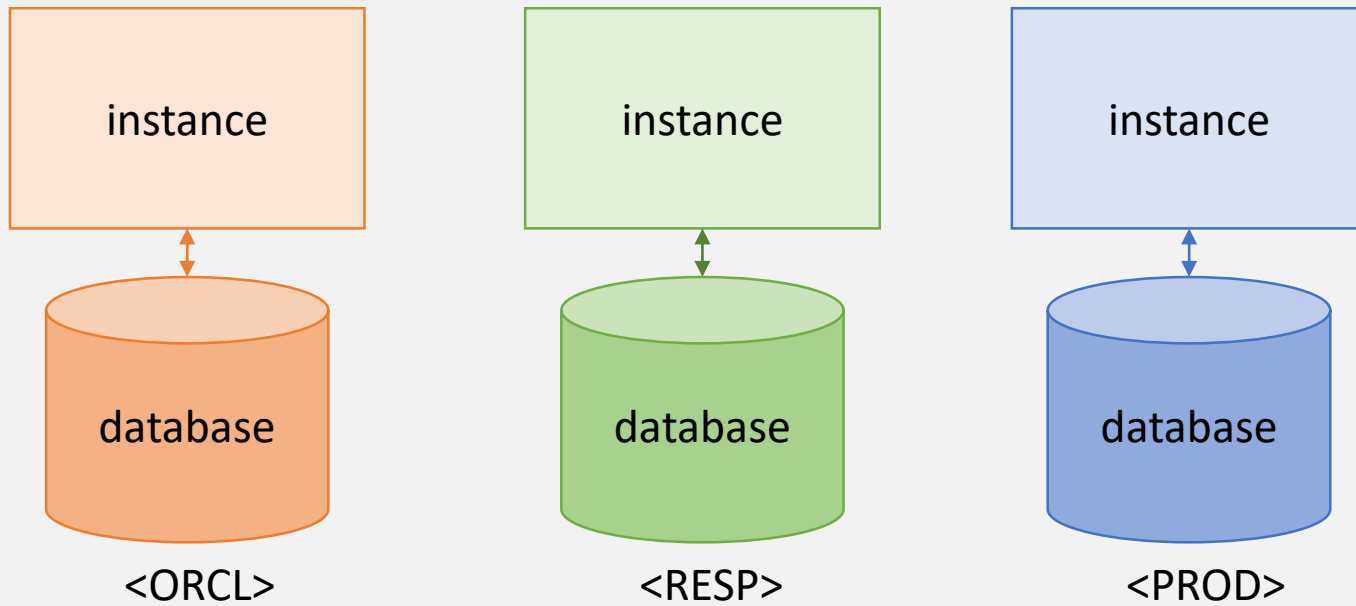

ORCL DB

System T/S

system01.dbf
(500M)

Undo T/S

undo01.dbf
(100M)

Sysaux T/S

sysaux01.dbf
(300M)

Temp T/S

temp01.tmp
(50M)

Users T/S

user01.dbf
(5M)

Example T/S

exam01.dbf
(50M)

Inventory T/S

inventory01.dbf
(50M)

Appuser T/S

appuser01.dbf
(100M)

ORCL DB

System T/S

system01.dbf
(500M)

Undo T/S

undo01.dbf
(100M)

Sysaux T/S

sysaux01.dbf
(300M)

Temp T/S

temp01.tmp
(50M)

Users T/S

employees
(table)
(segment)

departments
(segment)

Locations
(segment)

lname_idx
(index)
(segment)

Etc...

user01.dbf (100M)

ORCL DB

System T/S

system01.dbf
(500M)

Undo T/S

undo01.dbf
(100M)

Sysaux T/S

sysaux01.dbf
(300M)

Temp T/S

temp01.tmp
(50M)

Users T/S

employees

Extent 1

Extent 2

Extent 3

departments

Extent 1

Extent 2

user01.dbf (100M)

ORCL DB

System T/S

system01.dbf
(500M)

Undo T/S

undo01.dbf
(100M)

Sysaux T/S

sysaux01.dbf
(300M)

Temp T/S

temp01.tmp
(50M)

Users T/S

