

Deliverables

Your project files should be submitted to Web-CAT by the due date and time specified. Note that there is also an optional Skeleton Code assignment which will indicate level of coverage your tests have achieved (there is no late penalty since the skeleton code assignment is ungraded for this project). The files you submit to skeleton code assignment may be incomplete in the sense that method bodies have at least a return statement if applicable or they may be essentially completed files. To avoid a late penalty for the project, you must submit your completed code files to Web-CAT no later than 11:59 PM on the due date for the completed code assignment. If you are unable to submit via Web-CAT, you should e-mail your project Java files in a zip file to your TA before the deadline. Test files are not required for this project. If submitted, you will be able to see your code coverage, but this will not be counted as part of your grade.

Files to submit to Web-CAT

(test files are optional):

From Bakery – Part 1


- BakedItem.java
- Cookie.java, *CookieTest.java*
- Pie.java, *PieTest.java*
- Cake.java, *CakeTest.java*
- WeddingCake.java, *WeddingCakeTest.java*

From Bakery – Part 2

- PriceComparator.java, *PriceComparatorTest.java*
- FlavorComparator.java, *FlavorComparatorTest.java*
- BakedItemList.java [as modified below], *BakedItemListTest.java*

New in Bakery – Part 3

- InvalidCategoryException.java, *InvalidCategoryExceptionTest.java*
- BakeryPart3.java, *BakeryPart3Test.java*

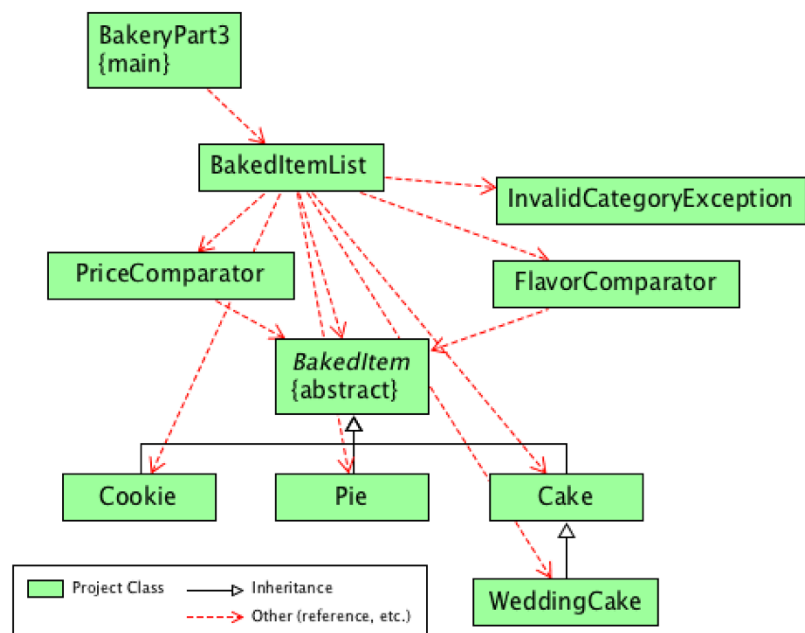

Recommendations

You should create new folder for Part 3 and copy your relevant Part 2 source, data, and optional test files to it. You should create a jGRASP project with these files in it, and then add the new source and optionally add test files as they are created if you decide to do them.

Specifications – Use arrays in this project; ArrayLists are not allowed!

Overview: This project is Part 3 of three that involves a bakery and reporting for baked items. In Part 1, you developed Java classes that represent categories of baked items including cookies, pies, cakes, and wedding cakes. In Part 2, you implemented additional classes: (1) PriceComparator, which implements the Comparator interface to compare baked items by price; (2) FlavorComparator, which implements the Comparator interface to compare baked items by flavor; (3) BakeryItemList,

which represents a list of baked items and includes several specialized methods. In Part 3, you are to add exception handling. You will need to do the following: (1) create a new class named `InvalidCategoryException` which extends the `Exception` class, (2) add try-catch statements to catch a `FileNotFoundException` in the main method of the `BakeryPart3` class, and (3) modify the `readItemFile` method in the `BakedItemList` class to catch/handle the `InvalidCategoryException`, `NumberFormatException`, and `NoSuchElementException` in the event that one or more of these exceptions are thrown while reading the input file.

Note that the main method in `BakeryPart3` should create a `BakedItemList` object and then invoke the `readItemFile` method on that `BakedItemList` object to read data from a file and add baked items to the list. You can use `BakeryPart3` in conjunction with interactions by running the program in the canvas (or debugger with a breakpoint) and single stepping until the variables of interest are created. You can then enter interactions in the usual way. In addition to the source files, you will create a JUnit test file for the indicated source files and write one or more test methods to ensure the classes and methods meet the specifications. You should create a jGRASP project upfront and then add the source files as they are created. All of your files should be in a single folder.

- **Cookie, Pie, Cake, and WeddingCake**

Requirements and Design: No changes from the specifications in Bakery – Part 1.

- **PriceComparator and FlavorComparator**

Requirements and Design: No changes from the specifications in Bakery – Part 2.

- **InvalidCategoryException.java**

Requirements and Design: `InvalidCategoryException` is a user defined exception created by extending the `Exception` class. This exception is to be thrown and caught in the `readItemFile` method in the `BakedItemList` class when a line of input data contains an invalid baked item category. The constructor for `InvalidCategoryException` takes a single `String` parameter representing *category* and invokes the super constructor with the following `String`:

"For category: " + "\"" + category + "\""

This string will be the `toString()` value of an `InvalidCategoryException` when it occurs. For a similar constructor, see `InvalidLengthException.java` in `Examples\Polygons` from the class notes on Exceptions.

- **BakedItemList.java**

Requirements and Design: The `BakedItemList` class provides methods for reading in the data file and generating reports.

Design: In addition to the specifications in Bakery – Part 2, the existing `readItemFile` method must be modified to catch the following: `InvalidCategoryException`, `NumberFormatException`, and `NoSuchElementException`.

- `readItemFile` has no return value and accepts the data file name as a `String`. Remember to include the `throws FileNotFoundException` clause in the method declaration. This method creates a `Scanner` object to read in the file, and then reads the file line by line. The first line contains the `BakedItemList` name and each of the remaining lines contains the data for a baked item. After reading in the list name, the “baked item” lines should be processed as follows. A baked item line is read in, a second scanner is created on the line, and the individual values for the baked item are read in. After the values on the line have been read in, an “appropriate” `BakedItem` object is created. The data file is a “comma separated values” file; i.e., if a line contains multiple values, the values are delimited by commas. So when you set up the scanner for the baked item lines, you need to set the delimiter to use a “,” by calling the `useDelimiter(",")` method on the `Scanner` object. Each baked item line in the file begins with a category for the baked item (C, P, K, and W are valid categories for baked items indicating **C**ookie, **P**ie, **K** for **C**ake, and **W**edding**C**ake respectively). The second field in the record is the name, followed by flavor, and quantity. The next field(s) may correspond, as appropriate, to the data needed for the particular category (or subclass) of `BakedItem` (e.g., a `Pie` has a `crustCost` and a `Cake` has `layers`). The last fields are the ingredients, which should be stored in an array (`new String[50]`) as they are read in. After all ingredients have been read in, use the `java.util.Arrays.copyOf` method make a new ingredients array with length equal to the number of ingredients. If the line/record has a valid category and it has been successfully read in, the appropriate `BakedItem` object should be created and added to `itemList`. For each *incorrect* line scanned (i.e., a line of data contains an invalid category, invalid numeric data, or missing data), your method will need to handle the invalid items properly.

- If the line of data begins with an invalid category, your program should throw an `InvalidCategoryException` (see description above). The code that adds a record with an invalid baked item category to the excluded records array should be placed in the catch block for `InvalidCategoryException`.
- If a line of data has a valid category, but includes invalid numeric data (e.g., the value for *quantity* contains an alphabetic character), a `NumberFormatException` (see notes on last page) will be thrown automatically by the Java Runtime Environment (JRE).
- If a line of data has a valid category but has missing data, a `java.util.NoSuchElementException` will be thrown automatically by the JRE.

The code in the while loop that reads in the baked item records and checks for baked item category should be in a try statement followed by three catch blocks: one for each of `InvalidCategoryException`, `NumberFormatException`, and `NoSuchElementException` (fully qualify as `java.util.NoSuchElementException` or include import statement). In each catch block, a `String` object should be created consisting of

```
    "*** " + e + " in:\n" + line
```

where *e* is the exception and *line* is the record with the invalid data. The `String` object should be added to the `excludedRecords` array.

The file `baked_item_data2.csv` is available for download from the course web site.

Below are example data records (the first line/record containing the baked item list name is

followed by baked item lines/records). Note that five of these baked item records will cause an exception to be thrown. These are listed in the “Excluded Records Report” on page 6.

```
Auburn's Best Bakery
C,Chips Delight,Chocolate Chip,12,flour,sugar,dark chocolate chips,butter,baking soda,salt
D,Chips Delight,Chocolate Chip,12,flour,sugar,dark chocolate chips,butter,baking soda,salt
P,Weekly Special,Apple,1,0,flour,sugar,apple,cinnamon,butter,baking soda,salt
P,Daily Special,Pecan,1,0,0,flour,sugar,pecans,dark corn syrup,butter,baking soda,salt
R,Weekly Special,Apple,1,0,flour,sugar,apple,cinnamon,butter,baking soda,salt
P,Summer Special,Key Lime,1,2,0,flour,sugar,lime juice,lemon juice,graham crackers,butter,baking soda,salt
K,Birthday,Chocolate,1,1,flour,sugar,cocoa powder,vanilla,eggs,butter,baking soda,baking powder,salt
K,2-Layer,Red Velvet,1,2,flour,sugar,cocoa powder,food coloring,eggs,butter,baking soda,baking powder,salt
K,2-Layer,Chocolate,1,two,flour,sugar,cocoa powder,eggs,butter,baking soda,baking powder,salt
W,3-Layer/3-Tier,Buttermilk,1,3
W,3-Layer/3-Tier,Vanilla,1,3,3,flour,sugar,buttermilk,coffee,eggs,butter,baking soda,baking powder,salt
```

BakeryPart3.java

Requirements and Design: The BakeryPart3 class has only a main method as described below. In addition to the specifications in Bakery – Part 2, the main method should be modified to catch and handle an FileNotFoundException if one is thrown in the readItemFile method.

- As before, the main method reads in the file name as the first argument, args[0], of the command line arguments, creates an instance of BakedItemList, and then calls the readItemFile method in the BakedItemList class to read in the data file and generate the five reports as shown in the output examples beginning on the next page. The main method should not include the throws FileNotFoundException in the declaration. Instead, the main method should include a try-catch statement to catch FileNotFoundException when/if it is thrown in the readItemFile method in the BakedItemList class. This exception is most likely to occur when an incorrect file name is passed to the readItemFile method. After this exception is caught and the appropriate message is printed in the main method, your program should end. See the second example output below.

Example data files can be downloaded from the Lab web page, and the program output for *baked_item_data2.csv* begins on the next page.

Example Output when file name is missing as command line argument

```
----jGRASP exec: java BakeryPart3
File name expected as command line argument.
Program ending.

----jGRASP: operation complete.
```

Example Output when attempting to read a file that is not found (fake_data.csv)

```
----jGRASP exec: java BakeryPart3 fake_data.csv
Attempted to read file: fake_data.csv (No such file or directory)
Program ending.

----jGRASP: operation complete.
```

Example Output for *baked_item_data2.csv*

```
----jGRASP exec: java BakeryPart3 baked_item_data2.csv

-----
Report for Auburn's Best Bakery
-----

Cookie: Chips Delight - Chocolate Chip   Quantity: 12   Price: $4.20
(Ingredients: flour, sugar, dark chocolate chips, butter, baking soda,
salt)

Pie: Weekly Special - Apple   Quantity: 1   Price: $12.00
(Ingredients: flour, sugar, apple, cinnamon, butter,
baking soda, salt)

Pie: Summer Special - Key Lime   Quantity: 1   Price: $14.00
(Ingredients: flour, sugar, lime juice, lemon juice, graham crackers,
butter, baking soda, salt)

Cake: Birthday - Chocolate   Quantity: 1   Price: $8.00
(Ingredients: flour, sugar, cocoa powder, vanilla, eggs,
butter, baking soda, baking powder, salt)

Cake: 2-Layer - Red Velvet   Quantity: 1   Price: $16.00
(Ingredients: flour, sugar, cocoa powder, food coloring, eggs,
butter, baking soda, baking powder, salt)

WeddingCake: 3-Layer/3-Tier - Vanilla   Quantity: 1   Price: $135.00
(Ingredients: flour, sugar, buttermilk, coffee, eggs,
butter, baking soda, baking powder, salt)

-----
Report for Auburn's Best Bakery (by Class)
-----

Cake: 2-Layer - Red Velvet   Quantity: 1   Price: $16.00
(Ingredients: flour, sugar, cocoa powder, food coloring, eggs,
butter, baking soda, baking powder, salt)

Cake: Birthday - Chocolate   Quantity: 1   Price: $8.00
(Ingredients: flour, sugar, cocoa powder, vanilla, eggs,
butter, baking soda, baking powder, salt)

Cookie: Chips Delight - Chocolate Chip   Quantity: 12   Price: $4.20
(Ingredients: flour, sugar, dark chocolate chips, butter, baking soda,
salt)

Pie: Summer Special - Key Lime   Quantity: 1   Price: $14.00
(Ingredients: flour, sugar, lime juice, lemon juice, graham crackers,
butter, baking soda, salt)

Pie: Weekly Special - Apple   Quantity: 1   Price: $12.00
(Ingredients: flour, sugar, apple, cinnamon, butter,
baking soda, salt)

WeddingCake: 3-Layer/3-Tier - Vanilla   Quantity: 1   Price: $135.00
(Ingredients: flour, sugar, buttermilk, coffee, eggs,
butter, baking soda, baking powder, salt)

-----
Report for Auburn's Best Bakery (by Price)
-----

Cookie: Chips Delight - Chocolate Chip   Quantity: 12   Price: $4.20
(Ingredients: flour, sugar, dark chocolate chips, butter, baking soda,
salt)
```

Cake: Birthday - Chocolate Quantity: 1 Price: \$8.00
(Ingredients: flour, sugar, cocoa powder, vanilla, eggs,
butter, baking soda, baking powder, salt)

Pie: Weekly Special - Apple Quantity: 1 Price: \$12.00
(Ingredients: flour, sugar, apple, cinnamon, butter,
baking soda, salt)

Pie: Summer Special - Key Lime Quantity: 1 Price: \$14.00
(Ingredients: flour, sugar, lime juice, lemon juice, graham crackers,
butter, baking soda, salt)

Cake: 2-Layer - Red Velvet Quantity: 1 Price: \$16.00
(Ingredients: flour, sugar, cocoa powder, food coloring, eggs,
butter, baking soda, baking powder, salt)

WeddingCake: 3-Layer/3-Tier - Vanilla Quantity: 1 Price: \$135.00
(Ingredients: flour, sugar, buttermilk, coffee, eggs,
butter, baking soda, baking powder, salt)

Report for Auburn's Best Bakery (by Flavor)

Pie: Weekly Special - Apple Quantity: 1 Price: \$12.00
(Ingredients: flour, sugar, apple, cinnamon, butter,
baking soda, salt)

Cake: Birthday - Chocolate Quantity: 1 Price: \$8.00
(Ingredients: flour, sugar, cocoa powder, vanilla, eggs,
butter, baking soda, baking powder, salt)

Cookie: Chips Delight - Chocolate Chip Quantity: 12 Price: \$4.20
(Ingredients: flour, sugar, dark chocolate chips, butter, baking soda,
salt)

Pie: Summer Special - Key Lime Quantity: 1 Price: \$14.00
(Ingredients: flour, sugar, lime juice, lemon juice, graham crackers,
butter, baking soda, salt)

Cake: 2-Layer - Red Velvet Quantity: 1 Price: \$16.00
(Ingredients: flour, sugar, cocoa powder, food coloring, eggs,
butter, baking soda, baking powder, salt)

WeddingCake: 3-Layer/3-Tier - Vanilla Quantity: 1 Price: \$135.00
(Ingredients: flour, sugar, buttermilk, coffee, eggs,
butter, baking soda, baking powder, salt)

Excluded Records Report

*** InvalidCategoryException: For category: "D" in:
D,Chips Delight,Chocolate Chip,12,flour,sugar,dark chocolate chips,butter,baking soda,salt
*** java.lang.NumberFormatException: For input string: "1.0" in:
P,Daily Special,Pecan,1.0,0,flour,sugar,pecans,dark corn syrup,butter,baking soda,salt
*** InvalidCategoryException: For category: "R" in:
R,Weekly Special,Apple,1,0,flour,sugar,apple,cinnamon,butter,baking soda,salt
*** java.lang.NumberFormatException: For input string: "two" in:
K,2-Layer,Chocolate,1,two,flour,sugar,cocoa powder,eggs,butter,baking soda,baking powder,salt
*** java.util.NoSuchElementException in:
W,3-Layer/3-Tier,Buttermilk,1,3

----jGRASP: operation complete.

Notes:

1. This project assumes that you are reading each double or int value as String using next() and then parsing it into a double with Double.parseDouble(...) or into an int with Integer.parseInt(...) as shown in the following examples.

```
... Double.parseDouble(myInput.next());  
... Integer.parseInt(myInput.next());
```

This form of input will throw a java.lang.NumberFormatException if the value is not a double.

If you are reading in each double value as a double using nextDouble(), for example

```
... myInput.nextDouble();
```

then a java.util.InputMismatchException will be thrown if the value read is not a double.

For this project, you must use Double.parseDouble(...) or Integer.parseInt(...) to input a double or int value respectively since Web-CAT is expecting NumberFormatException when an input String cannot be converted to double or int value.

2. In the readItemFile method, for the default case (or else), which detects an invalid category, the only statement should be:

```
throw new InvalidCategoryException(category);
```

The code that was in this block in Part 2 should be moved to the catch block for InvalidCategoryException with any changes specified for Part 3.