

# Fundamentals of Data Engineering

---


Week 09 - sync session


**datascience@berkeley**


# Assignment Review


- Review your Assignment 08
- Get ready to share

# Project Transition

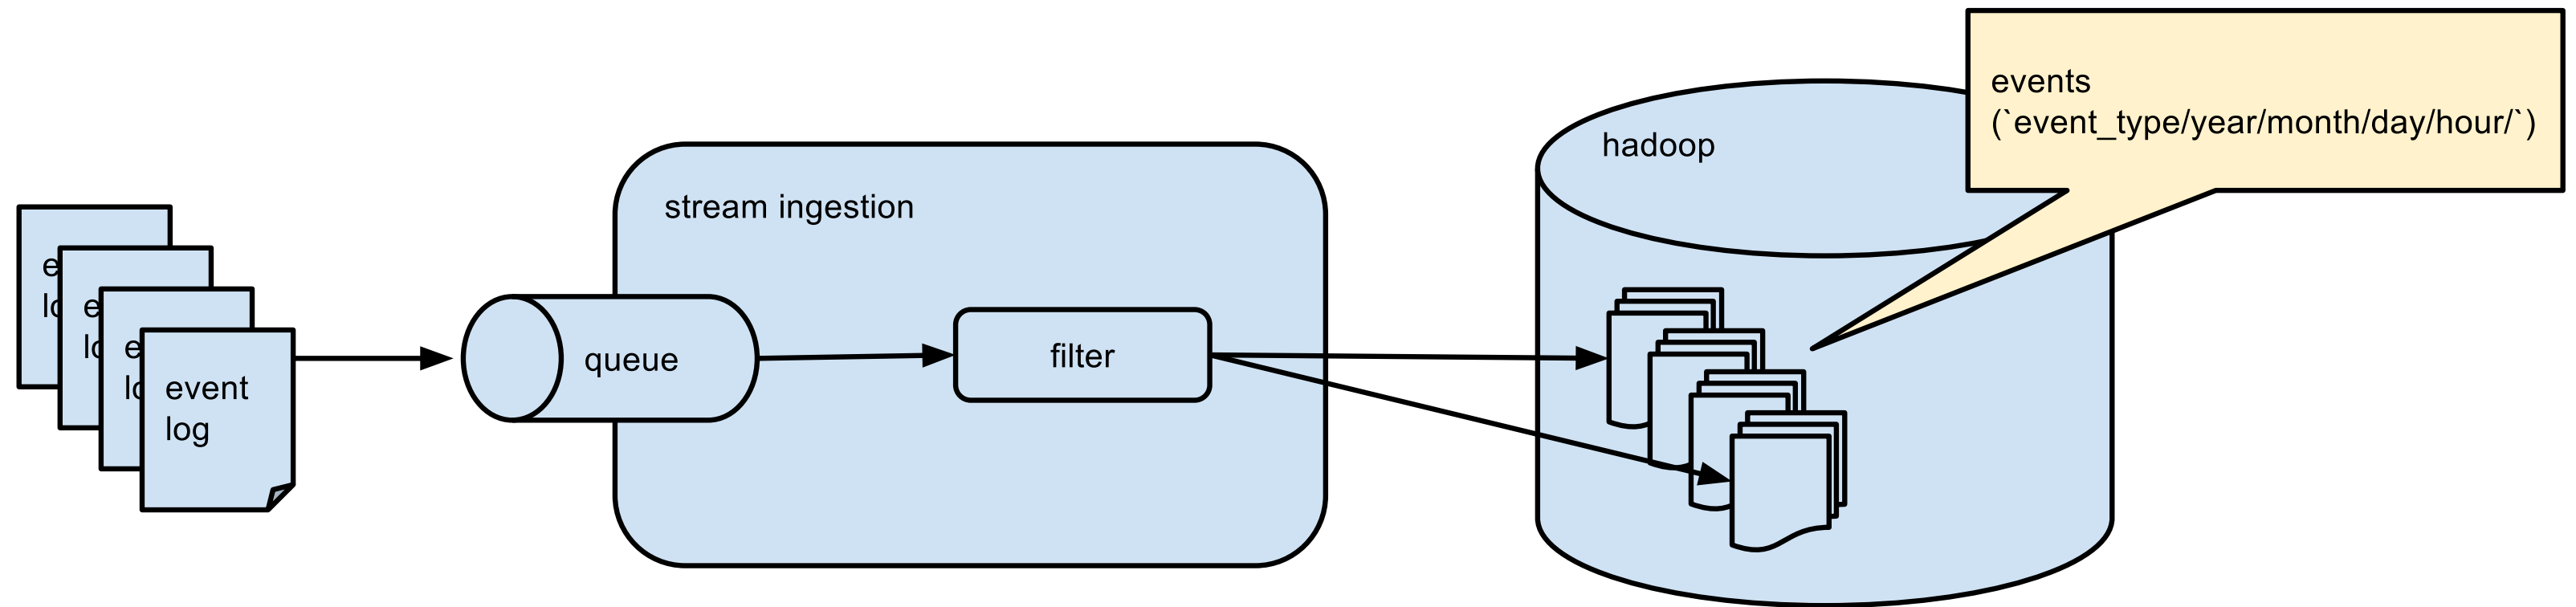

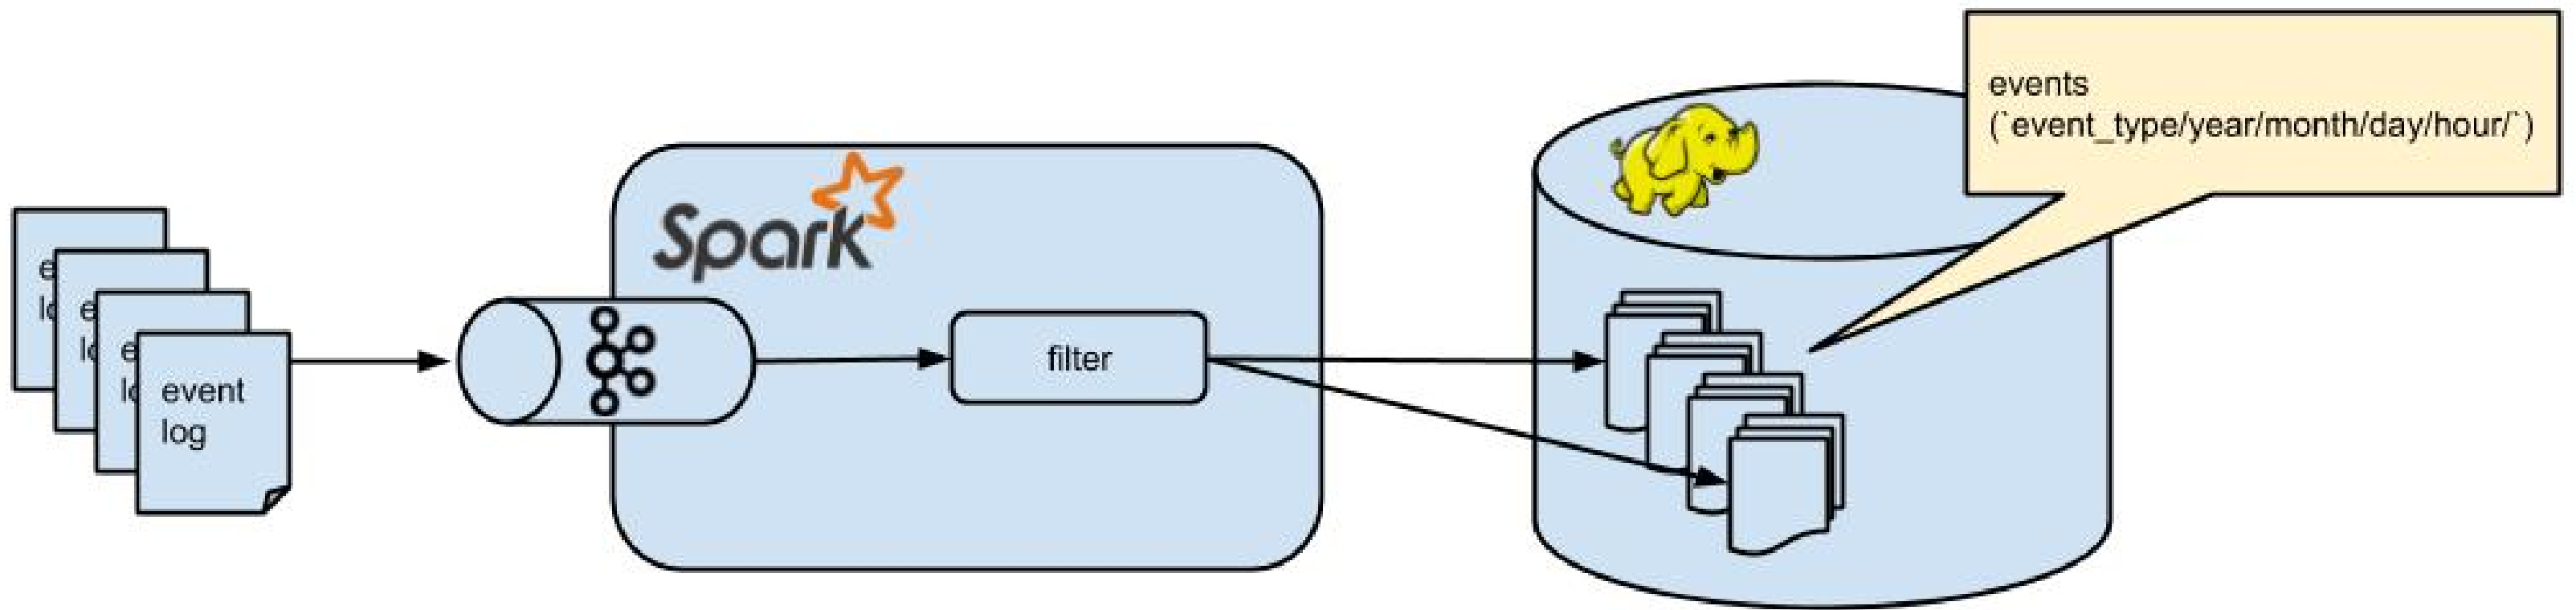

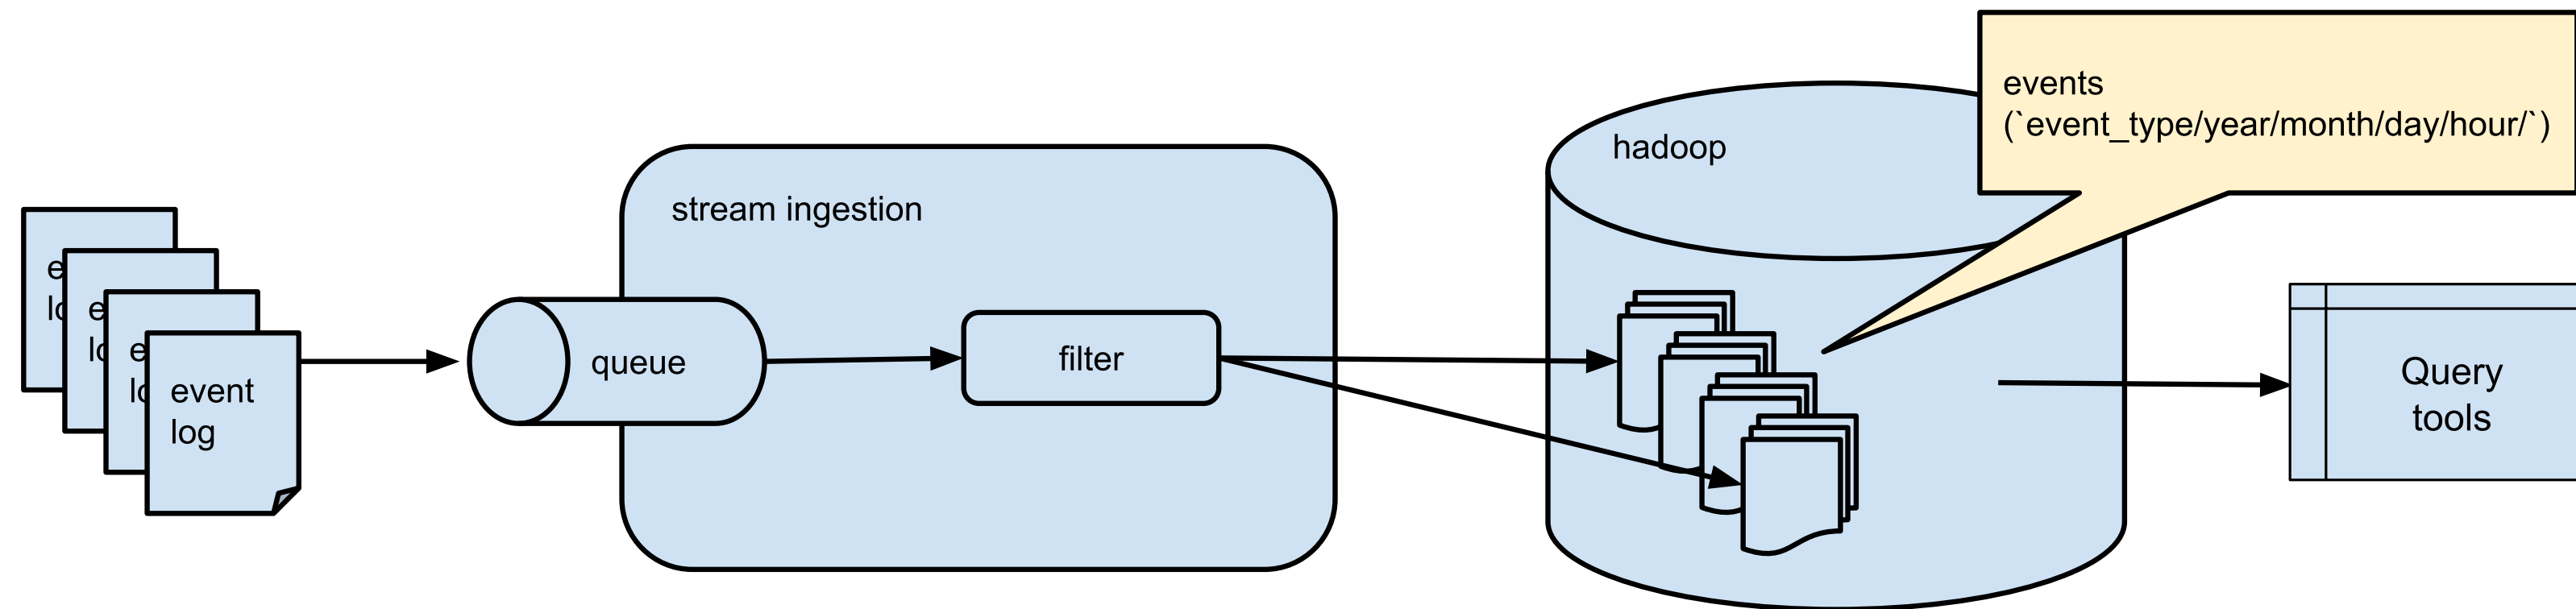

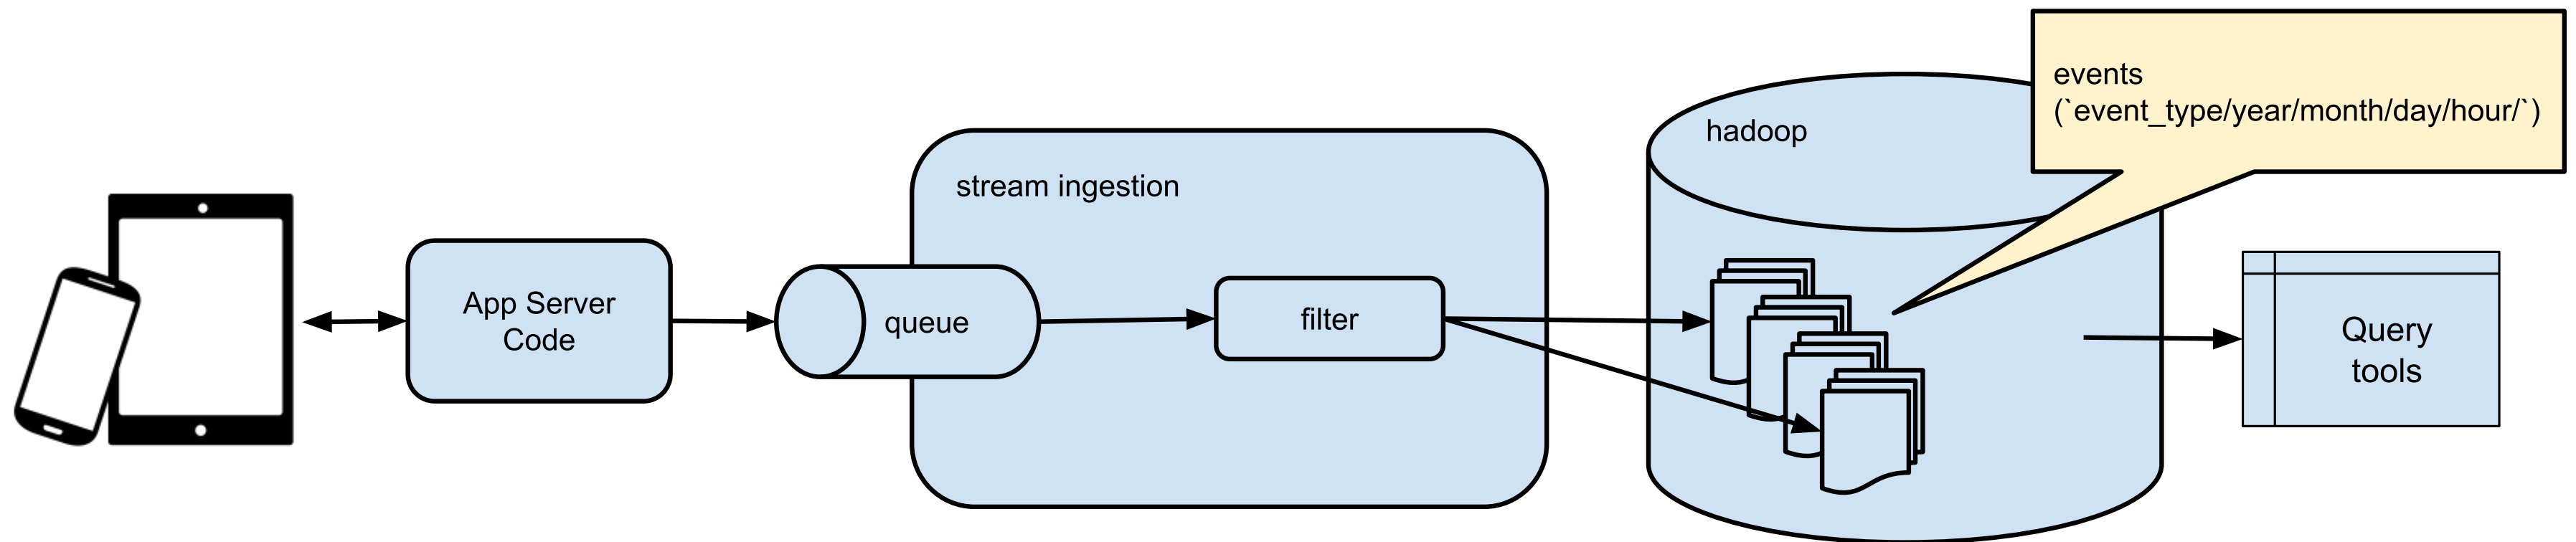

# Project 3 Setup

- You're a data scientist at a game development company.
- Your latest mobile game has two events you're interested in tracking:
  - `buy a sword & join guild...`
- Each has metadata



# Project 3 Task

- Your task: instrument your API server to catch and analyze these two event types.

# Project 3 options

# Flask with Kafka

# Setup

Create a `docker-compose.yml` with the following

```
---
version: '2'
services:
  zookeeper:
    image: confluentinc/cp-zookeeper:latest
    environment:
      ZOOKEEPER_CLIENT_PORT: 32181
      ZOOKEEPER_TICK_TIME: 2000
    expose:
      - "2181"
      - "2888"
      - "32181"
      - "3888"

  kafka:
    image: confluentinc/cp-kafka:latest
    depends_on:
```

# Spin up the cluster

```
docker-compose up -d
```

# Create a topic events

```
docker-compose exec kafka \  
  kafka-topics \  
    --create \  
    --topic events \  
    --partitions 1 \  
    --replication-factor 1 \  
    --if-not-exists \  
    --zookeeper zookeeper:32181
```

# Should show


```
Created topic "events".
```


Let's create a web-based application



# An example scenario


- You're a mobile game developer. During gameplay, your users perform various actions such as
  - purchase a sword
  - purchase a knife
  - join a guild
  - etc
- To process these actions, your mobile app makes API calls to a web-based API-server.

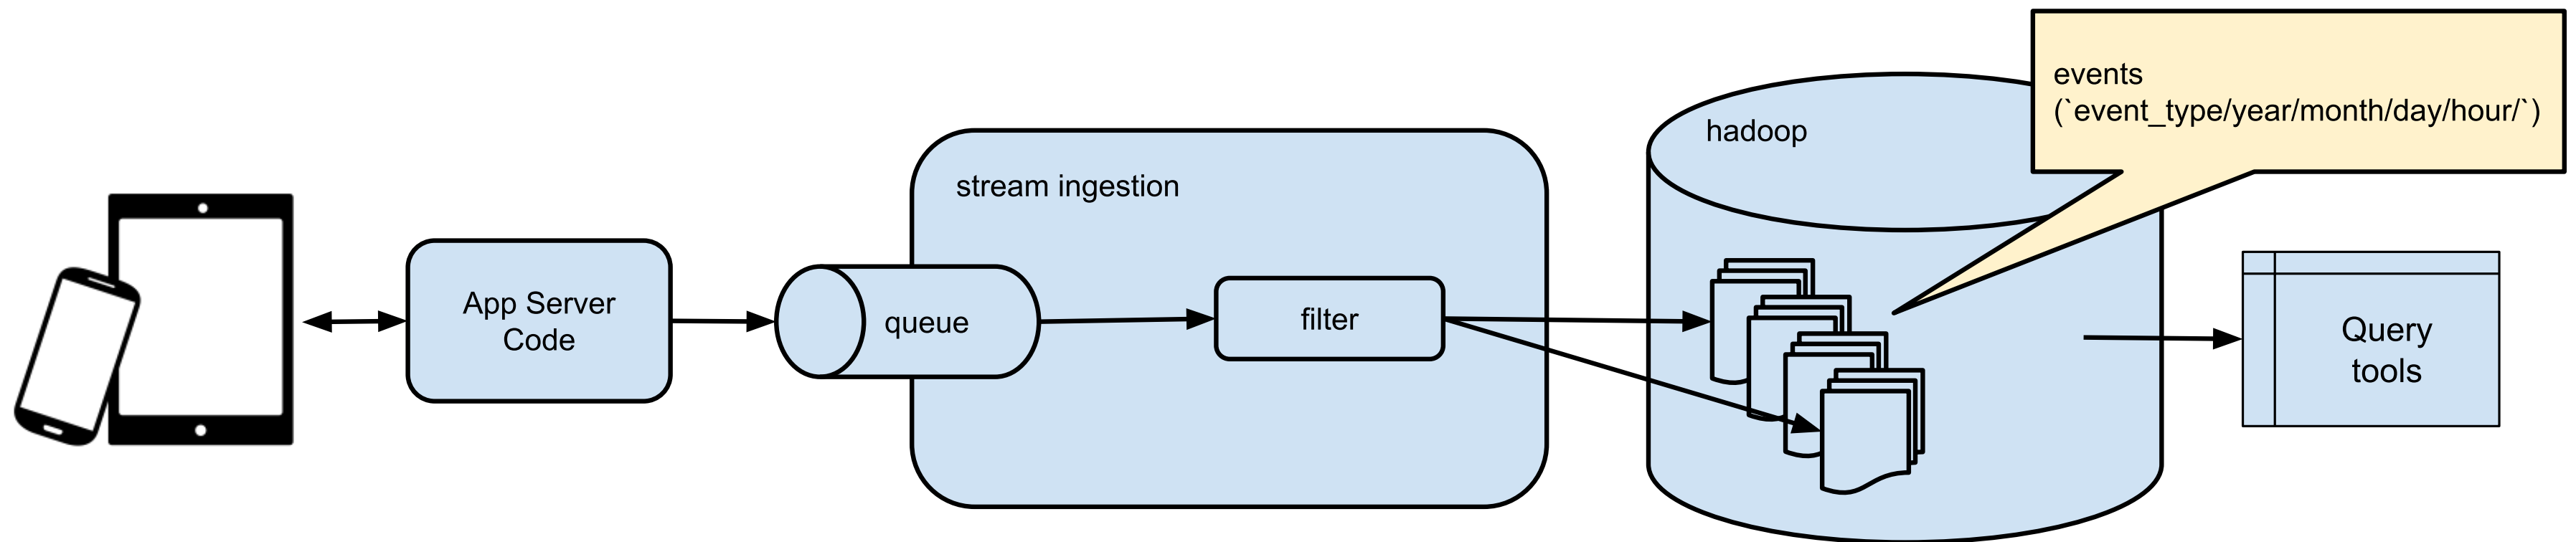

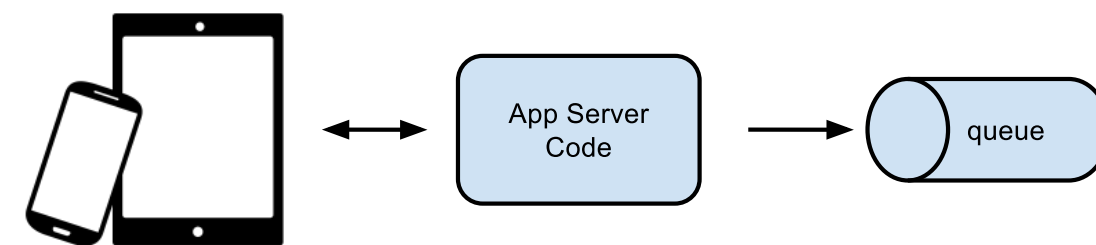

## No Load Balancing



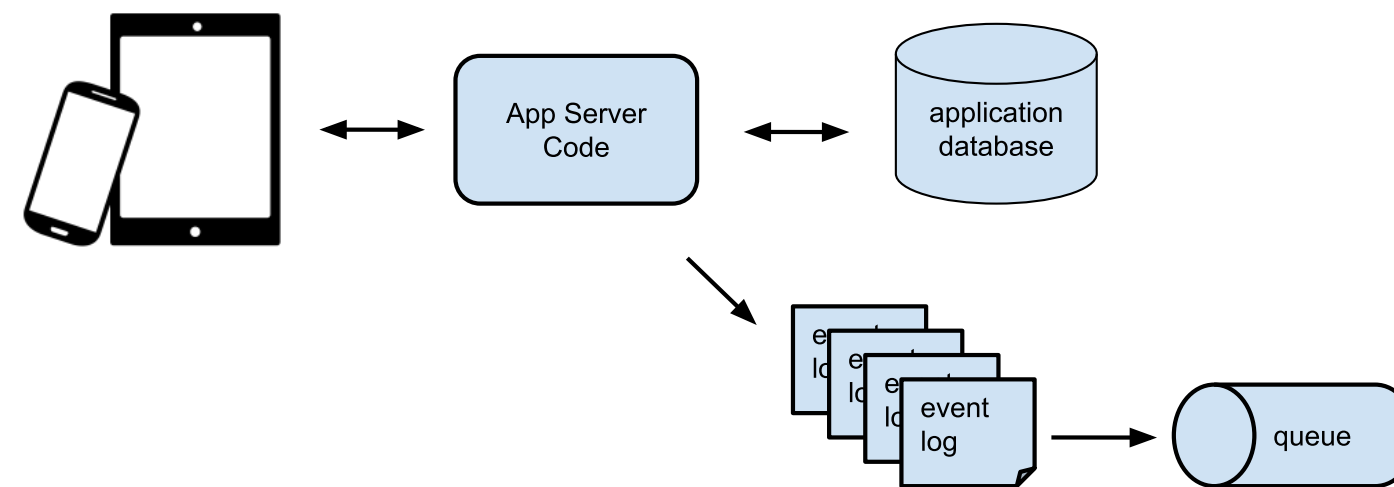

# An API server - usual case

- User actions map to API endpoints

```
POST /purchase
```

# To keep it simple

- Our actions will map to single API calls

```
GET /purchase_a_sword
```

# Flask

- Use the python `flask` library to write our simple API server.

```
#!/usr/bin/env python
from flask import Flask
app = Flask(__name__)

@app.route("/")
def default_response():
    return "This is the default response!"

@app.route("/purchase_a_sword")
def purchase_sword():
    # business logic to purchase sword
    return "Sword Purchased!"
```



- Save this as  
~/w205/flask-with-kafka/game\_api.py and  
run it via

```
docker-compose exec mids env FLASK_APP=/w205/flask-with-kafka/game_api.py flask run
```

# Test it out

```
docker-compose exec mids curl http://localhost:5000/
```

```
docker-compose exec mids curl http://localhost:5000/purchase_a_sword
```

# Stop flask

-Kill flask with `ctrl-c`.

Generate events from our webapp

- Let's add kafka into the mix

```
#!/usr/bin/env python
from kafka import KafkaProducer
from flask import Flask
app = Flask(__name__)
event_logger = KafkaProducer(bootstrap_servers='kafka:29092')
events_topic = 'events'

@app.route("/")
def default_response():
    event_logger.send(events_topic, 'default'.encode())
    return "This is the default response!"

@app.route("/purchase_a_sword")
def purchase_sword():
    # business logic to purchase sword
    # log event to kafka
```

# Run that

```
docker-compose exec mids env FLASK_APP=/w205/flask-with-kafka/game_ap
```

# Test it out

- Generate events

```
docker-compose exec mids curl http://localhost:5000/
```

```
docker-compose exec mids curl http://localhost:5000/purchase_a_sword
```



## read from kafka


- Use `kafkacat` to consume events from the `events` topic

```
docker-compose exec mids bash -c "kafkacat -C -b kafka:29092 -t event"
```


# down

```
docker-compose down
```

# Summary

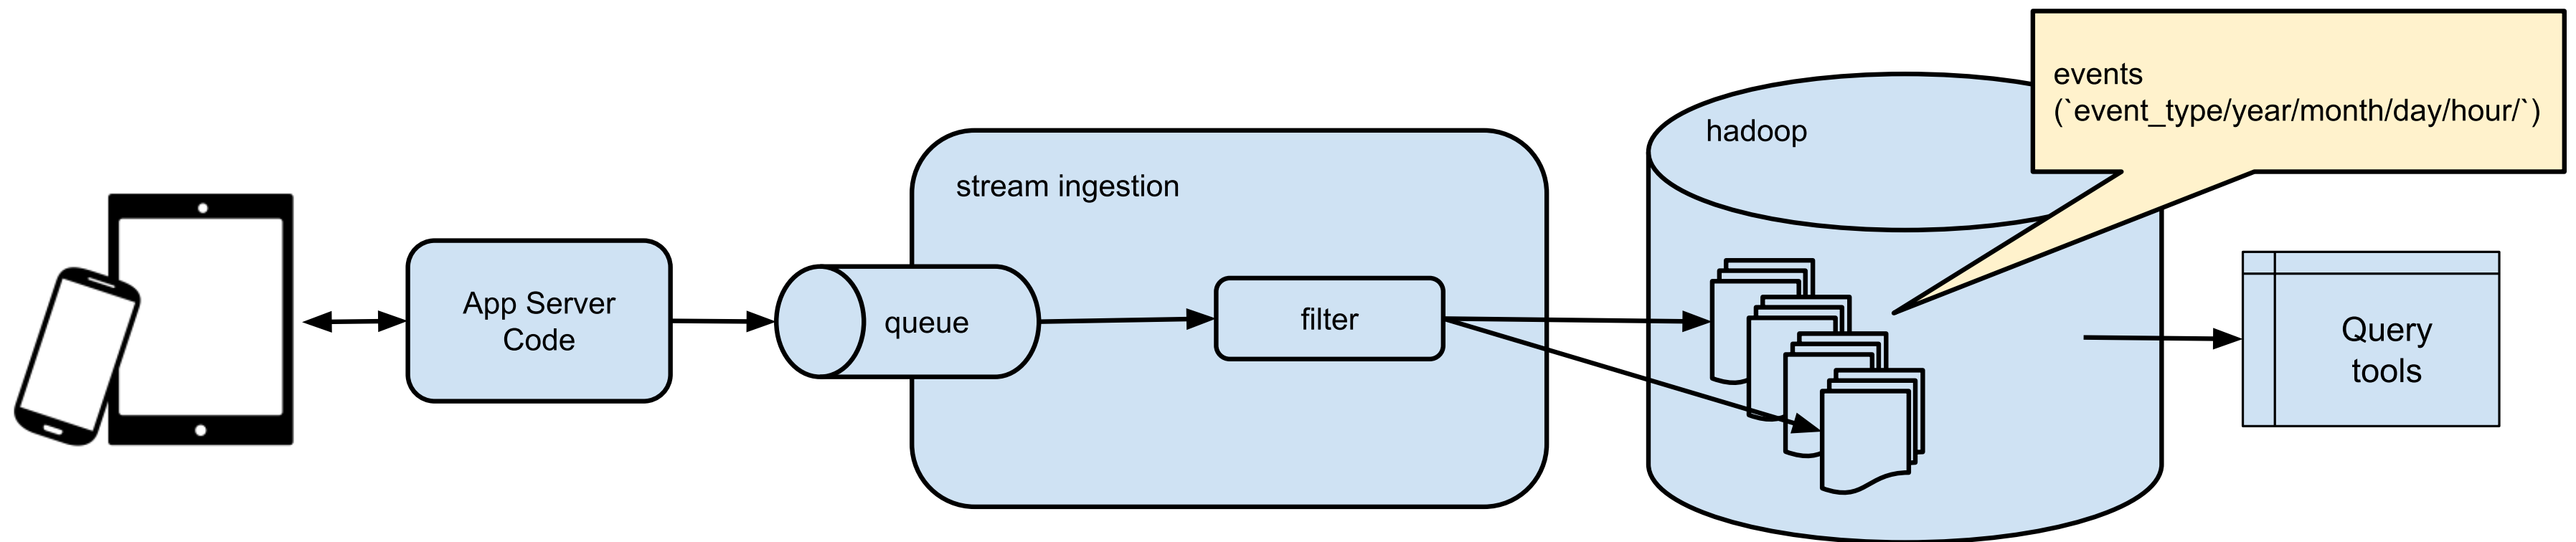

# Summary

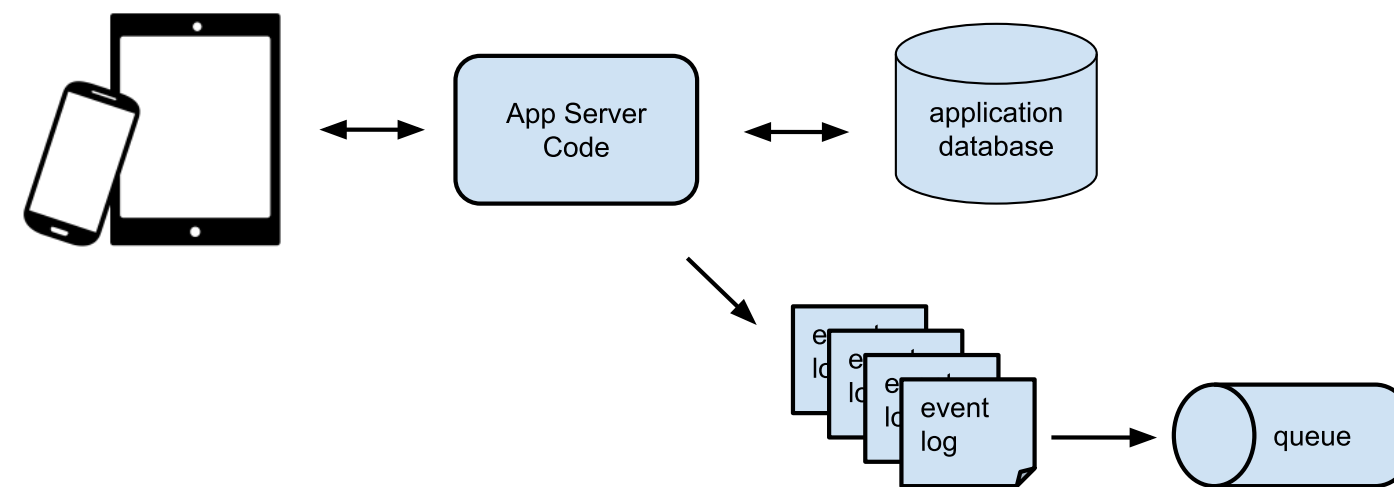

# Berkeley

SCHOOL OF  
INFORMATION