

Integrating the Clip AI Multi-Model API into the AI Video Pipeline


Workflow diagram and technical requirements for API access approval — based on PLAN.md (2026-09-19)

Approval requested: Step 4 — Image-to-video generation


How the process works

A script (.docx) is split into scenes and a Character Bible by an AI director. Deepix generates one image per scene, and each image is quality-checked (automatically or by a person, depending on the project mode). Approved images get a short motion prompt and are sent to Clip AI (a platform offering Seedance, Kling and MiniMax), which turns each one into a 5-second video clip. FFmpeg then joins the clips, adds transitions and music, and produces the final video. Everything is controlled from one Dashboard with start, pause, retry and cancel buttons.

A. 5-STEP PIPELINE (controlled from a single Dashboard)

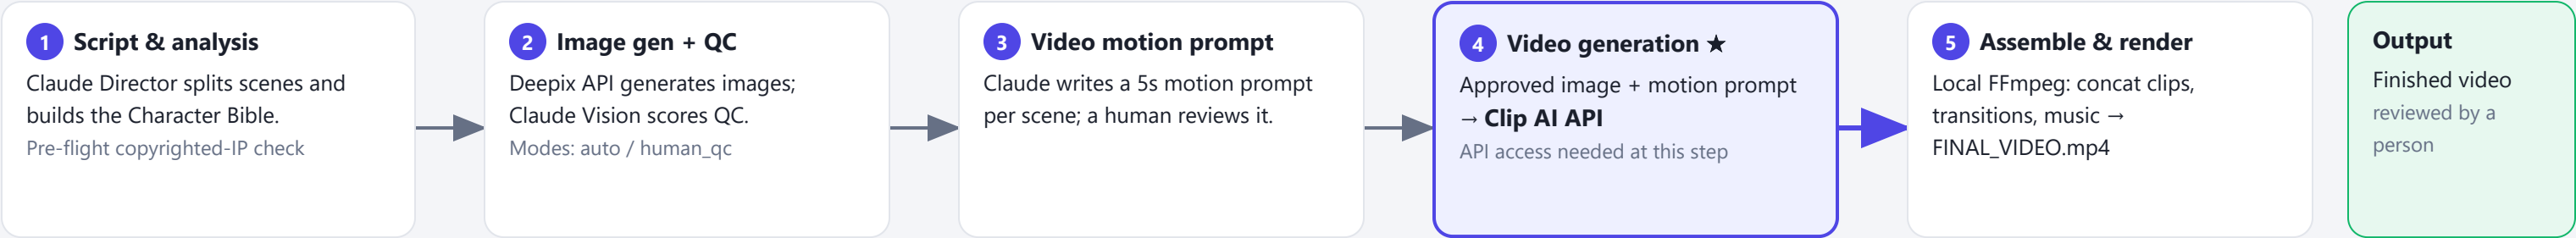

B. CLIP AI API INTEGRATION DETAILS

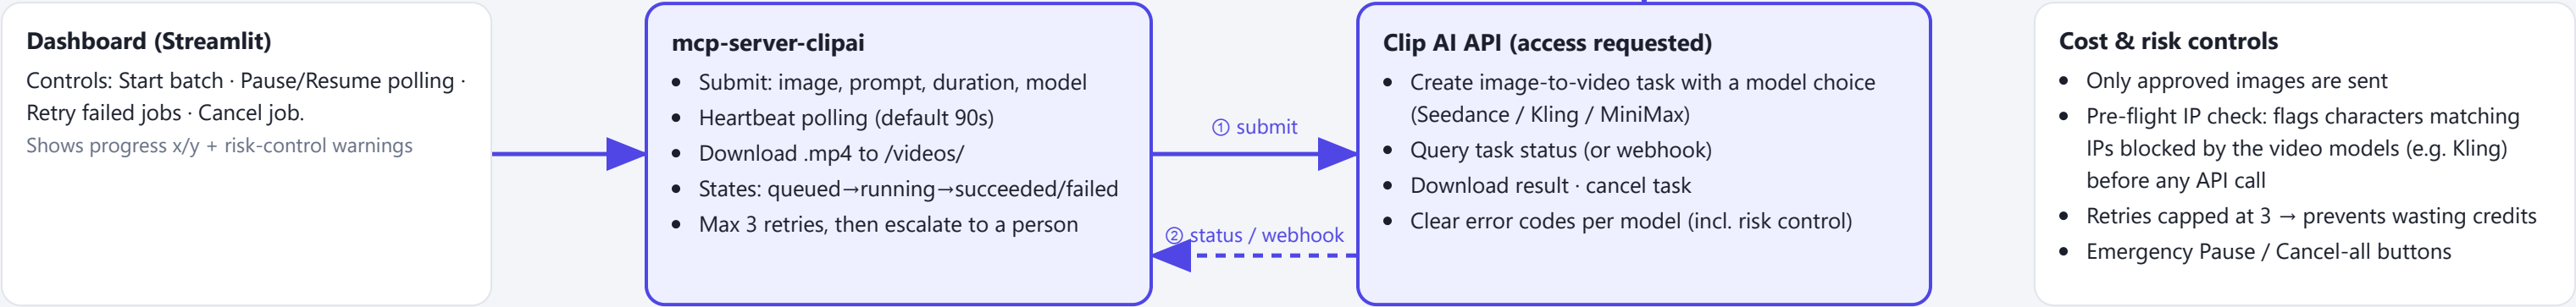

C. REQUESTED APPROVAL

Information / access requested

Item	Requirement
Authentication	API key / token (kept in an environment variable on the operating machine, never committed to the repo)
Endpoints	Create image-to-video task · get status · (webhook if available) · download video · cancel task
Input per task	1 image (png/jpg) + motion prompt + negative prompt + duration (default 5s)
Models & audio	Selectable models/versions and how to choose one; audio endpoints (music/voice via Seed Audio / ElevenLabs) if available
Limits & errors	Rate limit, concurrent tasks, timeouts; error-code docs, esp. "Failure to pass the risk control system"
Quota & cost	Quota/credits per model for the pilot phase and for scaling to batches of > 100 clips

Proposed usage scale

- **Pilot phase (V0):** ~2 scripts, 10–20 clips → at most ~60 requests if every scene needs 3 retries
- **Production phase:** batches may exceed 100 clips → requires long-running polling; per-request manual approval is not feasible
- Requested quota: **requests/day** (to be agreed)

Security & data

- Only pipeline-generated scene images and text prompts are sent; no personal data
- The API key stays on the operating machine; the source repo contains no keys
- Every call is logged (job, state, error) for auditing and cost tracking

D. PLAN ONCE ACCESS IS GRANTED

1 · Verify the API

Run 1 test task; confirm endpoints, error schema, processing time

2 · Build the connector

mcp-server-clipai: submit, heartbeat polling, download video, error logging

3 · V0 dry run

2 sample scripts (10–20 clips); measure failure rate and cost

4 · Scale up

Large batches via the Dashboard; tune quota from real usage data