

# Preface

Here is the preface Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Espoo, October 30, 2014,

Hongyu Su



# Contents

<b>Preface</b>	<b>1</b>
<b>Contents</b>	<b>3</b>
<b>List of Publications</b>	<b>5</b>
<b>Author's Contribution</b>	<b>7</b>
<b>1. Introduction</b>	<b>9</b>
1.1 Scope of the Thesis . . . . .	9
1.2 Contributions and Organization of the Thesis . . . . .	11
<b>2. Regularized Learning for Classification</b>	<b>13</b>
2.1 Regularized Risk Minimization . . . . .	13
2.1.1 Empirical Risk Minimization . . . . .	13
2.1.2 Regularized Learning . . . . .	14
2.2 Single-Label Classification . . . . .	15
2.2.1 Preliminary and Notations . . . . .	15
2.2.2 Perceptron . . . . .	16
2.2.3 Logistic Regression (LR) . . . . .	18
2.2.4 Support Vector Machines (SVM) . . . . .	20
2.3 Ensemble Methods . . . . .	24
2.3.1 Preliminary and Notations . . . . .	25
2.3.2 Boosting . . . . .	25
2.3.3 Bootstrap Aggregating . . . . .	27
<b>3. Flat Multilabel Classification</b>	<b>31</b>
3.1 Preliminary and Notations . . . . .	32
3.2 Problem Transformation . . . . .	32
3.2.1 Multilabel $K$ -Nearest Neighbors (ML-KNN) . . . . .	33

3.2.2 Classifier Chains (CC) . . . . .	33
3.2.3 Instant Based Logistic Regression (IBLR) . . . . .	34
3.3 Algorithm Adaptation . . . . .	35
3.3.1 Ensemble Methods for Flat Multilabel Classification	35
3.3.2 Correlated Logistic Regression (CORRLOG) . . . . .	36
3.3.3 Multitask Feature Learning (MTL) . . . . .	37
<b>4. Structured Output Prediction</b>	<b>39</b>
4.1 Preliminary and Notations . . . . .	39
4.2 Related Methods . . . . .	40
4.2.1 Structured Perceptron . . . . .	40
4.2.2 Conditional Random Field (CRF) . . . . .	41
4.2.3 Max-Margin Markov Network ( $M^3N$ ) . . . . .	41
4.2.4 Support Vector Machines for Interdependent and Structured Outputs (SSVM) . . . . .	43
4.3 Structured Output Prediction for Molecular Activity Classification . . . . .	44
4.3.1 Background . . . . .	44
4.3.2 Methods . . . . .	45
4.4 SPIN for Network Response Prediction . . . . .	47
4.4.1 Background . . . . .	47
4.4.2 Methods . . . . .	48
<b>5. Structured Output Prediction with Unknown Structure</b>	<b>51</b>
5.1 Graph Labeling Ensemble (MVE) . . . . .	51
5.1.1 Methods . . . . .	52
5.2 Random Graph Ensemble (AMM, MAM) . . . . .	52
5.2.1 Background . . . . .	53
5.2.2 Methods . . . . .	53
5.3 Random Spanning Tree Approximation (RTA) . . . . .	54
5.3.1 Background . . . . .	55
5.3.2 Methods . . . . .	56
<b>6. Evaluation and Comparison Methods</b>	<b>59</b>
6.1 Performance Measures . . . . .	59
6.2 Statistical Tests . . . . .	60
<b>7. Implementations</b>	<b>63</b>
<b>8. Conclusion</b>	<b>65</b>

8.1 Discussion . . . . .	65
8.2 Future Work . . . . .	66
<b>Bibliography</b>	<b>67</b>
<b>Publications</b>	<b>81</b>



# List of Publications

This thesis consists of an overview and of the following publications which are referred to in the text by their Roman numerals.

- I** Hongyu Su, Aristides Gionis, Juho Rousu. Structured Prediction of Network Response. In *Proceedings of the 31<sup>th</sup> International Conference on Machine Learning (ICML 2014)*, Beijing, China, 2014. JMLR W&CP volume 32:442-450, June 2014.
- II** Hongyu Su, Markus Heinonen, Juho Rousu. Multilabel Classification of Drug-like Molecules via Max-margin Conditional Random Fields. In *Proceedings of the 5<sup>th</sup> International Conference on Pattern Recognition in Bioinformatics (PRIB 2010)*, Nijmegen, The Netherlands, 2010. Springer LNBI volume 6282:265-273, September 2010.
- III** Hongyu Su, Juho Rousu. Multi-task Drug Bioactivity Classification with Graph Labeling Ensembles. In *Proceedings of the 6<sup>th</sup> International Conference on Pattern Recognition in Bioinformatics (PRIB 2011)*, Delft, The Netherlands, 2011. Springer LNBI volume 7035:157-167, November 2011.
- IV** Hongyu Su, Juho Rousu. Multilabel Classification through Random Graph Ensembles. *Machine Learning*, Volume, issue, pages, and other detailed information, Month Year.
- V** Mario Marchand, Hongyu Su, Emilie Morvant, Juho Rousu, John Shawe-Taylor. Multilabel Structured Output Learning with Random Spanning Trees of Max-Margin Markov Networks. In *Proceedings of the 28<sup>th</sup> Advances in Neural Information Processing Systems (NIPS 2014)*, to appear, December 2014.



# Author's Contribution

## **Publication I: “Structured Prediction of Network Response”**

Publication I presents a novel formalism of the network response prediction problem, and proposes a structured output prediction algorithm for the problem. The proposed algorithm SPIN captures the contextual information and improves the state-of-the-art models in terms of the prediction performance.

The definition of the problem and the initial modeling idea were developed jointly by the authors. The author made major contribution to designing the learning framework and the optimization algorithm. The author implemented the whole learning system including SDP and the GREEDY inference algorithms. The author designed and performed the experiments and analyzed the results. The author joint in the designing and writing the research article.

## **Publication II: “Multilabel Classification of Drug-like Molecules via Max-margin Conditional Random Fields”**

The novelty of Publication II is to use a structured output prediction model for multilabel molecular activity classification problem. The new model incorporates the correlation of the output variables into the learning process and surpasses the previous single-label classification approach in terms of the prediction performance.

The original modeling idea was jointly proposed. The author implemented the learning system that applying the structured output learning algorithm for the task. The author designed and performed the experiments and analyzed the results. The author participated in designing

and writing the articles.

### **Publication III: “Multi-task Drug Bioactivity Classification with Graph Labeling Ensembles”**

Publication III extends Publication II by learning a majority voting ensemble of a set of structured output classifiers built from random output graphs.

The idea of the ensemble learning strategy was jointly developed. The author made major contribution to the design of the algorithm. The author implemented the algorithm, designed and performed the experiments, and analyzed the results. The author participated in designing and writing the articles.

### **Publication IV: “Multilabel Classification through Random Graph Ensembles”**

Publication IV extends Publication III by introducing two aggregation framework (AMM and MAM) which perform the inference before or after combining the multiple structure output learners. The theoretical study in Publication IV explains the performance of the proposed MAM model. The performance of the proposed models are examined on a set of heterogeneous multilabel prediction problems.

The modeling idea was developed jointly by authors. The author designed and implemented the learning frameworks and the optimization algorithms. The author made major contribution to the theorem proposed in the article. The author designed and conducted the experiments and analyzed the results. The article was structured by authors and was written jointly.

### **Publication V: “Multilabel Structured Output Learning with Random Spanning Trees of Max-Margin Markov Networks”**

Publication V is a major step forward of Publication IV by introducing the joint learning and inference framework and developing rigours learning theory to backup the algorithm.

The idea was initialized jointly by the authors. The author joint the

development of the theories and the proofs. The author made major contribution to the learning framework and optimization algorithms. The author implemented the whole learning system that brings the theory into practice. The author designed and performed the experiments and analyzed the results. All authors participated in designing and writing the research article.



# 1. Introduction

## 1.1 Scope of the Thesis

Machine learning, defined by Arthur Samuel in 1959 as “a field of study that gives computers the ability to learn without being explicitly programmed”, has gained its popularity and become an active research field in information and computer science during the past few decades. Machine learning not only brings in intelligent system that generalizes well from previously observed examples, but also is firmly rooted in the statistical learning theory that establishes the conditions to guarantee the good generalization (Vapnik, 1998, 1999). Machine learning appears in many real world applications, to name but a few, page ranker in web search engine (Richardson et al., 2006), email spam filter (Goodman and tau Yih, 2006), recommender system in online shopping (Bell and Koren, 2007), optical image recognizer and speech recognizer (Bengio, 2009). With increasing availability of large scale data, machine learning is expected to play an indispensable role in many research fields (Fan and Bifet, 2013).

Supervised learning, an important paradigm in machine learning, is usually instantiated as learning a function that is capable of predicting the best value for an output variable given an arbitrary input variable. The function is learned by exploring a set of observed input/output pairs known as training examples. In the classical supervised learning setting, the output variable to be predicted can only take one value. In machine learning community, it is referred as single-label classification if the output is discrete valued, or as regression if the output is continuous valued. Many single-label classification models have been designed and applied in practice, for example, the support vector machines (Boser et al., 1992; Cortes and Vapnik, 1995) and the logistic regression (Chen and Rosenfeld,

1999, 2000; Goodman, 2003).

Multilabel classification is a natural extension to single-label classification by defining multiple valued output associated with each inputs. Problems of this type are prevalent in everyday life. For example, movie can be classified as “action”, “documentary” and “crime”; a news article can be categorized as “science”, “drug” and “people”; a gene can associate to multiple functions in genomics research; or a surveillant photo can be tagged by both “car” and “building”. The problem is known as flat multilabel classification when the multiple output variables are essentially treated as a “flat” vector. The flat multilabel classification problem has drawn increasing amount of interest from machine learning community (Tsoumakas and Katakis, 2007; Tsoumakas et al., 2010), and been tackled by many algorithms that aim to explore the correlation and dependency between multiple output variables in order to make better prediction (Read et al., 2009; Cheng and Hüllermeier, 2009; Bian et al., 2012).

In multilabel classification problem, multiple interdependent output variables are usually located in a structured output space where the dependency or correlation of the variables is defined by the structure of an output graph (e.g. Markov network). The flat multilabel classification renders the difficulty of modeling the complex dependency structure. Structured output prediction appears as a natural remedy to the flat multilabel classification. The models of this type usually incorporate the output dependency structure into the learning process (Lafferty et al., 2001; Taskar et al., 2002, 2004; Tsochantaridis et al., 2004). One problem inherited with structured output learning is the output dependency structure is assumed to be observed. However, this cannot be taken as granted since the proper dependency structure for the output variables is either hidden or difficult to retrieve in many applications (Chickering et al., 1994).

In this thesis, we examine the potential of applying structured output learning to improve the prediction performance in real world multilabel classification problems. In addition, we work on the problem of the structured output learning when the output dependency structure is not observed. We also investigate the efficiency and the scalability of the inference problems in the proposed structured output learning models as the inference problem of the structured output learning is often difficult to solve. Besides, we study the proposed models from the theoretic aspect where we wish to gain insights into the behaviour of the proposed models. In particular, the research questions can be casted as following:

- Q I:** In terms of multilabel classification, is the structured output learning approach more appropriate compared to flat multilabel classification approach which does not model the output dependency structure?
- Q II:** How to apply the structured output learning on multilabel classification problem when the dependency structure is not observed.
- Q III:** Can we understand the behavior of the proposed structured output prediction models from theoretical aspect?
- Q IV:** Can we efficiently tackle the inference problems in the proposed structured output learning models.

## 1.2 Contributions and Organization of the Thesis

The thesis focuses on the statistical learning on multilabel classification problem. It broadly reviews several lines of the research in this emerging field. The contributions of the thesis first include developing new structured output learning methods for multilabel classification problem. The proposed methods can incorporate the output dependency structure into the learning process. The methods are applied in molecular activity prediction task and the network influence prediction task. Besides, we tackle the problem of applying structured output learning on multilabel classification where the output dependency structure is not observed. We have designed new learning framework that does not required the observed output dependency structure, instead can learn from a random sample of spanning trees as the output graph.

The thesis is structured as follows. In Chapter 1, the scope of the research is briefly presented with several research questions being proposed which will be answered through this thesis. Chapter 2 gives the background introduction to the learning problem in classification which is necessary to understand the later part of the thesis. In particular, the chapter covers the basic concepts in classification learning including regularized risk minimization in Section 2.1, single-label classification in Section 2.2, ensemble learning in Section 2.3. Chapter 3 introduces the multilabel classification problem which is the core problem under study in this thesis. The chapter also describes the flat multilabel classification approach which is a standard treatment for multilabel classification

problem. Chapter 4 and Chapter 5 present the main contributions of the thesis. In particular, Chapter 4 presents the structured output learning models developed for multilabel classification problem, which extends the flat multilabel classification approach described in the previous chapter. Chapter 5 explains several learning methods developed for structured output learning when the output dependency structure is not observed. Chapter 6 covers the evaluation metrics and statistic test methods that are used in the research. Chapter 7 describes the implementation details of the developed models. Chapter 8 concludes the thesis by answering the proposed research questions and showing the possible future research directions.

The thesis presents the idea and the background of the proposed structured output learning methods. The formalisms of the proposed methods are also briefly explained. The technical details can be found from the original research articles in the later part of the thesis. The notations and the presentations of some proposed models are slightly improved in the thesis in order to incorporate the methods into a unified framework. Empirical evaluations of the proposed models are nowhere repeated, rather, they can be found from the original research articles in the later part of the thesis.

## 2. Regularized Learning for Classification

### 2.1 Regularized Risk Minimization

In this section, the author will introduce two fundamental concepts in statistical machine learning, known as *empirical risk minimization* and *regularization*. Together they give rise to the learning algorithms that will be presented in the following part of the thesis.

#### 2.1.1 Empirical Risk Minimization

Without loss of generality, we assume two random variable  $\mathbf{x} \in \mathcal{X}$  and  $\mathbf{y} \in \mathcal{Y}$  are jointly distributed according to some fixed but unknown probability distribution  $P(\mathbf{x}, \mathbf{y})$  over domain  $\mathcal{X} \times \mathcal{Y}$ . In addition, we are provided with examples in pair  $(\mathbf{x}, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$  generated by sampling according to the distribution  $P(\mathbf{x}, \mathbf{y})$ . A *hypothesis class*  $\mathcal{H}$  is a set of functions that the learning algorithm is allowed to search against. The basic goal for *statistical learning* is to provide from a hypothesis class  $\mathcal{H}$  an *estimator*  $f \in \mathcal{H} : \mathcal{X} \rightarrow \mathcal{Y}$  that predicts the value of  $\mathbf{y}$  given an arbitrary input  $\mathbf{x}$ .

To measure the goodness of the estimator, we define a risk function (loss function)  $\mathcal{L}(\mathbf{y}, f(\mathbf{x}))$  between the true value  $\mathbf{y}$  and the predicted value  $f(\mathbf{x})$ . The *true risk* of the estimator  $f$  over all examples from domain  $\mathcal{X} \times \mathcal{Y}$  can be computed from

$$\mathcal{R}(f) = \int_{(\mathbf{x}, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}} \mathcal{L}(\mathbf{y}, f(\mathbf{x})) P(\mathbf{x}, \mathbf{y}) d\mathbf{x} d\mathbf{y}. \quad (2.1)$$

As a results, we should search for an estimator  $f$  that minimizes the true risk defined by (2.1). However, the distribution  $P(\mathbf{x}, \mathbf{y})$  that generates the examples is unknown by which it is impossible to compute (2.1) directly. Instead, we are given a random sample of  $m$  examples, denoted by  $S = \{(\mathbf{x}_1, \mathbf{y}_1), \dots, (\mathbf{x}_m, \mathbf{y}_m)\}$ , called *training data*. *Empirical risk* is defined as

the average error made by estimator  $f$  on the training data  $S$  of finite size

$$\mathcal{R}_{emp}(f) = \frac{1}{m} \sum_{i=1}^m \mathcal{L}(\mathbf{y}_i, f(\mathbf{x}_i)). \quad (2.2)$$

This suggests the learning algorithm should search for an estimator  $f$  to minimize the empirical risk defined in (2.2). The strategy is known in machine learning community as *empirical risk minimization* (Vapnik, 1992).

### 2.1.2 Regularized Learning

The empirical risk minimization strategy is ill-posed which in general can provide infinity number of estimators with same empirical risk on the same training data. Besides, it often leads to *overfitting* when the dimensionality of the feature space is high and the number of training data is limited. In other words, underlying true distribution  $P(\mathbf{x}, \mathbf{y})$  is difficult to estimate from a finite sample of training examples. Thus, the estimator will generalize poorly on unseen test examples. The *regularization theory* provides a framework to alleviate these two difficulties. In particular, it suggests to minimize

$$\mathcal{J}(f) = \mathcal{R}_{emp}(f) + \Omega(f),$$

where  $\Omega(f)$  is the regularization function that controls the complexity of the estimator  $f$  by penalizing the norm of the feature weight vector.

In terms of the linear function class, there are varying way to defined the regularization term  $\Omega(f)$  among which  $L_1$ -norm and  $L_2$ -norm regularization are most popular. The  $L_2$ -norm regularization, defined by

$$\Omega(f) = \|\mathbf{w}\|_2 = \left( \sum_{i=1}^d |\mathbf{w}[i]|^2 \right)^{\frac{1}{2}},$$

controls the complexity of the estimator  $f$  and provides a smooth solution. It has been applied in, for example, Ridge Regression (Hoerl and Kennard, 2000), Logistic Regression (Chen and Rosenfeld, 2000), Support Vector Machines (Cortes and Vapnik, 1995). The  $L_1$ -norm regularization, defined by

$$\Omega(f) = \|\mathbf{w}\|_1 = \sum_{i=1}^d |\mathbf{w}[i]|,$$

provides sparse parameter estimation which means that we obtain a high dimensional weight vector with many zero entries. This is a attractive

property as the feature selection is incorporated into the learning and the interpretability of the resulting model is often high. The  $L_1$ -norm regularization has been applied in, for example, LASSO (Tibshirani, 1994). Besides, other regularization techniques have been widely studied, to name a few,  $L_{1,2}$ -norm regularization (Argyriou et al., 2007) and elastic net regularization (Zou and Hastie, 2005).

## 2.2 Single-Label Classification

In this section, the author will introduce the basic classification problem known as *single-label classification*. The author will explain three prominent algorithms in this area: Perceptron, Logistic Regression and Support Vector Machines. The optimization techniques and the latest advances of these algorithms will also be briefly discussed. The goal is to cover the background that is necessary to understand the algorithms presented in the later part of the dissertation.

### 2.2.1 Preliminary and Notations

We consider supervised learning problem which assumes an arbitrary input space  $\mathcal{X}$ , an output space  $\mathcal{Y}$ , and the training samples coming in pairs  $(\mathbf{x}_i, y_i) \in \mathcal{X} \times \mathcal{Y}$ . The definition of the output space will decide the type of the learning problem. For example, we obtain multiclass classification problem by setting  $\mathcal{Y} = \{1, \dots, K\}$  and regression problem by setting  $\mathcal{Y} = \mathbb{R}$  where  $\mathbb{R}$  is the set of real numbers. In this chapter we focus on standard supervised learning problem also known as *binary classification*, we explicitly assume the output space  $\mathcal{Y} = \{-1, +1\}$  (instead of  $\mathcal{Y} = \{0, +1\}$ ). Additionally, we assume a feature map  $\varphi : \mathcal{X} \rightarrow \mathcal{F}$ , which embeds the input into some high dimensional feature space  $\mathcal{F} = \mathbb{R}^d$ . In particular,  $\varphi(\mathbf{x})$  is a real value vector of  $d$  dimension. Given a training set of  $m$  training examples  $\mathcal{S} = \{(\mathbf{x}_1, y_1), \dots, (\mathbf{x}_m, y_m)\}$ , the goal is to learn from a *hypothesis class*  $\mathcal{H}$  a mapping function  $f \in \mathcal{H} : \mathcal{X} \rightarrow \mathcal{Y}$  that maps an input  $\mathbf{x} \in \mathcal{X}$  to an output  $y \in \mathcal{Y}$ .

We consider the hypothesis class to be a set of *linear classifiers* that are parameterized by the weight vector  $\mathbf{w}$  and the bias term  $b$  defined as

$$f(\mathbf{x}; \mathbf{w}, b) = \langle \mathbf{w}, \varphi(\mathbf{x}) \rangle + b, \quad (2.3)$$

where by  $\langle \cdot, \cdot \rangle$  we denote the inner product of two vectors

$$\langle \mathbf{w}, \varphi(\mathbf{x}) \rangle = \sum_{i=1}^d \mathbf{w}[i] \varphi(\mathbf{x})[i].$$

In addition, for any  $1 \leq \rho \in \mathbb{R}$  we defined the  $L_\rho$ -norm of vector  $\mathbf{w}$  as

$$\|\mathbf{w}\|_\rho = \left( \sum_{i=1}^d |\mathbf{w}[i]|^\rho \right)^{\frac{1}{\rho}}.$$

We use  $\|\mathbf{w}\|$  to denote the  $L_2$ -norm of vector  $\mathbf{w}$  in the following part of the thesis for the convenience of the presentation.

### 2.2.2 Perceptron

The Rosenblatt's Perceptron algorithm (Rosenblatt, 1958, 1962) is one type of linear classifiers that is parameterized by a weight vector  $\mathbf{w}$  and a bias term  $b$ . The decision boundary, given by

$$f(\mathbf{x}; \mathbf{w}, b) = \langle \mathbf{w}, \varphi(\mathbf{x}) \rangle + b = 0,$$

will separate the data into two classes. The goal of the Perceptron learning is to obtain  $\mathbf{w}$  and  $b$  by minimizing the distance of misclassified training examples to the decision boundary.

Assume data point  $(\mathbf{x}_i, y_i)$  is misclassified, the signed geometric distance from  $\mathbf{x}_i$  to decision boundary can be computed according to

$$D(\mathbf{x}_i; \mathbf{w}, b) = -\frac{y_i(\langle \mathbf{w}, \varphi(\mathbf{x}_i) \rangle + b)}{\|\mathbf{w}\|}.$$

Denote by  $\mathcal{X}^m$  the set of misclassified examples, the objective function of Perceptron is defined as

**Definition 1.** *Perceptron Objective Function.*

$$\min_{\mathbf{w}, b} D(\mathbf{w}, b) = \min_{\mathbf{w}, b} \left( - \sum_{\mathbf{x}_i \in \mathcal{X}^m} y_i [\langle \mathbf{w}, \varphi(\mathbf{x}_i) \rangle + b] \right).$$

To optimize (Definition 1), we first assume  $\mathcal{X}^m$  is fixed and compute the partial gradient with respect to parameter  $\mathbf{w}$  and  $b$

$$\frac{\partial D(\mathbf{w}, b)}{\partial \mathbf{w}} = - \sum_{\mathbf{x}_i \in \mathcal{X}^m} y_i \mathbf{x}_i, \quad \frac{\partial D(\mathbf{w}, b)}{\partial b} = - \sum_{\mathbf{x}_i \in \mathcal{X}^m} y_i.$$

In practice, the Perceptron algorithm uses stochastic gradient descent that iteratively processes one example from training data at a time. In each step, the algorithm makes sure the current  $\mathbf{w}$  and  $b$  will correctly

separate the current training example. Once a misclassified example is visited, it adjusts the parameters according to the update rule

$$\mathbf{w} \leftarrow \mathbf{w} + \eta y_i \mathbf{x}_i, \quad b \leftarrow b + \eta y_i,$$

where  $\eta$  is the perceptron learning rate.

**Theory 1** (Perceptron Convergence Theorem (Block, 1962; Novikoff, 1962)).  
*Given a sequence of training examples in pairs  $\mathcal{S} = \{(\mathbf{x}_1, y_1), \dots, (\mathbf{x}_m, y_m)\}$ . For simplicity, we consider a perceptron without bias term  $b$ . Assume  $\|\mathbf{x}_i\| \leq R$  for all  $i \in \{1, \dots, m\}$ . Suppose for some  $\gamma > 0$  there exists a unit length vector  $\|\hat{\mathbf{w}}\| = 1$  such that  $y_i(\langle \hat{\mathbf{w}}, \varphi(\mathbf{x}_i) \rangle) \geq \gamma$  holds for all  $i$  (training data  $\mathcal{S}$  is linearly separable). Then the number of mistakes the Perceptron algorithm makes on the sequence of training data  $\mathcal{S}$  is at most  $R^2/\gamma^2$ .*

Theory 1 shows that if the data are linearly separable, the perceptron algorithm will make a finite number of mistakes. In particular, the perceptron algorithm will iterate through the training set and will converge to a vector that well separates all training examples. Moreover, the number of mistakes will be bounded by the minimum gap between the positive and negative examples. That is the algorithm converges quickly when the gap  $\gamma$  is big. We have to keep in mind that the convergence theorem does not say anything about the quality of the solution, though it is built based on the assumption that there is a “gap” between positive and negative examples.

The standard Perceptron algorithm supposes that the data are linearly separable, iterates over the training set, and eventually converges. However, the setting is less interesting for most applications where the data might not be linearly separable or it takes too long for the algorithm to converge. Therefore, we need to find out the best decision rule given a set of updates.

*Voted Perceptron* developed in (Freund and Schapire, 1999) is a straight forward modification of the standard Perceptron. Voted Perceptron algorithm keeps track all weight vectors that appears during training phase and their weights. The weight can be seen as the “survival time” of the weight vector during the Perceptron training. The prediction for a new test example  $\mathbf{x}_{ts}$  is computed by

$$y_{ts} = \mathbf{sign} \left( \sum_{l=1}^k c^l (\mathbf{sign} \langle \mathbf{w}^l, \varphi(\mathbf{x}_{ts}) \rangle + b^l) \right) \quad (2.4)$$

using the weight vectors  $\mathbf{w}^l$  and the corresponding weights  $c^l$  obtained during learning. It is proved that Voted Perceptron (2.4) guarantees to achieve better generalization error than original Perceptron (Definition 1). However, Voted Perceptron does not work in practice as it needs to store all weight vectors encountered during training.

*Averaged Perceptron* is a simple alternative, where instead of storing all weight vectors the algorithm only keeps the weighted sum  $\sum_{l=1}^k c^l \mathbf{w}^l$ . The prediction for a new test example  $\mathbf{x}_{ts}$  is computed by

$$y_{ts} == \mathbf{sign} \left( \langle \sum_{l=1}^k c^l \mathbf{w}^l, \varphi(\mathbf{x}_{ts}) \rangle + \sum_{l=1}^k c^l b^l \right),$$

which is more efficient to compute and is extremely similar to (2.4) except for the inside **sign** operation.

### 2.2.3 Logistic Regression (LR)

Logistic Regression is another important method in statistical machine learning and is closely related to Perceptron (Section 2.2.2) and Support Vector Machines (Section 2.2.4). It is in fact a classification model rather than regression (Bishop, 2007). It models the conditional probability  $P(y = +1|\mathbf{x})$  for a binary output variable  $y \in \mathcal{Y}$ . To model the probability, we do not restrict to any particular form, as any unknown parameters can be estimated by *Maximum Likelihood Estimation* (MLE). However, we are most interested in the simple linear model as presented in (2.3).

To use linear model in Logistic Regression, we apply logistic transformation of the original probability function

$$\log \frac{P(y = +1|\mathbf{x})}{1 - P(y = +1|\mathbf{x})} = \langle \mathbf{w}, \varphi(\mathbf{x}) \rangle + b,$$

which by solving for  $P(y = +1|\mathbf{x})$  results in

$$P(y = +1|\mathbf{x}; \mathbf{w}, b) = \frac{1}{1 + e^{-\langle \mathbf{w}, \varphi(\mathbf{x}) \rangle - b}}. \quad (2.5)$$

We can also compute

$$P(y = -1|\mathbf{x}; \mathbf{w}, b) = 1 - P(y = +1|\mathbf{x}; \mathbf{w}, b) = \frac{1}{1 + e^{\langle \mathbf{w}, \varphi(\mathbf{x}) \rangle + b}}. \quad (2.6)$$

By putting (2.5) and (2.6) together, we define Logistic Regression as

**Definition 2.** *Logistic Regression.*

$$P(y|\mathbf{x}; \mathbf{w}, b) = \frac{1}{1 + e^{-y(\langle \mathbf{w}, \varphi(\mathbf{x}) \rangle - b)}}.$$

Naturally, we expect the prediction  $y = +1$  when  $P(y = +1|\mathbf{x}; \mathbf{w}, b) \geq 0.5$  and  $y = -1$ , when  $P(y = +1|\mathbf{x}; \mathbf{w}, b) < 0.5$ . The decision rule is similar to Perceptron where we predict  $y = +1$  when  $\langle \mathbf{w}, \varphi(\mathbf{x}) \rangle + b \geq 0$ , and  $y = -1$  otherwise. Besides decision boundary, Logistic Regression can output the class probability from (Definition 2) as the the “distance” of the data point to the decision boundary. It is the probabilistic output that makes Logistic Regression no more than a classifier, as it outputs detailed predictions (class probability).

As the model can output class probability, to obtain a Logistic Regression model we attempt to learn parameters  $\mathbf{w}$  and  $b$  by maximizing the probability (likelihood) of the training data. In particular, the probability of training data  $\mathbf{x}$  with class label  $y$  is  $P(y|\mathbf{x})$ . The likelihood of parameters given data can be computed from

$$L(\mathbf{w}, b; D) = \prod_{i=1}^m P(y_i|\mathbf{x}_i). \quad (2.7)$$

To apply MLE, it is easier if, instead of maximizing the likelihood, we maximize the log-likelihood, which turns the product (2.7) into sum

$$\log L(\mathbf{w}, b|D) = \sum_{i=1}^m \log P(y_i|\mathbf{x}_i) = - \sum_{i=1}^m \log(1 + e^{-y_i(\langle \varphi(\mathbf{x}_i), \mathbf{w} \rangle + b)}). \quad (2.8)$$

Though MLE training for Logistic Regression meets our need of fitting the training data, it does not guarantee to generalize well on the test data. To achieve better generalization power, one can apply regularization technique as discussed in Section ???. Many regularization methods for Logistic Regression have been proposed (Chen and Rosenfeld, 1999, 2000; Goodman, 2003), among which adding Gaussian prior on weight parameter  $\mathbf{w}$  is one of the standard option. In practice, we assume  $\mathbf{w}$  is generated according to a zero-mean spherical Gaussian with variance  $\sigma^2$ . Thus, the MLE problem (2.7) is transformed into *Maximum A-Posteriori* (MAP) problem of the following form

$$P(\mathbf{w}, b|D; \sigma^2) = P(\mathbf{w}|\sigma^2) \prod_{i=1}^m P(y_i|\varphi(\mathbf{x}_i)) = e^{-\frac{\|\mathbf{w}\|^2}{\sigma^2}} \prod_{i=1}^m \frac{1}{1 + e^{-y_i(\langle \varphi(\mathbf{x}_i), \mathbf{w} \rangle + b)}}. \quad (2.9)$$

Instead of maximizing the posteriori (2.9), it is easier to maximize the log-posteriori

$$\log P(\mathbf{w}, b|D; \sigma^2) = -\frac{\|\mathbf{w}\|^2}{\sigma^2} - \sum_{i=1}^m \log(1 + e^{-y_i(\langle \varphi(\mathbf{x}_i), \mathbf{w} \rangle + b)}). \quad (2.10)$$

Numbers of optimization techniques have been proposed to solve the maximization problem (2.10) in Logistic Regression, many of which are covered in the survey (Minka, 2003). For example, Iterative Scaling methods were proposed and continuously developed in (Darroch and Ratcliff, 1972; Della Pietra et al., 1997; Berger, 1999; Goodman, 2002; Jin et al., 2003). A quasi-Newton method was discussed in (Minka, 2003). Komarek and Moore (2005); Lin et al. (2008) have proposed truncated Newton method. And coordinate descent method was proposed in (Huang et al., 2009).

There are also efforts being made to solve the logistic regression from its dual, of which the first algorithm was proposed in (Jaakkola and Haussler, 1999). Later on, other dual optimization algorithms have been developed, for example iterative optimization method (Keerthi et al., 2005) and dual coordinate descent method (Yu et al., 2011).

#### 2.2.4 Support Vector Machines (SVM)

Support Vector Machines (SVM) is probably the most widely used classification algorithm in various real world applications. It is also among the best plug-and-play machine learning algorithms that usually achieves good classification performance. In this section we will begin the story of SVM by first introducing the *Maximum-Margin Principle* of separating training data. Then we will discuss the primal-dual optimization strategy and the kernel methods that allow SVM to deal with high dimensionality. In the end we will briefly cover the optimization strategy developed for SVM.

The algorithm framework of SVM was firstly introduced in (Boser et al., 1992; Cortes and Vapnik, 1995). Theory and algorithm are detailed in book chapters e.g. (Schölkopf and Smola, 2002; Shawe-Taylor and Christianini, 2004; Bishop, 2007). We begin our discussion by considering a very simple case where we assume the data are linearly separable, that is there is a hyperplane in the feature space which separates the training data into two classes. In addition we assume the *separating hyperplane* has a simple form

$$f(\mathbf{x}) = \langle \mathbf{w}, \varphi(\mathbf{x}) \rangle + b = 0,$$

such that we predict  $y_i = -1$  if  $f(\mathbf{x}_i) < 0$ , and  $y_i = +1$  if  $f(\mathbf{x}_i) > 0$ . Given  $\mathbf{w}$  that achieves correct separation on the training data, we can decide the label of an arbitrary test example  $x_{ts}$  by the decision rule  $y_{ts} =$

$\text{sign}(f(\mathbf{x}_{ts}))$ .

However, there can be infinite number of separating hyperplanes that solves the separation problem on the training data which is analogue to empirical risk minimization strategy presented in Section ?? . We wish to find the one that also generalizes well on the test data. A good strategy is to look for a hyperplane that keeps the maximum distance from examples of two classes. The strategy is often unknown as *Maximum-Margin Principle*. To see this, imagining putting a separating hyperplane close to one class of examples which will achieve better classification on the test examples from the other class.

Based on Maximum-Margin Principle, we further denote the *margin* for the  $i$ 'th example by  $\gamma_i$  which is defined as the geometric distance from the data point to the separating hyperplane

$$\gamma_i = \frac{y_i(\langle \mathbf{w}, \varphi(\mathbf{x}_i) \rangle + b)}{\|\mathbf{w}\|}.$$

We notice if we scale  $\mathbf{w}$  and  $b$  with any constant (e.g.  $\mathbf{w} \leftarrow \kappa \mathbf{w}, b \leftarrow \kappa b, \kappa \in \mathbb{R}$ , ) the margin  $\gamma_i$  stays unchanged. We still achieve the same classification performance and generalization power. As parameters are invariance to scaling, we set  $\|\mathbf{w}\| = 1$ . Given a set of training example  $S$ , we also define the margin with respect to  $S$  as the minimum margin of individual training example

$$\gamma = \min_{i \in \{1, \dots, m\}} \gamma_i.$$

Our goal is to find the separating hyperplane such that it maximizes the margin with respect to all training examples while separating the training examples into two classes. Naturally, this corresponds to finding a “big-gap” between two classes. The max-margin solution is given as (Bishop, 2007)

$$\begin{aligned} & \max_{\mathbf{w}, b, \gamma} \quad \gamma \\ \text{s.t.} \quad & y_i(\langle \mathbf{w}, \varphi(\mathbf{x}_i) \rangle + b) \geq \gamma, \quad \|\mathbf{w}\| = 1, \quad \forall i \in \{1, \dots, m\}. \end{aligned}$$

The objective is to maximize the minimum margin over all training examples such that all examples are correctly separated with margin at least  $\gamma$ . However, this is very difficult to optimize not only because the constraint  $\|\mathbf{w}\| = 1$  is non-convex, but also the optimization is not in any standard form. By replacing  $\mathbf{w}$  with  $\frac{\mathbf{w}}{\gamma}$ , we obtain

$$\begin{aligned} & \max_{\mathbf{w}, b} \quad \frac{1}{\|\mathbf{w}\|} \\ \text{s.t.} \quad & y_i(\langle \mathbf{w}, \varphi(\mathbf{x}_i) \rangle + b) \geq 1, \quad \forall i \in \{1, \dots, m\}, \end{aligned}$$

which is equivalent to

**Definition 3.** *Primal Hard-Margin SVM Optimization Problem.*

$$\begin{aligned} \min_{\mathbf{w}} \quad & \frac{1}{2} \|\mathbf{w}\|^2 \\ \text{s.t.} \quad & y_i(\langle \mathbf{w}, \varphi(\mathbf{x}_i) \rangle + b) \geq 1, \forall i \in \{1, \dots, m\}, \end{aligned}$$

where the objective is to find the weight vector of minimum norm that corresponds to maximize the margin between two class of examples. The constraints states that the training data should be well separated.

We do not use Definition 3 in practice for two reasons. First, many real world data are not linearly separable, where the solution to Definition 3 does not always exist. Secondly, the data usually come with noises and errors and we do not want the resulting classifier to over-fit the training data. Therefore, we relax the constraints by introducing a *margin slack* parameter  $\xi_i$  for each training example  $x_i$  and rewrite the constraints as

$$y_i(\langle \mathbf{w}, \varphi(\mathbf{x}_i) \rangle + b) \geq 1 - \xi_i, \xi_i \geq 0, \forall i \in \{1, \dots, m\}. \quad (2.11)$$

The margin slack parameter  $\xi_i$  will allow example with margin less than 1 (the violation of the constraints). In particular, with  $\xi_i = 0$  the data point  $x_i$  is correctly classified, and lies either on the margin or on the correct side. With  $0 < \xi_i \leq 1$  the data point is correctly classified and lies between margin and separating hyperplane. With  $\xi_i > 1$  the data point is misclassified locating on the other side of the hyperplane. With margin slack parameter, the new goal is to maximize the margin while penalizing the data points that either lies on the wrong side of the hyperplane or has margin less than one. This can be defined by

**Definition 4.** *Primal Soft-Margin SVM Optimization Problem.*

$$\begin{aligned} \min_{\mathbf{w}, \xi} \quad & \frac{1}{2} \|\mathbf{w}\|^2 + C \sum_{i=1}^m \xi_i \\ \text{s.t.} \quad & y_i(\langle \mathbf{w}, \varphi(\mathbf{x}_i) \rangle + b) \geq 1 - \xi_i, \xi_i \geq 0, \forall i \in \{1, \dots, m\}. \end{aligned}$$

Optimization problem is usually transformed into dual form by introducing for each constraint a *Lagrangian multiplier* (dual variable)  $\alpha$ . We obtain the following dual optimization problem

**Definition 5.** *Dual Soft-Margin SVM Optimization Problem.*

$$\begin{aligned} \max_{\alpha} \quad & \sum_{i=1}^m \alpha_i - \frac{1}{2} \sum_{i=1}^m \sum_{j=1}^m \alpha_i \alpha_j y_i y_j \langle \varphi(\mathbf{x}_i), \varphi(\mathbf{x}_j) \rangle \\ \text{s.t.} \quad & \sum_{i=1}^m \alpha_i y_i = 0, 0 \leq \alpha_i \leq C, \forall i \in \{1, \dots, m\}. \end{aligned}$$

It is not difficult to verify that according to KKT condition only examples with both  $\xi_i = 0$  and satisfying equality constraints in (2.11) will be “active” and have dual variable  $\alpha_i > 0$ . These training examples lie on the margin and have  $\gamma_i = 1$ . They are called *support vectors* in SVM optimization. In fact the number of support vectors is usually smaller than the size of the training set. The property is extremely useful, as the weight vector can be expressed as the linear combination of the training examples

$$\mathbf{w} = \sum_{i=1}^m \alpha_i y_i \varphi(\mathbf{x}_i).$$

As most of the dual variables are zero, the evaluation can be done efficiently by maintaining a small set of non-zero  $\alpha$ s.

In addition, we notice that to work out (Definition 5) it is not necessary to work on the explicit representation of  $\mathbf{x}$ , as only the value of the inner product  $\langle \varphi(\mathbf{x}_i), \varphi(\mathbf{x}_j) \rangle$  is needed. As the algorithm can be represented entirely in terms of the inner product, we can also replace the inner product with  $\langle \varphi(\mathbf{x}_i), \varphi(\mathbf{x}_j) \rangle$ . In particular, we define the *kernel*

$$K(\mathbf{x}_i, \mathbf{x}_j) = \langle \varphi(\mathbf{x}_i), \varphi(\mathbf{x}_j) \rangle, \quad (2.12)$$

where  $\varphi(\cdot)$  is some high-dimensional feature map. Whenever we need  $\langle \mathbf{x}_i, \mathbf{x}_j \rangle$ , we instead use  $K(\mathbf{x}_i, \mathbf{x}_j)$ . Besides, the property of kernel function (Schölkopf and Smola, 2002) allows us to compute (2.12) without explicitly accessing the high dimensional feature map. Thus the algorithm can tackle high dimensionality by learning from  $\varphi(\cdot)$  at a low computational cost.

In addition, according to *Mercer’s Theorem* (Shawe-Taylor and Cristianini, 2004), every positive semidefinite symmetric function is a kernel. Kernel functions that heavily used in practice include the *linear kernel*

$$K(\mathbf{x}_i, \mathbf{x}_j) = \langle \varphi(\mathbf{x}_i), \varphi(\mathbf{x}_j) \rangle,$$

the *polynomial kernel*

$$K(\mathbf{x}_i, \mathbf{x}_j) = (\langle \varphi(\mathbf{x}_i), \varphi(\mathbf{x}_j) \rangle + b)^k,$$

where  $b$  is the bias term and  $d$  is the degree of polynomial, and the *Gaussian kernel* (RBF)

$$K(\mathbf{x}_i, \mathbf{x}_j) = \exp\left(\frac{\|\varphi(\mathbf{x}_i) - \varphi(\mathbf{x}_j)\|^2}{2\sigma^2}\right),$$

where  $\sigma$  is the Gaussian width parameter.

The optimization techniques for solving SVM have been intensively studied. A “chunking” method was developed in (Vapnik, 1982) which takes the advantage that the SVM solution only depends on the nonzero Lagrangian multipliers. The method breaks down the original optimization problem into a set of smaller problems, and in each iteration solves a small problem which contains the nonzero Lagrangian multipliers from last step and a fixed number of worst examples that violate the constraints. Following the similar idea, Osuna et al. (1997) proposed a decomposition strategy to solve SVM on very large dataset. The algorithm decomposes the dual variables into an active part (working set) and an inactive part. In each iteration, the algorithm updates the variables in working set while keeps the rest unchanged by solving the smaller optimization problem arising from the working set. It adds and deletes the same amount of examples in the working set to maintain a constant memory. It gains advantage of linear memory requirement with respect to the number of support vectors and the size of the working set by compromising on the convergence time. (Joachims, 1998) has improved this decomposition strategy by applying a shrinking technique which will identify the dual variables that is less likely to change their values. Thus, the algorithm effectively maintains a good working set that makes much progress towards the object. The implementation of the algorithm is well-known as SVMLIGHT. The decomposition strategy was further developed by solving in each iteration a smallest as possible optimization that only contains two Lagrangian multipliers, which is known as *Sequential Minimum Optimization* (SMO) (Platt, 1998, 1999). SMO is the basis of another powerful software package LIBSVM developed by Chang and Lin (2011). Pérez-cruz et al. (2004) proposed a double-chunking method to further speed up the decomposition type of training. Similarly yet another approach “digesting” (Decoste and Schölkopf, 2002) optimizes subsets close to completion before adding new data, which saves huge amount of memory.

Another line of research to speed up SVM training is to divide the original problem into subproblems of smaller size, optimize SVM on each subproblem, and combine the results from each subproblem. In (Tresp, 2000; Schwaighofer and Tresp, 2001), the authors proposed a Bayesian scheme to combine the models from subproblems. Collobert et al. (2002) proposed a partition scheme. Graf et al. (2005) developed the SVMCASCADE that builds a partition tree of training examples, trains SVM on each partition, and returns only support vector from each partition. Quite recently, Hsieh

et al. (2014) proposed a divide and conquer solver that solves the original SVM problem with theoretical guarantee.

There are many other active lines of research on SVM optimization that aim to make kernel support vector machine scalable on very large scale datasets in terms of both computational time and memory space, to name but a few, representing the training data with a small set of landmark points (Pavlov et al., 2000; Boley and Cao, 2004; Yu et al., 2005; Zhang et al., 2008), greedy method for basis selection (Keerthi et al., 2006), on-line SVM solver (Bordes et al., 2005), approximating kernel SVM objective function (Zhang et al., 2012; Le et al., 2013) which avoids high computational and memory cost but struggles in prediction performance, and approximating kernel matrix with low-rank matrix (Smola and Schölkopf, 2000; Fine and Scheinberg, 2002; Drineas and Mahoney, 2005; Si et al., 2014).

### 2.3 Ensemble Methods

Ensemble methods are one of the prominent classification techniques widely used in machine learning community. In general, the methods train multiple base classifiers and combine them in order to achieve better classification performance. Most importantly, there is no requirement for base classifiers to be accuracy as long as they perform better than random guessing. There are several different types of ensemble algorithms, to name a few, bagging (Breiman, 1996a), boosting (Freund and Schapire, 1997; Schapire and Singer, 1999), stacking (Smyth and Wolpert, 1999), Bayesian averaging (Freund et al., 2004). Most of the algorithms have improved the classification performance when compared to their base classifier counterpart, some of them are also supported with theoretical guarantee (Schapire et al., 1997; Koltchinskii and Panchenko, 2000; Cortes et al., 2014a,b). For our purposes, the section will start with and focus on bagging and boosting ensemble since both methods are best known approaches and are most related to this thesis. In the later part of the section, we will extend the ensemble methods to structured output space by reviewing several recently established algorithms.

### 2.3.1 Preliminary and Notations

In addition to the notations introduced in Section ?? and ??, we assume there is a hypothesis class  $\mathcal{F}$  where we generate weak/base hypothesis  $f^t(x) \in \mathcal{F}$ . By  $t$  we intend to index the  $t$ 'th weak hypothesis. We denote by  $H(x)$  the ensemble framework that is able to combine multiple weak hypotheses and generate a stronger one. In many cases, no other information about  $f^t(x)$  is available to  $H(x)$  except that each weak hypothesis will take in as parameter  $x$  and output  $y \in \mathcal{Y}$  for single label classification ( $y \in \mathcal{Y}$  in multilabel classification respectively).

### 2.3.2 Boosting

*Boosting* corresponds to a learning framework or a family of algorithms that take in a weak classifier and tuning it into a strong one. We begin our discussion from the notion of *concept class*. A *concept* is a boolean function over domain  $\mathcal{X}$ , and a *concept class* is a class of concepts. A concept class is *strongly learnable* if there exists a polynomial learning algorithm that achieves high accuracy with high probability for all concepts in the class. On the other hand, a concept class is *weakly learnable* if the learning algorithm achieves arbitrary high accuracy where the only requirement is that the learning algorithm finds a function that performs better than coin flip. The concept of learnability were proposed in (Kearns and Valiant, 1989) together with the question whether the strong learnability and the weak learnability are equivalent which is known as *hypothesis boosting problem*. Finding a weak learner which performs better than random guessing is easy in practice, but finding a strong learner is usually difficult. Schapire (1990) has proved that two classes of learnability are equal which lays the foundation of the boosting algorithm that aim to convert a weak learning algorithm into a strong one that achieves high performance.

Adaptive Boosting (ADABOOST) developed by Freund and Schapire (1997) is the very first practical boosting algorithm and is the most influential one. In addition, Schapire and Singer (1999) proposed a variant of the algorithm which updates the adaptive parameters in order to minimize the exponential loss of the weak learners. The exact algorithm is shown in (Algorithm 1). The fundamental idea of ADABOOST is to maintain a distribution  $D$  over all training examples, and update the distribution in each iteration such that difficult-to-classify examples will get more prob-

ability mass for the next iteration (line 8). In particular, the algorithm computes in each iteration a weak learner  $f^t(\mathbf{x})$  base on all training examples and the current distribution  $D^t$  (line 3), calculates the weighted training error  $\epsilon^t$  for the current weak learner (line 5), and computes the adaptive parameter  $\alpha^t$  for the current weak learner (line 6). The ensemble is the weighted combination of all weak learners.

$$H(\mathbf{x}) = \mathbf{sign}(\sum_{t=1}^T \alpha^t f^t(\mathbf{x})).$$

---

**Algorithm 1** ADABOOST

---

**Input:** Training sample  $\mathcal{S} = \{(x_i, y_i)\}_{i=1}^m$ , learning function  $\mathcal{W}$ , number of weak learners  $T$

**Output:** Boosting ensemble  $H(\mathbf{x})$

- 1: Initialize  $D^0(i) = \frac{1}{m}, i \in \{1, \dots, m\}$
  - 2: **for**  $t = 1 \dots T$  **do**
  - 3:    $f^t(\mathbf{x}) \leftarrow \mathcal{W}(\mathcal{S}, D^{t-1})$
  - 4:    $y_i = f^t(\mathbf{x}_i), \forall i \in \{1, \dots, m\}$
  - 5:    $\epsilon^t = \sum_{i=1}^m D^t(i) [\![y_i \neq \hat{y}_i]\!]$
  - 6:    $\alpha^t = \frac{1}{2} \ln \left( \frac{1-\epsilon^t}{\epsilon^t} \right)$
  - 7:    $Z = \sum_{i=1}^m D^{t-1}(i) \exp(-\alpha^t y_i \hat{y}_i)$
  - 8:    $D^t(i) = \frac{1}{Z} D^{t-1}(i) \exp(-\alpha^t y_i \hat{y}_i), \forall i \in \{1, \dots, m\}$
  - 9: **end for**
  - 10: **return**  $H(\mathbf{x}) = \mathbf{sign}(\sum_{t=1}^T \alpha^t f^t(\mathbf{x}))$
- 

For each weak learner  $f^t(\mathbf{x})$ , the strategy of updating adaptive parameter  $\alpha^t$  is to ensure that the exponential loss of  $\alpha^t f^t(\mathbf{x})$  is minimized. To see this, we first compute the exponential loss for  $\alpha^t f^t(\mathbf{x})$  given current distribution  $D^t$  over training example and adaptive parameter for  $f^t(\mathbf{x})$

$$\begin{aligned} \ell_{exp}(\alpha^t, f^t(\mathbf{x}), D^t) &= \sum_{i=1}^m D^t(i) \exp(-\hat{f}(\mathbf{x}_i) \alpha^t f^t(\mathbf{x}_i)) \\ &= \exp(-\alpha^t) \sum_{i=1}^m D^t(i) [\![\hat{f}(\mathbf{x}_i) = f(\mathbf{x}_i)]\!] + \exp(\alpha^t) \sum_{i=1}^m D^t(i) [\![\hat{f}(\mathbf{x}_i) \neq f(\mathbf{x}_i)]\!] \\ &= \exp(-\alpha^t)(1 - \epsilon^t) + \exp(\alpha^t)\epsilon^t. \end{aligned}$$

To minimize  $\ell_{exp}(\alpha^t, f^t(\mathbf{x}), D^t)$ , we take partial derivative with respect to  $\alpha^t$  and set it to zero

$$\frac{\partial \ell_{exp}(\alpha^t, f^t(\mathbf{x}), D^t)}{\partial \alpha^t} = -\exp(-\alpha^t)(1 - \epsilon^t) + \exp(\alpha^t)\epsilon^t = 0$$

Solve it for  $\alpha^t$ , we get

$$\alpha^t = \frac{1}{2} \ln \left( \frac{1 - \epsilon^t}{\epsilon^t} \right).$$

Thus the rule for updating  $\alpha^t$  will make sure the exponential loss of  $\alpha^t f^t(\mathbf{x})$  will be minimized.

It is worth noticing that the ADABOOST algorithm described in (algorithm 1) requires the learning algorithm  $\mathcal{W}$  capable of learning from some specific distribution. The distribution will reflect the difficulty of the training examples during the learning. It is usually achieved by *reweighting* which initializes a uniform distribution over training examples and updates the distribution after each iteration. For learning algorithms that cannot handle training data with specific distribution, we can apply *resampling* which samples training examples in each iteration according to some desired distribution.

Most recently, a new boosting algorithm DEEPBOOSTING was developed in (Cortes et al., 2014b). DEEPBOOSTING allows the learning algorithm to use complex hypothesis class containing very deep decision trees, by which it extends ADABOOST that only uses simple hypothesis class of decision tree with depth one. In addition, Cortes et al. (2014b) also developed rich learning bounds for DEEPBOOSTING optimization problem in terms of the Rademacher complexity theory. The new theory advances the previous performance guarantee of ADABOOST which is built in terms of margins of the training examples (Schapire et al., 1997; Koltchinskii and Panchenko, 2000).

### 2.3.3 Bootstrap Aggregating

*Bootstrap Aggregating* (BAGGING), initially developed by Breiman (1996a), is an ensemble method that exploits the independency between the weak learners. The algorithm is based on the fact that the error can be dramatically reduced by combining independent base learners. Denote by  $f_i$  the  $i$ 'th weak learner. The ensemble prediction  $H(\mathbf{x})$  is the averaged prediction over all weak learners

$$H(\mathbf{x}) = \mathbf{sign} \left( \sum_{i=1}^T f_i(\mathbf{x}) \right). \quad (2.13)$$

Denote by  $\hat{f}$  the ground true function. Suppose base learner has probability  $\epsilon$  of making independent mistake

$$P(f_i(\mathbf{x}) \neq \hat{f}(\mathbf{x})) = \epsilon.$$

As the bagging ensemble (2.13) makes a mistake when at least half of the weak learners make mistakes, we can compute the probability of bagging ensemble making mistake by

$$P(H(\mathbf{x}) \neq \hat{f}(\mathbf{x})) = \sum_{i=0}^{T/2} \binom{T}{k} (1-\epsilon)^k \epsilon^{T-k} \leq \exp\left(-\frac{1}{2}T(2\epsilon - 1)^2\right).$$

It is clear that the probability decreases exponentially with respect to the number of the weak learners. In extreme case, the probability will approach zero when  $T$  approaches infinity. Though it is impractical as the base learners are hardly independent since they are generated from the same training data, we still try to exploit the independency by adding randomness in the algorithm framework.

BAGGING uses bootstrap sampling (Efron and Tibshirani, 1994) to generate subsets of training examples. Given a training set of  $m$  training examples, a subset of same size is generated by sampling with replacement  $m$  time from original training set. The sampling procedure is then repeated  $T$  time in order to generate  $T$  subsets for constructing base learners. Note that the sampled subsets will be similar as they are sampled from the same training set. However, they will not be too similar which each subset will only cover around 63% of the origin training data under the condition that  $m$  is large. To see this, consider the probability that the  $i$ 'th training examples is not sampled once is  $(1 - \frac{1}{m})$ , and the probability that the training example is not sampled at all is  $(1 - \frac{1}{m})^m$ . When  $m$  is large, the probability will approach 37%. That is around 37% of the training examples will not be represented in any given subset. The property of the bootstrap sampling allows us to efficiently estimate the generalization error of the base learner known as *out-of-bag estimation* (Breiman, 1996b; Tibshirani, 1996; Wolpert and Macready, 1999).

Random Forest developed in (Breiman, 2001) is an important extension of BAGGING. The major different from BAGGING is that randomized feature selection is incorporated in random forest. In practice, the random forest algorithm selects in each step a subset of features and constructs conventional random tree classifier within the selected subset of features. The feature split process of decision tree is deterministic given a set of features. Liu et al. (2008) proposed VR-TREE which further extend random forest algorithm by introducing randomness in both feature selection and split processes.



### 3. Flat Multilabel Classification

Multilabel classification is a natural extension to single-label classification presented in Section 2.2. In multilabel classification each input (instant) is simultaneously associated with multiple outputs (labels). The research of the multilabel classification has progressed rapidly in the past two decades with many learning algorithms being developed and applied in real world classification tasks. In general, there are two lines of research for multilabel classification namely flat multilabel classification and structured output prediction. In flat multilabel classification, the multiple labels are essentially treated as a “flat” vector of labels. The structured output prediction, on the other hand, models the multiple labels via a graph structure that connects labels. This chapter will devote to flat multilabel classification in which we will present several classical algorithm techniques. The structured output prediction will be covered in the later part of the thesis.

Consider the infeasibility of listing all algorithms for flat multilabel classification, it is easier if we are able to categorize the algorithms into classes. In this chapter, we adopt the simple categorization presented in (Tsoumakas and Katakis, 2007; Tsoumakas et al., 2010) which gives us two major algorithm categories namely problem transformation and algorithm adaptation. For problem transformation category, we will present the methods that aim to transfer the flat multilabel classification problem into other well studied problem settings (e.g. single-label classification problem, ranking problem). For algorithm adaptation category, we will describe the methods that directly modify the popular learning techniques (e.g. LR and ensemble method) to solve the multilabel classification problem. Nevertheless, the present algorithms will explore the inherited difficulties of flat multilabel classification. That is the exponential multilabel space and the implicit label correlation. Besides, the author re-

alizes that it is impossible to cover every lines of research in the field of flat multilabel classification. Interested readers are pointed out to the recent research review articles, for example, (Tsoumakas and Katakis, 2007; Tsoumakas et al., 2010; Zhang and Zhou, 2014)

### 3.1 Preliminary and Notations

We borrow most notations from the single-label classification setting described in Section 2.2.1. In particular, we examine the following *multilabel classification* problem. We assume data are drawn from a domain  $\mathcal{X} \times \mathcal{Y}$ , where  $\mathcal{X}$  is a set of inputs (instants) and  $\mathcal{Y}$  is the set of outputs (multilabels).  $\mathcal{Y} = \mathcal{Y}_1 \times \cdots \times \mathcal{Y}_k$  is composed by a Cartesian product of  $k$  sets  $\mathcal{Y}_i = \{-1, +1\}$ . We retain a single-label classification setting by letting  $k = 1$ . A vector  $\mathbf{y} = (y_1, \dots, y_k) \in \mathcal{Y}$  is called *multilabel* and its element  $y_j$  is called *microlabel*. We use  $\mathbf{y}_i[j]$  to denote the  $j$ 'th microlabel in the  $i$ 'th multilabel. In addition, we are given a training set consisting of  $m$  labeled examples  $S = \{(\mathbf{x}_i, \mathbf{y}_i)\}_{i=1}^m \in \mathcal{X} \times \mathcal{Y}$ . A pair  $(\mathbf{x}_i, \mathbf{y})$ , where  $\mathbf{x}_i$  is the training input and  $\mathbf{y} \in \mathcal{Y}$  is an arbitrary output, is called *pseudo-example*. It is worthy of noticing that pseudo-example  $(\mathbf{x}_i, \mathbf{y})$  can be generated from a different distribution that generates training examples  $(\mathbf{x}_i, \mathbf{y}_i)$ . The goal is to learn a mapping function  $f \in \mathcal{H} : \mathcal{X} \rightarrow \mathcal{Y}$  that can compute the multilabel given an arbitrary input such that the predefined loss  $\ell$  for the future unseen examples will be minimized. The loss function is usually tailored for the learning algorithm.

### 3.2 Problem Transformation

The problem transformation approach aims to transform the flat multilabel classification problem in to other well established problem settings. The most typical way is known as *binary relevant* proposed by Tsoumakas and Katakis (2007); Tsoumakas et al. (2010). BR amounts to transform the multilabel classification problem into a set of single-label classification problems and to independently learn a single-label classifier for each microlabel. We will focus on BR in this section. Another possibilities include, for example, to transform the multiple labels into label power set (Tsoumakas and Vlahavas, 2007) or to transform the problem into label ranking problem (Elisseeff and Weston, 2001; Brinker and Hüllermeier,

2007; Fürnkranz et al., 2008; Chiang et al., 2012). However, learning through label ranking will not be discussed into details as it slightly diverges from the main scope of the thesis.

### 3.2.1 Multilabel K-Nearest Neighbors (ML-KNN)

Multilabel  $K$ -Nearest Neighbors (ML-KNN) proposed by Zhang and Zhou (2005, 2007) is perhaps the most famous binary relevant classifier for flat multilabel classification. ML-KNN is also an instance based learning approach (Aha et al., 1991) that is derived from  $K$ -Nearest Neighbor (KNN) algorithm designed for single-label classification problem. ML-KNN transforms the flat multilabel classification problem into a set of single-label classification and processes each microlabel independently. For each unseen example  $x$ , the ML-KNN algorithm first identifies the set of  $K$ -nearest neighbors  $N(x)$  from the training sets. After that the algorithm computes the multilabel  $y$  of the unseen example  $x$  by examining the set of labels collected from its  $K$ -nearest neighbors.

Mathematically let  $C_x(j)$  denote the number of the neighbors of  $x$  with  $j$ 'th label being “+1”, let  $H_x^b(j)$  denote the event that the  $j$ 'th label of  $x$  is  $b \in \mathcal{Y}_j$ , and let  $E_x^l(j)$  denote the event that  $0 \leq l \leq K$  neighbors of  $x$  have the  $j$ 'th label being “+1”. ML-KNN processes each microlabel at a time and determines the value of the microlabel by examining the following Maximize A-Posteriori (MAP) problem

$$y[j]^* = \underset{b \in \mathcal{Y}_j}{\text{argmax}} P(H_x^b(j) | E_x^{C_{x(j)}}(j)) = \underset{b \in \mathcal{Y}_j}{\text{argmax}} \frac{P(H_x^b(j)) P(E_x^{C_{x(j)}}(j) | H_x^b(j))}{P(E_x^{C_{x(j)}}(j))}.$$

The prior probability distribution  $H_x^b(j)$  and the likelihood distribution  $P(H_x^b(j) | E_x^{C_{x(j)}}(j))$  can be estimated from training data in terms of corresponding relative frequencies.

The central problem with ML-KNN is that ML-KNN is ignorant of the label correlations. In order to exploit the label dependency, other approaches have been proposed (Cheng and Hüllermeier, 2009; Younes et al., 2011). Besides, there are many algorithm alternatives that also align to the direction of KNN typed learning in flat multilabel classification, for example, Brinker and Hüllermeier (2007); Chiang et al. (2012) proposed methods that incorporates KNN with ranking model.

### 3.2.2 Classifier Chains (CC)

Classification Chains (CC) developed in (Read et al., 2009, 2011) is another problem transformation approach for flat multilabel classification. CC involves  $k$  binary transformations and forms a chain of  $k$  binary classifiers  $h = \{h_1, \dots, h_k\}$ . The  $j$ 'th classifier  $h_j$  is responsible for learning and predicting the  $j$ 'th microlabel. In particular, for each microlabel  $\mathbf{y}[j]$ , CC first constructs a new training data  $S_j$  then learns a classifier  $h_j$  via arbitrary single-label classifier.  $S_j$  is built by taking the  $j$ 'th microlabel as output variable and combining the feature space of  $\mathbf{x}$  and all  $j - 1$  prior microlabels as the input feature which is defined by

$$S_j = \{((\mathbf{x}_i[1], \dots, \mathbf{x}_i[d], \mathbf{y}_i[1], \dots, \mathbf{y}_i[j-1]), \mathbf{y}_i[j])\}_{i=1}^m.$$

Thus, CC takes the label correlation into account by incorporating label information as concatenated features in the input feature space. The idea has previously been applied in (Godbole and Sarawagi, 2004). However, the addition label information only takes a small part of the input feature space especially when the origin space is already high. In this case, one can only expect to gain additional performance from concatenated label information with high correlation to the output microlabel.

Besides, CC has been explained in terms of condition probability theory by Probabilistic Classifier Chains (PCC) presented in (Read et al., 2009; Dembczynski et al., 2010). Since there is no standard way for classification order of microlabels in CC, Ensemble Classifier Chains (ECC) has been developed in (Read et al., 2011) which further improves CC by generating and combining multiple chains of classifiers.

### 3.2.3 Instant Based Logistic Regression (IBLR)

Cheng and Hüllermeier (2009) developed Instance Based Logistic Regression (IBLR) with an extension to flat multilabel classification. IBLR is also an instant base learning approach (Aha et al., 1991) as ML-KNN. It extends ML-KNN by exploring the label correlation within the neighbors of an instant for posterior inference. It is also similar to CC but with major difference. The central idea of IBLR is to take the labels of the neighboring examples as the only features in order to evaluate the label of current example. Similar idea has been applied in collective classification (Ghamrawi and McCallum, 2005) and link based classification (Getoor, 2005; Getoor and Taskar, 2007).

In particular, for each unseen example  $\mathbf{x}$ , IBLR first identifies the set of  $K$ -nearest neighbors  $N_k(\mathbf{x})$  from the training sets. Then the algorithm builds a logistic regression (LR) model (2.2.3) for each microlabel based on the label information collected from all training examples in  $N_k(\mathbf{x})$ . Mathematically IBLR defines a posterior probability for the  $j$ 'th microlabel of  $\mathbf{x}$  being labeled as  $u_j$  by

$$\pi^{(j)} = P(\mathbf{y}(\mathbf{x})[j] = u_j | N_k(\mathbf{x})), u_j \in \mathcal{Y}_j.$$

It constructs a logistic regression classifier for  $\pi^{(j)}$  which can be derived from the following

$$\log \frac{\pi^{(j)}}{1 - \pi^{(j)}} = w_0^{(j)} + \sum_{i=1}^k \alpha_i^{(j)} \cdot w_i^{(j)}(\mathbf{x}),$$

where  $i$  is the index that iterates over all microlabels.  $w_i^{(j)}(\mathbf{x})$  defined by

$$w_i^{(j)}(\mathbf{x}) = \sum_{\mathbf{x}' \in N_k(\mathbf{x})} K(\mathbf{x}', \mathbf{x}) \cdot \mathbf{y}(\mathbf{x}') [i]$$

collects the  $i$ 'th microlabel from each neighbor  $\mathbf{x}' \in N_k(\mathbf{x})$  and weights the microlabel according to the similarity between  $\mathbf{x}$  and  $\mathbf{x}'$  encoded in  $K(\mathbf{x}', \mathbf{x})$ .  $\alpha_i^{(j)}$  is the regression coefficient of the  $i$ 'th microlabel information from the neighbors of  $\mathbf{x}$  to the  $j$ 'th microlabel of example  $\mathbf{x}$ .  $w_0^{(j)}$  is a bias term.

### 3.3 Algorithm Adaptation

The central idea of the algorithm adaptation approach is to directly modify the popular single-label learning algorithms and apply them to the multilabel classification problems. The approach includes but is not limited to the ensemble typed learning, the LR typed learning, and regularized learning that are described in the following part of the section. There also exists methods that are adapted from, for example, perceptron (Crammer et al., 2003) and neural network (Zhang and Zhou, 2006). They are not detailed mostly due to the divergence from the main topic of the thesis.

#### 3.3.1 Ensemble Methods for Flat Multilabel Classification

As it is straightforward to combine multiple scalar output variables, the ensemble methods have been initially developed for single-label classification (Breiman, 1996a; Freund and Schapire, 1997) or regression (Breiman,

1996a) tasks. However, it is not immediately apparent how to combine vector valued outputs in flat multilabel space.

ADABOOST.MH is the multilabel variance of original ADABOOST algorithm proposed by Schapire and Singer (1999), which is further developed by Esuli et al. (2008). The core idea of ADABOOST.MH is to adopt hamming loss instead of 0/1 loss. In particular, the algorithm reduces from a multilabel classification problem to a set of single label classification problems by replacing each training example  $(\mathbf{x}_i, \mathbf{y}_i)$  with  $k$  examples  $\{(\mathbf{x}_i, \mathbf{y}_i[l])\}_{l=1}^k$ . The algorithm is detailed in (Algorithm 2). In particular, it maintains a distribution over all examples and labels. In each iteration, the algorithm takes in the distribution and all training examples, generates a weak learner  $f^k(\mathbf{x})$  (line 3), computes hamming loss (line 5), computes the adaptive parameter  $\alpha^t$  (line 6), and update the distribution (line 8). The returned prediction  $H(\mathbf{x})$  is the combination of base learners  $f^t(\mathbf{x})$  weighted by  $\alpha^t$ .

---

**Algorithm 2** ADABOOST.MH

---

**Input:** Training sample  $\mathcal{S} = \{(\mathbf{x}_i, \mathbf{y}_i)\}_{i=1}^m$ , learning function  $\mathcal{W}$ , number of weak learners  $T$

**Output:** Boosting ensemble  $H(\mathbf{x})$

- 1: Initialize  $D^0(i, l) = \frac{1}{mk}, i \in \{1, \dots, m\}$
  - 2: **for**  $t = 1 \dots T$  **do**
  - 3:    $f^t(\mathbf{x}) \leftarrow \mathcal{W}(\mathcal{S}, D^{t-1})$
  - 4:    $\mathbf{y}_i = f^t(\mathbf{x}_i), \forall i \in \{1, \dots, m\}$
  - 5:    $\epsilon^t = \sum_{l=1}^k \sum_{i=1}^m D^t(i, l) [\mathbf{y}_i[l] \neq \hat{\mathbf{y}}_i[l]]$
  - 6:    $\alpha^t = \frac{1}{2} \ln \left( \frac{1-\epsilon^t}{\epsilon^t} \right)$
  - 7:    $Z = \sum_{i=1}^m \sum_{l=1}^k D^{t-1}(i, l) \exp(-\alpha^t \mathbf{y}_i[l] \hat{\mathbf{y}}_i[l])$
  - 8:    $D^t(i, l) = \frac{1}{Z} D^{t-1}(i, l) \exp(-\alpha^t \mathbf{y}_i[l] \hat{\mathbf{y}}_i[l]), \forall i, \forall l$
  - 9: **end for**
  - 10: **return**  $H(\mathbf{x}) = \text{sign}(\sum_{t=1}^T \alpha^t f^t(\mathbf{x}))$
- 

Other ensemble flat multilabel classification methods based on boosting or bagging are also developed in (Wang et al., 2007; Yan et al., 2007; Kocev et al., 2013). Most recently, three other learning algorithms with performance guarantee are proposed in (Cortes et al., 2014a). Besides, there are quite a few ensemble approaches that are adapted from single label ensemble methods and are dedicated to solve real world classification problems. For example, (Collins and Koo, 2005; Zeman and Žabokrtský, 2005; Sagae and Lavie, 2006; Zhang et al., 2009) are applied in natural lan-

guage processing, and (Fiscus, 1997; Mohri et al., 2008; Petrov, 2010) are applied in text and speech recognition.

### 3.3.2 Correlated Logistic Regression (CORRLOG)

Correlated Logistic Regression (CORRLOG) developed by Bian et al. (2012) is a model based approach for flat multilabel classification. CORRLOG is a major step forward of IBLR by constructing a logistic regression classifier over all microlabels and by modeling pairwise microlabel correlation with a function defined on microlabel pairs.

In fact, CORRLOG is derived from Independent Logistic Regression (ILRS) model. Given an arbitrary training example and label  $(\mathbf{x}, \mathbf{y})$ , we can construct a set of independent logistic regreesion classifiers, one for each microlabel. The posteriori probability can be computed by

$$P_{\text{ILRS}}(\mathbf{y}|\mathbf{x}) = \prod_{j=1}^k P_{\text{LR}}(\mathbf{y}[j]|\mathbf{x}) = \prod_{j=1}^k \frac{\exp(\mathbf{y}[j]\mathbf{w}^\top \mathbf{x})}{\exp(\mathbf{w}^\top \mathbf{x}) + \exp(-\mathbf{w}^\top \mathbf{x})}, \quad (3.1)$$

where  $j$  is the index that iterates over all microlabels. The bias term as in Definition 2 is omitted which is equivlent to augment  $\mathbf{x}$  with a constant term (Bian et al., 2012). Otherwise, (3.1) can be derived into Definition 2 by replacing  $\mathbf{w}$  with  $\frac{\mathbf{w}}{2}$ . ILRS has the problem of ignoring the label correlation and overfitting the training data when the number of microlabel  $k$  is high. To reveal label correlation, CORRLOG augments the posteriori probability (3.1) by a function  $Q(\mathbf{y})$  defined on the set of microlabels as

$$Q(\mathbf{y}) = \exp \left\{ \sum_{k < j} \alpha_{k,j} \mathbf{y}[k] \mathbf{y}[j] \right\}. \quad (3.2)$$

Put together (3.1) and (3.2), the formalism of CORRLOG can be defined as

$$\begin{aligned} P_{\text{CORRLOG}}(\mathbf{y}|\mathbf{x}) &\propto P_{\text{ILRS}}(\mathbf{y}|\mathbf{x}) Q(\mathbf{y}) \\ &= \exp \left\{ \sum_{j=1}^m \mathbf{y}(\mathbf{x})[j] \mathbf{w}^\top \mathbf{x} + \sum_{k < j} \alpha_{k,j} \mathbf{y}(\mathbf{x})[k] \mathbf{y}(\mathbf{x})[j] \right\}. \end{aligned}$$

Thus, CORRLOG examines the pairwise label correlation by augmenting joint prediction with a quadratic term  $Q(\mathbf{y})$  built from microlabel pairs.

### 3.3.3 Multitask Feature Learning (MTL)

Multitask Feature Learning (MTL) developed in (Argyriou et al., 2007) is another algorithm designed for flat multilabel classification. MTL is quite different from other learning algorithms discussed in the previous sections. In particular, the MTL approach is based on the assumption that

different microlabels are related such that they share a common underlying feature representations. Similar assumption is also applied in (Caruana, 1997; Baxter, 2000; Ben-David and Schuller, 2003).

Denote by  $f_t(\mathbf{x})$  the task specific function for the  $t$ 'th task.  $f_t(\mathbf{x})$  can be expressed as

$$f_t(\mathbf{x}) = \langle \mathbf{a}_t, h(\phi(\mathbf{x})) \rangle = \sum_{i=1}^d \mathbf{a}_t[i] h(\phi(\mathbf{x}))[i],$$

where  $\mathbf{a}_t \in \mathbb{R}^d$  is the weight vector parameters for the  $t$ 'th task.  $h(\phi(\mathbf{x}))$  is a linear feature mapping composed by

$$h(\phi(\mathbf{x}))[i] = \langle \mathbf{u}_i, \phi(\mathbf{x}) \rangle,$$

where  $\phi(\mathbf{x}) \in \mathbb{R}^d$  is in original feature space and  $\mathbf{u}_i \in \mathbb{R}^d$  is a linear feature map. We further denote by  $A$  the matrix composed by  $\mathbf{a}_t$ , and denote by  $U$  the matrix composed by  $\mathbf{u}_i$ . MTL assumes that tasks share a small set of features where  $A$  is supposed to be sparse with many entries equal to zero. The optimization problem of MTL is defined as

**Definition 6.** MTL Optimization Problem in Primal

$$\min_{\substack{\mathbf{u} \in \mathbb{R}^{d \times d} \\ A \in \mathbb{R}^{d \times T}}} \left\{ \sum_{t=1}^T \sum_{i=1}^m \ell(\mathbf{y}_{i,t}, \langle \mathbf{a}_t, \langle U, \phi(\mathbf{x}_i) \rangle \rangle) + C \|A\|_{2,1}^2 \right\},$$

where the objective is to minimize the empirical error  $\ell(\mathbf{y}_{i,t}, \langle \mathbf{a}_t, \langle U, \phi(\mathbf{x}_i) \rangle \rangle)$  and to keep a small proportion of the non-zero element in  $\mathbf{a}_t$ .  $C$  is the parameter to balance these two aspects. As (Definition 6) is non-convex and the second term is non-smooth, it is transformed into an equivalent form and solved by an alternative optimization approach.

An extension of MTL algorithm was proposed in (Argyriou et al., 2008a) which introduced a nonlinear generalization using kernel methods. In addition, similar but not identical algorithms (Argyriou et al., 2008b; jacob et al., 2009) are also proposed which assume that the tasks form clusters such that task specific weight vectors should be similar within the clusters. Recently, Romera-Paredes et al. (2012) proposed a method which exploits the information between unrelated microlabels, based on a similar assumption that microlabels of different groups tend not to share any features.

# 4. Structured Output Prediction

Structured output prediction is a natural extension to flat multilabel classification presented in Chapter 3. Unlike flat multilabel classification which takes multiple output variables as a “flat” vector, structure output prediction assumes multiple output variables are correlated and locate in the structured output space. It builds a graph structure (e.g. chain, tree) to connect multiple output variables by which it gains the advantage of exploring the label correlation compared to flat multilabel classification. In this chapter, we will start by introducing several classical structured output learning models developed during the last decade. We will present our research of applying the structured output learning on molecular activity prediction problem. We will also present our new algorithm SPIN that is capable of predicting a directed acyclic graph and examine the performance on the network influence prediction problem.

## 4.1 Preliminary and Notations

Multilabel classification deals with multiple interdependent output variables (e.g.  $\mathbf{y} \in \mathcal{Y}$ ). The problem is known as *structured output prediction* when these variables are located in structured output space. That is the label correlation is described by an *output graph* that connects multiple labels. In particular, we define the output graph  $G = (E, V)$  by a node set  $V = \{1, \dots, k\}$  corresponding to the microlabels  $\{y_1, \dots, y_k\}$  and a edge set  $E = V \times V$  representing the dependency between pair of microlabels. For each edge  $e = (j, j') \in E$ , we use  $\mathbf{y}_e$  to denote the edge label of edge  $e$  with respect to multilabel  $\mathbf{y}$  by concatenating the head label  $y_j$  and the tail label  $y_{j'}$ , with the edge label domain  $\mathbf{y}_e \in \mathcal{Y}_e = \mathcal{Y}_j \times \mathcal{Y}_{j'}$ . By  $\mathbf{y}_{i,e}$ , we denote the edge label of example pair  $(\mathbf{x}_i, \mathbf{y}_i)$  on edge  $e$ . Thus, given a training example  $(\mathbf{x}_i, \mathbf{y}_i)$  and the output graph  $G$ , we can uniquely iden-

tify the node label  $y_i$  and the edge label  $y_{i,e}$  on the graph. In addition, we denote the possible label of node  $i$  by  $u_i$  and the possible label of edge  $e$  by  $u_e$  where  $u_i$  and  $u_e$  do not constraint to any multilabel  $y$ . Naturally,  $u_i \in \mathcal{Y}_i$  and  $u_e \in \mathcal{Y}_e$ .

## 4.2 Related Methods

In this section, we will briefly present several related algorithms for structured output prediction include Structured Perceptron, Conditional Random Field, Structured SVM, and Max-Margin Markov Network.

### 4.2.1 Structured Perceptron

The Perceptron developed by Rosenblatt (1958) is one of the oldest learning algorithm in machine learning. Structured Perceptron, as suggested by its name, can be seen as the generalization of Perceptron algorithm to structured output space. It was firstly proposed in (Collins, 2002; Collins and Duffy, 2002) with the formalism incredibly similar to multiclass Perceptron. The model assumes a score function  $\langle w, \phi(x, y) \rangle$  as the inner product between a joint feature map  $\phi(x, y)$  and some feature weight parameter  $w$ . After weight parameter  $w$  is obtained, one need to solve the *argmax* problem in order to find the best output for a given input  $x$

$$\hat{y} = \underset{y \in \mathcal{Y}}{\text{argmax}} \langle w, \phi(x, y) \rangle. \quad (4.1)$$

This is solved by Viterbi decoding in (Collins, 2002).

The weight parameter  $w$  is learned via standard Perceptron iterative update by solving argmax problem (4.1) in each iteration. In particular, the algorithm loops through training examples and updates  $w$  whenever the predicted label  $\hat{y}_i$  is different from true label  $y_i$  defined by

$$w \leftarrow w + (\phi(x_i, y_i) - \phi(x_i, \hat{y}_i)). \quad (4.2)$$

The update usually leads to over-fitting. A simple refinement is usually applied the idea of which is also used in “Average Perceptron” (Freund and Schapire, 1999).

The central problem with Structured Perceptron learning is its loss function. In fact, Structured Perceptron tacitly applies 0/1 loss over output variables defined as

$$\ell(y, \hat{y}) = \llbracket y \neq \hat{y} \rrbracket.$$

As a result, it is impossible to distinguish the nearly correct and the completely incorrect output multilabels. Both will lead to the same update to the feature weight parameter during the training in (4.2) .

#### 4.2.2 Conditional Random Field (CRF)

Condition Random Field (CRF) developed in (Lafferty et al., 2001; Taskar et al., 2002) is a discriminative framework that constructs a conditional model  $P(\mathbf{y}|\mathbf{x})$  from input variable  $\mathbf{x} \in \mathcal{X}$  and output variables  $\mathbf{y} \in \mathcal{Y}$ . It optimizes a log-loss which is analogue to 0/1 loss over the structured output space.

Mathematically, let  $Y = \{\mathbf{y}_1, \dots, \mathbf{y}_m\}$  denote a set of output random variables and  $X = \{\mathbf{x}_1, \dots, \mathbf{x}_m\}$  denote a set of input random variables to condition on. Let  $G = (E, V)$  be an output graph such that  $\mathbf{y} = (y_v)_{v \in V}$ . A *Conditional Random Field* (CRF) defines the conditional probability distribution

$$P(\mathbf{y}|\mathbf{x}) = \frac{1}{Z_{\mathbf{x}, \mathbf{w}}} \exp \langle \mathbf{w}, \phi(\mathbf{x}, \mathbf{y}) \rangle,$$

where  $\phi(\mathbf{x}, \mathbf{y})$  is the joint feature map and  $Z_{\mathbf{x}, \mathbf{w}}$  is the partition function dependent on  $\mathbf{x}$ .  $Z_{\mathbf{x}, \mathbf{w}}$  sums over all possible multilabels

$$Z_{\mathbf{x}, \mathbf{w}} = \sum_{\mathbf{y}' \in \mathcal{Y}} \exp \langle \mathbf{w}, \phi(\mathbf{x}, \mathbf{y}') \rangle. \quad (4.3)$$

Thus, when conditioned on  $\mathbf{x}$ , the random variables  $y_v$  obey the Markov property with respect to output graph  $G$ .

Apply similar regularization technique as used on LR in Section 2.2.3, the feature weight parameter  $\mathbf{w}$  can be solved by introducing a Gaussian prior and maximizing the logarithm of the resulting *Maximize A-Posteriori* (MAP) problem (Taskar et al., 2002) defined as

$$L(\mathbf{w}) = \sum_{i=1}^m \left[ \langle \mathbf{w}, \phi(\mathbf{x}_i, \mathbf{y}_i) \rangle - \log \sum_{\mathbf{y}' \in \mathcal{Y}} \exp \langle \mathbf{w}, \phi(\mathbf{x}_i, \mathbf{y}') \rangle \right] - \frac{1}{\sigma^2} \|\mathbf{w}\|^2. \quad (4.4)$$

The optimization problem derived from (4.4) is solved in (Lafferty et al., 2001) by Improved Iterative Scaling algorithm (IIS) (Della Pietra et al., 1997). In order to make CRF work in practice, one has to make sure that the partition function (4.3) can be computed efficiently.

#### 4.2.3 Max-Margin Markov Network ( $M^3N$ )

Taskar et al. (2004) designed Max-Margin Markov Network ( $M^3N$ ) that combines the framework of kernel based discriminative learning and probabilistic graphical model.  $M^3N$  is extended from SVM (Section 2.2.4) to

structured output space. It also improves CRF (Section 4.2.2) in terms that the evaluation of the partition function (4.3) can be avoided by introducing the odd-ratio typed learning that is not dissimilar to LR (Section 2.2.3).

$M^3N$  defined a log-linear Markov network over multiple output labels which explores the correlation in the label space. The compatibility score define by

$$F(\mathbf{x}, \mathbf{y}; \mathbf{w}) = \langle \mathbf{w}, \phi(\mathbf{x}, \mathbf{y}) \rangle \quad (4.5)$$

can be seen as the affinity of the multilabel  $\mathbf{y}$  to the input  $\mathbf{x}$  according to the Markov network. Feature weight parameter  $\mathbf{w}$  in (4.5) ensures the example with correct multilabel will reach higher score than with incorrect multilabel. To learn the feature weight parameter  $\mathbf{w}$ ,  $M^3N$  defines the margin as the difference in compatibility scores between the correct example  $(\mathbf{x}_i, \mathbf{y}_i)$  and the psudo-example  $(\mathbf{x}_i, \mathbf{y})$ . Under the Maximum-Margin principle (Section 2.2.4),  $M^3N$  requires the margin to be at least  $\ell(\mathbf{y}_i, \mathbf{y})$ . The primal optimization problem of  $M^3N$  can be formulated as

**Definition 7.**  $M^3N$  Optimization Problem in Primal.

$$\begin{aligned} \min_{\mathbf{w}, \xi_i} \quad & \frac{1}{2} \|\mathbf{w}\|^2 + C \sum_{i=1}^m \xi_i \\ \text{s.t.} \quad & \langle \mathbf{w}, \phi(\mathbf{x}_i, \mathbf{y}_i) \rangle - \langle \mathbf{w}, \phi(\mathbf{x}_i, \mathbf{y}) \rangle \geq \ell(\mathbf{y}_i, \mathbf{y}) - \xi_i, \\ & \forall \xi_i \geq 0, \forall \mathbf{y} \in \mathcal{Y}/\mathbf{y}_i, \forall i \in \{1, \dots, m\}, \end{aligned}$$

where  $\xi_i$  is the slack allotted to each example to make sure solution can always be found,  $\ell(\mathbf{y}_i, \mathbf{y})$  is the loss function between the correct multilabel  $\mathbf{y}_i$  and the incorrect multilabel  $\mathbf{y}$ ,  $C$  is the slack parameter that controls the amount of regularization in the model. For each example  $\mathbf{x}_i$ , the optimization calls for maximizing the margin between the correct label  $\mathbf{y}_i$  and incorrect labels  $\mathbf{y}$ . The margin is scaled by the loss function  $\ell(\mathbf{y}_i, \mathbf{y})$  such that the completely incorrect multilabel will incur bigger loss than the nearly correct multilabel.

The primal optimization problem of  $M^3N$  in Definition 7 is difficult to solve as there are exponential numbers of constraints, one for each pseudo-example  $(\mathbf{x}_i, \mathbf{y})$ . The corresponding dual form is also difficult due to exponential number of dual variables (Taskar et al., 2004). By exploring the Markov network structure, the original optimization problem (Definition 7) can be formulated into factorized dual quadratic programming, as long as the loss function  $\ell$  and joint feature map  $\phi(\mathbf{x}, \mathbf{y})$  are decomposable over the Markov network.

As the number of parameters is quadratic in the number of training examples and edges in the network, it still cannot fit into standard QP solver. (Taskar et al., 2004) developed a coordinate descent method analogous to the Sequential Minimal Optimization (SMO) used for SVM training (Platt, 1998, 1999). Subsequently, other efficient optimization algorithms have been proposed, which include exponential gradient optimization methods from Bartlett et al. (2005), extra-gradient methods from Taskar et al. (2006), sub-gradient methods from Ratliff et al. (2007), and conditional gradient methods from Rousu et al. (2006, 2007).

In order to use M<sup>3</sup>N in practice, one have to solve the *loss augmented* inference problem defined as

$$\hat{\mathbf{y}} = \underset{\mathbf{y} \in \mathcal{Y}/\mathbf{y}_i}{\text{argmax}} \langle \mathbf{w}, \phi(\mathbf{x}_i, \mathbf{y}) \rangle + \ell(\mathbf{y}_i, \mathbf{y}). \quad (4.6)$$

To compute (4.6) efficiently, the loss function need to be decomposable over the Markov network. Nevertheless, M<sup>3</sup>N improves CRF by avoiding partition function and allowing complex loss function.

#### 4.2.4 Support Vector Machines for Interdependent and Structured Outputs (SSVM)

Support Vector Machine for interdependent and structured output space (SSVM) is developed in (Tsochantaridis et al., 2004, 2005). The formalism of SSVM is quite similar to M<sup>3</sup>N described in (Section 4.2.3). Compared to M<sup>3</sup>N which scales the margin by the loss function, SSVM scales the margin errors (*slack*) by the loss function. The primal optimization problem of SSVM can be defined as

**Definition 8.** SSVM *Optimization Problem in Primal*.

$$\begin{aligned} \min_{\mathbf{w}, \xi_i} \quad & \frac{1}{2} \|\mathbf{w}\|^2 + \frac{C}{m} \sum_{i=1}^m \xi_i \\ \text{s.t.} \quad & \langle \mathbf{w}, \phi(\mathbf{x}_i, \mathbf{y}_i) \rangle - \langle \mathbf{w}, \phi(\mathbf{x}_i, \mathbf{y}) \rangle \geq 1 - \frac{\xi_i}{\ell(\mathbf{y}_i, \mathbf{y})}, \\ & \forall \xi_i \geq 0, \forall \mathbf{y} \in \mathcal{Y}/\mathbf{y}_i, \forall i \in \{1, \dots, m\}, \end{aligned}$$

where  $\xi_i$  is the slack allotted to each example,  $\ell(\mathbf{y}_i, \mathbf{y})$  is the loss function between pseudo-label and the correct label, and  $C$  is the slack parameter that controls the amount of regularization in the model. The interpretation of Definition 8 is also similar as of Definition 7. Besides, Tsochantaridis et al. (2004) suggest that M<sup>3</sup>N will work hard on the pseudo-example  $(\mathbf{x}_i, \mathbf{y})$  that incur big loss though they may not even close to be confusable to the true multilabel  $\mathbf{y}_i$ .

On the other hand, the optimization techniques employed by SSVM differ significantly compared to M<sup>3</sup>N. SSVM will have to work with the exponential number of constraints as the optimization is not decomposable over the Markov network. Tsochantaridis et al. (2004) developed an iterative optimization approach that creates a nested sequence of successively tighter relaxation of the original problem via a cutting-plane methods (Bishop, 2007; Joachims et al., 2009). Constraints are added as necessary and the iterative optimization approach will converge to some optimal solution of  $\epsilon$  precision within a polynomial number of iterations.

Besides the issue during the optimization, another problem with SSVM is the intractability of the inference problem. To find the most violating constraint, the model need to compute the loss-augmented inference problem (Tsochantaridis et al., 2005) defined as

$$\hat{y} = \underset{y \in \mathcal{Y} / y_i}{\text{argmax}} [1 - \langle w, \phi(x_i, y) \rangle] \ell(y_i, y). \quad (4.7)$$

The loss function appears as a multiplicative term making (4.7) not decomposable over the Markov network. This gives a intractable inference problem in general. In exchange of intractability, SSVM can work with complex loss functions that do not assume any property of decomposition. The generality of the loss function can be seen as an advantage compared to CRF and M<sup>3</sup>N.

### 4.3 Structured Output Prediction for Molecular Activity Classification

The molecular activity classification problem has long been tackled with single-label classification approaches (Dutt, 2012). On the other hand, multiple interdependent molecular activities are often screened simultaneously (Shoemaker, 2006), which poses two challenges for single-label classification approaches. The first is about scalability which a set of single-label classifiers need to be built independently in order to predict multiple activities. This soon becomes infeasible when large amount of activities need to be predicted. The second lies in the fact the single-label classification approach cannot model label correlation. In Publication II we investigate the potential of using structured output learning to tackle the molecular activity classification problem.

### 4.3.1 Background

Molecular classification, the goal of which is to predict the anticancer potentials of the drug-like molecules, is one crucial step in drug discovery and has draw enormous attention from machine learning community. Viable molecular structures are scanned, searched, or designed for therapeutic efficacy. In particular, expensive preclinical *in vitro* and *in vivo* drug tests can be largely avoided and special efforts can be devoted to few promising candidate molecules, once accurate *in silico* models are available (Burbidge et al., 2001).

Various machine learning methods have been developed for the task, to name but a few, inductive logic programming (King et al., 1996), artificial neural network (Bernazzani et al., 2006), kernel methods for nonlinear molecular properties (Trotter et al., 2001; Ralaivola et al., 2005; Swamidass et al., 2005; Ceroni et al., 2007a), and SVM based methods for reliable predictions (Trotter et al., 2001; Byvatov et al., 2003; Xue et al., 2004). Albeit with the large quantity of the computational models, they only focus on predicting single target variable (e.g. inhibition potential in one cell line). On the other hand, relative larger number of cell lines are often screened at the same time. For example in the recent NCI-60 Human Tumor Cell Line Screen project (Shoemaker, 2006), thousands of molecular structures are tested againts hundreds of cell lines.

### 4.3.2 Methods

To efficiently and accurately predict molecular activities in multiple cell lines at the same time, we applied a structured output learning approach in Publication II which is to our knowledge the first multi-task learning approach for molecular classification problem. The algorithm is an instantiation of the structured output learning method MMCRF developed in (Rousu et al., 2006). It can also be seen as a sibling method of M<sup>3</sup>N presented in Section 4.2.3. In particular, the model defines a compatibility score through inner product for a molecular structure  $x$  and the activities in multiple cell lines  $y$

$$F(x, y; w) = \langle w, \phi(x, y) \rangle,$$

where  $w$  is the feature weight parameter that ensures the molecular structure with correct activities will be scored higher than with incorrect activities.  $w$  are learned by maximizing the minimum loss-scaled margin

between correct examples  $(\mathbf{x}_i, \mathbf{y}_i)$  and incorrect examples  $(\mathbf{x}_i, \mathbf{y})$  over the whole training set

$$\begin{aligned} \min_{\mathbf{w}, \xi_i} \quad & \frac{1}{2} \|\mathbf{w}\|^2 + C \sum_{i=1}^m \xi_i \\ \text{s.t.} \quad & \langle \mathbf{w}, \phi(\mathbf{x}_i, \mathbf{y}_i) \rangle - \langle \mathbf{w}, \phi(\mathbf{x}_i, \mathbf{y}) \rangle \geq \ell(\mathbf{y}_i, \mathbf{y}) - \xi_i, \\ & \xi_i > 0, \forall i \in \{1, \dots, m\}, \forall \mathbf{y} \in \mathcal{Y}, \end{aligned}$$

where  $\ell(\mathbf{y}_i, \mathbf{y})$  is the loss function defined as

$$\ell(\mathbf{y}_i, \mathbf{y}) = \sum_{j=1}^k [\mathbf{y}_i[j] \neq \mathbf{y}[j]].$$

The loss scaled margin optimization will push high-loss pseudo-examples further away from the correct example than the low-loss pseudo-examples. The model is optimized by conditional gradient optimization (Bertsekas, 1995) in marginalized dual space (Taskar et al., 2004), which not only benefits from a polynomial-size parameter space in marginalized dual representation but also enables the kernel function that is capable of dealing with non-linearity of the complex molecular structures.

In Publication II, we used graph kernel to measure the similarity of pair of molecular structures. The common way to represent the structure of a molecule is to use an undirected labeled graph  $G = (V, E)$ , where vertices  $V = \{v_1, \dots, v_n\}$  corresponds to atoms and edge  $E = \{e_1, \dots, e_m\}$  corresponds to the covalent bonds. The adjacency matrix  $A$  of graph  $G$  is defined such that its  $(i, j)$ 'th entry  $A_{i,j}$  equals to one if there is an edge between atom  $i$  and atom  $j$ .

*Walk Kernel* (Kashima et al., 2003; Gärtner, 2003) computes the sum of matching walks in a pair of graphs. The contribution of each matching walk is down scaled exponentially according to its length. We denote by  $w_m$  a walk of length  $m$  in graph  $G$  such that there exists a edge for each pair of vertices  $(v_i, v_{i+1})$  for all  $i \in \{1, \dots, m-1\}$ . In addition, we denote by  $G_\times(G_1, G_2)$  the direct product graph of two graph  $G_1$  and  $G_2$ , of which the vertices of a product graph are computed from

$$V_\times(G_1, G_2) = \{(v_1, v_2) \in V_1 \times V_2, \text{label}(v_1) = \text{label}(v_2)\},$$

and edges are computed from

$$E_\times(G_1, G_2) = \{((v_1, v_2), (u_1, u_2)) \in V_\times \times V_\times, (v_1, u_1) \in E_1 \wedge (v_2, u_2) \in E_2\}.$$

The walk kernel can be defined on the adjacency matrix of  $G_\times$

$$K_{wk}(G_1, G_2) = \sum_{i,j=1}^{|V_\times|} \left[ \sum_{n=0}^{\infty} \lambda^n A_\times^n \right]_{i,j},$$

where  $0 < \lambda < 1$ . Using exponential series or geometric series the walk kernel can be compute in cubic time (Gärtner, 2003) by

$$K_{wk}(G_1, G_2) = \mathbf{e}^\top (\mathbf{I} - \lambda A_{\times})^{-1} \mathbf{e},$$

where we use  $\mathbf{I}$  to denote the identity matrix and  $\mathbf{e}$  to denote the matrix of ones.

*Weighted Decomposition Kernel* developed in (Menchetti et al., 2005; Ceroni et al., 2007b) is an extension of substructure kernel (Komarek and Moore, 1999). The kernel weights identical part in two graph with contextual information. It evaluates the matching subgraphs (*contextor*) in the neighborhood of an atom (*selector*). We also used *Tanimoto Kernel* (Ralaivola et al., 2005) on a finite set of molecular fingerprints (Wang et al., 2009). See (Vishwanathan et al., 2010) for a more comprehensive survey on graph kernels.

To apply structured output learning model described above, we assume the underlying Markov network structure is fully observed. In other words, we need to build an output graph with nodes correspond to cell lines and edges correspond to potential statistical dependencies. Auxiliary datasets are available for this purpose (Shoemaker, 2006) which implicitly describes the correlation between cell lines. To build the output graph, we first compute the covariance matrix for cell lines based on auxiliary data, then extracte the network structure by applying the following two methods. In **maximum spanning tree** approach, we take the minimum number of edges that make a connected network whilst maximizing the edge weights. In **correlation thresholding** approach, we take all edges that exceed a fixed threshold, which typically generates a non-tree graph.

#### 4.4 SPIN for Network Response Prediction

Publication I presents a structured output learning model for network influence prediction problem. The proposed model, SPIN, is *context-sensitive* which is different from the previous the state-of-the-art methods that only model the influence in terms of the network connectivity. The inference problem of SPIN is  $\mathcal{NP}$ -hard in general. We provides a semidefinite programming algorithm SDP with approximation guarantee as well as fast GREEDY heuristics.

#### 4.4.1 Background

With the extensive availability of the large scale networks, there are tremendous interest in studying the phenomena of the network influence, in particular, the structure, the function and the influence dynamics. The outcome of the network influence research have been widely applied in many areas, to name but a few, spreadness of pathogens or infectious diseases (Hethcote, 2000; Anderson and May, 2002), diffusion of medical and technology innovation (Strang and Soule, 1998; Rogers, 2003), opinion and news formation (Adar et al., 2004; Gruhl et al., 2004; Adar and Adamic, 2005; Leskovec et al., 2007; Liben-Nowell and Kleinberg, 2008; Leskovec et al., 2009), viral market (Domingos and Richardson, 2001; Kempe et al., 2003; Liben-Nowell and Kleinberg, 2003).

In the field of studying network influence, one primary interest is to discover the latent structures that reveal the dynamics of influences. In general, the problem can be defined into two different ways depending on the availability of the underlying network structure. On one hand, one would assume that the underlying structure is hidden or incomplete and the only observation is a cascade of actions. The instantiation of the setting can be, for example, online news agents sharing information but not physically connected, or in epidemiological study where people are affected by pathogens through various ways. In this case, the task is to infer network structure in terms of edges connecting nodes given a set of action cascade. Many algorithms are designed to solve the problem in this setting from NETINF (Gomez Rodriguez et al., 2010), NETRATE (Rodriguez et al., 2011), KERNEL CASCADE (Du et al., 2012) to the most recent work about two stage model for inferring influence (Du et al., 2014), inference algorithm using cascade without timestamp (Amin et al., 2014), and general framework of inferring diffusion structure (Daneshmand et al., 2014). On the other hand, we argue the problem is unnecessarily hard as in many cases the structure of the network is fully observed (e.g. friendship network, citation network). There are also related research that aim to discover the hidden variables in the network (Saito et al., 2008; Goyal et al., 2010)

However, none of them consider the property of the action. In particular, our network influence problem is motivated by the following observation: for a given action  $a$  performed on the network  $G$ , the influence from node  $u$  to  $u'$  not only depends on their connections but also depend on the action

under consideration. For example,  $u'$  is a follower of  $u$  in twitter network,  $u'$  will retweet the message from  $u$  if the message is related to *science* but not related to *politics*. We propose the following definition of the network influence problem

**Definition 9.** *Network Influence Problem.* *Given a complex network and an action performed on the network, predict the subnetwork that responds to the action. In particular, which nodes perform the action and which directed edges relay the action from one node to its neighbors.*

#### 4.4.2 Methods

We approach the problem by structured output learning, where we define a computability score as a inner product of the action  $\mathbf{a}$  and the response network  $G_{\mathbf{a}}$

$$F(\mathbf{a}, G_{\mathbf{a}}; \mathbf{w}) = \langle \mathbf{a}, \phi(\mathbf{a}, G_{\mathbf{a}}) \rangle.$$

It is intuitive that the action  $\mathbf{a}$  with correct response network  $G_{\mathbf{a}}$  will achieve high score than with any incorrect response network  $G'_{\mathbf{a}}$ . The joint feature map  $\phi(\mathbf{a}, G_{\mathbf{a}})$  is composed by the tensor product between action feature  $\varphi(\mathbf{a})$  and the features of the response network  $\Upsilon(G_{\mathbf{a}})$ . In particular,  $\varphi(\mathbf{a})$  can be a bag-of-words features of the action (e.g. blog post) and  $\Upsilon(G_{\mathbf{a}})$  can be vector of edges and labels of the response network  $G_{\mathbf{a}}$ .

The feature weight parameter  $\mathbf{w}$  is learned through maximum-margin structured output learning by solving the following optimization problem

**Definition 10.** *Primal SPIN Optimization Problem.*

$$\begin{aligned} \min_{\mathbf{w}, \xi_i} \quad & \frac{1}{2} \|\mathbf{w}\|^2 + C \sum_{i=1}^m \xi_i \\ \text{s.t.} \quad & F(\mathbf{a}_i, G_{\mathbf{a}_i}; \mathbf{w}) > \max_{G'_{\mathbf{a}_i} \in \mathcal{H}(G)/G_{\mathbf{a}_i}} (F(\mathbf{a}_i, G'_{\mathbf{a}_i}; \mathbf{w}) + \ell_G(G_{\mathbf{a}_i}, G'_{\mathbf{a}_i})) - \xi_i, \\ & \xi_i \geq 0, \forall i \in \{1, \dots, m\}, \end{aligned}$$

where we use  $\mathcal{H}(G)$  to denote the set of directed acyclic graphs of  $G$ .

To solve the above optimization problem, we have to compute the highest-scoring subgraph given an action. In particular, the goal during the training is to find the worst margin violating subgraph which corresponds to solving the loss-augmented maximization problem

$$H^*(\mathbf{a}_i) = \operatorname{argmax}_{G'_{\mathbf{a}_i} \in \mathcal{H}(G)/G_{\mathbf{a}_i}} (F(\mathbf{a}_i, G'_{\mathbf{a}_i}; \mathbf{w}) + \ell_G(G_{\mathbf{a}_i}, G'_{\mathbf{a}_i})).$$

The goal during the prediction is to find the subgraph with maximum compatibility given the action

$$H^*(\mathbf{a}_i) = \underset{H \in \mathcal{H}(G)}{\text{argmax}} F(\mathbf{a}_i, H; \mathbf{w}). \quad (4.8)$$

As the two problems are different only in terms of the definition of the score, we explain our inference algorithm based on (4.8) by writing the problem explicitly in terms of weight vectors and the feature maps

$$\begin{aligned} H^*(\mathbf{a}_i) &= \underset{H \in \mathcal{H}(G)}{\text{argmax}} \langle \mathbf{w}, \varphi(\mathbf{a}) \otimes \mathbf{T}(H) \rangle \\ &= \underset{H \in \mathcal{H}(G)}{\text{argmax}} \sum_{e \in E^H} s_{y_e}(e, \mathbf{a}), \end{aligned} \quad (4.9)$$

where we denote by  $s_{y_e}(e, \mathbf{a}) = \sum_i \mathbf{w}_{i,e,y_e} \varphi(\mathbf{a})$  the score of edge  $e$  with edge label  $y_e$ .

We have proved the  $\mathcal{NP}$ -hardness of (4.9) by forming a reduction from the MAX-CUT problem (Garey and Johnson, 1990). In addition, we proposed two algorithms to solve (4.9). The first is called SDP inference which introduces for each node  $u \in V$  a binary variable  $x_u \in \{-1, +1\}$  and transfer the inference problem into an integer quadratic program (IQP) problem. The IQP is then tackle by similar technique introduced in (Goemans and Williamson, 1995), such that each variable  $x_u$  is relaxed to a vector  $\mathbf{v}_u \in \mathbb{R}^n$  and the relaxed problem is solved by semidefinite programming (SDP). The resulting vector is rounded back into binary value by incomplete Cholesky decomposition. The benefit from SDP inference algorithm is the approximation guarantee. In particular, the proposed SDP inference algorithm is a 0.796 approximation of the original IQP.

As SDP inference is not scalable on large networks, we developed a GREEDY heuristic base on observation stated as the following lemma:

**Lemma 1.** *The inference problem (4.9) can be stated equivalently as a function of activated vertices*

$$H^*(\mathbf{a}) = \underset{H \in \mathcal{H}(G)}{\text{argmax}} \sum_{v_i \in V_p^H} F_m(v_i).$$

The proof is given in supplementary material of Publication I. As a results, the GREEDY algorithm starts with an empty vertex set and adds one vertex at a time such that the increment of the score is maximized over all inactivated vertices. The iteration ends when the objective cannot be improved. It is worthy noticing that we are not able to give any approximation guarantee for the solutions produced by the GREEDY algorithm. The property of submodularity, which is often used to analyze the greedy algorithm, only holds for the special case of our inference problem.

## 5. Structured Output Prediction with Unknown Structure

Structured output learning (Chapter 4) gains the power of the representation by connecting multiple output variables in to an output graph. In this chapter, we extend the structure output prediction model to the scenario where the output graph is hidden, by exploring the potential of learning from a random set of random output graphs. In Section 5.1, we start with a majority voting ensemble (MVE) of a set of structured output classifiers and proceed with two aggregation techniques (AMM and MAM respectively) that performs inference before or after forming the ensemble. In Section 5.3, we present and discuss the RTA method that improves MAM by the joint learning and inference.

### 5.1 Graph Labeling Ensemble (MVE)

We have presented in Section 4.3 a structured output prediction model for multilabel molecular activity prediction problem. The model relies on the representation of the cell-line structure which allows us to model the correlation of multiple labels. To apply structured output learning, it is assumed the structure of the output graph is fully observed. Alternatively in Publication II, we suppose there exist auxiliary data that encodes the label correlation which can be utilized in order to retrieve the output graph. However, we cannot take the availability of the output graph as granted because the underlying dependency structure is often hidden in many real world problems. In Publication III, we explore the potential of constructing an majority voting ensemble of multiple structured output learners and examine the performance of the proposed model on molecular activity classification problem. Each structured output learner is built based on a random generated output graph. As a results, the proposed model MVE is not constraint to the availability of the dependency struc-

ture.

### 5.1.1 Methods

We use MMCRF as base classifier trained on a set of random output graphs. For each base classifier, a random graph  $G_t$  is generated to couple the multiple output labels which are the activities of molecular structure  $\mathbf{x}$  over all cell-lines. The base model MMCRF is constructed with training data  $S = \{(\mathbf{x}_i, \mathbf{y}_i)\}_{i=1}^m$  and the output graph  $G_t$ . After ensemble has been generated, the predictions are extracted from each base classifier and are collected for a post-processing step: we compute a majority vote over the graph labeling from the sign on the means of the base classifier's prediction

$$F_j^{\text{MVE}} = \underset{y_j \in \mathcal{Y}_j}{\text{argmax}} \left( \frac{1}{T} \sum_{i=1}^T \llbracket F_j^{(t)}(\mathbf{x}) = y_j \rrbracket \right), \forall j \in \{1, \dots, k\},$$

where by  $T$  we denote the size of the ensemble, and by  $F^{(t)}(\mathbf{x}) = \{F_j^{(t)}(\mathbf{x})\}_{j=1}^k$  we denote the predicted multilabel from the  $t$ 'th base classifier. In words, the ensemble prediction on each microlabel is the most frequently appearing prediction among the base classifiers. It is also worthy of noticing that the MVE framework is not restrict to base classifier MMCRF and can be extended with any structured output learning models as long as they incorporate the output structure into learning process and make predictions based on the structure.

In addition, we designed two approaches to generate random output graphs. In **random spanning tree** approach, we first generate a random correlation matrix and extract the spanning tree out from the matrix. The approach eventually generates a tree structure connecting all vertices. In **random pairing** approach, we randomly draw two vertices at a time and couple the two with an edge. The approach outputs disconnected pairs.

## 5.2 Random Graph Ensemble (AMM, MAM)

We have shown in Section 5.1 that we can construct a majority voting ensemble of structured output learners to tackle the problem during structured output learning when the output graph is not observed. We evaluate the method on molecular activity classification problem. This section is based on Publication IV where we aim to present two other aggregation techniques to combine the base structured output classifiers. Compare

to previously developed MVE, the proposed model (AMM and MAM respectively) perform inference before or after forming the ensemble. We also examine the performance of the proposed models on a set of heterogeneous multilabel datasets from various domains. In addition, we bring in a theory which is based on the reconstruction error of the compatibility score to explains the improvement of MAM framework.

### 5.2.1 Background

We still work with the assumption mode for MVE in Section 5.1 in which the base classifier will devise the prediction according to the structure of the output graph. In addition, we assume that the base classifier for AMM and MAM is defined with a Markov network structure. That is the base classifier compute a compatibility score  $\psi(\mathbf{x}, \mathbf{y})$  for the pair  $(\mathbf{x}, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$  according to the output graph  $G$ , indicating how well the input  $\mathbf{x}$  gets along with the output  $\mathbf{y}$ . The compatibility score is defined as

$$\psi(\mathbf{x}, \mathbf{y}) = \langle \mathbf{w}, \phi(\mathbf{x}, \mathbf{y}) \rangle = \sum_{e \in E} \langle \mathbf{w}, \phi_e(\mathbf{x}, \mathbf{y}_e) \rangle = \sum_{e \in E} \psi_e(\mathbf{x}, \mathbf{y}_e),$$

where we use  $\psi_e(\mathbf{x}, \mathbf{y}_e)$  to denote edge compatibility score (*edge potential*) between input  $\mathbf{x}$  and edge label  $\mathbf{y}_e$  on edge  $e$ .  $\mathbf{w}$  is the feature weight parameter which ensures input  $\mathbf{x}$  with correct output  $\mathbf{y}$  achieves higher compatibility score than with incorrect output.

In addition, we assume we have access to the edge potentials between input and edge labels for each base classifiers

$$\boldsymbol{\psi}_E^{(t)} = (\psi_e^{(t)}(\mathbf{x}, \mathbf{u}_e))_{e \in E^{(t)}, \mathbf{u}_e \in \mathcal{Y}_e}.$$

With edge compatibility scores, we can infer the max-marginal of the  $i$ 'th node which is the score incurred by assigning label  $u_i \in \mathcal{Y}_i$  to the  $i$ 'th node (Wainwright et al., 2005) defined by

$$\tilde{\psi}_j(\mathbf{x}, u_j) = \max_{\mathbf{y} \in \mathcal{Y}, y_j = u_j} \sum_{e \in E} \psi_e(\mathbf{x}, \mathbf{y}_e).$$

In words, the max-marginal is the maximum score of the multilabel consistent with  $y_i = u_i$ . We denote the collection of max-marginals by  $\tilde{\boldsymbol{\psi}} = (\tilde{\psi}_j(\mathbf{x}, u_j))_{j \in V, u_j \in \mathcal{Y}_j}$ .

### 5.2.2 Methods

Let  $\mathcal{G} = \{G^{(1)}, \dots, G^{(T)}\}$  denote a set of random output graphs, and let  $\{\tilde{\boldsymbol{\psi}}^{(1)}, \dots, \tilde{\boldsymbol{\psi}}^{(T)}\}$  denote the max-marginal vectors from base classifiers that

is built on each output graph. The prediction of the Average-of-Max-Marginal aggregation (AMM) on each node is obtained by averaging the max-marginals of base classifiers and choose the maximizing microlabel for the node

$$F_j^{\text{AMM}} = \underset{u_j \in \mathcal{Y}_j}{\text{argmax}} \frac{1}{T} \sum_{t=1}^T \tilde{\psi}_{j,u_j}^{(t)}(\mathbf{x}).$$

The predicted multilabel from AMM is composed by the predicted micro-labels

$$F^{\text{AMM}} = (F_j^{\text{AMM}})_{j \in V}.$$

AMM performs the inference to find the max-marginals before combining the base classifier into ensemble. On the other hand, the Maximum-of-average-marginals (MAM) aggregation first collects the local edge potentials  $\psi_E^{(t)}$  from each base classifier, averages them and finally performs inference on the global consensus graph  $\hat{G} = (\hat{E}, V)$  with averaged edge potentials. The MAM model can be defined as

$$F^{\text{MAM}}(x) = \underset{\mathbf{y} \in \mathcal{Y}}{\text{argmax}} \sum_{e \in \hat{E}} \frac{1}{T} \sum_{t=1}^T \psi_e^{(t)}(x, \mathbf{y}_e) = \underset{\mathbf{y} \in \mathcal{Y}}{\text{argmax}} \frac{1}{T} \sum_{t=1}^T \sum_{e \in \hat{E}} \langle \mathbf{w}_e^{(t)}, \phi_e(x, \mathbf{y}_e) \rangle.$$

Publication IV, Lemma 1 allows us to simplify the computation of MAM in terms of dual variables and kernels.

Besides the proposed algorithm frameworks, we also developed theoretical analysis to explain the improvement of MAM ensemble. The analysis extends the theory on single task ensemble developed by Brown and Kuncheva (2010). In general, Publication IV, Theory 1 states that the reconstructive error from MAM ensemble is guaranteed to be less than or equal to the average reconstruction error from the base classifiers. The improvement can be decomposed into two terms, namely *diversity* and *coherence*. The former measures the variability of individual classifiers learned from different perspectives which shares the same argument as the analysis of single task ensemble model (Brown and Kuncheva, 2010), the later measures the correlation of microlabel predictions in which higher correlation lead to better improvements.

### 5.3 Random Spanning Tree Approximation (RTA)

Random Spanning Tree Approximation (RTA) model developed in Publication V is a major step forward of MAM. Recall that MAM generates a

set of base learner built on random spanning trees, learns them separately, and combines them via a final inference step. The goal of RTA is to bring in joint learning and inference framework such that the random spanning tree learners are optimized simultaneously towards the same objective. Publication V also provides theoretical analysis to guarantee the performance and the tractability of the inference. RTA explores the potential of tackling the intractable graph inference problem with a set of random spanning trees. It lays the foundation of performing inference on unknown structure to achieve accurate optimization with attainable computational efforts.

### 5.3.1 Background

Limiting the applicability of structured output learning methods is the fact that the output structure is assumed to be observed. It is also difficult to learn the dependency structure from data (Chickering et al., 1994) if it is not harder than structured output learning itself. We can instead opt to the *complete graph* by assuming the complete set of pairwise dependency has enough expression power. In particular, we can construct a structured output learner with a complete graph as output graph and rely on the optimization algorithm to uncover the hidden “parameters” defined on the edges (e.g. edge potentials). To understand this, think the edges that are not from the correct output graph will have zero “parameters” in the complete graph.

Structured output learning with complete graph is not an easier problem as the inference is  $\mathcal{NP}$ -hard in nature. The inference problem is often instantiated as finding the *Maximum A-Posteriori* (MAP) configuration on a graph-structured probability distribution. In terms of the intractability issue of graph inference problem, many techniques have been proposed but with important differences. Jordan and Wainwright (2004) developed semi-definite programming convex relaxation for inference on graph with cycles. Wainwright et al. (2005) proposed MAP inference with tree-based and *linear programming* (LP) relaxation. Efficient inference on special graph has also been studied in (Globerson and Jaakkola, 2007).

Publication V is motivated by well-established Max-Margin Principle presented in Section 2.2.4. The work investigates whether the problem of inference over a complete graph in structured output learning can be avoided in an analogous way. Start from a sampling results, Publication V, Lemma 3 shows that with high probability a big fraction of margin

achieved by the complete graph can be obtained by a sample of spanning trees of small size. Besides, Publication V, Theorem 5 shows the good generalization can also be guaranteed when learning with instead of complete graph a sample of spanning trees.

Thus, in addition to Publication IV, Theory 1, we further provide the theoretical justification of MAM that constructs a set of base classifiers trained on random spanning trees. Besides, Publication V, Theorem 5 suggests we should, instead of optimizing the margin separately on each spanning tree as in MAM, optimize the joint margin from all spanning trees. This strategy leads to the learning model presented in the following section.

### 5.3.2 Methods

Let  $\mathcal{T} = \{T_1, \dots, T_n\}$  denote a sample of  $n$  random spanning trees, and  $\{\mathbf{w}_{T_t} | T_t \in \mathcal{T}\}$  denote the feature weight parameter to be learner on each tree. For each example  $(\mathbf{x}_i, \mathbf{y}_i)$ , the goal of optimization is to maximize the joint margin from all spanning trees between correct training examples and the pseudo-examples  $(\mathbf{x}_i, \mathbf{y})$  defined as

**Definition 11. Primal  $L_2$ -norm Random Tree Approximation (RTA).**

$$\begin{aligned} \min_{\mathbf{w}_{T_t}, \xi_i} \quad & \frac{1}{2} \sum_{t=1}^n \|\mathbf{w}_{T_t}\|^2 + C \sum_{i=1}^m \xi_i \\ \text{s.t.} \quad & \sum_{t=1}^n \langle \mathbf{w}_{T_t}, \phi_{T_t}(\mathbf{x}_i, \mathbf{y}_i) \rangle - \max_{\mathbf{y} \neq \mathbf{y}_i} \sum_{t=1}^n \langle \mathbf{w}_{T_t}, \phi_{T_t}(\mathbf{x}_i, \mathbf{y}) \rangle \geq 1 - \xi_i, \\ & \xi_i \geq 0, \forall i \in \{1, \dots, m\}, \end{aligned}$$

where  $\phi_{T_t}(\mathbf{x}, \mathbf{y})$  is the feature map that is local on each tree  $T_t$ ,  $\xi_i$  is the margin slack allocated for each  $\mathbf{x}_i$ , and  $C$  is the slack parameter that controls the amount of regularization.

The key for the optimization is to solve the '**argmax**' problem efficiently. This is a  $\mathcal{NP}$ -hard problem in practice, as the size of the multilabel space is exponential in terms of the number of microlabels. In Publication V, we have developed a  $K$ -best inference algorithm working in  $\Theta(Knk)$  time per data point, where  $k$  is the number of microlabels and  $K$  is the number of best multilabels we compute from each random spanning tree.

It is known that the exact solution for the inference problem on individual tree  $T_t$  is tractable (Koller and Friedman, 2009) for which

$$\hat{\mathbf{y}}_{T_t}(x) = \underset{\mathbf{y} \in \mathcal{Y}}{\mathbf{argmax}} F_{\mathbf{w}_{T_t}}(x, \mathbf{y}) = \underset{\mathbf{y} \in \mathcal{Y}}{\mathbf{argmax}} \langle \mathbf{w}_{T_t}, \phi_{T_t}(x, \mathbf{y}) \rangle, \quad (5.1)$$

can be solved in  $\Theta(k)$  time by *dynamic programming* algorithm also known as *max-product* or *min-sum* algorithm. However, there is no guarantee the the maximizer of (5.1) is also the global maximizer of Definition 11 over the set of random spanning trees. Therefore, we compute the top  $K$ -best multilabels for each random spanning tree. In total the computation costs  $\Theta(Knk)$  time for all spanning trees. Publication V, Lemma 7 provides a method to retrieve the best multilabel from  $K$ -best multilabel list in linear time. Now the question is to make sure the global violation multilabel is within the  $K$ -best multilabel list. Publication V, Lemma 8 guarantees that with high probability the global violation multilabel is in the list and  $K$  does not need to be large.

In addition, we derived the marginalized dual representation of Definition 11 which not only works with a polynomial sized parameter space but also enables kernel function to deal with complex input space.



# 6. Evaluation and Comparison Methods

In this chapter, the author will briefly introduce the performance measures and statistical tests that are involved in the research. These methods enable us to quantitatively evaluate the performance of the proposed models and to measure the significance comparing to other well established methods.

## 6.1 Performance Measures

It is often difficult and expensive to obtain labeled data. In order to maximize the outcomes of the valuable labeled data, the common approach adopted by machine learning community is known as *K-fold cross-validation*. In particular, the origin set of labeled examples are partitioned into  $K$  disjoint subsets of same size denoted by  $\{S_1, \dots, S_K\}$ . The cross-validation framework will repeat training and test procedures  $K$  times. In the  $i$ 'th iteration, the method uses  $K - 1$  subsets of labeled examples  $\cup_{j \in \{1, \dots, K\} / i} S_j$  to build a training set in order to construct a classifier. The examples in the  $i$ 'th subset is taken as test data of which the labels are assumed to be unknown to the classifier. The resulting classifier is used to predict the label of each example from the test set  $S_i$ . The performance is evaluated by comparing to the true labels from the test set  $S_i$ . In extreme case where we have  $K$  equal to the number of original labeled examples, there will be only one example in each test set. This is typically known as *leave-one-out cross-validation* (LOO).

Most machine learning algorithms explicitly assume that the training data and the test data are drawn from the same distribution. We should make sure that the statistical property of the original labeled data is well preserved when partitioning the original labeled examples into subsets. In single-label classification problem we can easily preserve the label dis-

tribution if we randomly sample labeled examples without replacement from the origin dataset. However, it is not clear how to preserve label distribution under multilabel classification setting. To this end, we use *stratification (stratified sampling)* method where we first group the labeled examples into equivalent classes based on the number of positive labels they have. Each class is then randomly split into  $K$  local fold, after that local folds are merged to create  $K$  global fold. The stratification scheme ensures that also smaller classes have representations in all folds.

After partitioning the original data into training set and test set, we adopt several well-known performance measures in order to quantitatively evaluate the performance of difference classifiers. We report *multilabel accuracy (0/1 accuracy)* which counts the percentage of multilabel predictions that have all of the microlabel being correct. The counterpart is often known as *multilabel loss (0/1 loss)* defined as

$$\ell_{0/1} = \frac{1}{m} \sum_{i=1}^m \llbracket \mathbf{y}_i \neq \hat{\mathbf{y}}_i \rrbracket,$$

where by  $\mathbf{y}_i$  we denote the predicted multilabel of the  $i$ 'th example  $\mathbf{x}_i$ , and by  $\hat{\mathbf{y}}_i$  we denote ground true multilabel. We also report *microlabel accuracy* as the proportion of microlabel being correct, of which the counterpart is often known as *hamming loss* defined as

$$\ell_h = \frac{1}{mk} \sum_{i=1}^m \sum_{j=1}^k \llbracket \mathbf{y}_i[j] \neq \hat{\mathbf{y}}_i[j] \rrbracket.$$

In addition, we report  *$F_1$  score* as the harmonic mean of *microlabel precision* and *microlabel recall* defined as

$$F_1 = 2 \cdot \frac{Pre \times Rec}{Pre + Rec}.$$

Microlabel precision and microlabel recall are defined as

$$Pre = \frac{TP}{TP + FP}, \quad Rec = \frac{TP}{TP + FN},$$

where we use  $TP$ ,  $FP$ , and  $FN$  to denote *true positive*, *false positive*, and *false negative* predictions respectively.

## 6.2 Statistical Tests

Once we have computed the performance measures of multiple machine learning algorithms, we want to compare the performance in order to decide the best model under consideration. To serve as a starting point,

we assume a very basic setting where we already have the performance of multiple machine learning algorithms on one selected dataset. It is straight forward to compare the performance of the algorithms in terms of the performance metrics and choose the best model based on the value of the metric without resorting to any statistical methods. We only assume that the metrics accurately reveal the performance of the algorithms. However, when a new learning algorithm is proposed, it is usually evaluated over multiple dataset to rule out the probability that it performs well on one particular dataset by chance. Statistical evaluation of experimental results have been considered as an essential part of comparison steps in such complicate scenarios. We will base our discuss on (Demšar, 2006; García and Herrera, 2008) in the following part of the section.

We first consider the case where we want to compare two learning algorithms over multiple datasets. In order to decide the best performing method, one way is to average the performance over all test datasets. However, it is debatable that the error rate from different domains (test datasets) are commensurable. Beside, the averaging is susceptible to the outliers. Another approach is to use paired t-test to check if the average difference of two learning algorithms over datasets is significantly different from zero. Paired t-test is problematic due to commensurability. Besides, the result will not be significant unless the sample size is larger enough. Demšar (2006) proposed Wilcoxon signed-ranks test which is a non-parametric alternative to the paired t-test to compared two algorithms over multiple datasets. Meanwhile, sign-test is also proposed in (Demšar, 2006). As the setting is not very interesting for our purpose, we will not expand our discussion on the details.

Secondly, we will consider a more common situation where we want to compare multiple learning algorithms over many datasets. In practice, we want to answer the question, for example, whether algorithm A is significantly better than algorithm C, and algorithm C outperforms algorithm B in a significantly manner. In statistics, this amounts to multiple hypothesis test. The common way is to use repeat-measures ANOVA (Fisher, 1959) with post-hoc Tukey test (Tukey, 1949). The test procedure is based on two assumptions: the first is known as *normality* meaning samples are drawn from normal distributions; the second is known as *sphericity* meaning samples should have equal variant. It is not difficult to see that the ANOVA is ill-posed as none the assumptions are met within the context of comparing the performance of learning algorithms

over datasets.

To alleviate the problems, Demšar (2006) suggest to use Friedman test (Friedman, 1937, 1940) with post-hoc Nemenyi test (Nemenyi, 1963). The goal of the test procedure is to examine whether a pair of algorithms are significantly different from each other under multiple hypothesis test setting. To perform Friedman test, we first compute the average rank  $R_j$  of the  $j$ 'th algorithms. The Friedman test then compares the average ranks and under null-hypothesis states that the average ranks are equal. The test statistics can be computed according to the procedure discussed in (Demšar, 2006). If null-hypothesis is rejected, we can proceed with post-hoc Nemenyi test to compare algorithms with each other. In particular, we can compute the *critical difference (CD)* and state that the performance of two classifiers are significantly different if the corresponding average rank differs by at least  $CD$ . As the post-hoc Nemenyi test is usually conservative and has little statistical power, we sometimes use Bonferroni-Dunn test (Dunn, 1961) to compare the learning algorithms against the selected control which is usually the newly proposed algorithm. The test results are often visualized as *CD diagram*.

## 7. Implementations

In this thesis, several structured output learning algorithms have been proposed to solve multilabel classification problem. Each presented models has been implemented into a software package. In this chapter, the author aims to briefly summarize the implementation for the sake of clarity and link the implementation to public domain.

1. RTA developed in Publication V is a structured output prediction model for multilabel classification problem. RTA performs joint learning and inference on a random sample of spanning trees.
  - (a) The inference algorithm is written in C. The parallelization of the inference algorithm is written with OPENMP. Other parts of RTA are mostly written in MATLAB.
  - (b) The package can be found from [git@github.com:hongyusu/random\\_spanning\\_tree\\_approximation.git](https://github.com/hongyusu/random_spanning_tree_approximation.git).
2. SPIN developed in Publication I is a structured output prediction model that is capable of predicting a direct acyclic graph. SPIN is designed for network influence prediction.
  - (a) The major part of the RTA is written in MATLAB. SDP inference algorithm is written with CVX package designed for convex programming. The data preprocessing with topic model is written in PYTHON and MATLAB.
  - (b) The implementation can be found from [git@github.com:hongyusu/SPIN.git](https://github.com/hongyusu/SPIN.git).
3. MVE developed in Publication III and Publication IV, AMM and MAM presented in Publication IV are ensemble models that combines a set of structured output classifiers built from a set of random spanning trees.

- (a) The codes are written in MATLAB.
  - (b) The implementation can be found from `git@github.com:hongyusu/RandomOutputGraphEnsemble.git`.
4. The structured output model used in Publication II for molecular activities classification is a instantiation of MMCRF developed in Rousu et al. (2006).
- (a) The code is written in MATLAB.
  - (b) The implementation can be found from <http://research.ics.aalto.fi/kepaco/software.shtml>.

# 8. Conclusion

## 8.1 Discussion

In this thesis, we have studied the supervised learning for classification. In particular, we focused on multilabel classification where the task is to predict multiple interdependent output variables given an input example. As the multiple variables can be “on” or “off” simultaneously, the central problem in multilabel classification is to explore the label correlation in order to make better prediction.

The problem has been previously tackled by flat multilabel classification approach which treats the multiple outputs essentially as a “flat” vector. The flat multilabel classification approach has difficulty of modeling the label correlation. The structured output learning approach is a natural remedy to flat multilabel classification. The first outcome of the thesis is to extend the structured output learning methods. We have applied the structured output learning on molecular activity classification problem. We have also developed SPIN that is able to predict a directed acyclic graph that connects multiple output variables. SPIN has been applied in network influence prediction problem. It is also useful in predicting other influence or spreading typed problems. Both the methods and the empirical results have demonstrated that structured output learning is an important extension to flat multilabel classification approach for predicting multiple interdependent output variables.

The current structured output learning approach rely on representing the label correlation as an output graph which is assumed to be observed. The second outcome of the thesis is the new methods for structured output learning when the output dependency structure is not observed. The new methods aim to learn from a random set of spanning trees that connect

multiple output variables, thus widen the applicability of the structured output learning. Besides, we have studied the behaviour of the proposed methods in terms of reconstruction error of the compatibility score as well as the generalization error which guaranteed the performance of the proposed models.

In addition, we have explored the inference algorithms for the proposed structured output learning methods, which can avoid the exponential number of parameter space and provide fast convergence.

## 8.2 Future Work

The work presented in the thesis can be extended along two main directions. First, the presented algorithm can be applied into other multilabel classification problems in structured output space. Secondly, the algorithm development and theoretic analysis can be continued. As the first direction of applying the presented algorithms is clear and application oriented, we will concentrate on the algorithm development and theory analysis part.

As a starting point, we can extend SPIN by developing new inference algorithm that is both scalable and with approximation guarantee. The current research ends with RTA method that performs joint learning and inference on a random sample of spanning trees. RTA combines the feature weight parameter from each spanning tree using  $L_2$ -norm convex combination. We can further explore the possibility of combining the feature weight vectors by  $L_1$ -norm combination. Learning with  $L_1$ -norm regularization of parameter combination has previously been studied under the multiple kernel learning setting (Rakotomamonjy et al., 2008), which can be formulated into an equivalent form of learning a weighted  $L_2$ -norm combination. The weight of parameter vector on each spanning tree can be seen as the fitness of the tree to the current learning problem. This can be used to select output graph that is most relevant to the current problem. We should also design the optimization techniques for  $L_1$ -norm regularization as current alternative optimization method in (Rakotomamonjy et al., 2008) is not efficient. The theoretical properties should also be extended from RTA to the new model.

# Bibliography

- Adar, E. and Adamic, L. A. (2005). Tracking information epidemics in blogspace. In *Proceedings of the 2005 IEEE / WIC / ACM International Conference on Web Intelligence*, WI '05, pages 207–214, Washington, DC, USA. IEEE Computer Society.
- Adar, E., Zhang, L., Adamic, L., and Lukose, R. (2004). Implicit structure and the dynamics of blogspace. In *Workshop on the Weblogging Ecosystem*, volume 13.
- Aha, D., Kibler, D., and Albert, M. (1991). Instance-based learning algorithms. *Machine Learning*, 6(1):37–66.
- Amin, K., Heidari, H., and Kearns, M. (2014). Learning from contagion (without timestamps). In *Proceedings of the 31th International Conference on Machine Learning (ICML 2004)*, pages 823–830. JMLR.org.
- Anderson, R. M. and May, R. M. (2002). *Infectious Diseases of Humans: Dynamics and Control*. Oxford Press.
- Argyriou, A., Evgeniou, T., and Pontil, M. (2007). Multi-task feature learning. In *Advances in Neural Information Processing Systems 19*. MIT Press.
- Argyriou, A., Evgeniou, T., and Pontil, M. (2008a). Convex multi-task feature learning. *Machine Learning*, 73(3):243–272.
- Argyriou, A., Maurer, A., and Pontil, M. (2008b). An algorithm for transfer learning in a heterogeneous environment. In *Proceedings of the 2008 European Conference on Machine Learning and Knowledge Discovery in Databases - Part I*, ECML PKDD '08, pages 71–85, Berlin, Heidelberg. Springer-Verlag.
- Bartlett, P. L., Collins, M., Taskar, B., and McAllester, D. A. (2005). Exponentiated gradient algorithms for large-margin structured classification. In *Advances in Neural Information Processing Systems 17 (NIPS 2005)*, pages 113–120. MIT Press.
- Baxter, J. (2000). A model of inductive bias learning. *J. Artif. Int. Res.*, 12(1):149–198.
- Bell, R. M. and Koren, Y. (2007). Lessons from the netflix prize challenge. *SIGKDD Explor. Newsl.*, 9(2):75–79.
- Ben-David, S. and Schuller, R. (2003). Exploiting task relatedness for multiple task learning. In Schölkopf, B. and Warmuth, M., editors, *Learning Theory and Kernel Machines*, volume 2777 of *Lecture Notes in Computer Science*, pages 567–580. Springer Berlin Heidelberg.

- Bengio, Y. (2009). Learning deep architectures for ai. *Found. Trends Mach. Learn.*, 2(1):1–127.
- Berger, A. (1999). The improved iterative scaling algorithm: A gentle introduction. *Machine Learning*.
- Bernazzani, L., Duce, C., Micheli, A., Mollica, V., Sperduti, A., Starita, A., and Tine, M. (2006). Predicting physical-chemical properties of compounds from molecular structures by recursive neural networks. *J. Chem. Inf. Model.*, 46:2030–2042.
- Bertsekas, D. P. (1995). *Nonlinear Programming*. Athena Scientific, Belmont, MA.
- Bian, W., Xie, B., and Tao, D. (2012). Corrlog: Correlated logistic models for joint prediction of multiple labels. *Journal of Machine Learning Research - Proceedings Track*, pages 109–117.
- Bishop, C. M. (2007). *Pattern Recognition and Machine Learning (Information Science and Statistics)*. Springer, 1st ed. 2006. corr. 2nd printing 2011 edition.
- Block, H. D. (1962). The perceptron: A model for brain functioning. i. *Rev. Mod. Phys.*, 34:123–135.
- Boley, D. and Cao, D. (2004). Training support vector machine using adaptive clustering. In *in Proc. of the 4th SIAM International Conference on Data Mining, Lake Buena*.
- Bordes, A., Ertekin, S., Weston, J., and Bottou, L. (2005). Fast kernel classifiers with online and active learning. *J. Mach. Learn. Res.*, 6:1579–1619.
- Boser, B. E., Guyon, I. M., and Vapnik, V. N. (1992). A training algorithm for optimal margin classifiers. In *Proceedings of the 5th annual workshop on Computational learning theory*, pages 144–152. ACM.
- Breiman, L. (1996a). Bagging predictors. *Machine Learning*, 24(2):123–140.
- Breiman, L. (1996b). Out-of-bag estimation. Technical report, Statistics Department, University of California, Berkeley.
- Breiman, L. (2001). Random forests. *Machine Learning*, 45(1):5–32.
- Brinker, K. and Hüllermeier, E. (2007). Case-based multilabel ranking. In *Proceedings of the 20th International Joint Conference on Artificial Intelligence, IJCAI'07*, pages 702–707, San Francisco, CA, USA. Morgan Kaufmann Publishers Inc.
- Brown, G. and Kuncheva, L. I. (2010). “good” and “bad” diversity in majority vote ensembles. In *Multiple Classifier Systems*, pages 124–133. Springer.
- Burbridge, R., Trotter, M., Buxton, B., and Holden, S. (2001). Drug design by machine learning: support vector machines for pharmaceutical data analysis. *Computers and Chemistry*, 26(1):5 – 14.
- Byvatov, E., Fechner, U., Sadowski, J., and Schneider, G. (2003). Comparison of support vector machine and artificial neural network systems for drug/nondrug classification. *J. Chem. Inf. Comput. Sci.*, 43:1882–1889.

- Caruana, R. (1997). Multitask learning. *Mach. Learn.*, 28(1):41–75.
- Ceroni, A., Costa, F., and Frasconi, P. (2007a). Classification of small molecules by two- and three-dimensional decomposition kernels. *Bioinformatics*, 23:2038–2045.
- Ceroni, A., Costa, F., and Frasconi, P. (2007b). Classification of small molecules by two- and three-dimensional decomposition kernels. *Bioinformatics*, 23(16):2038–2045.
- Chang, C.-C. and Lin, C.-J. (2011). Libsvm: A library for support vector machines. *ACM Trans. Intell. Syst. Technol.*, 2(3):27:1–27:27.
- Chen, S. and Rosenfeld, R. (1999). *A Gaussian Prior for Smoothing Maximum Entropy Models*. PhD thesis, Computer Science Department, Carnegie Mellon University. Technical Report CMU-CS-99-108.
- Chen, S. and Rosenfeld, R. (2000). A survey of smoothing techniques for me models. *Speech and Audio Processing, IEEE Transactions on*, 8(1):37–50.
- Cheng, W. and Hüllermeier, E. (2009). Combining instance-based learning and logistic regression for multilabel classification. *Machine Learning*, 76(2-3):211–225.
- Chiang, T.-H., Lo, H.-Y., and Lin, S.-D. (2012). A ranking-based knn approach for multi-label classification. In Hoi, S. C. H. and Buntine, W. L., editors, *ACML*, volume 25 of *JMLR Proceedings*, pages 81–96. JMLR.org.
- Chickering, D. M., Geiger, D., and Heckerman, D. (1994). Learning bayesian networks is np-hard. Technical Report MSR-TR-94-17, Microsoft Research.
- Collins, M. (2002). Discriminative training methods for hidden markov models: Theory and experiments with perceptron algorithms. In *Proceedings of the ACL-02 Conference on Empirical Methods in Natural Language Processing*, pages 1–8. Association for Computational Linguistics.
- Collins, M. and Duffy, N. (2002). New ranking algorithms for parsing and tagging: Kernels over discrete structures, and the voted perceptron. In *Proceedings of the 40th Annual Meeting on Association for Computational Linguistics*, pages 263–270, Stroudsburg, PA, USA. Association for Computational Linguistics.
- Collins, M. and Koo, T. (2005). Discriminative reranking for natural language parsing. *Comput. Linguit.*, 31(1):25–70.
- Collobert, R., Bengio, S., and Bengio, Y. (2002). A parallel mixture of svms for very large scale problems. *Neural Computation*, 14(5):1105–1114.
- Cortes, C., Kuznetsov, V., and Mohri, M. (2014a). Ensemble methods for structured prediction. In *Proceedings of the 31th International Conference on Machine Learning (ICML 2004)*, pages 823–830. JMLR.org.
- Cortes, C., Mohri, M., and Syed, U. (2014b). Deep boosting. In *Proceedings of the 31th International Conference on Machine Learning (ICML 2004)*, pages 823–830. JMLR.org.
- Cortes, C. and Vapnik, V. (1995). Support-vector networks. *Machine Learning*, 20(3):273–297.

- Crammer, K., Singer, Y., K, J., Hofmann, T., Poggio, T., and Shawe-taylor, J. (2003). A family of additive online algorithms for category ranking. *Journal of Machine Learning Research*, 3:2003.
- Daneshmand, H., Gomez-Rodriguez, M., Song, L., and Schoelkopf, B. (2014). Estimating diffusion network structures: Recovery conditions, sample complexity and soft-thresholding algorithm. In *Proceedings of the 31th International Conference on Machine Learning (ICML 2004)*, pages 823–830. JMLR.org.
- Darroch, J. and Ratcliff, D. (1972). Generalized iterative scaling for log-linear models. *Annals of Mathematical Statistics*, 43(4):25–40.
- Decoste, D. and Schölkopf, B. (2002). Training invariant support vector machines. *Machine Learning*, 46(1-3):161–190.
- Della Pietra, S., Della Pietra, V., and Lafferty, J. (1997). Inducing features of random fields. *Pattern Analysis and Machine Intelligence, IEEE Transactions on*, 19(4):380–393.
- Dembczynski, K., Cheng, W., and Hüllermeier, E. (2010). Bayes optimal multilabel classification via probabilistic classifier chains. In Fürnkranz, J. and Joachims, T., editors, *ICML*, pages 279–286. Omnipress.
- Demšar, J. (2006). Statistical comparisons of classifiers over multiple data sets. *J. Mach. Learn. Res.*, 7:1–30.
- Domingos, P. and Richardson, M. (2001). Mining the network value of customers. In *Proceedings of the Seventh ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, KDD ’01, pages 57–66, New York, NY, USA. ACM.
- Drineas, P. and Mahoney, M. W. (2005). On the nyström method for approximating a gram matrix for improved kernel-based learning. *J. Mach. Learn. Res.*, 6:2153–2175.
- Du, N., Liang, Y., Balcan, M.-F., and Song, L. (2014). Influence function learning in information diffusion networks. In *Proceedings of the 31th International Conference on Machine Learning (ICML 2004)*, pages 823–830. JMLR.org.
- Du, N., Song, L., Smola, A. J., and Yuan, M. (2012). Learning networks of heterogeneous influence. In *Advances in Neural Information Processing Systems (NIPS)*.
- Dunn, O. J. (1961). Multiple comparisons among means. *Journal of the American Statistical Association*, 56(293):52–64.
- Dutt, R. and Madan, A. K. (2012). Classification models for anticancer activity. *Mach. Learn.*, 12(23/24):2705.
- Efron, B. and Tibshirani, R. (1994). An introduction to the bootstrap (crc, boca raton, fl).
- Elisseeff, A. and Weston, J. (2001). A kernel method for multi-labelled classification. In *In Advances in Neural Information Processing Systems 14*, pages 681–687. MIT Press.
- Esuli, A., Fagni, T., and Sebastiani, F. (2008). Boosting multi-label hierarchical text categorization. *Information Retrieval*, 11(4):287–313.

- Fan, W. and Bifet, A. (2013). Mining big data: Current status, and forecast to the future. *SIGKDD Explor. Newsl.*, 14(2):1–5.
- Fine, S. and Scheinberg, K. (2002). Efficient svm training using low-rank kernel representations. *J. Mach. Learn. Res.*, 2:243–264.
- Fiscus, J. (1997). A post-processing system to yield reduced word error rates: Recognizer output voting error reduction (rover). In *Automatic Speech Recognition and Understanding, 1997. Proceedings., 1997 IEEE Workshop on*, pages 347–354.
- Fisher, S. R. A. (1959). Statistical methods and scientific inference.
- Freund, Y., Mansour, Y., and Schapire, R. E. (2004). Generalization bounds for averaged classifiers. *THE ANNALS OF STATISTICS*, 32:1698–1722.
- Freund, Y. and Schapire, R. E. (1997). A decision-theoretic generalization of on-line learning and an application to boosting. *J. Comput. Syst. Sci.*, 55(1):119–139.
- Freund, Y. and Schapire, R. E. (1999). Large margin classification using the perceptron algorithm. *Machine Learning*, 37(3):277–296.
- Friedman, M. (1937). The use of ranks to avoid the assumption of normality implicit in the analysis of variance. *Journal of the American Statistical Association*, 32(200):pp. 675–701.
- Friedman, M. (1940). A Comparison of Alternative Tests of Significance for the Problem of m Rankings. *The Annals of Mathematical Statistics*, 11(1):86–92.
- Fürnkranz, J., Hüllermeier, E., Loza Mencía, E., and Brinker, K. (2008). Multilabel classification via calibrated label ranking. *Mach. Learn.*, 73(2):133–153.
- García, S. and Herrera, F. (2008). An extension on "statistical comparisons of classifiers over multiple data sets" for all pairwise comparisons. *J. Mach. Learn. Res.*, 9:2677–2694.
- Garey, M. R. and Johnson, D. S. (1990). *Computers and Intractability; A Guide to the Theory of NP-Completeness*. W. H. Freeman & Co., New York, NY, USA.
- Gärtner, T. (2003). A survey of kernels for structured data. *SIGKDD Explor. Newsl.*, 5(1):49–58.
- Getoor, L. (2005). Link-based classification. In *Advanced Methods for Knowledge Discovery from Complex Data*, Advanced Information and Knowledge Processing, pages 189–207. Springer London.
- Getoor, L. and Taskar, B. (2007). *Introduction to Statistical Relational Learning*. the MIT Press.
- Ghamrawi, N. and McCallum, A. (2005). Collective multi-label classification. In *Proceedings of the 14th ACM International Conference on Information and Knowledge Management*, CIKM '05, pages 195–200, New York, NY, USA. ACM.
- Globerson, A. and Jaakkola, T. S. (2007). Approximate inference using planar graph decomposition. In Schölkopf, B., Platt, J., and Hoffman, T., editors, *Advances in Neural Information Processing Systems 19*, pages 473–480. MIT Press.

- Godbole, S. and Sarawagi, S. (2004). Discriminative methods for multi-labeled classification. In Dai, H., Srikant, R., and Zhang, C., editors, *Advances in Knowledge Discovery and Data Mining*, volume 3056 of *Lecture Notes in Computer Science*, pages 22–30. Springer Berlin Heidelberg.
- Goemans, M. and Williamson, D. (1995). Improved approximation algorithms for maximum cut and satisfiability problems using semidefinite programming. *Journal of the ACM*, 42(6):1115 – 1145.
- Gomez Rodriguez, M., Leskovec, J., and Krause, A. (2010). Inferring networks of diffusion and influence. In *Proceedings of the 16th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, KDD ’10, pages 1019–1028, New York, NY, USA. ACM.
- Goodman, J. (2002). Sequential conditional generalized iterative scaling. In *Proceedings of the 40th Annual Meeting on Association for Computational Linguistics*, ACL ’02, pages 9–16.
- Goodman, J. (2003). Exponential priors for maximum entropy models. In *In Proceedings of the Annual Meeting of the Association for Computational Linguistics*, pages 305–312.
- Goodman, J. and tau Yih, W. (2006). Online discriminative spam filter training. In *CEAS’06*, pages –1–1.
- Goyal, A., Bonchi, F., and Lakshmanan, L. V. (2010). Learning influence probabilities in social networks. In *Proceedings of the Third ACM International Conference on Web Search and Data Mining*, WSDM ’10, pages 241–250, New York, NY, USA. ACM.
- Graf, H. P., Cosatto, E., Bottou, L., Durdanovic, I., and Vapnik, V. (2005). Parallel support vector machines: The cascade svm. In *In Advances in Neural Information Processing Systems*, pages 521–528. MIT Press.
- Gruhl, D., Guha, R., Liben-Nowell, D., and Tomkins, A. (2004). Information diffusion through blogspace. In *Proceedings of the 13th International Conference on World Wide Web*, WWW ’04, pages 491–501, New York, NY, USA. ACM.
- Hethcote, H. W. (2000). The mathematics of infectious diseases. *SIAM Review*, 42:599–653.
- Hoerl, A. E. and Kennard, R. W. (2000). Ridge regression: Biased estimation for nonorthogonal problems. *Technometrics*, 42(1):80–86.
- Hsieh, C.-J., Si, S., and Dhillon, I. (2014). A divide-and-conquer solver for kernel support vector machines. In *Proceedings of the 31th International Conference on Machine Learning (ICML 2014)*, pages 566–574. JMLR.org.
- Huang, F.-L., Hsieh, C.-J., Chang, K.-W., and Lin, C.-J. (2009). Iterative scaling and coordinate descent methods for maximum entropy. In *Proceedings of the ACL-IJCNLP 2009 Conference Short Papers*, pages 285–288.
- Jaakkola, T. S. and Haussler, D. (1999). Probabilistic kernel regression models. In *In Proceedings of the 7th Workshop on Artificial Intelligent and Statistics*. Morgan Kaufmann.

- jacob, L., Bach, F., and Vert, J.-P. (2009). Clustered multi-task learning: a convex formulation. In *Advances in Neural Information Processing Systems 16 (NIPS 2009)*, pages 25–32. MIT Press.
- Jin, R., Yan, R., Zhang, J., and Hauptmann, A. G. (2003). A faster iterative scaling algorithm for conditional exponential model. In *Proceedings of the 20th International Conference on Machine Learning (ICML-03)*, pages 282–289.
- Joachims, T. (1998). Making large-scale svm learning practical. LS8-Report 24, Universität Dortmund, LS VIII-Report.
- Joachims, T., Finley, T., and Yu, C.-N. (2009). Cutting-plane training of structural svms. *Machine Learning*, 77(1):27–59.
- Jordan, M. I. and Wainwright, M. J. (2004). Semidefinite relaxations for approximate inference on graphs with cycles. In Thrun, S., Saul, L., and Schölkopf, B., editors, *Advances in Neural Information Processing Systems 16*, pages 369–376. MIT Press.
- Kashima, H., Tsuda, K., and Inokuchi, A. (2003). Marginalized kernels between labeled graphs. In *Proceedings of the Twentieth International Conference on Machine Learning*, pages 321–328. AAAI Press.
- Kearns, M. and Valiant, L. (1989). Cryptographic limitations on learning boolean formulae and finite automata. *J. ACM*, 41(1):67–95.
- Keerthi, S., Duan, K., Shevade, S., and Poo, A. (2005). A fast dual algorithm for kernel logistic regression. *Machine Learning*, 61(1-3):151–165.
- Keerthi, S. S., Chapelle, O., and DeCoste, D. (2006). Building support vector machines with reduced classifier complexity. *J. Mach. Learn. Res.*, 7:1493–1515.
- Kempe, D., Kleinberg, J., and Tardos, E. (2003). Maximizing the spread of influence through a social network. In *Proceedings of the Ninth ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, KDD ’03, pages 137–146, New York, NY, USA. ACM.
- King, R. D., Muggleton, S. H., Srinivasan, A., and Sternberg, M. J. (1996). Structure-activity relationships derived by machine learning: the use of atoms and their bond connectivities to predict mutagenicity by inductive logic programming. *Proceedings of the National Academy of Sciences*, 93(1):438–442.
- Kocev, D., Vens, C., Struyf, J., and Deroski, S. (2013). Tree ensembles for predicting structured outputs. *Pattern Recogn.*, 46(3):817–833.
- Koller, D. and Friedman, N. (2009). *Probabilistic Graphical Models: Principles and Techniques*. The MIT Press.
- Koltchinskii, V. and Panchenko, D. (2000). Empirical margin distributions and bounding the generalization error of combined classifiers. *Annals of Statistics*, 30:2002.
- Komarek, P. and Moore, A. (1999). Convolution kernels on discrete structures. Technical Report UCSC-CRL-99-10, University of California at Santa Cruz.

- Komarek, P. and Moore, A. (2005). Making logistic regression a core data mining tool: A practical investigation of accuracy, speed, and simplicity. Technical Report CMU-RI-TR-05-27, Robotics Institute.
- Lafferty, J. D., McCallum, A., and Pereira, F. C. N. (2001). Conditional random fields: Probabilistic models for segmenting and labeling sequence data. In *Proceedings of the 8th International Conference on Machine Learning*, pages 282–289. Morgan Kaufmann Publishers Inc.
- Le, Q., Sarlos, T., and Smola, A. (2013). Fastfood - approximating kernel expansions in loglinear time. In *30th International Conference on Machine Learning (ICML)*.
- Leskovec, J., Backstrom, L., and Kleinberg, J. (2009). Meme-tracking and the dynamics of the news cycle. In *Proceedings of the 15th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, KDD ’09, pages 497–506, New York, NY, USA. ACM.
- Leskovec, J., McGlohon, M., Faloutsos, C., Glance, N., and Hurst, M. (2007). Cascading behavior in large blog graphs: Patterns and a model. In *Society of Applied and Industrial Mathematics: Data Mining (SDM07)*.
- Liben-Nowell, D. and Kleinberg, J. (2003). The link prediction problem for social networks. In *Proceedings of the Twelfth International Conference on Information and Knowledge Management*, CIKM ’03, pages 556–559, New York, NY, USA. ACM.
- Liben-Nowell, D. and Kleinberg, J. (2008). Tracing information flow on a global scale using Internet chain-letter data. *Proceedings of the National Academy of Sciences*, 105(12):4633–4638.
- Lin, C.-J., Weng, R. C., and Keerthi, S. S. (2008). Trust region newton method for logistic regression. *Journal of Machine Learning Research*, 9:627–650.
- Liu, F. T., Ting, K. M., Yu, Y., and Zhou, Z.-H. (2008). Spectrum of variable-random trees. *J. Artif. Int. Res.*, 32(1):355–384.
- Menchetti, S., Costa, F., and Frasconi, P. (2005). Weighted decomposition kernels. In *Proceedings of the 22Nd International Conference on Machine Learning*, ICML ’05, pages 585–592, New York, NY, USA. ACM.
- Minka, T. P. (2003). A comparison of numerical optimizers for logistic regression.
- Mohri, M., Pereira, F., and Riley, M. (2008). Speech recognition with weighted finite-state transducers. In Benesty, J., Sondhi, M., and Huang, Y., editors, *Springer Handbook of Speech Processing*, pages 559–584. Springer Berlin Heidelberg.
- Nemenyi, P. B. (1963). Distribution-free multiple comparisons. *PhD thesis, Princeton University*.
- Novikoff, A. B. (1962). On convergence proofs on perceptrons. *Symposium on the Mathematical Theory of Automata*, 12:615–622.
- Osuna, E., Freund, R., and Girosi, F. (1997). An improved training algorithm for support vector machines. In *Neural Networks for Signal Processing [1997] VII. Proceedings of the 1997 IEEE Workshop*, pages 276–285.

- Pavlov, D., Chudova, D., and Smyth, P. (2000). Towards scalable support vector machines using squashing. In *Proceedings of the Sixth ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, KDD '00, pages 295–299, New York, NY, USA. ACM.
- Petrov, S. (2010). Products of random latent variable grammars. In *Human Language Technologies: The 2010 Annual Conference of the North American Chapter of the Association for Computational Linguistics*, HLT '10, pages 19–27, Stroudsburg, PA, USA. Association for Computational Linguistics.
- Platt, J. (1998). Sequential minimal optimization: A fast algorithm for training support vector machines. Technical Report MSR-TR-98-14, Microsoft Research.
- Platt, J. C. (1999). Advances in kernel methods. chapter Fast Training of Support Vector Machines Using Sequential Minimal Optimization, pages 185–208. MIT Press, Cambridge, MA, USA.
- Pérez-cruz, O., Figueiras-vidal, A. R., and Artés-rodríguez, A. (2004). Double chunking for solving svms for very large datasets. In *Learning'04, Elche, Spain (2004)*.
- Rakotomamonjy, A., , Bach, F., Canu, S., and Grandvalet, Y. (2008). implemkl. *Journal of Machine Learning Research* 9.
- Ralaivola, L., Swamidass, S., Saigo, H., and Baldi, P. (2005). Graph kernels for chemical informatics. *Neural Networks*, 18:1093–1110.
- Ratliff, N., Bagnell, J. A. D., and Zinkevich, M. (2007). (online) subgradient methods for structured prediction. In *Proceedings of the 11th International Conference on Artificial Intelligence and Statistics (AISTATS 2007)*, volume 2. Journal of Machine Learning Research W&CP.
- Read, J., Pfahringer, B., Holmes, G., and Frank, E. (2009). Classifier chains for multi-label classification. In Buntine, W., Grobelnik, M., Mladenić, D., and Shawe-Taylor, J., editors, *Machine Learning and Knowledge Discovery in Databases*, volume 5782 of *Lecture Notes in Computer Science*, pages 254–269. Springer Berlin Heidelberg.
- Read, J., Pfahringer, B., Holmes, G., and Frank, E. (2011). Classifier chains for multi-label classification. *Mach. Learn.*, 85(3):333–359.
- Richardson, M., Prakash, A., and Brill, E. (2006). Beyond pagerank: Machine learning for static ranking. In *Proceedings of the 15th International Conference on World Wide Web*, WWW '06, pages 707–715, New York, NY, USA. ACM.
- Rodriguez, M. G., Balduzzi, D., and Schölkopf, B. (2011). Uncovering the temporal dynamics of diffusion networks. In Getoor, L. and Scheffer, T., editors, *Proceedings of the 28th International Conference on Machine Learning (ICML-11)*, pages 561–568, New York, NY, USA. ACM.
- Rogers, E. M. (2003). *Diffusion of Innovations*. The Free Press, 5th ed. 2003 edition.
- Romera-Paredes, B., Argyriou, A., Berthouze, N., and Pontil, M. (2012). Exploiting unrelated tasks in multi-task learning. In Lawrence, N. D. and Girolami, M., editors, *AISTATS*, volume 22 of *JMLR Proceedings*, pages 951–959. JMLR.org.

- Rosenblatt, F. (1958). The perceptron: A probabilistic model for information storage and organization in the brain. *Psychological Review*, 65:386–408.
- Rosenblatt, F. (1962). Principles of neurodynamics.
- Rousu, J., Saunders, C., Szedmak, S., and Shawe-Taylor, J. (2006). Kernel-Based Learning of Hierarchical Multilabel Classification Models. *The Journal of Machine Learning Research*, 7:1601–1626.
- Rousu, J., Saunders, C., Szedmak, S., and Shawe-Taylor, J. (2007). Efficient algorithms for max-margin structured classification. *Predicting Structured Data*, pages 105–129.
- Sagae, K. and Lavie, A. (2006). Parser combination by reparsing. In *Proceedings of the Human Language Technology Conference of the NAACL, Companion Volume: Short Papers*, NAACL-Short ’06, pages 129–132, Stroudsburg, PA, USA. Association for Computational Linguistics.
- Saito, K., Nakano, R., and Kimura, M. (2008). Prediction of information diffusion probabilities for independent cascade model. In Lovrek, I., Howlett, R., and Jain, L., editors, *Knowledge-Based Intelligent Information and Engineering Systems*, volume 5179 of *Lecture Notes in Computer Science*, pages 67–75. Springer Berlin Heidelberg.
- Schapire, R. and Singer, Y. (1999). Improved boosting algorithms using confidence-rated predictions. *Machine Learning*, 37(3):297–336.
- Schapire, R. E. (1990). The strength of weak learnability. *Mach. Learn.*, 5(2):197–227.
- Schapire, R. E., Freund, Y., Bartlett, P., and Lee, W. S. (1997). Boosting the margin: A new explanation for the effectiveness of voting methods. In *Proceedings of the Fourteenth International Conference on Machine Learning*, ICML ’97, pages 322–330, San Francisco, CA, USA. Morgan Kaufmann Publishers Inc.
- Schwaighofer, A. and Tresp, V. (2001). The bayesian committee support vector machine. In Dorffner, G., Bischof, H., and Hornik, K., editors, *Artificial Neural Networks — ICANN 2001*, volume 2130 of *Lecture Notes in Computer Science*, pages 411–417. Springer Berlin Heidelberg.
- Schölkopf, B. and Smola, A. J. (2002). *Learning with Kernels - Support Vector Machines, Regularization, Optimization, and Beyond*. MIT Press.
- Shawe-Taylor, J. and Cristianini, N. (2004). *Kernel Methods for Pattern Analysis*. Cambridge University Press.
- Shoemaker, R. H. (2006). The NCI60 human tumour cell line anticancer drug screen. *Nat Rev Cancer*, 6(10):813–823.
- Si, S., jui Hsieh, C., and Dhillon, I. (2014). Memory efficient kernel approximation. In Jebara, T. and Xing, E. P., editors, *Proceedings of the 31st International Conference on Machine Learning (ICML-14)*, pages 701–709. JMLR Workshop and Conference Proceedings.
- Smola, A. J. and Schölkopf, B. (2000). Sparse greedy matrix approximation for machine learning. In *Proceedings of the Seventeenth International Conference on Machine Learning*, ICML ’00, pages 911–918, San Francisco, CA, USA. Morgan Kaufmann Publishers Inc.

- Smyth, P. and Wolpert, D. (1999). Linearly combining density estimators via stacking. *Machine Learning*, 36(1-2):59–83.
- Strang, D. and Soule, S. A. (1998). Diffusion in Organizations and Social Movements: From Hybrid Corn to Poison Pills. *Annual Review of Sociology*, 24(1):265–290.
- Swamidass, S., Chen, J., Bruand, J., Phung, P., Ralaivola, L., and Baldi, P. (2005). Kernels for small molecules and the prediction of mutagenicity, toxicity and anti-cancer activity. *Bioinformatics*, 21:359–368.
- Taskar, B., Abbeel, P., and Koller, D. (2002). Discriminative probabilistic models for relational data. In *Proceedings of the Eighteenth Conference on Uncertainty in Artificial Intelligence*, UAI'02, pages 485–492, San Francisco, CA, USA. Morgan Kaufmann Publishers Inc.
- Taskar, B., Guestrin, C., and Koller, D. (2004). Max-margin markov networks. In *Advances in Neural Information Processing Systems 16 (NIPS 2004)*, pages 25–32. MIT Press.
- Taskar, B., Lacoste-Julian, S., and Jordan, M. I. (2006). Structured prediction via the extragradient method. In *Advances in Neural Information Processing Systems 18 (NIPS 2006)*, pages 1345–1352. MIT Press.
- Tibshirani, R. (1994). Regression shrinkage and selection via the lasso. *Journal of the Royal Statistical Society, Series B*, 58:267–288.
- Tibshirani, R. (1996). Bias, variance and prediction error for classification rules.
- Tresp, V. (2000). A bayesian committee machine. *NEURAL COMPUTATION*, 12:2000.
- Trotter, M., Buxton, M., and Holden, S. (2001). Drug design by machine learning: support vector machines for pharmaceutical data analysis. *Comp. and Chem.*, 26:1–20.
- Tsochantaridis, I., Hofmann, T., Joachims, T., and Altun, Y. (2004). Support vector machine learning for interdependent and structured output spaces. In *Proceedings of the 21th International Conference on Machine Learning (ICML 2004)*, pages 823–830, New York, NY, USA. ACM.
- Tsochantaridis, I., Joachims, T., Hofmann, T., and Altun, Y. (2005). Large margin methods for structured and interdependent output variables. *Journal of Machine Learning Research*, 6:1453–1484.
- Tsoumakas, G. and Katakis, I. (2007). Multi-label classification: An overview. *Int J Data Warehousing and Mining*, 2007:1–13.
- Tsoumakas, G., Katakis, I., and Vlahavas, I. (2010). Mining multi-label data. In Maimon, O. and Rokach, L., editors, *Data Mining and Knowledge Discovery Handbook*, pages 667–685. Springer US.
- Tsoumakas, G. and Vlahavas, I. (2007). Random k-labelsets: An ensemble method for multilabel classification. In Kok, J., Koronacki, J., Mantaras, R., Matwin, S., Mladenić, D., and Skowron, A., editors, *Machine Learning: ECML 2007*, volume 4701 of *Lecture Notes in Computer Science*, pages 406–417. Springer Berlin Heidelberg.

- Tukey, J. W. (1949). Comparing individual means in the analysis of variance. *Biometrics*, 5(2):99–114.
- Vapnik, V. (1982). *Estimation of Dependences Based on Empirical Data*. Springer-Verlag.
- Vapnik, V. (1992). Principles of risk minimization for learning theory. In Moody, J., Hanson, S., and Lippmann, R., editors, *Advances in Neural Information Processing Systems 4*, pages 831–838. Morgan-Kaufmann.
- Vapnik, V. N. (1998). *Statistical Learning Theory*. Wiley-Interscience.
- Vapnik, V. N. (1999). An overview of statistical learning theory. *Trans. Neur. Netw.*, 10(5):988–999.
- Vishwanathan, S. V. N., Schraudolph, N. N., Kondor, R., and Borgwardt, K. M. (2010). Graph kernels. *J. Mach. Learn. Res.*, 11:1201–1242.
- Wainwright, M., Jaakkola, T., and Willsky, A. (2005). Map estimation via agreement on trees: message-passing and linear programming. *IEEE Transactions on Information Theory*, 51(11):3697–3717.
- Wang, Q. I., Lin, D., and Schuurmans, D. (2007). Simple training of dependency parsers via structured boosting. In *Proceedings of the 20th International Joint Conference on Artificial Intelligence*, IJCAI'07, pages 1756–1762, San Francisco, CA, USA. Morgan Kaufmann Publishers Inc.
- Wang, Y., Xiao, J., Suzek, T. O., Zhang, J., Wang, J., and Bryant, S. H. (2009). Pubchem: a public information system for analyzing bioactivities of small molecules. *Nucleic Acids Research*, 37(suppl 2):W623–W633.
- Wolpert, D. and Macready, W. (1999). An efficient method to estimate bagging’s generalization error. *Machine Learning*, 35(1):41–55.
- Xue, Y., Li, Z., Yap, C., Sun, L., Chen, X., and Chen, Y. (2004). Effect of molecular descriptor feature selection in support vector machine classification of pharmacokinetic and toxicological properties of chemical agents. *J. Chem. Inf. Comput. Sci.*, 44:1630–1638.
- Yan, R., Tesic, J., and Smith, J. R. (2007). Model-shared subspace boosting for multi-label classification. In *Proceedings of the 13th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, KDD ’07, pages 834–843, New York, NY, USA. ACM.
- Younes, Z., Abdallah, F., Denoeux, T., and Snoussi, H. (2011). A dependent multilabel classification method derived from the k-nearest neighbor rule. *EURASIP J. Adv. Sig. Proc.*, 2011.
- Yu, H., Yang, J., Han, J., and Li, X. (2005). Making svms scalable to large data sets using hierarchical cluster indexing. *Data Min. Knowl. Discov.*, 11(3):295–321.
- Yu, H.-F., Huang, F.-L., and Lin, C.-J. (2011). Dual coordinate descent methods for logistic regression and maximum entropy models. *Machine Learning*, 85(1-2):41–75.

- Zeman, D. and Žabokrtský, Z. (2005). Improving parsing accuracy by combining diverse dependency parsers. In *Proceedings of the Ninth International Workshop on Parsing Technology*, Parsing '05, pages 171–178, Stroudsburg, PA, USA. Association for Computational Linguistics.
- Zhang, H., Zhang, M., Tan, C. L., and Li, H. (2009). K-best combination of syntactic parsers. In *Proceedings of the 2009 Conference on Empirical Methods in Natural Language Processing: Volume 3 - Volume 3*, EMNLP '09, pages 1552–1560, Stroudsburg, PA, USA. Association for Computational Linguistics.
- Zhang, K., Lan, L., Wang, Z., and Moerchen, F. (2012). Scaling up kernel svm on limited resources: A low-rank linearization approach. In Lawrence, N. D. and Girolami, M. A., editors, *Proceedings of the Fifteenth International Conference on Artificial Intelligence and Statistics (AISTATS-12)*, volume 22, pages 1425–1434.
- Zhang, K., Tsang, I. W., and Kwok, J. T. (2008). Improved nyström low-rank approximation and error analysis. In *Proceedings of the 25th International Conference on Machine Learning*, ICML '08, pages 1232–1239, New York, NY, USA. ACM.
- Zhang, M. and Zhou, Z. (2005). A k-nearest neighbor based algorithm for multi-label classification. In *Granular Computing, 2005 IEEE International Conference on*, volume 2, pages 718–721 Vol. 2.
- Zhang, M. and Zhou, Z. (2007). Ml-knn: A lazy learning approach to multi-label learning. *PATTERN RECOGNITION*, 40:2007.
- Zhang, M.-L. and Zhou, Z.-H. (2006). Multilabel neural networks with applications to functional genomics and text categorization. *Knowledge and Data Engineering, IEEE Transactions on*, 18(10):1338–1351.
- Zhang, M.-L. and Zhou, Z.-H. (2014). A review on multi-label learning algorithms. *Knowledge and Data Engineering, IEEE Transactions on*, 26(8):1819–1837.
- Zou, H. and Hastie, T. (2005). Regularization and variable selection via the elastic net. *Journal of the Royal Statistical Society, Series B*, 67:301–320.



# Publication I

**Hongyu Su, Aristides Gionis, Juho Rousu.** Structured Prediction of Network Response. In *Proceedings of the 31<sup>th</sup> International Conference on Machine Learning (ICML 2014)*, Beijing, China, 2014. JMLR W&CP volume 32:442-450, June 2014.

© 2014 Copyright 2014 by the authors.  
Reprinted with permission.



---

# Structured Prediction of Network Response

---

Hongyu Su  
Aristides Gionis  
Juho Rousu

Helsinki Institute for Information Technology (HIIT)  
Department of Information and Computer Science, Aalto University, Finland

HONGYU.SU@AALTO.FI  
ARISTIDES.GIONIS@AALTO.FI  
JUHO.ROUSU@AALTO.FI

## Abstract

We introduce the following *network response* problem: given a complex network and an action, predict the subnetwork that responds to action, that is, which nodes perform the action and which directed edges relay the action to the adjacent nodes.

We approach the problem through max-margin structured learning, in which a compatibility score is learned between the actions and their activated subnetworks. Thus, unlike the most popular influence network approaches, our method, called SPIN, is *context-sensitive*, namely, the presence, the direction and the dynamics of influences depend on the properties of the actions. The inference problems of finding the highest scoring as well as the worst margin violating networks, are proven to be NP-hard. To solve the problems, we present an approximate inference method through a semi-definite programming relaxation (SDP), as well as a more scalable greedy heuristic algorithm.

In our experiments, we demonstrate that taking advantage of the context given by the actions and the network structure leads SPIN to a markedly better predictive performance over competing methods.

## 1. Introduction

With the widespread use and extensive availability of large-scale networks, an increasing amount of research has been proposed to study the structure and function of networks. In particular, network analysis has been applied to study dynamic phenomena and complex interactions, such as

*Proceedings of the 31<sup>st</sup> International Conference on Machine Learning*, Beijing, China, 2014. JMLR: W&CP volume 32. Copyright 2014 by the author(s).

information propagation, opinion formation, adoption of technological innovations, viral marketing, and disease spreading (De Choudhury et al., 2010; Kempe et al., 2003; Watts & Dodds, 2007).

Influence models typically consider *actions* performed by the network nodes. Examples of such actions include buying a product or (re)posting a news story in one's social network. Often, network nodes perform such actions as a result of influence from neighbouring nodes, and a number of different models have been proposed to quantify influence in a network, most notably the independent-cascade and the linear-threshold models (Kempe et al., 2003). On the other hand, performing an action may also come as a result to an external (out of the network) stimulus, a situation that has also been subject to modeling and analysis (Anagnostopoulos et al., 2008). A typical assumption made by existing models is that influence among nodes depends only on the nodes that perform the action and not on the action itself.

A central question in the study of network influence, is to infer the latent structure that governs the influence dynamics. This question can be formulated in different ways. In one case no underlying network is available (for example, news agencies that do not link each other) and one asks to infer the hidden network structure, e.g., to discover implicit edges between the network nodes (De Choudhury et al., 2010; Du et al., 2012; Eagle et al., 2009; Gomez-Rodriguez et al., 2010; 2011). However, this problem is an unnecessarily hard one to solve in many applications. On the other hand, in many applications the network is known (e.g., "follower" links in twitter), and the research question is to estimate the hidden variables of the influence model (Goyal et al., 2010; Saito et al., 2008).

The present paper is motivated by the following observation: the influence between two nodes in the network does not depend only on the nodes and their connections, but also depends on the action under consideration. For example, if  $u$  and  $v$  represent users in twitter,  $v$  may be influenced from  $u$  regarding topics related to *science* but not

regarding topics related to, say, *politics*. Thus, in our view, the influence model needs to be *context-sensitive*.

We thus consider the following *network response* problem: given an action, predict which nodes in the network will perform it and along which edges the action will spread. We approach the problem via structured output learning that models the activated *response network* as a directed graph. We learn a function for mappings between action descriptions and the response subnetwork. Given an action, the model is able to predict a directed subnetwork that is most favourable to performing the action.


## 2. Preliminaries

We consider a *directed* network  $G = (V, E)$  where the nodes  $v \in V$  represent entities, and edges  $e = (u, v) \in E$  represent relationships among entities. As discussed in the introduction, for each edge  $(u, v)$  we assume that node  $v$  can be influenced by node  $u$ . In real applications, some networks are directed (e.g., follower networks), while other networks are undirected (e.g., friendship networks). For simplicity of exposition, and without loss of generality we formulate our problem for directed networks; indeed an undirected edge can be modeled by considering pair of directed edges. In our experiments we also consider undirected networks.

In addition to other nodes, we allow the nodes to be influenced by external stimuli, modelled by a *root* node  $r$ , which is connected to all other nodes in the network, namely  $(r, v) \in E$ , for all  $v \in V \setminus \{r\}$ . Reversely, no node can influence  $r$ , so  $(v, r) \notin E$ , for all  $v \in V \setminus \{r\}$ .

The second ingredient of our model consists of the actions performed by the network nodes. We write  $A$  to denote the underlying *action space*, that is, the set of all possible actions, and we use  $\mathbf{a}$  to indicate a particular action in  $A$ . We assume that actions in  $A$  are represented using a feature map  $\phi : A \rightarrow \mathcal{F}_A$  to an associated inner product space  $\mathcal{F}_A$ . For example,  $\mathcal{F}_A$  can be a vector space of dimension  $k$ , where each action  $\mathbf{a}$  is represented by a  $k$ -dimensional vector  $\phi(\mathbf{a})$ . In the social-network application discussed in the introduction, where actions  $\mathbf{a}$  correspond to news articles posted by users,  $\phi(\mathbf{a})$  can be the bag-of-words representation of the news article  $\mathbf{a}$ .

We assume that the network gets exposed to an action  $\mathbf{a} \in A$ , and in response a subgraph  $G_{\mathbf{a}} = (V_{\mathbf{a}}, E_{\mathbf{a}}) \subseteq G$ , called the *response network* gets activated. The nodes  $V_{\mathbf{a}} \subseteq V$  are the ones that get activated and  $E_{\mathbf{a}} \subseteq E$  is the set of induced edges. We assume that the root  $r$  is always activated, i.e.,  $r \in V_{\mathbf{a}}$ . Note that even though  $r$  is directly connected to each node  $v \in V_{\mathbf{a}}$ , in every response network  $G_{\mathbf{a}}$ , some nodes in  $V_{\mathbf{a}}$  may exercise on  $v$  stronger influence than the influence that  $r$  exercises on  $v$ . The nodes that get directly

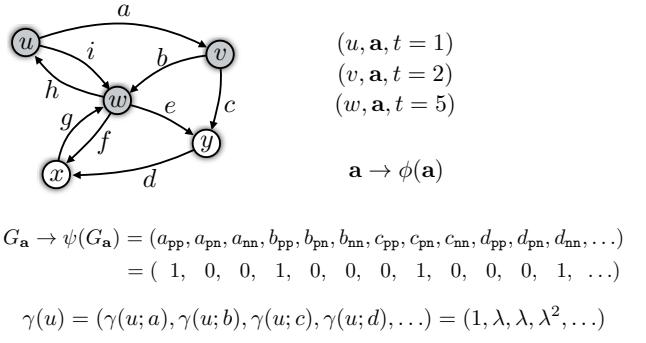

*Figure 1.* An action  $\mathbf{a}$  performed by nodes  $u, v, w$  of a directed network at times 1, 2, 5, respectively. Nodes  $x$  and  $y$  do not perform the action. The action  $\mathbf{a}$  is represented by input feature map  $\phi(\mathbf{a})$ . The response network  $G_{\mathbf{a}}$  is represented by output feature map  $\psi(G_{\mathbf{a}})$  that encodes the propagation of the action  $\mathbf{a}$  with respect to edge  $e$  (details in the text). Finally,  $\gamma$  is a scaling function (see Sec. 3.4). For instance,  $\gamma(u)$  represents a vector of exponentially-decaying weights for node  $u$  with respect to all edges.

activated by the root node  $r$  as a response to an action are called the *focal points* or *foci* of the response network.

We assume a dataset  $\{(\mathbf{a}_i, G_{\mathbf{a}_i})\}_{i=1}^m$  of  $m$  training examples, where each example  $(\mathbf{a}_i, G_{\mathbf{a}_i})$  consists of an action  $\mathbf{a}_i$  and the output  $G_{\mathbf{a}_i}$  encoding the response network activated by  $\mathbf{a}_i$ . Our intention is to build a model that given a previously unobserved action  $\mathbf{a}$ , predicts the response network  $G_{\mathbf{a}}$ .

## 3. Model for network responses

### 3.1. Structured-prediction model

Our method is based on embedding the input and output into a joint feature space and learning in that space a linear compatibility score

$$F(\mathbf{a}, G_{\mathbf{a}}; \mathbf{w}) = \langle \mathbf{w}, \varphi(\mathbf{a}, G_{\mathbf{a}}) \rangle.$$

The score  $F(\mathbf{a}, G_{\mathbf{a}}; \mathbf{w})$  is given by the inner product of parameters  $\mathbf{w}$  and the joint feature  $\varphi(\mathbf{a}, G_{\mathbf{a}})$ . As the joint feature we will use the tensor product  $\varphi(\mathbf{a}, G_{\mathbf{a}}) = \phi(\mathbf{a}) \otimes \psi(G_{\mathbf{a}})$  of the input feature map  $\phi(\mathbf{a})$  of action  $\mathbf{a}$ , and the output feature map  $\psi(G_{\mathbf{a}})$  that represents the response network  $G_{\mathbf{a}}$  to the action  $\mathbf{a}$ . The tensor product  $\varphi(\mathbf{a}, G_{\mathbf{a}})$  consists of all pairs of input and output features  $\varphi_{ij}(\mathbf{a}, G_{\mathbf{a}}) = \phi_i(\mathbf{a})\psi_j(G_{\mathbf{a}})$ .

The output features will encode the activated subgraph in the network. We use labels  $\{\text{p}, \text{n}\}$  to indicate whether nodes perform an action (positive vs. negative). Similarly, we use edge labels  $\{\text{pp}, \text{pn}, \text{nn}\}$  to indicate the role of edges in the propagation of actions. In particular, for each edge  $(u, v) = e$  of a response network  $G_{\mathbf{a}}$  and each label  $\ell \in \{\text{pp}, \text{pn}, \text{nn}\}$  we define the feature  $\psi_{e,\ell}(G_{\mathbf{a}})$  to

be 1 if and only if  $e$  is of type  $\ell$  in  $G_{\mathbf{a}}$  (and 0 otherwise). For example,  $\psi_{(u,v),\text{pp}}(G_{\mathbf{a}}) = 1$  indicates that both nodes  $u$  and  $v$  are activated in  $G_{\mathbf{a}}$  and  $u$  precedes  $v$  in the partial order of activation.

An example of the model is shown in Figure 1. For the sake of brevity in the figure, we abuse notation and we use  $e_\ell$  to denote  $\psi_{e,\ell}(G_{\mathbf{a}})$ . For instance, in this example we have  $a_{\text{pp}} = (u,v)_{\text{pp}} = 1$  since both  $u$  and  $v$  are activated and  $u$  precedes  $v$  in the activation order, and thus it is possible that  $u$  has influenced  $v$ .

### 3.2. Maximum-margin structured learning

The feature weight parameters  $\mathbf{w}$  of the compatibility score function  $F$  are learned by solving a regularized structured-output learning problem

$$\begin{aligned} \min_{\mathbf{w}, \xi} \quad & \frac{1}{2} \|\mathbf{w}\|_2^2 + C \sum_{i=1}^m \xi_i, \\ \text{s.t.} \quad & F(\mathbf{a}_i, G_{\mathbf{a}_i}; \mathbf{w}) > \underset{G'_{\mathbf{a}_i} \in \mathcal{H}(G)}{\text{argmax}} (F(\mathbf{a}_i, G'_{\mathbf{a}_i}; \mathbf{w}) \\ & + \ell_G(G'_{\mathbf{a}_i}, G_{\mathbf{a}_i})) - \xi_i, \xi_i \geq 0, \forall i = \{1, \dots, m\}. \end{aligned} \quad (1)$$

The impact of the constraints on the above optimization problem is to push the compatibility score of input  $\mathbf{a}_i$  with output  $G_{\mathbf{a}_i}$  above the scores of all competing outputs  $G'_{\mathbf{a}_i} \in \mathcal{H}(G)$  with a margin proportional to the loss  $\ell_G(G'_{\mathbf{a}_i}, G_{\mathbf{a}_i})$  between the correct  $G_{\mathbf{a}_i}$  and any competing subgraph  $G'_{\mathbf{a}_i}$ .  $\mathcal{H}(G)$  is the set of directed acyclic subgraphs of  $G$  rooted at  $r$ . The slack variable  $\xi_i$  is used to relax the constraints so that a feasible solution can always be found.  $C$  is a slack parameter that controls the amount of regularization in the model. The objective minimizes an  $L_2$ -norm regularizer of the weight vector and the slack allocated to the training set. This is equivalent to maximizing the margin subject to allowing some data to be outliers. In practice, the optimization problem (Eq. 1) is tackled by marginal dual conditional gradient optimization (Rousu et al., 2007).

### 3.3. The inference problem

In the structured prediction model, both in training and in prediction, we need to solve the problem of finding the highest-scoring subgraph for an action. The two problems differ only in the definition of the score: in training we need to iteratively find the subgraph that violates its margins the most, whilst in prediction we need to find the subgraph with the maximum compatibility to a given action. We explain our inference algorithms for the latter problem and note that the first problem is a straightforward variant.

Given feature weights  $\mathbf{w}$  and a network  $G = (V, E)$ , the prediction for a new input action  $\mathbf{a}$  is the maximally-

scoring response graph  $H^* = (V^H, E^H)$

$$H^*(\mathbf{a}) = \underset{H \in \mathcal{H}(G)}{\text{argmax}} F(\mathbf{a}, H; \mathbf{w}).$$

Writing this problem explicitly, in terms of the parameters and the feature maps gives

$$\begin{aligned} H^*(\mathbf{a}) &= \underset{H \in \mathcal{H}(G)}{\text{argmax}} \langle \mathbf{w}, \phi(\mathbf{a}) \otimes \psi(H) \rangle \\ &= \underset{H \in \mathcal{H}(G)}{\text{argmax}} \sum_{e \in E^H} s_{y_e}(e, \mathbf{a}), \end{aligned} \quad (2)$$

where we have substituted  $s_{y_e}(e, \mathbf{a}) = \sum_i w_{i,e,y_e} \phi_i(\mathbf{a})$ . We will abbreviate  $s_{y_e}(e, \mathbf{a})$  to  $s_{y_e}(e)$ , as the action  $\mathbf{a}$  is fixed for an individual inference problem. The output response network  $H$  can be specified by a node label  $y_v \in \{\text{p}, \text{n}\}$ , where  $y_v = \text{p}$  if and only if  $v$  is activated. We write  $H_y$  to emphasize the dependence of the output subgraph  $H$  from labelling  $y$ . The node labels  $y_v$  induce edge labels  $y_e$ . The score function  $s(e)$  can be interpreted as a score function for the edges, given by the current input  $\mathbf{a}$  and weight vector  $\mathbf{w}$ . The variable  $y_e$  indicates the possible labels of an edge  $e$ , and for each possible label the score function  $s(e)$  assigns a different score. Depending on the values that  $y_e$  can take, the inference problem can be further diverged into two modes:

**Activation mode.** We assume  $y_e \in \{\text{pp}, \text{pn}\}$  where  $y_e = \text{pp}$  implies node  $v$  is activated by  $u$  via a directed edge  $e = (u, v)$ , and  $y_e = \text{pn}$  means that the activation cannot pass through  $e$ . In activation mode, the inference problem is transformed as finding the maximally scoring node label  $y_v$  and corresponding edge label  $y_e$ , consistent with an activated subgraph  $H_y$  given a set of edge scores  $s_{y_e}(e)$ .

**Negative-feed mode.** In addition to the setting in activation mode, we also explicitly model the inactive network by assume  $y_e \in \{\text{pp}, \text{pn}, \text{nn}\}$ , where by  $y_e = \text{nn}$  we denote our belief that both  $u$  and  $v$  should be inactive given action  $\mathbf{a}$ . The inference problem is then to find the maximally scoring node labels and induced edge labels with regards to an activated subgraph together with the inactive counterpart given a set of edge score  $s_{y_e}(e)$ .

It is not difficult to show that the inference problem (Eq. 2) is NP-hard. The proof of the following lemma, which provides a reduction from the MAX-CUT problem, is given in the supplementary material.

**Lemma 1** *Finding the graph that maximizes Eq. (2) is an NP-hard problem.*

To solve the inference problem we propose two algorithms, described on the negative-feed mode. Similar techniques can be adapted to the activation-mode by setting edge score  $s_{\text{nn}}(e) = 0$ . The first algorithm is based on a semidefinite programming (SDP) relaxation, similar to the one

used for MAX-CUT and satisfiability problems (Goemans & Williamson, 1995). The SDP algorithm offers a constant-factor approximation guarantee for the inference problem. However, it requires solving semidefinite programs. Efficient solvers do exist, but the method is not scalable to large datasets. Besides, it cannot handle the order of activations. In contrast, our second approach is a more efficient GREEDY algorithm that models activation order in a natural way, but it does not provide any quality guarantee.

**The SDP inference.** Recall that for each edge  $(u, v) \in E$  we are given three scores:  $s_{\text{pp}}(u, v)$ ,  $s_{\text{pn}}(u, v)$ , and  $s_{\text{nn}}(u, v)$ . The inference problem is to assign a label p or n for each vertex  $u \in V$ . If a vertex  $u$  is assigned to label p we say that  $u$  is *activated*. If both vertices  $u$  and  $v$  of an edge  $(u, v) \in E$  are activated, a gain  $s_{\text{pp}}(u, v)$  incurs. Respectively, the assignments pn and nn yield gains  $s_{\text{pn}}(u, v)$  and  $s_{\text{nn}}(u, v)$ . The objective is to find the assignments that maximizes the total gain.

We formulate this optimization problem as a quadratic program. We introduce a variable  $x_u \in \{-1, +1\}$ , for each  $u \in V$ . We also introduce a special variable  $x_0 \in \{-1, +1\}$ , which is used to distinguish the activated vertices. In particular, if  $x_u = x_0$  we consider that the vertex  $u$  is assigned to label p, and thus it is activated, while  $x_u = -x_0$  implies that  $u$  is assigned to n and not activated. The network-response inference problem can now be written as (QP):

$$\begin{aligned} \max \frac{1}{4} \sum_{(u,v) \in E} & [s_{\text{pn}}(u, v)(1 + x_0 x_u - x_0 x_v - x_u x_v) \\ & + s_{\text{nn}}(u, v)(1 - x_0 x_u - x_0 x_v + x_u x_v) \\ & + s_{\text{pp}}(u, v)(1 + x_0 x_u + x_0 x_v + x_u x_v)], \\ \text{s.t. } & x_0, x_u, x_v \in \{-1, +1\}, \text{ for all } u, v \in V. \end{aligned}$$

The intuition behind the formulation of Problem (QP) is that there is gain  $s_{\text{pn}}(u, v)$  if  $x_0 = x_u = -x_v$ , a gain  $s_{\text{nn}}(u, v)$  if  $x_0 = -x_u = -x_v$ , and a gain  $s_{\text{pp}}(u, v)$  if  $x_0 = x_u = x_v$ .

To solve the problem (QP), we use the similar technique introduced by Goemans & Williamson (1995), such that each variable  $x_u$  is *relaxed* to a vector  $\mathbf{v}_u \in \mathbb{R}^n$ . The relaxed quadratic program becomes (RQP):

$$\begin{aligned} \max \frac{1}{4} \sum_{(u,v) \in E} & [s_{\text{pn}}(u, v)(1 + \mathbf{v}_0 \cdot \mathbf{v}_u - \mathbf{v}_0 \cdot \mathbf{v}_v - \mathbf{v}_u \cdot \mathbf{v}_v) \\ & + s_{\text{nn}}(u, v)(1 - \mathbf{v}_0 \cdot \mathbf{v}_u - \mathbf{v}_0 \cdot \mathbf{v}_v + \mathbf{v}_u \cdot \mathbf{v}_v) \\ & + s_{\text{pp}}(u, v)(1 + \mathbf{v}_0 \cdot \mathbf{v}_u + \mathbf{v}_0 \cdot \mathbf{v}_v + \mathbf{v}_u \cdot \mathbf{v}_v)], \\ \text{s.t. } & \mathbf{v}_i \in \mathbb{R}^n, \text{ for all } i = 0, \dots, n. \end{aligned}$$

Consider an  $(n+1) \times (n+1)$  matrix  $Y$  whose  $(u, v)$  entry is  $y_{u,v} = \mathbf{v}_u \cdot \mathbf{v}_v$ . If  $V$  is the matrix having  $\mathbf{v}_u$ 's as its

columns, i.e.,  $V = [\mathbf{v}_0 \dots \mathbf{v}_k]$ , then  $Y = V^T V$ , implying that the matrix  $Y$  is semidefinite, a fact we denote by  $Y \succeq 0$ . Problem (RQP) now becomes (SDP):

$$\begin{aligned} \max \frac{1}{4} \sum_{u,v=1}^k & [s_{\text{pn}}(u, v)(1 + y_{0,u} - y_{0,v} - y_{u,v}) \\ & + s_{\text{nn}}(u, v)(1 - y_{0,u} - y_{0,v} + y_{u,v}) \\ & + s_{\text{pp}}(u, v)(1 + y_{0,u} + y_{0,v} + y_{u,v})], \\ \text{s.t. } & Y \succeq 0. \end{aligned}$$

Problem (SDP) asks to find a semidefinite matrix, so that a linear function on the entries of the matrix is optimized. This problem can be solved by semidefinite programming within accuracy  $\epsilon$ , in time that it is polynomial on  $k$  and  $\frac{1}{\epsilon}$ . After solving the semidefinite program one needs to *round* each vector  $\mathbf{v}_u$  to the variable  $x_u \in \{-1, +1\}$  in the following way:

1. Factorize  $Y$  with Cholesky decomposition to find  $V = [\mathbf{v}_0, \mathbf{v}_1 \dots \mathbf{v}_n]$ .
2. Select a random vector  $\mathbf{r}$ .
3. For each  $u = 0, 1, \dots, n$ , if  $\mathbf{v}_u \cdot \mathbf{r} \geq 0$  set  $x_u = 1$ , otherwise set  $x_u = -1$ .

Let  $Z$  be the value of the solution obtained by the above algorithm. Let  $Z^*$  be the optimal value of Problem (QP) and  $Z_R$  the optimal value of Problem (SDP). Since Problem (SDP) is a relaxation of Problem (QP) it is  $Z_R \geq Z^*$ . Furthermore, it can be shown that for the *expected* value of  $Z$  it holds  $E[Z] \geq (\alpha - \epsilon)Z_R$ , with  $\alpha > 0.796$  and where expectation is taken over the choice of  $\mathbf{r}$ . Thus the above algorithm is a 0.796 approximation algorithm for Problem (QP).

**The GREEDY inference.** The inference (Eq. 2) is defined on all edges of the network, which can be expressed equivalently as a function of activated vertices (see details in supplementary)

$$H^*(\mathbf{a}) = \underset{H \in \mathcal{H}(G)}{\text{argmax}} \sum_{v_i \in V_p^H} F_m(v_i),$$

where  $V_p^H$  is a set of activated vertices.  $F_m(v_i)$  is the marginal gain on each node that is comprised partially from changing edge label from pn to pp on incoming edges  $\{(v_p, v_i) \mid v_p \in \text{parents}(v_i)\}$ , and partially from changing edge label from nn to pn on outgoing edges  $\{(v_i, v_c) \mid v_c \in \text{parents}(v_i)\}$  defined as

$$\begin{aligned} F_m(v_i) = & \sum_{v_p \in \text{parents}(v_i)} [s_{\text{pp}}(v_p, v_i) - s_{\text{pn}}(v_p, v_i)] \\ & + \sum_{v_c \in \text{children}(v_i)} [s_{\text{pn}}(v_i, v_c) - s_{\text{nn}}(v_i, v_c)]. \end{aligned}$$

It is difficult to maximize the sum of marginal gains as the activated subnetwork is unknown. One can instead compute for each vertex the maximized marginal gain  $\max_{v_i} F_m(v_i)$  in an iterative fashion as long as  $F_m(v_i) \geq 0$ , which leads to a greedy algorithm described as follows. The algorithm starts with an activated vertex set  $V_p^H = \{r\}$ . In each iteration, it chooses a vertex  $v_i \in V/V_p^H$  and adds to  $V_p^H$  such that  $v_i$  is the current maximizer of  $F_m(v)$ . The procedure terminates if the maximized gain is smaller than 0.  $E^H$  can be obtained by adding edges  $e = (v_i, v_j) \in E$ , if  $v_i, v_j \in V_p^H$  and  $v_i$  was added to  $V_p^H$  prior to  $v_j$ . The time complexity for greedy inference algorithm is  $O(|E| \log |V|)$ . See supplementary material for details of the algorithm.

We note that we have not been able to show an approximation guarantee for the quality of solutions produced by the GREEDY algorithm. A property that it is typically used to analyse greedy methods is *submodularity*. However, for this particular problem submodularity does not hold (it only holds in the special case of MAX-CUT, i.e., when  $s_{pp}(e) = s_{nn}(e) = 0$  and  $s_{pn}(e) = 1$ ).

### 3.4. Loss functions

Instead of penalizing prediction mistakes uniformly on the network  $G$ , we wish to focus in the vicinity of the response network. To achieve this effect we scale the loss accrued on the nodes and edges by their distance to the children of the root of the response network.

As the loss function in (1) we use *symmetric-difference loss* (or Hamming loss), applied to the nodes and the edges of the subgraphs separately, and scaled by function  $\gamma_G(v_k)$  according distance to the focal point  $v_k$ .

$$\begin{aligned}\ell_G(G_a, G_b) &= \sum_{v \in V} \ell_v^\Delta(G_a, G_b) \gamma_G(v_k; v) \\ &\quad + \sum_{(v, v') \in E} \ell_{v, v'}^\Delta(G_a, G_b) \gamma_G(v_k; v),\end{aligned}$$

where  $\ell_v^\Delta(G_a, G_b) = [v \in V_a \Delta V_b]$ ,  $\ell_e^\Delta(G_a, G_b) = [e \in E_a \Delta E_b]$ ,  $S \Delta S'$  denotes the symmetric difference of two sets  $S$  and  $S'$ . We consider the following strategies to construct the scaling function  $\gamma_G(v_k)$ :

**Exponential scaling.** Mistakes are penalized by  $\lambda$  and  $\lambda$  is weighted exponentially according to the shortest path distance to the focal point  $v_k$ . Given focal point  $v_k$ , edge  $(v_i, v_j)$ , and distance matrix  $D$  between the nodes, the scaling function is defined as

$$\gamma_G(v_k; v_i, v_j) = \begin{cases} 1 & \text{if } i = 0 \\ \lambda^{D(k, i)} & \text{if } i \neq 0 \text{ and } D(k, i) \leq R \\ \lambda^{(R+1)} & \text{if } D(k, i) > R \end{cases}$$

where  $\lambda > 0$  is the scaling factor and  $R > 1$  is a radius parameter. Edges outside the radius have equal scalings.

**Diffusion scaling.** The diffusion kernel defines a distance-based function between nodes  $v_i$  and  $v_j$  (Kondor & Lafferty, 2002). The kernel value  $K(i, j)$  corresponds to the probability of a random walk from node  $v_i$  to node  $v_j$ . Given the adjacency matrix  $L$  of the network  $G$ , the diffusion kernel is computed as

$$K = \lim_{s \rightarrow \infty} \left( I + \frac{\beta L}{s} \right)^s = \exp(\beta L),$$

where  $I$  is the identity matrix and  $\beta$  is the a parameter that controls how much the random walks deviate from the focal point. Given focal node  $v_k$ , edge  $(v_i, v_j)$ , and diffusion kernel  $K$  the scaling function is defined as

$$\gamma_G(v_k; v_i, v_j) = \begin{cases} 1 & \text{if } i = 0, \\ K(v_k, v_i) & \text{otherwise.} \end{cases}$$

The scaling function keeps the loss value on the edges connecting the focal point, and scale other edges by the weights computed from diffusion kernel. Diffusion scaling has the effect of shrinking the distance to nodes that connects to the focal point by many paths.

## 4. Experimental evaluation

In this section, we evaluate the performance of SPIN and compare it with the state-of-the-art methods through extensive experiments. We use two real-world datasets, DBLP and Memetracker, described below. Statistics of the datasets are given in Table 1.

**DBLP**<sup>1</sup> dataset is a collection of bibliographic information on major computer science journals and proceedings. We extract a subset of original data by using “inproceedings” articles from year 2000. First, we construct an undirected DBLP network  $G$  by connecting pairs of authors who have coauthored more than  $p$  papers ( $p = 5, 10, 15$ ). After that, we generate a set of experimental networks of different size by performing snowball sampling (Goodman, 1961). For each experimental network, we extract all the documents for which at least one of their authors is a node in the network. We apply LDA algorithm (Blei et al., 2002) on the titles of extracted documents to generated topics. Topics are associated with publications, timestamped by publication dates, and described by bag-of-word features computed from LDA. In this way, a topic can be seen as an action and we will study the influence among authors.

**Memetracker**<sup>2</sup> dataset is a set of phrases propagated over prominent online news sites in March 2009. We construct

<sup>1</sup><http://www.informatik.uni-trier.de/~ley/db/>

<sup>2</sup><http://Memetracker.org>

directed networks  $G$  for Memetracker dataset by connecting two websites via a directed edge if there are at least five phrases copying from one website to the other. A posted phrase corresponds to an action, which again is timestamped and represented with bag-of-word features.

#### 4.1. Experimental setup and metrics

SPIN can be applied to predict action-specific network response (context-aware) when action representation  $\phi(a)$  is given as input. It is also capable of predicting edge influence scores in context-free mode when  $\phi(a)$  is treated as unknown. For comparison purposes, we evaluate SPIN against the following the state-of-the-art methods:

- Support Vector Machine (SVM) is used as a single target classifier used to predict the response network via decomposing it as a bag of nodes and edges, and predicting each element in the bag.
- Max-Margin Conditional Random Field (MMCRF) (Rousu et al., 2007; Su et al., 2010) is a multi-label classifier that utilizes the structure of output graph  $G$ . The model predicts the node labels of the network.
- Expectation-Maximization for the independent cascade model (ICM-EM) (Saito et al., 2008) is a context-free model that infers the influence probability of the network given a directed network and a set of action cascades. Here we use the implementation from Mathioudakis et al. (2011) of this algorithm, which is publicly available<sup>3</sup>.
- Netrate (Gomez-Rodriguez et al., 2011) models the network influence as temporal processes occurs at difference rate. It infers the directed edges of the global network and estimates the transmission rate of each edge.

To quantitatively evaluate the performance of the tested methods in predicting node and edge labels, we adopt two popular metrics: *accuracy* and *F<sub>1</sub> score*, defined as

$$F_1 = \frac{2 \cdot P \cdot R}{P + R},$$

where  $P$  is precision and  $R$  is recall. We also define *Predicted Subgraph Coverage* (PSC) as

$$PSC = \frac{1}{mn} \sum_{i=1}^m \sum_{v \in V_i} |G_v|,$$

where  $V_i$  is the set of focal points given action  $a_i$ ,  $n$  is the number of nodes in the network, and  $m$  is the number of actions. PSC expresses the relative size of a correctly predicted subgraph  $G_v$  in terms of node predictions that cover the focal points  $v$ .

<sup>3</sup>[https://dl.dropboxusercontent.com/u/21620176/public\\_html/spine/index.html](https://dl.dropboxusercontent.com/u/21620176/public_html/spine/index.html)

Dataset	Training Example	Feature Space	Network	
			V	E
<b>DBLP S100</b>	440	1190	100	204
<b>DBLP M100</b>	478	1127	100	151
<b>DBLP M500</b>	2119	3619	500	699
<b>DBLP M700</b>	2800	4369	699	952
<b>DBLP M1k</b>	3720	5281	1000	1368
<b>DBLP M2k</b>	6030	7183	2000	2687
<b>DBLP L100</b>	509	1274	100	152
<b>DBLP L500</b>	1869	3424	499	701
<b>DBLP L700</b>	2620	4300	699	960
<b>DBLP L1k</b>	3560	5405	1000	1368
<b>DBLP L2k</b>	3618	5454	1023	1402
<b>memeS</b>	4632	181	82	325
<b>memeM</b>	4804	179	182	521
<b>memeL</b>	4809	179	333	597

Table 1. Statistics of DBLP and Memetracker datasets.

Data	Accuracy			F <sub>1</sub> Score			Time (10 <sup>2</sup> s)		
	SDP	Neg	Act	SDP	Neg	Act	SDP	Neg	Act
S100	<b>79.9</b>	77.6	72.9	<b>57.2</b>	56.2	55.5	16.0	1.5	<b>0.2</b>
M100	<b>75.8</b>	73.6	68.5	51.6	53.1	<b>54.5</b>	15.2	1.4	<b>0.2</b>
L100	<b>75.1</b>	72.0	67.4	53.5	56.9	<b>57.2</b>	13.7	1.6	<b>0.3</b>
Geom.	<b>76.9</b>	74.3	69.6	52.0	55.4	<b>55.7</b>	15.0	1.5	<b>0.3</b>

Table 2. Comparison of different inference algorithms. *Geom.* is geometric mean of rows.

Our metrics are computed both in *global context* where we pool all the nodes and edges from the background network, as well as in *local context* where we only collect the nodes and edges within certain radius  $R$  of the focal points. The experimental results are from a five-fold cross validation.

#### 4.2. Experimental results

We examine whether our context-sensitive structure predictor can boost the performance of predicting network responses. We compare SPIN with other methods in both context-sensitive and context-free problems. We show that SPIN can perform significantly better in terms of predicting action-specific network responses.

**Comparison of inference algorithms.** Table 2 shows the geometric mean of node accuracy,  $F_1$  and running time over parameter space on three DBLP datasets, where “Neg” and “Act” represent the GREEDY inference defined on the negative-feed and the activation modes. SDP is also formulated on the negative-feed mode. In general, the inference algorithm based on negative-feed mode outperforms activation mode in terms of accuracy. The difference in  $F_1$  is smaller in comparison. SDP based inference surpasses GREEDY inference in accuracy, however, by a small margin. In addition, GREEDY inference is almost 10 times faster even on small datasets, where running time is total time used for cross validation. For the following experiments, we opted for GREEDY inference in negative-feed mode as the inference engine of SPIN.

### Structured Prediction of Network Response

Dataset	Node Accuracy			Node $F_1$ Score			Edge Acc		PSC			Time ( $10^3$ s)		
	SVM	MMCRF	SPIN	SVM	MMCRF	SPIN	SVM	SPIN	SVM	MMCRF	SPIN	SVM	MMCRF	SPIN
memeS	<b>73.4</b>	68.0	72.2	39.0	39.8	<b>47.1</b>	<b>62.7</b>	45.6	23.4	25.3	<b>33.6</b>	6.6	<b>2.9</b>	4.1
memeM	<b>82.1</b>	79.0	<i>81.5</i>	29.1	<i>30.1</i>	<b>38.0</b>	61.1	<b>68.8</b>	18.6	18.8	<b>28.3</b>	13.7	<b>3.2</b>	7.3
memeL	<b>89.9</b>	88.3	89.8	26.7	27.1	<b>35.0</b>	45.5	<b>80.0</b>	17.7	18.9	<b>27.6</b>	19.9	<b>5.9</b>	11.8
M100	71.2	73.6	<b>76.7</b>	49.3	50.8	<b>54.3</b>	33.3	<b>61.7</b>	33.3	<b>35.6</b>	34.6	<b>0.1</b>	0.2	<b>0.1</b>
M500	89.0	91.4	<b>92.0</b>	<b>18.8</b>	13.5	<i>14.6</i>	28.2	<b>92.6</b>	29.3	26.4	<b>29.5</b>	9.0	3.8	<b>3.2</b>
M700	91.9	<b>94.1</b>	92.1	<i>13.8</i>	7.3	<b>14.2</b>	26.3	<b>93.0</b>	29.4	23.9	<b>34.4</b>	18.5	8.3	<b>4.4</b>
M1k	94.1	<b>95.8</b>	94.2	<b>10.9</b>	3.5	9.3	26.6	<b>94.7</b>	33.7	16.6	<b>35.2</b>	42.2	<i>14.7</i>	<b>10.4</b>
M2k	96.8	<b>97.6</b>	96.7	<b>6.2</b>	1.4	3.4	25.3	<b>97.6</b>	<b>34.6</b>	9.6	<i>14.7</i>	165.0	88.4	<b>54.1</b>
L100	69.4	72.2	<b>75.7</b>	51.1	53.1	<b>57.4</b>	31.6	<b>62.3</b>	30.9	<i>31.7</i>	<b>33.4</b>	<b>0.1</b>	0.2	0.3
L500	85.9	<b>89.1</b>	86.8	21.7	15.1	<b>24.7</b>	27.9	<b>87.9</b>	14.2	11.2	<b>19.7</b>	6.5	3.2	<b>2.1</b>
L700	89.7	<b>92.4</b>	89.7	<i>16.2</i>	9.4	<b>17.3</b>	26.5	<b>90.4</b>	9.5	6.7	<b>12.5</b>	16.0	7.8	<b>5.3</b>
L1k	92.4	<b>94.4</b>	91.5	<i>12.4</i>	6.4	<b>13.9</b>	26.4	<b>92.3</b>	6.1	4.4	<b>8.4</b>	40.3	<i>13.7</i>	<b>10.4</b>
L2k	92.5	<b>94.5</b>	91.9	<i>12.3</i>	5.4	<b>12.7</b>	26.5	<b>93.2</b>	6.0	2.9	<b>7.2</b>	41.9	21.9	<b>13.1</b>
<b>Geom.</b>	85.5	86.4	<b>86.6</b>	19.8	12.6	<b>20.3</b>	32.6	<b>79.7</b>	18.9	14.2	<b>21.7</b>	9.4	4.6	<b>4.3</b>

Table 3. Comparison of prediction performance on global context. The best in bold-face, the second best in italic.

**Context-aware prediction.** We apply SPIN with exponential scaling to predict context-sensitive network responses. Comparison of prediction performance against SVM and MMCRF is listed in Table 3. We show that SPIN can dramatically boost the performance of all measures except node accuracy: MMCRF wins in node accuracy, but SPIN is the second best and the difference is small. In terms of time consumption for training, SPIN is around three times faster than SVM and two times faster than MMCRF on the largest M2k dataset.

**Context-free network influence prediction.** Here we compare SPIN to methods developed for influence network prediction, namely Netrate and ICM-EM, on Memetracker data. To make the comparison fair to the competition, we convert the network to undirected network and replace action features by a constant value. For SPIN, we further represent each undirected edge by two directed edges. The measure of success is *Precision@K*, where we ask for top- $K$  percent edge predictions from each model and compute the precision. Table 4 shows *Precision@K* as function of  $K$ , where the performance of SPIN surpasses ICM-EM and Netrate in all spectrum of  $K$  with a noticeable margin. ICM-EM has the least accurate predictions of the three, but achieves by far the the best running time. SPIN and Netrate solve more complex convex optimization problems, leading more accurate predictions at the cost of more CPU time needed for training, SPIN being the more efficient on the largest dataset, memeL.

The good performance of SPIN compared to Netrate is mostly explained by the fact that Netrate solves a much harder problem in which the underlying undirected network is assumed to be unknown, while SPIN is able to leverage the known network structure. In the experiment reported, the edge predictions from Netrate are filtered against the underlying complex network, in order to excessively personalize influence predictions along non-linked nodes.

**Effect of loss scaling.** Figure 2 depicts the effect of pa-

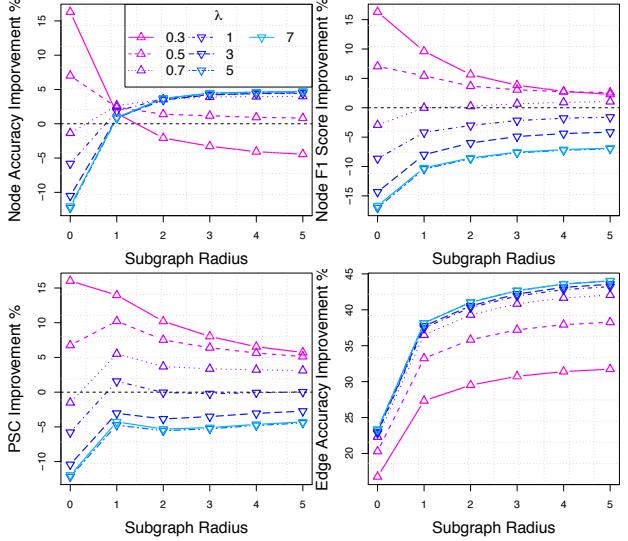


Figure 2. The improvement of prediction performance for different scaling factor  $\lambda$  with respect to SVM.

rameter  $\lambda$  of the exponential loss scaling to prediction performance on subgraphs of different radius. SVM (dashed line) is used as the baseline. When  $0 < \lambda < 1$ , the node prediction accuracy (top, left) and  $F_1$  (top, right) decrease by the increasing subgraph radius, while  $\lambda \geq 1$  leads to the opposite behavior allowing larger subgraph to be learned. Predicted subgraph coverage decreases by increasing  $\lambda$ . Edge prediction accuracy (bottom, right) increases monotonically in  $\lambda$  implying that predicting the longer influence paths is a hard problem for SVM. In Table 5 we examine the performance of diffusion scaling. The numbers reported are geometric means over the different Memetracker and DBLP datasets. We observe a decreased performance when increasing the parameter  $\beta$ , which corresponds to smoothing the distance matrix. This indicates

## Structured Prediction of Network Response

Dataset	Model	T (10 <sup>3</sup> s)	Precision @ K									
			10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
memeS	SPIN	5.50	<b>82.9</b>	<b>81.0</b>	<b>76.0</b>	<b>74.0</b>	<b>74.0</b>	<b>70.0</b>	<b>69.8</b>	<b>67.9</b>	<b>66.7</b>	<b>64.7</b>
	ICM-EM	<b>0.01</b>	60.3	63.5	65.1	62.0	62.0	61.5	62.2	60.4	60.7	61.9
	NETRATE	5.83	76.2	73.8	70.4	68.7	68.7	66.8	64.9	63.4	62.9	61.9
memeM	SPIN	5.52	<b>82.7</b>	<b>72.1</b>	<b>70.5</b>	<b>69.2</b>	<b>69.2</b>	<b>67.9</b>	<b>66.2</b>	<b>65.6</b>	<b>64.3</b>	<b>64.2</b>
	ICM-EM	<b>0.02</b>	56.3	55.3	56.8	57.4	57.4	56.3	57.5	57.8	58.3	58.5
	NETRATE	13.93	61.2	64.6	62.9	62.5	62.5	62.4	61.2	60.1	58.7	58.5
memeL	SPIN	4.75	<b>82.2</b>	<b>73.6</b>	<b>69.1</b>	<b>66.7</b>	<b>66.7</b>	<b>65.9</b>	<b>66.1</b>	<b>65.9</b>	<b>63.9</b>	<b>63.6</b>
	ICM-EM	<b>0.01</b>	52.1	55.7	54.2	56.5	56.5	56.7	57.4	58.0	57.6	57.0
	NETRATE	12.63	56.5	57.8	60.0	59.3	59.3	59.4	58.9	58.4	57.5	57.0

Table 4. Model performance in context-free influence network prediction.

Loss Scaling	Node Acc		Node F <sub>1</sub>		Edge Acc		PSC		Time (10 <sup>3</sup> s)	
	Meme	DBLP	Meme	DBLP	Meme	DBLP	Meme	DBLP	Meme	DBLP
Dif $\beta = 0.1$	80.8	86.5	40.0	28.6	63.0	80.5	30.2	30.3	68.3	2.7
Dif $\beta = 0.5$	66.4	86.5	42.5	28.5	40.9	80.5	33.0	30.2	50.9	4.0
Dif $\beta = 0.8$	63.5	86.5	40.9	28.5	39.3	80.5	31.2	30.2	32.6	3.2
Exp $\lambda = 0.5$	80.9	83.9	39.7	28.7	63.1	77.7	29.7	24.3	71.0	10.8

Table 5. Comparison of diffusion scaling with exponential scaling.

that emphasizing connections between long-distance nodes makes prediction more difficult, a finding consistent with the results on exponential scaling. Setting  $\beta = 0.1$  leads to comparable performance over exponential scaling with  $\lambda = 0.5$ , with slight improvement on the DBLP datasets.

## 5. Discussion

We have presented a novel approach, based on structured output learning, to the problem of modelling influence in networks. In contrast to previous state-of-the-art approaches, such as Netrate and ICM-EM, our proposal, named SPIN, is a context-sensitive model. SPIN does not try to force global influence parameters, but instead it incorporates the action space into the learning process and makes predictions tailored to the action under consideration. Our method can provide a useful tool in market research or other application scenarios when actions arise from a high-dimensional space, and one wants to make predictions for actions not seen before. Another benefit of our approach, compared to other state-of-the-art methods, is that our method does not make explicit assumptions regarding the underlying propagation model. Additionally, action responses are explicitly formulated as directed acyclic subgraphs, and the model is capable of predicting the complete subgraph structure. We proved that the inference problem of SPIN is NP-hard, and we provided an approximation algorithm based on semidefinite programming (SDP). In addition, we developed a greedy heuristic algorithm for the inference problem that scales linearly in the size of the network, with time consumption in the same ballpark as Netrate. With extensive experiments we show that SPIN can dramatically boost the performance of action-based network-response prediction. SPIN can also

be applied in context-free prediction where it captures the edge influence weight of the network.

## References

- Anagnostopoulos, Aris, Kumar, Ravi, and Mahdian, Mohammad. Influence and correlation in social networks. *KDD*, 2008.
- Blei, D., Ng, A., and Jordan, M. Latent dirichlet allocation. In Dietterich, T., Becker, S., and Ghahramani, Z. (eds.), *Advances in Neural Information Processing Systems 14*. MIT Press, 2002.
- De Choudhury, Munmun, Mason, Winter A, Hofman, Jake M, and Watts, Duncan J. Inferring relevant social networks from interpersonal communication. *WWW*, pp. 301–310, 2010.
- Du, Nan, Song, Le, Smola, Alex, and Yuan, Ming. Learning Networks of Heterogeneous Influence. *NIPS*, 2012.
- Eagle, Nathan, Pentland, Alex Sandy, and Lazer, David. Inferring friendship network structure by using mobile phone data. *Proceedings of the National Academy of Sciences*, 106(36):15274–15278, 2009.
- Goemans, Michel and Williamson, David. Improved approximation algorithms for maximum cut and satisfiability problems using semidefinite programming. *JACM*, 42(6), 1995.
- Gomez-Rodriguez, Manuel, Leskovec, Jure, and Krause, Andreas. Inferring Networks of Diffusion and Influence. *KDD*, 2010.

Gomez-Rodriguez, Manuel, Balduzzi, David, and Schölkopf, Bernhard. Uncovering the Temporal Dynamics of Diffusion Networks. *ICML*, 2011.

Goodman, Leo A. Snowball sampling. *The annals of mathematical statistics*, 32(1):148–170, 1961.

Goyal, Amit, Bonchi, Francesco, and Lakshmanan, Laks VS. Learning influence probabilities in social networks. *WSDM*, 2010.

Kempe, David, Kleinberg, Jon, and Tardos, Éva. Maximizing the spread of influence through a social network. In *KDD*, 2003.

Kondor, I.R. and Lafferty, J. D. Diffusion kernels on graphs and other discrete structures. In *Proceedings of the ICML*, 2002.

Mathioudakis, Michael, Bonchi, Francesco, Castillo, Carlos, Gionis, Aristides, and Ukkonen, Antti. Sparsification of influence networks. *KDD*, 2011.

Rousu, J., Saunders, C., Szedmak, S., and Shawe-Taylor, J. Efficient algorithms for max-margin structured classification. *Predicting Structured Data*, pp. 105–129, 2007.

Saito, Kazumi, Nakano, Ryohei, and Kimura, Masahiro. Prediction of information diffusion probabilities for independent cascade model. In *Knowledge-Based Intelligent Information and Engineering Systems (KES)*, 2008.

Su, Hongyu, Heinonen, Markus, and Rousu, Juho. Structured output prediction of anti-cancer drug activity. In *Proceedings of the 5th IAPR international conference on Pattern recognition in bioinformatics*, PRIB’10, 2010.

Watts, Duncan J and Dodds, Peter Sheridan. Influentials, networks, and public opinion formation. *Journal of consumer research*, 34(4):441–458, 2007.



## Publication II

Hongyu Su, Markus Heinonen, Juho Rousu. Multilabel Classification of Drug-like Molecules via Max-margin Conditional Random Fields. In *Proceedings of the 5<sup>th</sup> International Conference on Pattern Recognition in Bioinformatics (PRIB 2010)*, Nijmegen, The Netherlands, 2010. Springer LNBI volume 6282:265-273, September 2010.

© 2010 Copyright 2014 by the authors.

Reprinted with permission.



# Structured Output Prediction of Anti-cancer Drug Activity

Hongyu Su, Markus Heinonen, and Juho Rousu

Department of Computer Science  
P.O. Box 68, 00014 University of Helsinki, Finland  
[{hongyu.su,markus.heinonen,juho.rousu}@cs.helsinki.fi](mailto:{hongyu.su,markus.heinonen,juho.rousu}@cs.helsinki.fi)  
<http://www.cs.helsinki.fi/group/sysfys>

**Abstract.** We present a structured output prediction approach for classifying potential anti-cancer drugs. Our QSAR model takes as input a description of a molecule and predicts the activity against a set of cancer cell lines in one shot. Statistical dependencies between the cell lines are encoded by a Markov network that has cell lines as nodes and edges represent similarity according to an auxiliary dataset. Molecules are represented via kernels based on molecular graphs. Margin-based learning is applied to separate correct multilabels from incorrect ones. The performance of the multilabel classification method is shown in our experiments with NCI-Cancer data containing the cancer inhibition potential of drug-like molecules against 59 cancer cell lines. In the experiments, our method outperforms the state-of-the-art SVM method.

## 1 Introduction

Machine learning has become increasingly important in drug discovery where viable molecular structures are searched or designed for therapeutic efficacy. In particular, Quantitative Structure-Activity Relationship (QSAR) models, relating the molecular structures to bioactivity (therapeutical effect, side-effects, toxicity, etc.) are routinely built using state-of-the-art machine learning methods. In particular, the costly pre-clinical *in vitro* and *in vivo* testing of drug candidates can be focused to the most promising molecules, if accurate *in silico* models are available [16].

Molecular classification—the task of predicting the presence or absence of the bioactivity of interest—has been tackled with a variety of methods, including inductive logic programming [9] and artificial neural networks [1]. During the last decade kernel methods [11,16,4] have emerged as an computationally effective way to handle the non-linear properties of chemicals. In numerous studies, SVM-based methods have obtained promising results [3,16,20]. However, classification methods focusing on a single target variable are probably not optimally suited to drug screening applications where large number of target cell lines are to be handled.

In this paper we propose, to our knowledge, the first multilabel learning approach for molecular classification. Our method belongs to the structured output

prediction family [15,17,12,13], where graphical models and kernels have been successfully married in recent years. In our approach, the drug targets (cancer cell lines) are organized in a Markov network, drug molecules are represented by kernels and discriminative max-margin training is used to learn the parameters. Alternatively, our method can be interpreted as a form of multitask learning [5] where the Markov network couples the tasks (cell lines) and joint features are learned for pairs of similar tasks.

## 2 Methods

### 2.1 Structured Output Learning with MMCRF

The model used in this paper is an instantiation of the structured output prediction framework MMCRF [13] for associative Markov networks and can also be seen as a sibling method to HM<sup>3</sup>[12], which is designed for hierarchies. We give a brief outline here, the interested reader may check the details from the above references.

The MMCRF learning algorithm takes as input a matrix  $K = (k(x_i, x_j))_{i,j=1}^m$  of kernel values  $k(x_i, x_j) = \phi(x_i)^T \phi(x_j)$  between the training patterns, where  $\phi(x)$  denotes a feature description of an input pattern (in our case a potential drug molecule), and a label matrix  $Y = (\mathbf{y}_i)_{i=1}^m$  containing the multilabels  $\mathbf{y}_i = (y_1, \dots, y_k)$  of the training patterns. The components  $y_j \in \{-1, +1\}$  of the multilabel are called microlabels and in our case correspond to different cancer cell lines. In addition, the algorithm assumes an associative network  $G = (V, E)$  to be given, where node  $j \in V$  corresponds to the  $j$ 'th component of the multilabel and the edges  $e = (j, j') \in E$  correspond to a microlabel dependency structure.

The model learned by MMCRF takes the form of a conditional random field with exponential edge-potentials,

$$P(\mathbf{y}|x) \propto \prod_{e \in E} \exp(\mathbf{w}_e^T \varphi_e(x, \mathbf{y}_e)) = \exp(\mathbf{w}^T \varphi(x, \mathbf{y})),$$

where  $\mathbf{y}_e = (y_j, y_{j'})$  denotes the pair of microlabels of the edge  $e = (j, j')$ . A joint feature map  $\varphi_e(x, \mathbf{y}) = \phi(x) \otimes \psi_e(\mathbf{y}_e)$  for an edge is composed via tensor product of input  $\phi(x)$  and output feature map  $\psi(\mathbf{y})$ , thus including all pairs of input and output features. The output feature map is composed of indicator functions  $\psi_e^u(\mathbf{y}) = [\![\mathbf{y}_e = u]\!]$  where  $u$  ranges over the four possible labelings of an edge given binary node labels. The corresponding weights are denoted by  $\mathbf{w}_e$ . The benefit of the tensor product representation is that context (edge-labeling) sensitive weights can be learned for input features and no prior alignment of input and output features needs to be assumed.

The parameters are learned by maximizing the minimum loss-scaled margin between the correct training examples  $(x_i, \mathbf{y}_i)$  and incorrect pseudo-examples

$(x_i, \mathbf{y}), \mathbf{y} \neq \mathbf{y}_i$ , while controlling the norm of the weight vector. The primal soft-margin optimization problem takes the form

$$\begin{aligned} & \underset{\mathbf{w}, \xi \geq 0}{\text{minimize}} \quad \frac{1}{2} \|\mathbf{w}\|^2 + C \sum_{i=1}^m \xi_i \\ & \text{s.t. } \mathbf{w}^T \varphi(x_i, \mathbf{y}_i) - \mathbf{w}^T \varphi(x_i, \mathbf{y}) \geq \ell(\mathbf{y}_i, \mathbf{y}) - \xi_i, \\ & \quad \text{for all } i \text{ and } \mathbf{y}, \end{aligned} \tag{1}$$

where  $\xi_i$  denote the slacks allotted to each example. The effect of loss-scaling is to push high-loss pseudo-examples further away from the correct example than the low-loss pseudo-examples, which, intuitively, decreases the risk of incurring high-loss. We use *Hamming loss*

$$\ell_\Delta(\mathbf{y}, \mathbf{u}) = \sum_j [\![y_j \neq u_j]\!]$$

that is gradually increasing in the number of incorrect microlabels so that we can make a difference between 'nearly correct' and 'clearly incorrect' multilabel predictions.

The MMCRF algorithm [13] optimizes the model (1) in the so called marginal dual form, that has several benefits: the use of kernels to represent high-dimensional inputs, and polynomial-size of the optimization problem with respect to the size of the output structure. Efficient optimization is achieved via the conditional gradient algorithm [2] with feasible ascent directions found by loopy belief propagation over the Markov network  $G$ .

## 2.2 Kernels for Drug-Like Molecules

A major challenge for any statistical learning model is to define a measure of similarity. In chemical community, widely researched quantitative structure-activity relationship (QSAR) theory asserts that compounds having similar physico-chemical and geometric properties should have related bioactivity [7]. Various descriptors have been used to represent molecules with fixed-length feature vectors, such as atom counts, topological and shape indices, quantum-chemical and geometric properties [19]. Kernels computed from the structured representation of molecules extend the scope of the traditional approaches by allowing complex derived features to be used (walks, subgraphs, properties) while avoiding excessive computational cost [11].

In this paper, we experiment with a set of graph kernels designed for classification of drug-like molecules, including walk kernel [6], weighted decomposition kernel [10] and Tanimoto kernel [11]. All of them rely on representing the molecule as a labeled graph with atoms as nodes and bonds between the atoms as the edges.

*Walk kernel.* [8,6] computes the sum of matching walks (a sequence of labeled nodes so that there exists an edge for each pair of adjacent nodes) in a pair

of graphs. The contribution of each matching walk is downscaled exponentially according to its length. We consider finite-length walk kernel where only walks of length  $p$  are counted. The finite walk kernel can be efficiently computed using dynamic programming.

*Weighted decomposition kernel.* [4] is an extension of the substructure kernel by weighting identical parts in a pair of graphs based on contextual information [4]. The kernel looks at matching subgraphs (*contextor*) in the neighborhood of *selector* atoms.

*Tanimoto kernel.* [11] is a kernel computed from two molecule fingerprints by checking the fraction of features that occur in both fingerprints of all features. *Hash fingerprints* enumerates all linear fragments of a given length, while *substructure keys* correspond to molecular substructures in a predefined set designed by domain experts. Based on good performance in preliminary studies, in this paper we concentrate on hash fingerprints.

### 2.3 Markov Network Generation for Cancer Cell Lines

In order to use MMCRF to classify drug molecules we need to build a Markov network for the cell lines used as the output, with nodes corresponding to cell lines and edges to potential statistical dependencies. To build the network we used auxiliary data (e.g. mRNA and protein expression, mutational status, chromosomal aberrations, DNA copy number variations, etc) available on the cancer cell lines from NCI database<sup>1</sup>. The basic approach is to construct from this data a correlation matrix between the pairs of cell lines and extract the Markov network from the matrix by favoring high-valued pairs. The following methods of network extraction were considered:

- Maximum weight spanning tree. Take the minimum number of edges that make a connected network whilst maximizing the edge weights.
- Correlation thresholding. Take all edges that exceed fixed threshold. This approach typically generates a general non-tree graph.

## 3 Experiments


### 3.1 NCI-Cancer Dataset

In this paper we use the NCI-Cancer dataset obtained through PubChem Bioassay<sup>2</sup> [18] data repository. The dataset initiated by National Cancer Institute and National Institutes of Health (NCI/NIH) contains bioactivity information of large number of molecules against several human cancer cell lines in 9 different tissue types, including leukemia, melanoma and cancers of the lung, colon, brain, ovary, breast, prostate, and kidney. For each molecule tested against a certain cell line, the dataset provide a bioactivity outcome that we use as the classes (active, inactive).

---

<sup>1</sup> <http://discover.nci.nih.gov/cellminer/home.do>

<sup>2</sup> <http://pubchem.ncbi.nlm.nih.gov>

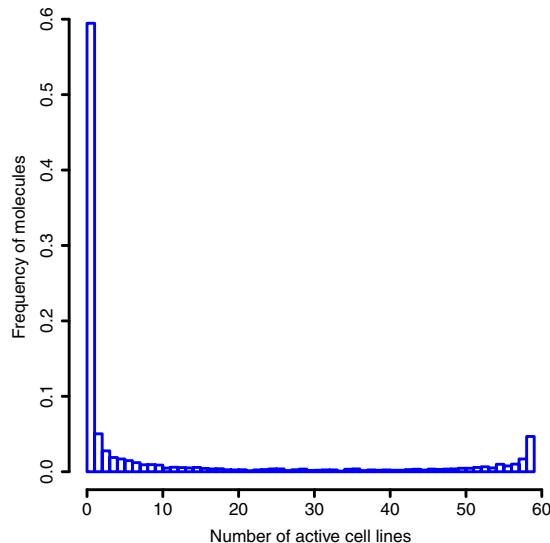

**Fig. 1.** Skewness of the multilabel distribution


### 3.2 Data Preprocessing

Currently, there are 43884 molecules in the PubChem Bioassay database together with anti-cancer activities in 73 cell lines. 59 cell lines have screen experimental results for most molecules and 4554 molecules have no missing data in these cell lines, therefore these cell lines and molecules are selected and employed in our experiments.

However, molecular activity data are highly biased over the cell lines. Figure 1 shows the molecular activity distribution over all 59 cell lines. Most of the molecules are inactive in all cell lines, while a relatively large proportion of molecules are active against almost all cell lines, which can be taken as toxics. These molecules are less likely to be potential drug candidates than the ones in the middle part of the histogram.

Figure 2 shows a heatmap of normalized Tanimoto kernel, where molecules have been sorted by the number of cell lines they are active in. The heatmap shows that the molecules in the two extremes of the multilabel distribution form groups of high similarity whereas the molecules in the middle are much more dissimilar both to each other and to the extreme groups. The result seems to indicate that the majority of molecules in the dataset are either very specific or very general in the targets they are active against. Other kernels mentioned in section 2.2 produce a similar heatmap indicating that the phenomenon is not kernel-specific.

Because of the above-mentioned skewness, we prepared different versions of the dataset:

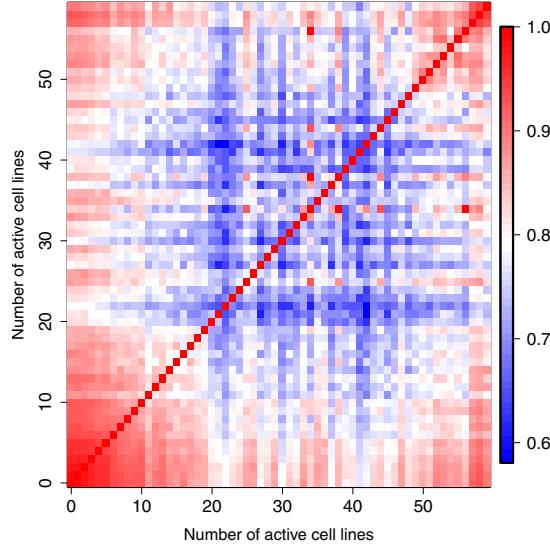

**Fig. 2.** Heatmap of the kernel space for the molecules sorted by the multilabel distribution

**Full.** This dataset contains all 4554 molecules in the NCI-Cancer dataset that have their activity class (active vs. inactive) recorded against all 59 cancer cell lines.

**No-Zero-Active.** From this dataset, we removed all molecules that are not active towards any of the cell lines (corresponding to the leftmost peak in Figure 1). The remaining 2305 molecules are all active against at least one cell line.

**Middle-Active.** Here, we followed the preprocessing suggested in [14], and selected molecules that are active in more than 10 cell lines and inactive in more than 10 cell lines. As a result, 544 molecules remained and were employed in our experiments.

### 3.3 Experiment Setup

We conducted experiments to compare the effect of various kernels, as well as the performances of support vector machine (SVM) and MMCRF. We used the SVM implementation of the LibSVM software package written in C++<sup>3</sup>. We tested SVM with different margin  $C$  parameters, relative hard margin ( $C = 100$ ) emerging as the value used in subsequent experiments. The same value was used for MMCRF classifier as well.

Because of the skewness of the multilabel distribution (c.f. 1) we used the following *stratified 5-fold cross-validation* scheme in all experiments reported:

<sup>3</sup> <http://www.csie.ntu.edu.tw/~cjlin/libsvm/>

we group the molecules in equivalence classes based on the number of cell lines they are active against. Then each group is randomly split among the five folds. This ensures that also the smaller groups have representation in all folds.

### 3.4 Kernel Setup

For the three kernel methods, walk kernel (WK) was constructed using parameters  $\lambda = 0.1$  and  $p = 6$  as recommended in [6]. The Weighted decomposition kernel (WDK) used context radius 3 as in [4], and a single attribute (atom type) was sufficient to give the best performance. We also used hash fragments as molecular fingerprints generated by OpenBabel<sup>4</sup> (using default value  $n = 6$  for linear structure length), which is a chemical toolbox available in public domain. All kernels were normalized.

## 4 Results

### 4.1 Effect of Markov Network Generation Methods

We report overall prediction accuracies on the Middle-Active dataset from various Markov networks shown in Figure 3. X-axis corresponds to different microarray experiments. The accuracies from different Markov networks differ slightly. The best accuracy was achieved by using maximum weighted spanning tree approach on RNA radiation arrays dataset, shown in Figure 4, which describes profiles of radiation response in cell lines. This meets our expectations since cancer cells mostly mutated from normal cells and normal cells with radiation treatments can possibly explain the mutations.

### 4.2 Effect of molecule kernels


In Table 1, we report overall accuracies and microlabel F1 scores using SVM with different kernels on the Middle-Active dataset. The results were from a five-fold cross validation procedure. Here, the three kernel methods achieve almost the same accuracies in SVM classifier, while Tanimoto kernel is slightly better than others in microlabel F1 score. Thus we deemed Tanimoto kernel to be the best kernel in this experiment and chose it for the subsequent experiments.

### 4.3 Effect of Dataset Versions

Figure 5 gives overall accuracy and microlabel F1 score of MMCRF versus SVM for each cell line on the three versions of the data. Points above the diagonal line correspond to improvements in accuracies or F1 scores by MMCRF classifier. MMCRF improves the F1 score over SVM on each version of the data in statistically significant manner, as judged by the two-tailed sign test. Accuracy is improved in two versions, No-Zero-Actives and the Middle-Active molecules,

---

<sup>4</sup> <http://openbabel.org>

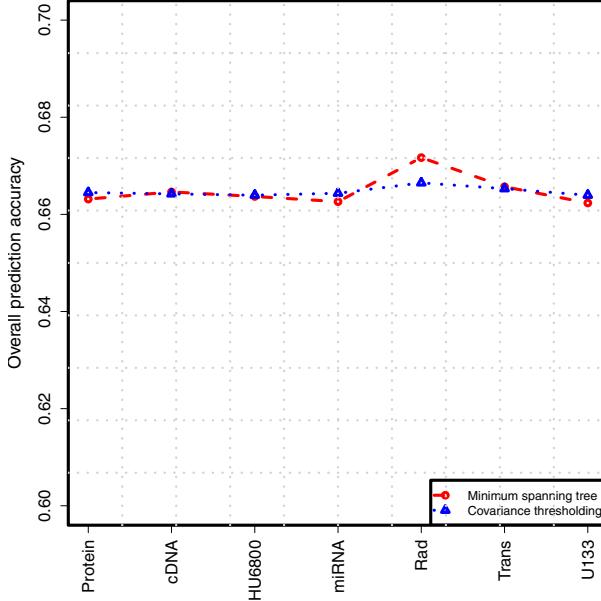

**Fig. 3.** Effects of Markov network construction methods and type of auxiliary data (from left to right: reverse-phase lysate arrays, cDNA arrays, Affymetric HU6800 arrays, miRNA arrays, RNA radiation arrays, transporter arrays, and Affymetrix U133 arrays)


**Table 1.** Accuracies and microlabel F1 scores of MMCRF and SVM with different kernels

Classifier	Kernel	Accuracy	F1 score
SVM	WK	64.6%	49.0%
	WDK	63.9%	51.6%
	Tanimoto	64.1%	52.7%
MMCRF	Tanimoto	67.6%	56.2%

again in statistically significant manner. Among the Middle-Active dataset, the difference in accuracy (bottom, left of Figure 5) is sometimes drastic, around 10 percentage units in favor of MMCRF for a significant fraction of the cell lines.

#### 4.4 Agreement of MMCRF and SVM Predictions

For a closer look at the predictions of MMCRF and SVM, Table 2 depicts the agreement of the two models among positive and negative classes. Both models were trained on the Full dataset. Overall, the two models agree on the label most of the time (close to 90% of positive predictions and close to 95% of the negative predictions). MMCRF is markedly more accurate than SVM on the

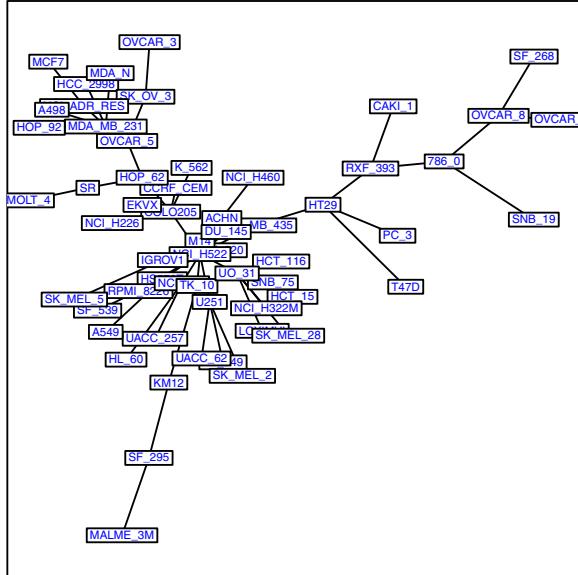

**Fig. 4.** Markov network constructed from maximum weighted spanning tree method on RNA radiation array data. The labels correspond to different cancer cell lines.

**Table 2.** Agreement of MMCRF and SVM on the positive (left) and negative (right) classes


	Positive class		Negative class	
	SVM Correct	SVM Incorrect	SVM Correct	SVM Incorrect
MMCRF Correct	48.6 ± 4.1%	7.1 ± 2.6%	88.0 ± 4.9%	2.2 ± 1.2%
MMCRF Incorrect	3.4 ± 1.3%	40.9 ± 3.4%	3.8 ± 1.7%	6.1 ± 3.0%

positive class while SVM is slightly more accurate among the negative class. Qualitatively similar results are obtained when the zero-active molecules are removed from the data (data not shown).


#### 4.5 Computation Time

Besides predictive accuracy, training time of classifiers is important when a large number of drug targets need to be processed. The potential benefit of multilabel classification is the fact that only single model needs to be trained instead of a bag of binary classifiers.

We compared the running time needed to construct MMCRF classifier (implemented in native MATLAB) against libSVM classifier (C++). We conducted the experiment on a 2.0GHz computer with 8GB memory. Figure 6 shows that MMCRF scales better when training set increases.

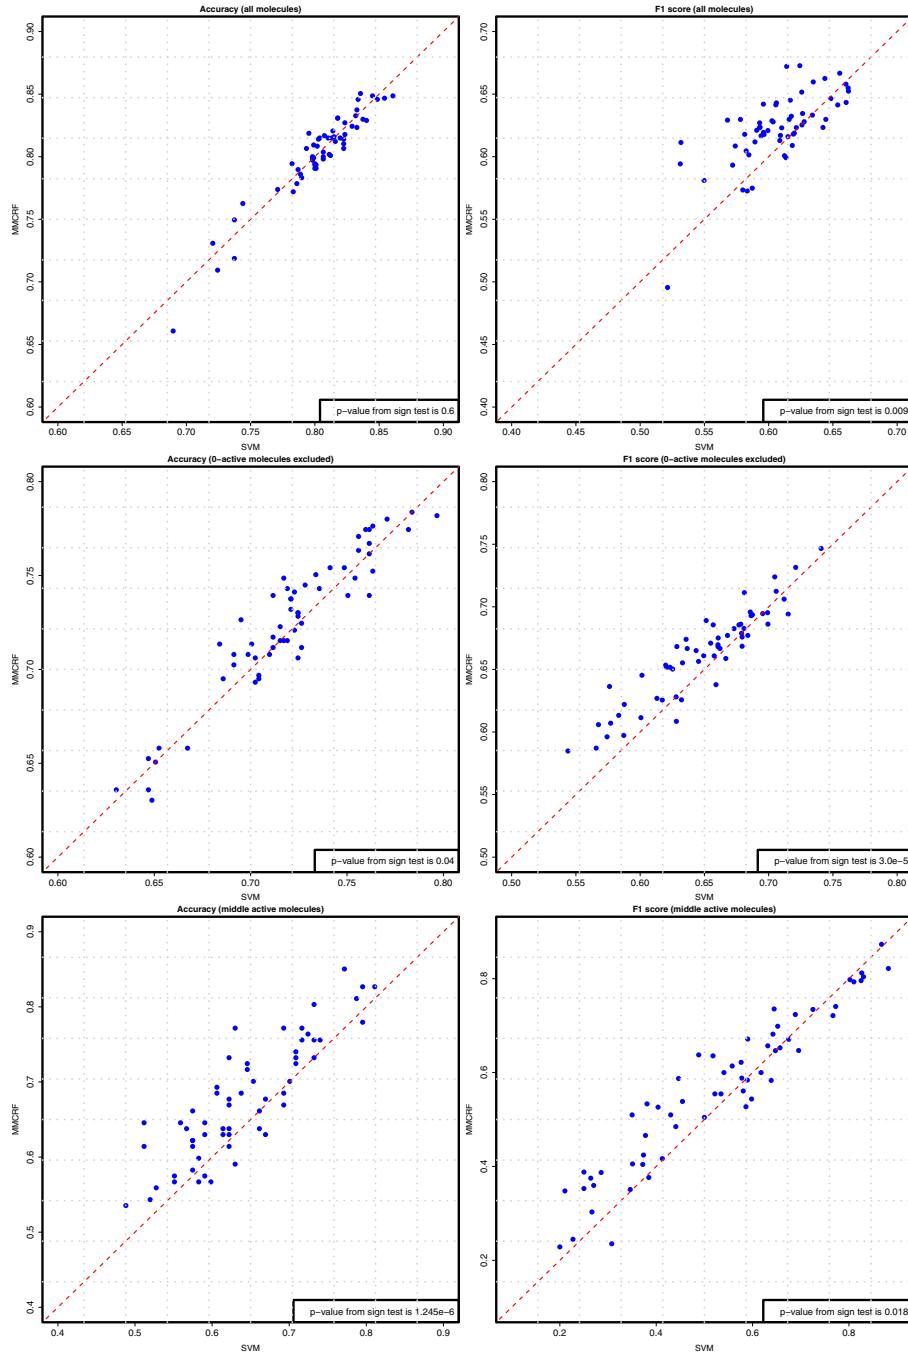

**Fig. 5.** Accuracy (left) and F1 score (right) of MMCIF vs. SVM on Full data (top), No-Zero-Active (middle) and Middle-Active molecules (bottom)

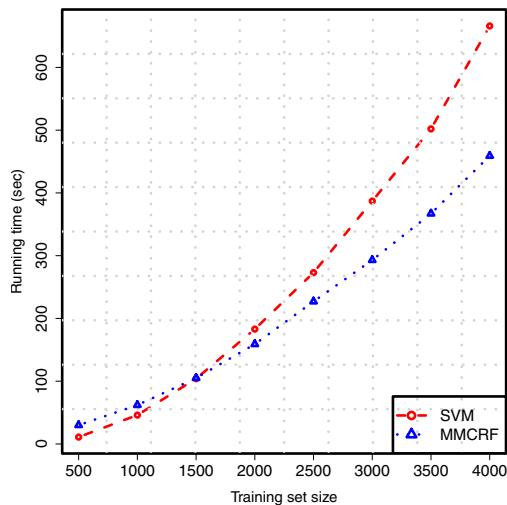

**Fig. 6.** Training time for SVM and MMCRF classifiers on training sets of different sizes

## 5 Conclusions

We presented a multilabel classification approach to drug activity classification using the Max-Margin Conditional Random Field algorithm. In the experiments against a large set of cancer lines the method significantly outperformed SVM in training time and accuracy. In particular, drastic improvements could be seen in the setup where molecules with extreme activity (active against no or a very small fraction, or a very large fraction of the cell lines) were excluded from the data. The remaining middle ground of selectively active molecules is in our view more important from drug screening applications point of view, than the two extremes.

The MMCRF software and preprocessed versions of the data are available from <http://cs.helsinki.fi/group/sysfys/software>.

## Acknowledgements

This work was financially supported by Academy of Finland grant 118653 (ALGODAN) and in part by the IST Programme of the European Community, under the PASCAL2 Network of Excellence, ICT-2007-216886. This publication only reflects the authors' views.

## References

1. Bernazzani, L., Duce, C., Micheli, A., Mollica, V., Sperduti, A., Starita, A., Tine, M.: Predicting physical-chemical properties of compounds from molecular structures by recursive neural networks. *J. Chem. Inf. Model.* 46, 2030–2042 (2006)
2. Bertsekas, D.: Nonlinear Programming. Athena Scientific (1999)

3. Byvatov, E., Fechner, U., Sadowski, J., Schneider, G.: Comparison of support vector machine and artificial neural network systems for drug/nondrug classification. *J. Chem. Inf. Comput. Sci.* 43, 1882–1889 (2003)
4. Cerone, A., Costa, F., Frasconi, P.: Classification of small molecules by two- and three-dimensional decomposition kernels. *Bioinformatics* 23, 2038–2045 (2007)
5. Evgeniou, T., Pontil, M.: Regularized multi-task learning. In: KDD'04, pp. 109–117. ACM Press, New York (2004)
6. Gärtner, T.: A survey of kernels for structured data. *SIGKDD Explor. Newsl.* 5(1), 49–58 (2003)
7. Karelson, M.: Molecular Descriptors in QSAR/QSPR. Wiley-Interscience, Hoboken (2000)
8. Kashima, H., Tsuda, K., Inokuchi, A.: Marginalized kernels between labeled graphs. In: Proceedings of the 20th International Conference on Machine Learning (ICML), Washington, DC, United States (2003)
9. King, R., Muggleton, S., Srinivasan, A., Sternberg, M.: Structure-activity relationships derived by machine learning: the use of atoms and their bond connectivities to predict mutagenicity by inductive logic programming. *PNAS* 93, 438–442 (1996)
10. Menchetti, S., Costa, F., Frasconi, P.: Weighted decomposition kernels. In: International Conference on Machine Learning, pp. 585–592. ACM Press, New York (2005)
11. Ralaivola, L., Swamidass, S., Saigo, H., Baldi, P.: Graph kernels for chemical informatics. *Neural Networks* 18, 1093–1110 (2005)
12. Rousu, J., Saunders, C., Szedmak, S., Shawe-Taylor, J.: Kernel-Based Learning of Hierarchical Multilabel Classification Models. *JMLR* 7, 1601–1626 (2006)
13. Rousu, J., Saunders, C., Szedmak, S., Shawe-Taylor, J.: Efficient algorithms for max-margin structured classification. *Predicting Structured Data*, 105–129 (2007)
14. Shivakumar, P., Krauthammer, M.: Structural similarity assessment for drug sensitivity prediction in cancer. *Bioinformatics* 10, S17 (2009)
15. Taskar, B., Guestrin, C., Koller, D.: Max-margin markov networks. In: Neural Information Processing Systems 2003 (2003)
16. Trotter, M., Buxton, M., Holden, S.: Drug design by machine learning: support vector machines for pharmaceutical data analysis. *Comp. and Chem.* 26, 1–20 (2001)
17. Tsochantaridis, I., Hofmann, T., Joachims, T., Altun, Y.: Support vector machine learning for interdependent and structured output spaces. In: ICML'04, pp. 823–830 (2004)
18. Wang, Y., Bolton, E., Dracheva, S., Karapetyan, K., Shoemaker, B., Suzek, T., Wang, J., Xiao, J., Zhang, J., Bryant, S.: An overview of the pubchem bioassay resource. *Nucleic Acids Research* 38, D255–D266 (2009)
19. Xue, Y., Li, Z., Yap, C., et al.: Effect of molecular descriptor feature selection in support vector machine classification of pharmacokinetic and toxicological properties of chemical agents. *J. Chem. Inf. Comput. Sci.* 44, 1630–1638 (2004)
20. Zernov, V., Balakin, K., Ivaschenko, A., Savchuk, N., Pletnev, I.: Drug discovery using support vector machines. The case studies of drug-likeness, agrochemical-likeness, and enzyme inhibition predictions. *J. Chem. Inf. Comput. Sci.* 43, 2048–2056 (2003)

## Publication III

Hongyu Su, Juho Rousu. Multi-task Drug Bioactivity Classification with Graph Labeling Ensembles. In *Proceedings of the 6<sup>th</sup> International Conference on Pattern Recognition in Bioinformatics (PRIB 2011)*, Delft, The Netherlands, 2011. Springer LNBI volume 7035:157-167, November 2011.

© 2011 Copyright 2014 by the authors.  
Reprinted with permission.



# Multi-task Drug Bioactivity Classification with Graph Labeling Ensembles

Hongyu Su and Juho Rousu

Department of Computer Science,  
P.O. Box 68, 00014 University of Helsinki, Finland  
`{hongyu.su, juho.rousu}@cs.helsinki.fi`

**Abstract.** We present a new method for drug bioactivity classification based on learning an ensemble of multi-task classifiers. As the base classifiers of the ensemble we use Max-Margin Conditional Random Field (MMCRF) models, which have previously obtained the state-of-the-art accuracy in this problem. MMCRF relies on a graph structure coupling the set of tasks together, and thus turns the multi-task learning problem into a graph labeling problem. In our ensemble method the graphs of the base classifiers are random, constructed by random pairing or random spanning tree extraction over the set of tasks.

We compare the ensemble approaches on datasets containing the cancer inhibition potential of drug-like molecules against 60 cancer cell lines. In our experiments we find that ensembles based on random graphs surpass the accuracy of single SVM as well as a single MMCRF model relying on a graph built from auxiliary data.

**Keywords:** drug bioactivity prediction; multi-task learning; ensemble methods; kernel methods.

## 1 Introduction

Molecular classification, the task of predicting the presence or absence of the bioactivity of interest, has been benefited from variety of methods in statistics and machine learning [7]. In particular, kernel methods [9,16,2,7] have emerged as an effective way to handle the non-linear properties of chemicals. However, classification methods focusing on a single target variable are probably not optimally suited to drug screening applications where large number of target cell lines are to be handled.

In [15] a multi-task (or multilabel) learning approach was proposed to classify molecules according to their activity against a set of cancer cell lines. It was shown that the multilabel learning setup improves predictive performance over a set of support vector machine based single target classifiers. The multilabel classifier applied, Max-Margin Conditional Random Field (MMCRF) [11] relies on a graph structure coupling the outputs together. In [15] the graph was extracted

from auxiliary data, concerning sets of experiments conducted on the cancer cell lines, by simple techniques such as correlation thresholding and maximum weight spanning tree extraction.

In this paper, we develop ensemble learning methods for the multi-task learning setup. In our method, MMCRF models are used as the ensemble components. Unlike other ensemble learners for multi-task setups, our method does not require bootstrapping of the training data or changing instance weights to induce diversity among the ensemble components. In our case, the diversity is provided by the randomization of the output graphs, which combined with discriminative training of the base MMCRF classifiers, realizes the benefits typically seen from ensemble approaches. The random graph approach is compared against single classifiers and ensembles on graphs built from auxiliary data with different graph extraction methods, including inverse covariance learning [5] that is theoretically superior to correlation thresholding for extracting statistical dependencies.


Ensembles of multi-task or multilabel classifiers have been proposed in a few papers prior to ours, but with important differences both in the methods and the applications. In general, the previous approaches can be divided into two groups based on the source of diversity among the base classifiers of the ensemble. The first group of methods, boosting type, relies on changing the weights of the training instances so that difficult-to-classify instances gradually receive more and more weight. The Boostexter method [12] by the inventors of boosting has a multilabel learning variant. Later, Esuli et al. [4] developed a hierarchical multilabel variant of AdaBoost. Neither method explicitly considers label dependencies but the multilabel is considered essentially a flat vector. The second group of methods, bagging, is based on bootstrap sampling the training set several times and building the base classifiers from the bootstrap samples. Averaging over the ensemble gives the final predictions. Schietgat et al [13] concentrate a bagging in multilabel gene function prediction. They build ensembles of predictive clustering trees (PCT) by bagging, that is, bootstrap sampling of the data several times to arrive at a set of different models. In their approach, there is also no structure defined for the tasks, but the multilabel is essentially treated as a flat vector. Finally, Yan et al. [18] select different random subsets of input features and examples to induce the base classifiers.

The remainder of the article is structured as follows. In section 2 we present the base classifier MMCRF and the multi-task ensemble learning approach. In section 3 we validate the methods empirically, in particular we show that the ensemble approach exceeds the accuracy of MMCRF, which to our knowledge currently has the state-of-the-art predictive performance. In section 4 we aim to provide intuition of the hows and whys of the behaviour of the new method by relating the new ensemble approach to other multi-task and multilabel ensemble approaches. In section 5 finish with concluding remarks.

## 2 Ensemble Learning with Max-Margin Conditional Random Field Models on Random Graphs

Ensemble learners [3,8], such as boosting [12] and bagging [1] are based on the notion that a set of *weak learners*, those that have accuracy higher than coin tossing, may produce a strong learner with high accuracy when appropriately combined. It has been found that the diversity among the base models is the key property. The diversity may arise from re-weighting of examples, bootstrap resampling of examples, from the different inductive biases of the base learners, or in multiclass setup, or by generating a set of derived binary classification tasks (one-vs-the rest, one vs. one, and error-correcting output codes [3]).

In this section we present our ensemble learning approach where the diversity among the base learners comes from a different source, namely randomized graph structures that are used to couple the tasks. We use a majority voting approach over the predictions of the base classifiers, namely labelings of the randomized graphs. Two basic types of graphs are used, random spanning trees and random pairings of targets (Figure 1). As the base learner, we use the MMCRF algorithm [11].

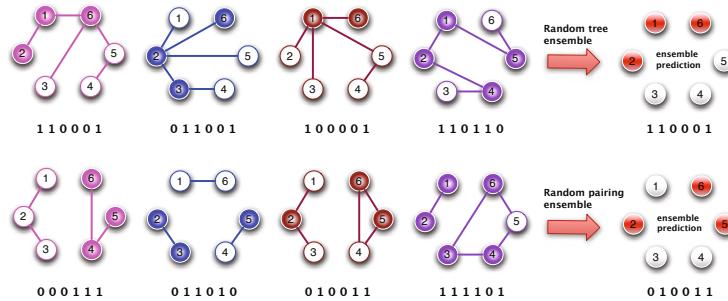

**Fig. 1.** Ensemble prediction from a set of random spanning trees (top) and a set of random pairings of tasks (bottom). The varying graph structures provide the required diversity among the ensemble components. Majority vote decides the final predicted label for each task.

The method for generating the ensemble is depicted in Algorithm 1. The algorithm receives a training sample of molecules  $x_i$ , computes the input kernel  $K$  and embarks on the ensemble learning phase. For each base model, a random graph  $G_t$  of the type specified by the user is drawn to couple the outputs  $y_i$  which are the inhibition potentials of molecule  $x_i$  against 60 cancer cell lines. The input kernel, label data and the graph are given as input to the MMCRF (see Section 2.1) that learns the graph labeling. After the ensemble has been generated, the ensemble prediction is extracted in post-processing: we extract the majority vote over the graph labelings from the sign of the mean of the base classifier predictions.

---

**Algorithm 1.** Ensemble learning algorithm with random graph multi-task classifiers

---

**Input:** Training sample  $S = \{(x_i, \mathbf{y}_i)\}_{i=1}^m$ , ensemble size  $T$ , type of the graph generated  $graphType$ ,  $n$  the number of nodes in the graph, type of input kernel applied  $kernelType$

**Output:** Multi-task classification ensemble  $(f^{(1)}, \dots, f^{(T)})$

```

1:  $K = buildKernel(\{x_i\}_{i=1}^m, kernelType)$ 
2:  $t = 0$ 
3: while  $t < T$  do
4:    $t = t + 1$ 
5:    $G_t = randomGraph(n, graphType)$ 
6:    $f^{(t)} = learnMMCRF(K, (\mathbf{y}_i)_{i=1}^m, G_t)$ 
7: end while
8: return  $f = (f^{(1)}, \dots, f^{(T)})$ 

```

---

## 2.1 Learning Graph Labeling with MMCRF

The MMCRF method used as the base learner in the multi-task ensembles is an instantiation of the structured output prediction framework MMCRF [11] for associative Markov networks and can also be seen as a sibling method to HM<sup>3</sup>[10], which is designed for hierarchies. We give a brief outline here, the interested reader may check the details from the above references.

The MMCRF learning algorithm takes as input a matrix  $K = (k(x_i, x_j))_{i,j=1}^m$  of kernel values  $k(x_i, x_j) = \phi(x_i)^T \phi(x_j)$  between the training patterns, where  $\phi(x)$  denotes a feature description of an input pattern (in our case a potential drug molecule), and a label matrix  $Y = (\mathbf{y}_i)_{i=1}^m$  containing the multilabels  $\mathbf{y}_i = (y_1, \dots, y_k)$  of the training patterns. The components  $y_j \in \{-1, +1\}$  of the multilabel are called microlabels, which in multi-task learning setup, correspond to labels of different tasks. In addition, the algorithm assumes an associative network  $G = (V, E)$  to be given, where node  $j \in V$  corresponds to the  $j$ 'th component of the multilabel and the edges  $e = (j, j') \in E$  correspond to a microlabel dependency structure.

The model learned by MMCRF takes the form of a conditional random field with exponential edge-potentials,

$$P(\mathbf{y}|x) \propto \prod_{e \in E} \exp(\mathbf{w}_e^T \varphi_e(x, \mathbf{y}_e)) = \exp(\mathbf{w}^T \varphi(x, \mathbf{y})),$$

where  $\mathbf{y}_e = (y_j, y_{j'})$  denotes the pair of microlabels of the edge  $e = (j, j')$ . A joint feature map  $\varphi(x, \mathbf{y}) = \phi(x) \otimes \psi(\mathbf{y})$  is composed via tensor product of input  $\phi(x)$  and output feature map  $\psi(\mathbf{y})$ , thus including all pairs of input and output features. The output feature map is composed of indicator functions  $\psi_e^u(\mathbf{y}) = \llbracket \mathbf{y}_e = u \rrbracket$  where  $u$  ranges over the four possible labelings of an edge given binary node labels. The corresponding weights are denoted by  $\mathbf{w} = (\mathbf{w}_e)_e$ . The benefit of the tensor product representation is that context (edge-labeling)

sensitive weights can be learned for input features and no prior alignment of input and output features needs to be assumed.

The parameters are learned by maximizing the minimum loss-scaled margin between the correct training examples  $(x_i, \mathbf{y}_i)$  and incorrect pseudo-examples  $(x_i, \mathbf{y}), \mathbf{y} \neq \mathbf{y}_i$ , while controlling the norm of the weight vector. The dual soft-margin optimization problem takes the form

$$\begin{aligned} \min_{\alpha \geq 0} \quad & \sum_{i, \mathbf{y}} \alpha(i, \mathbf{y}) \ell(\mathbf{y}_i, \mathbf{y}) - \frac{1}{2} \sum_{i, \mathbf{y}} \sum_{j, \mathbf{y}'} \alpha(i, \mathbf{y}) K(x_i, \mathbf{y}; x_j, \mathbf{y}') \alpha(j, \mathbf{y}') \\ \text{s.t.} \quad & \sum_{\mathbf{y}} \alpha(i, \mathbf{y}) \leq C, \forall i, \end{aligned} \quad (1)$$

where  $K(x_i, \mathbf{y}; x_j, \mathbf{y}') = \Delta\varphi(i, \mathbf{y})^T \Delta\varphi(j, \mathbf{y}') = K_X(x_i, x_j) \odot K_{\Delta Y}(\mathbf{y}, \mathbf{y}')$  is the joint kernel composed of the input  $K_X(x_i, x_j)$  and output  $K_{\Delta Y}(\mathbf{y}_i, \mathbf{y}')$  kernels. The underlying joint feature map is expressed by

$$\Delta\varphi(i, \mathbf{y}) = (\varphi(x_i, \mathbf{y}_i) - \varphi(x, \mathbf{y})) = \phi(x_i) \otimes (\psi(\mathbf{y}_i) - \psi(\mathbf{y})),$$

that is, joint feature difference vectors between the true ( $\mathbf{y}_i$ ) and a competing output ( $\mathbf{y}$ ).

As the input kernel we use the hash fingerprint Tanimoto kernel [9] that was previously shown [15] to be a well performing kernel in this task. Hash fingerprints enumerate all linear fragments of length  $n$  in a molecule. A hash function assigns each fragment a hash value that determines its position in descriptor space. Given two fingerprint vectors  $x$  and  $z$ , Tanimoto kernel is the way to measure their similarity defined as

$$K_X(x, z) = \frac{|I(x) \cap I(z)|}{|I(x) \cup I(z)|},$$

where  $I(x)$  denotes the set of indices of 1-bits in  $x$ .

As the loss function we use *Hamming loss*


$$\ell_{\Delta}(\mathbf{y}, \mathbf{u}) = \sum_j \llbracket y_j \neq u_j \rrbracket$$

that is gradually increasing in the number of incorrect microlabels so that we can make a difference between 'nearly correct' and 'clearly incorrect' multilabel predictions.

## 2.2 Graph Generation for Cancer Cell Lines

In the anti-cancer bioactivity prediction problem, a single task entails classification of drug molecules according to whether they are active or inactive against one of the 60 cancer cell lines. The nodes of the graph  $G$  to be labeled thus correspond to cancer cell lines. The edges of the graph depict coupling of the tasks, denoting a potential statistical dependency that is to be utilized in predicting the graph labels (Figure 2).

To generate random graphs  $G_t$  we use two approaches.

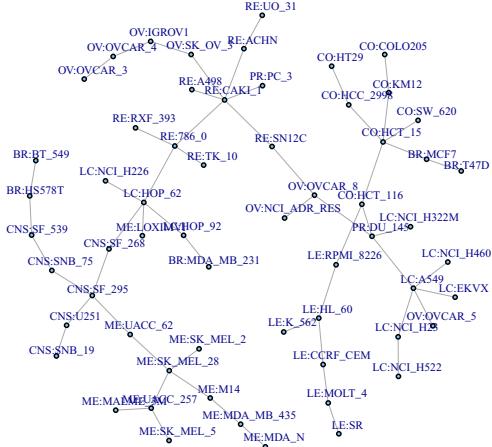**Fig. 2.** Example of a cell line graph

- In the random spanning tree approach, we first generate a random correlation matrix and extract the spanning tree out of the matrix with the above described approach.
- In the random pairing approach, one takes each vertex in turn, randomly draws another vertex and couples the two with an edge.

We note that the random graph approach lets us build ensembles whose size is not limited in practice.

We compare the random graphs against the approach used by [15], namely, graphs built from Radiation RNA Array data, available for the cancer cell lines from NCI database<sup>1</sup>. To extract a graph out of the correlation matrix we use the graphical lasso [5] which estimates a sparse graph model by using  $L_1$  (lasso) regularization on inverse covariance matrix, and is theoretically a better method than the simple thresholding of the covariance matrix, applied in [15]. Graphical lasso assumes multivariate Gaussian distribution over cell lines with mean  $\mu$  and covariance matrix  $\Sigma$ . The inverse covariance matrix  $\Sigma^{-1}$  is a good indicator for conditional independencies [6], where variable  $i$  and  $j$  are conditional independent given other variables if the  $ij$ th entry of  $\Sigma^{-1}$  is zero. It imposes  $L_1$  penalty during the estimation of  $\Sigma^{-1}$  to increase the sparsity of the resulted graph. The objective is to maximize the penalized log-likelihood

$$\log \det \Sigma^{-1} - \text{tr}(S \Sigma^{-1}) - \rho \|\Sigma^{-1}\|_1,$$

where  $\text{tr}$  is the trace of the matrix,  $S$  is empirical covariance matrix, and  $\|\Sigma^{-1}\|_1$  is the  $L_1$  norm of  $\Sigma^{-1}$ . Particularly in our application, we post processed the estimated sparse graph to be a tree-like one.

---

<sup>1</sup> <http://discover.nci.nih.gov/cellminer/home.do>

### 3 Experiments

#### 3.1 Data and Preprocessing

In this paper we use the NCI-Cancer dataset obtained through PubChem Bioassay<sup>2</sup> [17] data repository. The dataset, initiated by National Cancer Institute and National Institutes of Health (NCI/NIH), contains bioactivity information of large number of molecules against several human cancer cell lines in nine different tissue types including leukemia, melanoma and cancers of the lung, colon, brain, ovary, breast, prostate, and kidney. For each molecule tested against a certain cell line, the dataset provide a bioactivity outcome that we use as the classes (active, inactive).

Currently, there are 43197 molecules in the PubChem Bioassay database together with their activities information in 73 cancer cell lines. 60 cell lines have screen experimental results for most molecules and 4547 molecules have no missing data in these cell lines. Therefore these cell lines and molecules are selected and employed in our experiments. However, molecular activity data are highly biased over the 60 cell lines: Around 60% of molecules are inactive in all cell lines, while still a relatively large proportion of molecules are active against all cell lines. These molecules are less likely to be potential drug candidates than the ones in the middle part of the histogram.

To tackle the skewness problem, Su et al. [15] prepared three different versions of the datasets, which approach is also followed here:

**Full Data.** This dataset contains all 4547 molecules in the NCI-Cancer dataset that have their activity class (active vs. inactive) recorded against all 60 cancer cell lines.

**No-Zero-Active.** From full data, we removed all molecules that are not active towards any of the cell lines. The remaining 2303 molecules are all active against at least one cell line.

**Middle-Active.** Here, we followed the preprocessing suggested in [14], and selected molecules that are active in more than 10 cell lines and inactive in more than 10 cell lines. As a result, 545 molecules remained and were employed in our experiments.

#### 3.2 Compared Methods

Three kinds of multi-task classifier ensembles are compared:

- SVM: Support vector machines (SVM) are used as the single-task non-ensemble baseline classifier.
- MMCRF-Glasso: An MMCRF model where the underlying graph connecting the tasks is built by graphical lasso from auxiliary data.
- MMCRF-EnsRT: An ensemble of 1-500 MMCRF models, where the graph connecting the tasks is built by a random spanning tree.

---

<sup>2</sup> <http://pubchem.ncbi.nlm.nih.gov>

- MMCRF-EnsRP: An ensemble of 1-500 MMCRF models, where the graph connecting the tasks is built by random pairing of the tasks.

In the tests by [15], a relatively hard margin ( $C = 100$ ) emerged as the most favorable for SVM, while MMCRF proved to be quite insensitive as regarding margin softness. Here we used the same value for all compared classifiers.

### 3.3 Experiment Setup and Performance Measures

Because of the skewness of the multilabel distribution we used the following *stratified 5-fold cross-validation* scheme in all experiments reported such that we group the molecules in equivalence classes based on the number of cell lines they are active against. Then each group is randomly split among the five folds. The procedure ensures that also the smaller groups have representation in all folds. Besides overall classification accuracy, we also report microlabel  $F_1$  score, the harmonic mean of precision and recall

$$F_1 = 2 \times \frac{\text{Precision} \times \text{Recall}}{\text{Precision} + \text{Recall}}.$$

In particular, we pool together individual microlabel predictions over all examples and all cell lines, and count accuracy and  $F_1$  from the pool.

We generated hash fragments features from OpenBabel<sup>3</sup> which is a chemical toolbox available in public domain. We used default value for enumerating all linear structures up to length seven. Then Tanimoto kernel was built based on hash fingerprints features and normalized.


### 3.4 Results

Figure 3 illustrates the performance of the compared methods on the three versions of the datasets. All models based on MMCRF are clearly more accurate than SVM. Among single models and small ensembles, MMCRF-Glasso is the most competitive method, showing that the auxiliary data contains information that can be successfully used to improve predictive performance.

Both the random pairing and random tree based ensembles steadily improve accuracy and  $F_1$  score as the number of base models increases. SVM falls behind the random graph ensembles even on small ensemble sizes ( $T < 5$ ). With larger ensemble sizes, both types of ensembles end up superior to MMCRF-Glasso in terms of classification accuracy. In terms of  $F_1$  score, the best method depends on the dataset: on the Middle-Active dataset, the random tree ensemble outperform random pairing one, and MMCRF-Glasso is slightly behind. On No-zero-Active and Full data, random pairing ensemble ends up the best method. This result might reflect the sizes of the datasets: the Middle-Active dataset is significantly smaller than the other two, and perhaps the random pairing ensemble requires more data for best results.

---

<sup>3</sup> <http://openbabel.org>

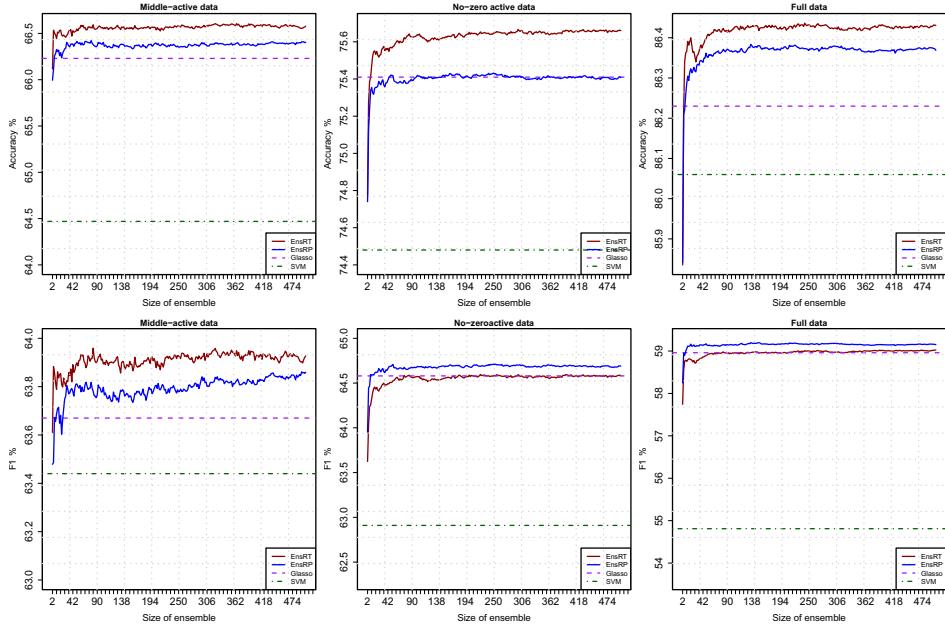

**Fig. 3.** Accuracy against number of individual classifiers in ensemble methods from different version of datasets. The red line corresponds to random tree ensemble, and blue line is random pairing ensemble. The performance of single models (SVM and MMCRF-Glasso) are depicted by the horizontal lines.

Table 1 shows the prediction performance from SVM, Glasso, EnsRP and EnsRT from three versions of the dataset. We performed two-tailed sign test to identify whether the differences in accuracy and  $F_1$  score in individual cell lines are statistically significant.  $P$ -values for the difference over the worst classifier and the ones towards the best classifier are shown as asterisks and crosses. The result shows that, in terms of accuracy and  $F_1$  the multi-task methods outperform SVM in all versions of datasets in a statistically significant manner. EnsRT outperforms Glasso in terms of accuracy in statistically very significant manner.

## 4 Discussion

The results of this paper show that ensemble methods can be effectively combined with a graph-based multi-task learner such as MMCRF. From machine learning point of view, perhaps the most surprising result obtained here is that in an ensemble, the base graph labeling models can be successfully learnt on random graphs, as opposed to using some auxiliary data or prior knowledge to extract graphs that aim to reflect statistical dependencies.

The present ensemble method differs from previous approaches in that the diversity among the base classifiers arises from the different random output

**Table 1.** Overall accuracy and microlabel  $F_1$  scores.  $P$ -values for the differences over the worst classifier in each version of the dataset are marked with asterisks.  $P$ -values for the differences towards the best classifier are marked with crosses. Single, double and triple symbols correspond to  $p$ -value below 0.05, 0.01 and 0.001.

Dataset	Accuracy				$F_1$			
	SVM	Glasso	EnsRP	EnsRT	SVM	Glasso	EnsRP	EnsRT
Middle-Active	64.5%†††	66.2%***	66.5%††	<b>66.6%***</b>	63.4%†	63.7%	63.9%*	<b>63.9%*</b>
No-Zero-Active	74.5%†††	75.4%†††	75.4%†††	<b>75.7%***</b>	62.9%†††	64.6%***	<b>64.7%***</b>	64.6%***
Full	86.1%†††	86.2%†††	86.3%***	<b>86.4%***</b>	54.8%†††	59.0%***	<b>59.2%***</b>	59.0%†††

structures, we do not reweight training examples as in boosting and we do not resample the data like in bagging methods. At the same time, each weak learner is trained to discriminate between different multilabels as well as possible.

Another way to understand the phenomenon is to see the edges of the task network as 'experts', and the collection of edges adjacent to a node as a 'expert committee' voting on the node label, each from a different context. The random pairing of tasks then induces a random set of experts. Random tree of tasks, in addition, makes the experts to negotiate on all node labels in order to keep the tree labeled consistently. Our experiments suggest that enforcing this consistency also may be beneficial.

## 5 Conclusions

We presented an ensemble approach for multi-task classification of drug bioactivity. The base classifiers of the ensemble, learned by Max-Margin Conditional Random Field algorithm (MMCRF), predict a labeling of a graph coupling the tasks together. The predictive performance of two types of ensembles, one based on random pairing of tasks, another based on a random spanning tree of tasks, surpasses that of SVM as well as single MMCRF model where the underlying graph has been built from auxiliary data using graphical lasso.

**Acknowledgements.** The work was financially supported by Helsinki Doctoral Programme in Computer Science (Hecse), Academy of Finland grant 118653 (ALGODAN), and in part by the IST Programme of the European Community, under the PASCAL2 Network of Excellence, ICT-2007-216886. This publication only reflects the authors' views.

## References

1. Breiman, L.: Bagging predictors. *Machine Learning* 24, 123–140 (1996)
2. Ceroni, A., Costa, F., Frasconi, P.: Classification of small molecules by two- and three-dimensional decomposition kernels. *Bioinformatics* 23, 2038–2045 (2007)
3. Dietterich, T.: Ensemble methods in machine learning. *Multiple classifier systems*, 1–15 (2000)

4. Esuli, A., Fagni, T., Sebastiani, F.: Boosting multi-label hierarchical text categorization. *Information Retrieval* 11(4), 287–313 (2008)
5. Hastie, T., Tibshirani, R.: Sparse inverse covariance estimation with the graphical lasso. *Biostatistics* 9(3), 432–441 (2008)
6. Meinshausen, N., Bühlmann, P., Zürich, E.: High dimensional graphs and variable selection with the lasso. *Annals of Statistics* 34, 1436–1462 (2006)
7. Obrezaanova, O., Segall, M.D.: Gaussian processes for classification: Qsar modeling of admet and target activity. *Journal of Chemical Information and Modeling* 50(6), 1053–1061 (2010)
8. Opitz, D., Maclin, R.: Popular ensemble methods: an empirical study. *Journal of Artificial Intelligence Research* 11, 169–198 (1999)
9. Ralaivola, L., Swamidass, S., Saigo, H., Baldi, P.: Graph kernels for chemical informatics. *Neural Networks* 18, 1093–1110 (2005)
10. Rousu, J., Saunders, C., Szedmak, S., Shawe-Taylor, J.: Kernel-Based Learning of Hierarchical Multilabel Classification Models. *The Journal of Machine Learning Research* 7, 1601–1626 (2006)
11. Rousu, J., Saunders, C., Szedmak, S., Shawe-Taylor, J.: Efficient algorithms for max-margin structured classification. *Predicting Structured Data*, 105–129 (2007)
12. Schapire, R.E., Singer, Y.: Boostexter: A boosting-based system for text categorization. *Machine Learning* 39(2/3), 135–168 (2000)
13. Schietgat, L., Vens, C., Struyf, J., Blockeel, H., Kocev, D., Džeroski, S.: Predicting gene function using hierarchical multi-label decision tree ensembles. *BMC bioinformatics* 11(1), 2 (2010)
14. Shivakumar, P., Krauthammer, M.: Structural similarity assessment for drug sensitivity prediction in cancer. *Bioinformatics* 10, S17 (2009)
15. Su, H., Heinonen, M., Rousu, J.: Structured Output Prediction of Anti-cancer Drug Activity. In: Dijkstra, T.M.H., Tsivtsivadze, E., Marchiori, E., Heskes, T. (eds.) PRIB 2010. LNCS, vol. 6282, pp. 38–49. Springer, Heidelberg (2010)
16. Trotter, M., Buxton, M., Holden, S.: Drug design by machine learning: support vector machines for pharmaceutical data analysis. *Comp. and Chem.* 26, 1–20 (2001)
17. Wang, Y., Bolton, E., Dracheva, S., Karapetyan, K., Shoemaker, B., Suzek, T., Wang, J., Xiao, J., Zhang, J., Bryant, S.: An overview of the pubchem bioassay resource. *Nucleic Acids Research* 38, D255–D266 (2009)
18. Yan, R., Tesic, J., Smith, J.: Model-shared subspace boosting for multi-label classification. In: Proceedings of the 13th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, pp. 834–843. ACM (2007)



## Publication IV

Hongyu Su, Juho Rousu. Multilabel Classification through Random Graph Ensembles. *Machine Learning*, Volume, issue, pages, and other detailed information, Month Year.

© Year Copyright 2014 by the authors.

Reprinted with permission.



Dear Author,

Here are the proofs of your article.

- You can submit your corrections **online**, via **e-mail** or by **fax**.
- For **online** submission please insert your corrections in the online correction form. Always indicate the line number to which the correction refers.
- You can also insert your corrections in the proof PDF and **email** the annotated PDF.
- For fax submission, please ensure that your corrections are clearly legible. Use a fine black pen and write the correction in the margin, not too close to the edge of the page.
- Remember to note the **journal title**, **article number**, and **your name** when sending your response via e-mail or fax.
- **Check** the metadata sheet to make sure that the header information, especially author names and the corresponding affiliations are correctly shown.
- **Check** the questions that may have arisen during copy editing and insert your answers/corrections.
- **Check** that the text is complete and that all figures, tables and their legends are included. Also check the accuracy of special characters, equations, and electronic supplementary material if applicable. If necessary refer to the *Edited manuscript*.
- The publication of inaccurate data such as dosages and units can have serious consequences. Please take particular care that all such details are correct.
- Please **do not** make changes that involve only matters of style. We have generally introduced forms that follow the journal's style.  
Substantial changes in content, e.g., new results, corrected values, title and authorship are not allowed without the approval of the responsible editor. In such a case, please contact the Editorial Office and return his/her consent together with the proof.
- If we do not receive your corrections **within 48 hours**, we will send you a reminder.
- Your article will be published **Online First** approximately one week after receipt of your corrected proofs. This is the **official first publication** citable with the DOI. **Further changes are, therefore, not possible.**
- The **printed version** will follow in a forthcoming issue.

#### Please note

After online publication, subscribers (personal/institutional) to this journal will have access to the complete article via the DOI using the URL: [http://dx.doi.org/\[DOI\]](http://dx.doi.org/[DOI]).

If you would like to know when your article has been published online, take advantage of our free alert service. For registration and further information go to: <http://www.link.springer.com>.

Due to the electronic nature of the procedure, the manuscript and the original figures will only be returned to you on special request. When you return your corrections, please inform us if you would like to have these documents returned.

# Metadata of the article that will be visualized in OnlineFirst

**Please note: Images will appear in color online but will be printed in black and white.**

ArticleTitle	Multilabel classification through random graph ensembles	
Article Sub-Title		
Article CopyRight	The Author(s) (This will be the copyright line in the final PDF)	
Journal Name	Machine Learning	
Corresponding Author	Family Name Particle Given Name Suffix Division Organization Address Email	Su <b>Hongyu</b> Department of Information and Computer Science, Helsinki Institute for Information Technology HIIT Aalto University Konemiehentie 2, 02150 , Espoo, Finland hongyu.su@aalto.fi
Author	Family Name Particle Given Name Suffix Division Organization Address Email	<b>Rousu</b> <b>Juho</b> Department of Information and Computer Science, Helsinki Institute for Information Technology HIIT Aalto University Konemiehentie 2, 02150 , Espoo, Finland juho.rousu@aalto.fi
Schedule	Received Revised Accepted	16 January 2014 14 July 2014
Abstract	We present new methods for multilabel classification, relying on ensemble learning on a collection of random output graphs imposed on the multilabel, and a kernel-based structured output learner as the base classifier. For ensemble learning, differences among the output graphs provide the required base classifier diversity and lead to improved performance in the increasing size of the ensemble. We study different methods of forming the ensemble prediction, including majority voting and two methods that perform inferences over the graph structures before or after combining the base models into the ensemble. We put forward a theoretical explanation of the behaviour of multilabel ensembles in terms of the diversity and coherence of microlabel predictions, generalizing previous work on single target ensembles. We compare our methods on a set of heterogeneous multilabel benchmark problems against the state-of-the-art machine learning approaches, including multilabel AdaBoost, convex multitask feature learning, as well as single target learning approaches represented by Bagging and SVM. In our experiments, the random graph ensembles are very competitive and robust, ranking first or second on most of the datasets. Overall, our results show that our proposed random graph ensembles are viable alternatives to flat multilabel and multitask learners.	
Keywords (separated by '-')	Multilabel classification - Structured output - Ensemble methods - Kernel methods - Graphical models	
Footnote Information	Editors: Cheng Soon Ong, Tu Bao Ho, Wray Buntine, Bob Williamson, and Masashi Sugiyama.	

## Multilabel classification through random graph ensembles

Hongyu Su · Juho Rousu

Received: 16 January 2014 / Accepted: 14 July 2014  
© The Author(s) 2014

1 **Abstract** We present new methods for multilabel classification, relying on ensemble learning  
2 on a collection of random output graphs imposed on the multilabel, and a kernel-based  
3 structured output learner as the base classifier. For ensemble learning, differences among the  
4 output graphs provide the required base classifier diversity and lead to improved performance  
5 in the increasing size of the ensemble. We study different methods of forming the ensemble  
6 prediction, including majority voting and two methods that perform inferences over the graph  
7 structures before or after combining the base models into the ensemble. We put forward a  
8 theoretical explanation of the behaviour of multilabel ensembles in terms of the diversity and  
9 coherence of microlabel predictions, generalizing previous work on single target ensembles.  
10 We compare our methods on a set of heterogeneous multilabel benchmark problems against  
11 the state-of-the-art machine learning approaches, including multilabel AdaBoost, convex  
12 multitask feature learning, as well as single target learning approaches represented by Bagging  
13 and SVM. In our experiments, the random graph ensembles are very competitive and robust,  
14 ranking first or second on most of the datasets. Overall, our results show that our proposed  
15 random graph ensembles are viable alternatives to flat multilabel and multitask learners.

16 **Keywords** Multilabel classification · Structured output · Ensemble methods · Kernel  
17 methods · Graphical models

### 18 1 Introduction

19 Multilabel and multitask classification rely on representations and learning methods that  
20 allow us to leverage the dependencies between the different labels. When such dependencies

---

Editors: Cheng Soon Ong, Tu Bao Ho, Wray Buntine, Bob Williamson, and Masashi Sugiyama.

H. Su (✉) · J. Rousu  
Department of Information and Computer Science, Helsinki Institute for Information Technology HIIT,  
Aalto University, Konemiehentie 2, 02150 Espoo, Finland  
e-mail: hongyu.su@aalto.fi

J. Rousu  
e-mail: juho.rousu@aalto.fi

are given in form of a graph structure such as a sequence, a hierarchy or a network, structured output prediction (Taskar et al. 2003; Tschantzidis et al. 2004; Rousu et al. 2006) becomes a viable option, and has achieved a remarkable success. For multilabel classification, limiting the applicability of the structured output prediction methods is the very fact they require the predefined output structure to be at hand, or alternatively auxiliary data where the structure can be learned from. When these are not available, flat multilabel learners or collections of single target classifiers are thus often resorted to.

In this paper, we study a different approach, namely using ensembles of graph labeling classifiers, trained on randomly generated output graph structures. The methods are based on the idea that variation in the graph structures shifts the inductive bias of the base learners and causes diversity in the predicted multilabels. Each base learner, on the other hand, is trained to predict as good as possible multilabels, which makes them satisfy the weak learning assumption, necessary for successful ensemble learning.

Ensembles of multitask or multilabel classifiers have been proposed, but with important differences. The first group of methods, boosting type, rely on changing the weights of the training instances so that difficult to classify instances gradually receive more and more weights. The AdaBoost boosting framework has spawned multilabel variants (Schapire and Singer 2000; Esuli et al. 2008). In these methods the multilabel is considered essentially as a flat vector. The second group of methods, Bagging, are based on bootstrap sampling the training set several times and building the base classifiers from the bootstrap samples. Thirdly, randomization has been used as the means of achieving diversity by Yan et al. (2007) who select different random subsets of input features and examples to induce the base classifiers, and by Su and Rousu (2011) who use majority voting over random graphs in drug bioactivity prediction context. Here we extend the last approach to two other types of ensembles and a wider set of applications, with gain in prediction performances. A preliminary version of this article appeared as Su and Rousu (2013).

The remainder of the article is structured as follows. In Sect. 2 we present the structured output model used as the graph labeling base classifier. In Sect. 3 we present three aggregation strategies based on random graph labeling. In Sect. 4 we present empirical evaluation of the methods. In Sect. 5 we present concluding remarks.

## 2 Multilabel classification through graph labeling

We start by detailing the graph labeling classification methods that are subsequently used as the base classifier. We examine the following multilabel classification setting. We assume data from a domain  $\mathcal{X} \times \mathcal{Y}$ , where  $\mathcal{X}$  is a set and  $\mathcal{Y} = \mathcal{Y}_1 \times \dots \times \mathcal{Y}_k$  is the set of multilabels, represented by a Cartesian product of the sets  $\mathcal{Y}_j = \{1, \dots, l_j\}$ ,  $j = 1, \dots, k$ . In particular, setting  $k = 1, l_1 = 2$  ( $\mathcal{Y} = \{1, 2\}$ ) corresponds to binary classification problem. A vector  $\mathbf{y} = (y_1, \dots, y_k) \in \mathcal{Y}$  is called the *multilabel* and the components  $y_j$  are called the *microlabels*. We assume that a training set  $\{(x_i, \mathbf{y}_i)\}_{i=1}^m \subset \mathcal{X} \times \mathcal{Y}$  has been given. A pair  $(x_i, \mathbf{y})$  where  $x_i$  is a training pattern and  $\mathbf{y} \in \mathcal{Y}$  is arbitrary, is called a *pseudo-example*, to denote the fact that the pair may or may not be generated by the distribution generating the training examples. The goal is to learn a model  $F : \mathcal{X} \mapsto \mathcal{Y}$  so that the expected loss over predictions on future instances is minimized, where the loss function is chosen suitably for multilabel learning problems. By  $\mathbf{1}_{\{\cdot\}}$  we denote the indicator function  $\mathbf{1}_{\{A\}} = 1$ , if  $A$  is true,  $\mathbf{1}_{\{A\}} = 0$  otherwise.

Here, we consider solving multilabel classification with graph labeling classifiers that, in addition to the training set, assumes a graph  $G = (V, E)$  with nodes  $V = \{1, \dots, k\}$  corresponding to microlabels and edges  $E \subseteq V \times V$  denoting potential dependencies between the

67 microlabels. For any edge  $e = (j, j') \in E$ , we denote by  $\mathbf{y}_e = (y_j, y_{j'})$  the edge label of  $e$   
 68 in multilabel  $\mathbf{y}$ , induced by concatenating the microlabels corresponding to end points of  $e$ ,  
 69 with corresponding domain of edge labels  $\mathcal{Y}_e = \mathcal{Y}_j \times \mathcal{Y}_{j'}$ . By  $y_{ie}$  we denote the label of the  
 70 edge  $e$  in the  $i$ 'th training example. Hence, for a fixed multilabel  $\mathbf{y}$ , we can compute corre-  
 71 sponding node label  $y_j$  of node  $j \in V$  and edge label  $\mathbf{y}_e$  of edge  $e \in E$ . We also use separate  
 72 notation for node and edge labels that are free, that is, not bound to any particular multilabel.  
 73 We denote by  $u_j$  a possible label of node  $j$ , and  $\mathbf{u}_e$  a possible labels of edge  $e$ . Naturally,  
 74  $u_j \in \mathcal{Y}_j$  and  $\mathbf{u}_e \in \mathcal{Y}_e$ . See supplementary material for a comprehensive list of notations.

## 75 2.1 Graph labeling classifier

76 As the graph labeling classifier in this work we use max-margin structured output prediction,  
 77 with the aim to learn a compatibility score for pairs  $(x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ , indicating how well  
 78 an input goes together with an output. Naturally, such a score for coupling an input  $x$  with  
 79 the correct multilabel  $\mathbf{y}$  should be higher than the score of the same input with an incorrect  
 80 multilabel  $\mathbf{y}'$ . The compatibility score between an input  $x$  and a multilabel  $\mathbf{y}$  takes the form

$$81 \quad \psi(x, \mathbf{y}) = \langle w, \varphi(x, \mathbf{y}) \rangle = \sum_{e \in E} \langle w_e, \varphi_e(x, \mathbf{y}_e) \rangle = \sum_{e \in E} \psi_e(x, \mathbf{y}_e), \quad (1)$$

83 where by  $\langle \cdot, \cdot \rangle$  we denote the inner product and parameter  $w$  contains the feature weights  
 84 to be learned.  $\psi_e(x, \mathbf{y}_e)$  is a shorthand for the compatibility score, or the potential, between  
 85 the input  $x$  and an edge label  $\mathbf{y}_e$ , defined as  $\psi_e(x, \mathbf{y}_e) = \langle w_e, \varphi_e(x, \mathbf{y}_e) \rangle$ , where  $w_e$  is the  
 86 element of  $w$  that associates to edge  $e$ .

87 The joint feature map

$$88 \quad \varphi(x, \mathbf{y}) = \phi(x) \otimes \Upsilon(\mathbf{y}) = \phi(x) \otimes (\Upsilon_e(\mathbf{y}_e))_{e \in E} = (\varphi_e(x, \mathbf{y}_e))_{e \in E}$$

89 is given by a tensor product of an input feature  $\phi(x)$  and the feature space embedding  
 90 of the multilabel  $\Upsilon(\mathbf{y}) = (\Upsilon_e(\mathbf{y}_e))_{e \in E}$ , consisting of edge label indicators  $\Upsilon_e(\mathbf{y}_e) =$   
 91  $(\mathbf{1}_{\{\mathbf{y}_e = \mathbf{u}_e\}})_{\mathbf{u}_e \in \mathcal{Y}_e}$ . The benefit of the tensor product representation is that context (edge label)  
 92 sensitive weights can be learned for input features and no prior alignment of input and output  
 93 features needs to be assumed.

94 The parameters  $w$  of the model are learned through max-margin optimization, where the  
 95 primal optimization problem takes the form (e.g. Taskar et al. 2003; Tschantzidis et al.  
 96 2004; Rousu et al. 2006)

$$97 \quad \begin{aligned} & \min_{w, \xi} \frac{1}{2} \|w\|^2 + C \sum_{i=1}^m \xi_i \\ 98 & \text{s.t. } \langle w, \varphi(x_i, \mathbf{y}_i) \rangle \geq \max_{\mathbf{y} \in \mathcal{Y}} (\langle w, \varphi(x_i, \mathbf{y}) \rangle + \ell(\mathbf{y}_i, \mathbf{y})) - \xi_i, \\ 99 & \quad \xi_i \geq 0, \forall i \in \{1, \dots, m\}, \end{aligned} \quad (2)$$

101 where  $\xi_i$  denotes the slack allotted to each example,  $\ell(\mathbf{y}_i, \mathbf{y})$  is the loss function between  
 102 pseudo-label and correct label, and  $C$  is the slack parameter that controls the amount of  
 103 regularization in the model. The primal form can be interpreted as maximizing the minimum  
 104 margin between the correct training example and incorrect pseudo-examples, scaled by the  
 105 loss function. The intuition behind loss-scaled margin is that example with nearly correct  
 106 multilabel would require smaller margin than with multilabel that is quite different from the  
 107 correct one. Denoting  $\Delta\varphi(x_i, \mathbf{y}) = \varphi(x_i, \mathbf{y}_i) - \varphi(x_i, \mathbf{y})$ , the Lagrangian of the problem is  
 108 given by

$$L(w, \xi, \alpha, \rho) = \frac{1}{2} \|w\|^2 + C \sum_{i=1}^m \xi_i - \sum_{i,y} \alpha(i, y) (\langle w, \Delta\varphi(x_i, y) \rangle + \ell(y_i, y)) - \sum_i \xi_i \rho_i,$$

where by setting derivatives to zero with respect to  $w$  we obtain

$$w = \sum_{i,y} \alpha(i, y) \Delta\varphi(x_i, y), \quad (3)$$

and the zero derivatives for  $\xi$  give the box constraint  $\sum_y \alpha(i, y) \leq C$  for all  $i$ , while the dual variables  $\rho_i$  are canceled out. Maximization with respect to  $\alpha$ 's gives the dual optimization problem as

$$\begin{aligned} & \max_{\alpha \geq 0} \alpha^T \ell - \frac{1}{2} \alpha^T K \alpha \\ & \text{s.t. } \sum_y \alpha(i, y) \leq C, \forall i \in \{1, \dots, m\}, \end{aligned} \quad (4)$$

where  $\alpha = (\alpha(i, y))_{i,y}$  denotes the vector of dual variables and  $\ell = (\ell(y_i, y))_{i,y}$  is the vector of losses for each pseudo-example  $(x_i, y)$ . The joint kernel

$$\begin{aligned} K(x_i, y; x_j, y') &= \langle \varphi(x_i, y_i) - \varphi(x_i, y), \varphi(x_j, y_j) - \varphi(x_j, y') \rangle \\ &= \langle \phi(x_i), \phi(x_j) \rangle_\phi \cdot \langle (\Upsilon(y_i) - \Upsilon(y), \Upsilon(y_j) - \Upsilon(y')) \rangle_\Upsilon \\ &= K_\phi(x_i, x_j) \cdot (K_\Upsilon(y_i, y_j) - K_\Upsilon(y_i, y') - K_\Upsilon(y, y_j) + K_\Upsilon(y, y')) \\ &= K_\phi(x_i, x_j) \cdot K_{\Delta\Upsilon}(y_i, y; y_j, y') \end{aligned}$$

is composed by product of input kernel  $K_\phi(x_i, x_j) = \langle x_i, x_j \rangle_\phi$  and output kernel

$$K_{\Delta\Upsilon}(y_i, y; y_j, y') = (K_\Upsilon(y_i, y_j) - K_\Upsilon(y_i, y') - K_\Upsilon(y, y_j) + K_\Upsilon(y, y')),$$

where  $K_\Upsilon(y, y') = \langle \Upsilon(y'), \Upsilon(y) \rangle$ .

## 2.2 Factorized dual form

The dual optimization problem (4) is a challenging one to solve due to the exponential-sized dual variable space, thus efficient algorithms are required. A tractable form is obtained via factorizing the problem according to the graph structure. Following Rousu et al. (2007), we transform (4) into the factorized dual form, where the edge-marginals of dual variables are used in place of the original dual variables

$$\mu(i, e, \mathbf{u}_e) = \sum_{y \in \mathcal{Y}} \mathbf{1}_{\{\Upsilon_e(y) = \mathbf{u}_e\}} \alpha(i, y), \quad (5)$$

where  $e = (j, j') \in E$  is an edge in the output graph and  $\mathbf{u}_e \in \mathcal{Y}_j \times \mathcal{Y}_{j'}$  is a possible label for the edge  $(j, j')$ .

The output kernel decomposes by the edges of the graph as

$$K_\Upsilon(\mathbf{y}, \mathbf{y}') = \langle \Upsilon(\mathbf{y}'), \Upsilon(\mathbf{y}) \rangle = \sum_e K_{\Upsilon,e}(\mathbf{y}_e, \mathbf{y}'_e),$$

139 where  $K_{\Upsilon,e}(u, u') = \langle \Upsilon_e(u), \Upsilon_e(u') \rangle_\Upsilon$ . Given the joint features defined by the tensor product  
 140 the joint kernel also decomposes as

$$\begin{aligned} 141 \quad K(x_i, \mathbf{y}; x_j, \mathbf{y}') &= K_\phi(x, x') K_{\Delta\Upsilon}(\mathbf{y}_i, \mathbf{y}; \mathbf{y}_j, \mathbf{y}') = \\ 142 \quad &= \sum_e K_\phi(x, x') K_{\Delta\Upsilon,e}(\mathbf{y}_e, \mathbf{y}'_e) = \sum_e K_e(x, \mathbf{y}_e; x', \mathbf{y}'_e), \end{aligned}$$

143 where we have denoted

$$\begin{aligned} 144 \quad K_{\Delta\Upsilon,e}(\mathbf{y}_{ie}, \mathbf{y}_{je}; \mathbf{y}'_e) &= \\ 145 \quad &\left( K_{\Upsilon,e}(\mathbf{y}_{ie}, \mathbf{y}_{je}) - K_{\Upsilon,e}(\mathbf{y}_{ie}, \mathbf{y}'_e) - K_{\Upsilon,e}(\mathbf{y}_e, \mathbf{y}_{je}) + K_{\Upsilon,e}(\mathbf{y}_e, \mathbf{y}'_e) \right). \end{aligned}$$

146 Using the above, the quadratic part of the objective factorizes as follows

$$\begin{aligned} 147 \quad \alpha^T K \alpha &= \sum_e \sum_{i,j} \sum_{\mathbf{y}, \mathbf{y}'} \alpha(i, \mathbf{y}) K_e(x_i, \mathbf{y}_e; x_j, \mathbf{y}'_e) \alpha(j, \mathbf{y}') \\ 148 \quad &= \sum_e \sum_{i,j} \sum_{\mathbf{u}, \mathbf{u}'} K_e(x_i, \mathbf{u}; x_j, \mathbf{u}') \sum_{\mathbf{y}: \mathbf{y}_e = \mathbf{u}} \sum_{\mathbf{y}'': \mathbf{y}'_e = \mathbf{u}'} \alpha(i, \mathbf{y}) \alpha(j, \mathbf{y}') \\ 149 \quad &= \sum_e \sum_{i,j} \sum_{\mathbf{u}, \mathbf{u}'} \mu(i, e, \mathbf{u}) K_e(x_i, \mathbf{u}; x_j, \mathbf{u}') \mu(j, e, \mathbf{u}') \\ 150 \quad &= \mu^T K_E \mu, \end{aligned} \tag{6}$$

151 where  $K_E = \text{diag}(K_e, e \in E)$  is a block diagonal matrix with edge-specific kernel blocks  $K_e$   
 152 and  $\mu = (\mu(i, e, u))_{i,e,u}$  is the vector of marginal dual variables. We assume a loss function  
 153 that can be expressed in a decomposed form as

$$\ell(\mathbf{y}, \mathbf{y}') = \sum_e \ell_e(\mathbf{y}_e, \mathbf{y}'_e),$$

155 a property that is satisfied by the Hamming loss family, counting incorrectly predicted nodes  
 156 (i.e. microlabel loss) or edges, and are thus suitable for our purpose. With a decomposable  
 157 loss function, the linear part of the objective satisfies

$$\begin{aligned} 158 \quad \sum_{i=1}^m \sum_{\mathbf{y} \in \mathcal{Y}} \alpha(i, \mathbf{y}) \ell(\mathbf{y}_i, \mathbf{y}) &= \sum_{i=1}^m \sum_{\mathbf{y}} \alpha(i, \mathbf{y}) \sum_e \ell_e(\mathbf{y}_{ie}, \mathbf{y}_e) = \\ 159 \quad &= \sum_{i=1}^m \sum_{e \in E} \sum_{u \in \mathcal{Y}_e} \sum_{\mathbf{y}: \mathbf{y}_e = u} \alpha(i, \mathbf{y}) \ell_e(\mathbf{y}_{ie}, u) \\ 160 \quad &= \sum_{i=1}^m \sum_{e \in E} \sum_{u \in \mathcal{Y}_e} \mu(e, u) \ell_e(\mathbf{y}_{ie}, u) = \sum_{i=1}^m \mu_i^T \ell_i = \mu^T \ell_E, \end{aligned} \tag{7}$$

162 where  $\ell_E = (\ell_i)_{i=1}^m = (\ell_e(i, u))_{i=1, e \in E, u \in \mathcal{Y}_e}^m$  is the vector of losses. Given the above, we  
 163 can state the dual problem (4) in equivalent form (c.f. Taskar et al. 2003; Rousu et al. 2007)  
 164 as

$$\max_{\mu \in \mathcal{M}} \mu^T \ell - \frac{1}{2} \mu^T K_E \mu, \tag{8}$$

166 where the constraint set is the marginal polytope (c.f. Rousu et al. 2007; Wainwright et al.  
 167 2005)

$$168 \quad \mathcal{M} = \{\mu | \exists \alpha \in \mathcal{A} \text{ s.t. } \mu(i, e, \mathbf{u}_e) = \sum_{\mathbf{y} \in \mathcal{Y}} \mathbf{1}_{\{\mathbf{y}_{ie} = \mathbf{u}_e\}} \alpha(i, \mathbf{y}), \forall i, \mathbf{u}_e, e\}$$

169 of the dual variables, the set of all combinations of marginal dual variables (5) of training  
 170 examples that correspond to some  $\alpha$  in the original dual feasible set  $\mathcal{A} = \{\alpha | \alpha(i, \mathbf{y}) \geq  
 171 0, \sum_{\mathbf{y}} \alpha(i, \mathbf{y}) \leq C, \forall i\}$  in (4). Note that the above definition of  $\mathcal{M}$  automatically takes care  
 172 of the consistency constraints between marginal dual variables (c.f. Rousu et al. 2007).

173 The factorized dual problem (8) is a quadratic program with a number of variables *linear*  
 174 in both the size of the output network and the number of training examples. There is an  
 175 exponential reduction in the number of dual variables from the original dual (4), however,  
 176 with the penalty of more complex feasible polytope  $\mathcal{M}$ . For solving (8) we use MMCRF  
 177 (Rousu et al. 2007) that relies on a conditional gradient method. Update directions are found  
 178 in linear time via probabilistic inference (explained in the next section), making use of the the  
 179 exact correspondence of maximum margin violating multilabel in the primal (2) and steepest  
 180 feasible gradient of the dual objective (4).

### 181 2.3 Inference

182 In both training and prediction, efficient inference is required over the multilabel spaces.  
 183 In training any of the models (2, 4, 8), one needs to iteratively solve the *loss-augmented*  
 184 *inference* problem

$$185 \quad \bar{\mathbf{y}}(x_i) = \underset{\mathbf{y} \in \mathcal{Y}}{\operatorname{argmax}} (\langle w, \varphi(x_i, \mathbf{y}) \rangle + \ell(\mathbf{y}_i, \mathbf{y})) \\ 186 \quad = \underset{\mathbf{y} \in \mathcal{Y}}{\operatorname{argmax}} \sum_e \langle w_e, \varphi_e(x_i, \mathbf{y}_e) \rangle + \ell_e(\mathbf{y}_e, \mathbf{y}_{ie}) \quad (9)$$

188 that finds for each example the multilabel that violates its margins the most (i.e. the worst  
 189 margin violator) given the current  $w$ . Depending on the optimization algorithm, the worst-  
 190 margin violator may be used to grow a constraint set (column-generation methods), or to  
 191 define an update direction (structured perceptron, conditional gradient).

192 In the prediction phase, the inference problem to be solved is simply to find the highest  
 193 scoring multilabel for each example:

$$194 \quad \hat{\mathbf{y}}(x) = \underset{\mathbf{y} \in \mathcal{Y}}{\operatorname{argmax}} \langle w, \varphi(x, \mathbf{y}) \rangle = \underset{\mathbf{y} \in \mathcal{Y}}{\operatorname{argmax}} \sum_e \langle w_e, \varphi_e(x, \mathbf{y}) \rangle \quad (10)$$

196 Both of the above inference problems can be solved in the factorized dual, thus allowing  
 197 us to take advantage of kernels for complex and high-dimensional inputs, as well as the  
 198 linear-size dual variable space.

199 Next, we put forward a lemma that shows explicitly how the compatibility score  
 200  $\psi_e(x, \mathbf{y}_e) = \langle w_e, \varphi_e(x, \mathbf{y}_e) \rangle$  of labeling an edge  $e$  as  $\mathbf{y}_e$  given input  $x$  can be expressed  
 201 in terms of kernels and marginal dual variables. We note that the property is already used in  
 202 marginal dual based structured output methods such as MMCRF, however, below we make  
 203 the property explicit, to facilitate the description of the ensemble learning methods.

204 **Lemma 1** Let  $w$  be the solution to (2),  $\varphi(x, \mathbf{y})$  be the joint feature map, and let  $G = (V, E)$   
 205 be the graph defining the output graph structure, and let us denote

$$206 \quad H_e(x_i, \mathbf{u}_e; x, \mathbf{y}_e) = K_\phi(x, x_i) \cdot (K_{\Upsilon, e}(\mathbf{y}_{ie}, \mathbf{y}_e) - K_{\Upsilon, e}(\mathbf{u}_e, \mathbf{y}_e)).$$

207 Then, we have

$$208 \quad \psi_e(x, \mathbf{y}_e) = \langle w_e, \varphi_e(x, \mathbf{y}_e) \rangle = \sum_{i, \mathbf{u}_e} \mu(i, e, \mathbf{u}_e) \cdot H_e(x_i, \mathbf{u}_e; x, \mathbf{y}_e), \\ 209$$

210 where  $\mu$  is the marginal dual variable learned by solving optimization problem (8).

211 Proof Using (3) and (5), and elementary tensor algebra, the compatibility score of a example  
212 ( $x, \mathbf{y}'$ ) is given by

$$213 \quad \langle w, \varphi(x, \mathbf{y}') \rangle = \sum_i \sum_{\mathbf{y}} \alpha(i, \mathbf{y}) \langle \Delta \varphi(x_i, \mathbf{y}), \varphi(x, \mathbf{y}') \rangle \\ 214 \quad = \sum_i \sum_e \sum_{\mathbf{u}_e} \sum_{\mathbf{y}: \mathbf{y}_e = \mathbf{u}_e} \alpha(i, \mathbf{y}) \langle \Delta \varphi_e(x_i, \mathbf{u}_e), \varphi_e(x, \mathbf{y}') \rangle \\ 215 \quad = \sum_e \sum_i \sum_{\mathbf{u}_e} \mu(i, e, \mathbf{u}_e) \langle \phi(x_i) \otimes (\Upsilon_e(\mathbf{y}_{ie}) - \Upsilon_e(\mathbf{u}_e)), \phi(x) \otimes \Upsilon_e(\mathbf{y}'_e) \rangle \\ 216 \quad = \sum_e \sum_i \sum_{\mathbf{u}_e} \mu(i, e, \mathbf{u}_e) K_\phi(x_i, x) \langle \Upsilon_e(\mathbf{y}_{ie}) - \Upsilon_e(\mathbf{u}_e), \Upsilon_e(\mathbf{y}'_e) \rangle \\ 217 \quad = \sum_e \sum_i \sum_{\mathbf{u}_e} \mu(i, e, \mathbf{u}_e) K_\phi(x_i, x) \cdot (K_{\Upsilon, e}(\mathbf{y}_{ie}, \mathbf{y}'_e) - K_{\Upsilon, e}(\mathbf{u}_e, \mathbf{y}'_e)) \\ 218 \quad = \sum_e \sum_{i, \mathbf{u}_e} \mu(i, e, \mathbf{u}_e) \cdot H_e(x_i, \mathbf{u}_e; x, \mathbf{y}'_e). \\ 219$$

220 The loss-augmented inference problem can thus be equivalently expressed in the factorized  
221 dual by

$$222 \quad \bar{\mathbf{y}}(x) = \operatorname{argmax}_{\mathbf{y} \in \mathcal{Y}} \sum_e \psi_e(x, \mathbf{y}_e) + \ell_e(\mathbf{y}_e, \mathbf{y}_{ie}) \\ 223 \quad = \operatorname{argmax}_{\mathbf{y} \in \mathcal{Y}} \sum_{e, i, \mathbf{u}_e} \mu(i, e, \mathbf{u}_e) H_e(i, \mathbf{u}_e; x, \mathbf{y}_e) + \ell_e(\mathbf{y}_e, \mathbf{y}_{ie}). \quad (11)$$

225 Similarly, the inference problem (10) solved in prediction phase can be solved in the factorized  
226 dual by

$$227 \quad \hat{\mathbf{y}}(x) = \operatorname{argmax}_{\mathbf{y} \in \mathcal{Y}} \sum_e \psi_e(x, \mathbf{y}_e) = \operatorname{argmax}_{\mathbf{y} \in \mathcal{Y}} \sum_e \langle \mathbf{w}_e, \varphi_e(x, \mathbf{y}_e) \rangle \\ 228 \quad = \operatorname{argmax}_{\mathbf{y} \in \mathcal{Y}} \sum_{e, i, \mathbf{u}_e} \mu(i, e, \mathbf{u}_e) H_e(i, \mathbf{u}_e; x, \mathbf{y}_e). \quad (12)$$

230 To solve (11) or (12) any commonly used inference technique for graphical models can  
231 be applied. In this paper we use MMCRF that relies on the message-passing method, also  
232 referred as loopy belief propagation (LBP). We use early stopping in inference of LBP, so  
233 that the number of iterations is limited by the diameter of the output graph  $G$ .

### 234 3 Learning graph labeling ensembles

235 In this section we consider generating ensembles of multilabel classifiers, where each base  
236 model is a graph labeling classifier. Algorithm 1 depicts the general form of the learning  
237 approach. We assume a function to output a random graph  $G^{(t)}$  for each stage of the ensemble,

238 a base learner  $F^{(t)}(\cdot)$  to learn the graph labeling model, and an aggregation function  $A(\cdot)$  to  
 239 compose the ensemble model. The prediction of the model is then obtained by aggregating  
 240 the base model predictions

$$F(x) = A(F^{(1)}(x), \dots, F^{(T)}(x)).$$

241 Given a set of base models trained on different graph structures we expect the predicted  
 242 labels of the ensemble have diversity which is known to be necessary for ensemble learning.  
 243 At the same time, since the graph labeling classifiers aim to learn accurate multilabels, we  
 244 expect the individual base classifiers to be reasonably accurate, irrespective of the slight  
 245 changes in the underlying graphs. Indeed, in this work we use randomly generated graphs to  
 246 emphasize this point. We consider the following three aggregation methods:

247 – In *majority-voting-ensemble*, each base learner gives a prediction of the multilabel. The  
 248 ensemble prediction is obtained by taking the most frequent value for each microlabel.  
 249 Majority voting aggregation is admissible for any multilabel classifier.

250 Second, we consider two aggregation strategies that assume the base classifier has a  
 251 conditional random field structure:

252 – In *average-of-maximum-marginals aggregation*, each base learner infers local maximum  
 253 marginal scores for each microlabel. The ensemble prediction is taken as the value with  
 254 highest average local score.  
 255 – In *maximum-of-average-marginals aggregation*, the local edge potentials of each base  
 256 model are first averaged over the ensemble and maximum global marginal scores are  
 257 inferred from the averages.

258 In the following, we detail the above aggregation strategies.

### 259 3.1 Majority voting ensemble (MVE)

260 The first ensemble model we consider is the majority voting ensemble (MVE), which was  
 261 introduced in drug bioactivity prediction context by [Su and Rousu \(2011\)](#). In MVE, the  
 262 ensemble prediction on each microlabel is the most frequently appearing prediction among  
 263 the base classifiers

$$F_j^{\text{MVE}}(x) = \underset{y_j \in \mathcal{Y}_j}{\text{argmax}} \left( \frac{1}{T} \sum_{i=1}^T \mathbf{1}_{\{F_j^{(t)}(x)=y_j\}} \right),$$

264 where  $F^{(t)}(x) = (F_j^{(t)}(x))_{j=1}^k$  is the predicted multilabel in the  $t$ 'th base classifier. When  
 265 using (8) as the base classifier, predictions  $F^{(t)}(x)$  are obtained via solving the inference  
 266 problem (12). We note, however, in principle, any multilabel learner will fit into the MVE

**Input:** Training sample  $S = \{(x_i, y_i)\}_{i=1}^m$ , ensemble size  $T$ , graph generating oracle function  
 $\text{outputGraph} : t \in \{1, \dots, T\} \mapsto \mathcal{G}_k$ , aggregation function  $A(\cdot) : \mathcal{F} \times \dots \times \mathcal{F} \mapsto \mathcal{Y}$

**Output:** Multilabel classification ensemble  $F(\cdot) : \mathcal{X} \mapsto \mathcal{Y}$

- 1: **for**  $t \in \{1, \dots, T\}$  **do**
- 2:    $G^{(t)} = \text{outputGraph}(t)$
- 3:    $F^t(\cdot) = \text{learnGraphLabelingClassifier}((x_i)_{i=1}^m, (y_i)_{i=1}^m, G^{(t)})$
- 4: **end for**
- 5:  $F(\cdot) = A(F^{(1)}(\cdot), \dots, F^{(T)}(\cdot))$

**Algorithm 1:** Graph Labeling Ensemble Learning

271 framework as long as it adapts to a collection of output graphs  $\mathcal{G} = \{G^{(1)}, \dots, G^{(T)}\}$  and  
 272 generates multilabel predictions accordingly from each graph.

### 273 3.2 Average-of-max-marginal aggregation (AMM)

274 Next, we consider an ensemble model where we perform inference over the graph to extract  
 275 information on the learned compatibility scores in each base model. Thus, we assume that  
 276 we have access to the compatibility scores between the inputs and edge labels

$$277 \quad \Psi_E^{(t)}(x) = (\psi_e^{(t)}(x, \mathbf{u}_e))_{e \in E^{(t)}, \mathbf{u}_e \in \mathcal{Y}_e}.$$

279 In the AMM model, our goal is to infer for each microlabel  $u_j$  of each node  $j$  its *max-marginal*  
 280 (Wainwright et al. 2005), that is, the maximum score of a multilabel that is consistent with  
 281  $y_j = u_j$

$$282 \quad \tilde{\psi}_j(x, u_j) = \max_{\{\mathbf{y} \in \mathcal{Y}: y_j = u_j\}} \sum_e \psi_e(x, \mathbf{y}_e). \quad (13)$$

284 One readily sees (13) as a variant of the inference problem (12), with similar solution tech-  
 285 niques. The maximization operation fixes the label of the node  $y_j = u_j$  and queries the  
 286 optimal configuration for the remaining part of output graph. In message-passing algorithms,  
 287 only slight modification is needed to make sure that only the messages consistent with the  
 288 microlabel restriction are considered. To obtain the vector  $\tilde{\Psi}(x) = (\tilde{\psi}_j(x, u_j))_{j,u_j}$  the same  
 289 inference is repeated for each target-microlabel pair  $(j, u_j)$ , hence it has quadratic time  
 290 complexity in the number of edges in the output graph.

291 Given the max-marginals of the base models, the AMM ensemble is constructed as follows.  
 292 Let  $\mathcal{G} = \{G^{(1)}, \dots, G^{(T)}\}$  be a set of output graphs, and let  $\{\tilde{\Psi}^{(1)}(x), \dots, \tilde{\Psi}^{(T)}(x)\}$  be the  
 293 max-marginal vectors of the base classifiers trained on the output graphs. The ensemble  
 294 prediction for each target is obtained by averaging the max-marginals of the base models and  
 295 choosing the maximizing microlabel for the node:

$$296 \quad F_j^{\text{AMM}}(x) = \underset{u_j \in \mathcal{Y}_j}{\text{argmax}} \frac{1}{|T|} \sum_{t=1}^T \tilde{\psi}_{j,u_j}^{(t)}(x),$$


298 and the predicted multilabel is composed from the predicted microlabels

$$299 \quad F^{\text{AMM}}(x) = \left( F_j^{\text{AMM}}(x) \right)_{j \in V}.$$


301 An illustration of AMM ensemble scheme is shown in Fig. 1. Edge information on indi-  
 302 vidual base learner are not preserved during AMM ensemble, which is shown as dash line  
 303 in Fig. 1. In principle, AMM ensemble can give different predictions compared to MVE,  
 304 since the most frequent label may not be the ensemble prediction if it has lower average  
 305 max-marginal score.

### 306 3.3 Maximum-of-average-marginals aggregation (MAM)

307 The next model, the maximum-of-average-marginals (MAM) ensemble, first collects the  
 308 local compatibility scores  $\Psi_E^{(t)}(x)$  from individual base learners, averages them and finally  
 309 performs inference on the global consensus graph with averaged edge potentials. The model  
 310 is defined as

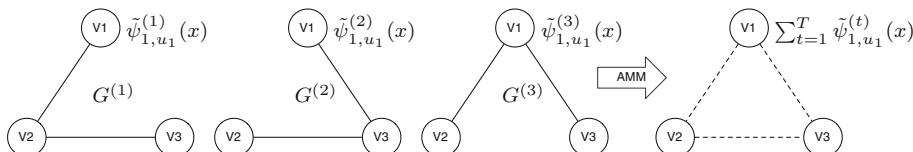

**Fig. 1** An example of AMM scheme, where three base models are learned on the output graph  $G^{(1)}, G^{(2)}, G^{(3)}$ . Given an example  $x$ , each base model computes for node  $v_1$  local max-marginals  $\tilde{\psi}_{1,u_1}^{(t)}$  for all  $u_1 \in \{+, -\}$ . The AMM collects local max-marginals  $\sum_{t=1}^T \tilde{\psi}_{1,u_1}^{(t)}(x)$ , and outputs  $F_1(x) = +$  if  $\sum_{t=1}^T \tilde{\psi}_{1,+}^{(t)}(x) \geq \sum_{t=1}^T \tilde{\psi}_{1,-}^{(t)}(x)$ , otherwise outputs  $F_1(x) = -$

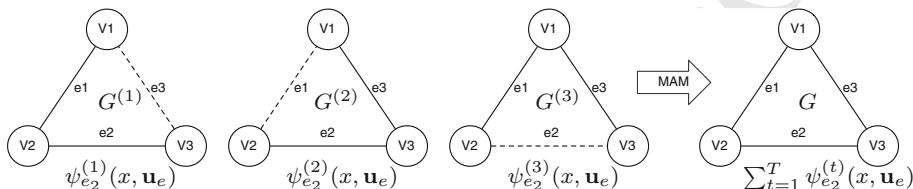

**Fig. 2** An example of MAM scheme, where three base models are learned on the output graph  $G^{(1)}, G^{(2)}, G^{(3)}$ . Given an example  $x$ , each base model computes for edge  $e_2$  local edge potentials  $\psi_{e_2}^{(t)}(x, \mathbf{u}_e)$  for all  $\mathbf{u}_e = \{--, --, ++, ++\}$ . For graph  $G^{(3)}$  where  $e_2 \notin E^{(3)}$ , we first impute corresponding marginal dual variable of  $e_2$  on  $G^{(3)}$  according to local consistency constraints. Similar computations are required for edge  $e_1$  and  $e_3$ . The final prediction is through inference over averaged edge potentials on consensus graph  $G$

$$F^{\text{MAM}}(x) = \underset{\mathbf{y} \in \mathcal{Y}}{\text{argmax}} \sum_{e \in E} \frac{1}{T} \sum_{t=1}^T \psi_e^{(t)}(x, \mathbf{y}_e) = \underset{\mathbf{y} \in \mathcal{Y}}{\text{argmax}} \frac{1}{T} \sum_{t=1}^T \sum_{e \in E} \langle \mathbf{w}_e^{(t)}, \varphi_e(x, \mathbf{y}_e) \rangle.$$

With the factorized dual representation, this ensemble scheme can be implemented simply and efficiently in terms of marginal dual variables and the associated kernels, which saves us from explicitly computing the local compatibility scores from each base learner. Using Lemma (1), the above can be equivalently expressed as

$$\begin{aligned} F^{\text{MAM}}(x) &= \underset{\mathbf{y} \in \mathcal{Y}}{\text{argmax}} \frac{1}{T} \sum_{t=1}^T \sum_{i, e, \mathbf{u}_e} \mu^{(t)}(i, e, \mathbf{u}_e) \cdot H_e(i, \mathbf{u}_e; x, \mathbf{y}_e) \\ &= \underset{\mathbf{y} \in \mathcal{Y}}{\text{argmax}} \sum_{i, e, \mathbf{u}_e} \bar{\mu}(i, e, \mathbf{u}_e) H_e(i, \mathbf{u}_e; x, \mathbf{y}_e), \end{aligned}$$

where we denote by  $\bar{\mu}(i, e, \mathbf{u}_e) = \frac{1}{T} \sum_{t=1}^T \mu^{(t)}(i, e, \mathbf{u}_e)$  the marginal dual variable averaged over the ensemble.

We note that  $\mu^{(t)}$  is originally defined on edge set  $E^{(t)}$ ,  $\mu^{(t)}$  from different random output graph are not mutually consistent. In practice, we first construct a consensus graph  $G = (E, V)$  by pooling edge sets  $E^{(t)}$ , then complete  $\mu^{(t)}$  on  $E$  where missing components are imputed via exploring local consistency conditions and solving constrained least square problem. Thus, the ensemble prediction can be computed in marginal dual form without explicit access to input features, and the only input needed from the different base models are the values of the marginal dual variables. An example that illustrates the MAM ensemble scheme is shown in Fig. 2.

## 330 3.4 The MAM ensemble analysis

331 Here, we present theoretical analysis of the improvement of the MAM ensemble over the  
 332 mean of the base classifiers. The analysis follows the spirit of the single-label ensemble  
 333 analysis by Brown and Kuncheva (2010), generalizing it to the multilabel MAM ensemble.

334 Assume there is a collection of  $T$  individual base learners, indexed by  $t \in \{1, \dots, T\}$ ,  
 335 that output compatibility scores  $\psi_e^{(t)}(x, \mathbf{u}_e)$  for all  $t \in \{1, \dots, T\}$ ,  $e \in E^{(t)}$ , and  $\mathbf{u}_e \in \mathcal{Y}_e$ .  
 336 For the purposes of this analysis, we express the compatibility scores in terms of the nodes  
 337 (microlabels) instead of the edges and their labels. We denote by

$$338 \quad \psi_j(x, y_j) = \sum_{\substack{e=(j,j'), \\ e \in N(j)}} \mathbf{1}_{\{y_j=u_j\}} \frac{1}{2} \psi_e(x, \mathbf{u}_e)$$

339 the sum of compatibility scores of the set of edges  $N(j)$  incident to node  $j$  with consistent  
 340 label  $\mathbf{y}_e = (y_j, y_{j'})$ ,  $y_j = u_j$ . Then, the compatibility score for the input and the multilabel  
 341 in (1) can be alternatively expressed as

$$342 \quad \psi(x, \mathbf{y}) = \sum_{e \in E} \psi_e(x, \mathbf{y}_e) = \sum_{j \in V} \psi_j(x, y_j).$$

343 The compatibility score from MAM ensemble can be similarly represented in terms of  
 344 the nodes by

$$345 \quad \psi^{\text{MAM}}(x, \mathbf{y}) = \frac{1}{T} \sum_t \psi^{(t)}(x, \mathbf{y}) = \sum_{e \in E} \bar{\psi}_e(x, \mathbf{y}_e) = \sum_{j \in V} \bar{\psi}_j(x, y_j),$$

347 where we have denoted  $\bar{\psi}_j(x, y_j) = \frac{1}{T} \sum_t \psi_j^{(t)}(x, y_j)$  and  $\bar{\psi}_e(x, \mathbf{y}_e) = \frac{1}{T} \sum_t \psi_e^{(t)}(x, \mathbf{y}_e)$ .

348 Assume now the ground truth, the optimal compatibility score of an example and multilabel  
 349 pair  $(x, \mathbf{y})$ , is given by  $\psi^*(x, \mathbf{y}) = \sum_{j \in V} \psi_j^*(x, y_j)$ . We study the reconstruction error of  
 350 the compatibility score distribution, given by the squared distance of the estimated score  
 351 distributions from the ensemble and the ground truth. The reconstruction error of the MAM  
 352 ensemble can be expressed as

$$353 \quad \Delta_{\text{MAM}}^R(x, \mathbf{y}) = (\psi^*(x, \mathbf{y}) - \psi^{\text{MAM}}(x, \mathbf{y}))^2,$$

355 and the average reconstruction error of the base learners can be expressed as

$$356 \quad \Delta_I^R(x, \mathbf{y}) = \frac{1}{T} \sum_t (\psi^*(x, \mathbf{y}) - \psi^{(t)}(x, \mathbf{y}))^2.$$

358 We denote by  $\Psi_j(x, y_j)$  a random variable of the compatibility scores obtained by the  
 359 base learners and  $\{\psi_j^{(1)}(x, y_j), \dots, \psi_j^{(T)}(x, y_j)\}$  as a sample from its distribution. We have  
 360 the following result:

361 **Theorem 1** *The reconstruction error of compatibility score distribution given by MAM  
 362 ensemble  $\Delta_{\text{MAM}}^R(x, \mathbf{y})$  is guaranteed to be no greater than the average reconstruction error  
 363 given by individual base learners  $\Delta_I^R(x, \mathbf{y})$ .*

364 In addition, the gap can be estimated as

$$365 \quad \Delta_I^R(x, \mathbf{y}) - \Delta_{\text{MAM}}^R(x, \mathbf{y}) = \text{Var}(\sum_{j \in V} \Psi_j(x, y_j)) \geq 0.$$

367 The variance can be further expanded as

$$368 \quad \text{Var} \left( \sum_{j \in V} \Psi_j(x, y_j) \right) = \underbrace{\sum_{j \in V} \text{Var}(\Psi_j(x, y_j))}_{\text{diversity}} + \underbrace{\sum_{\substack{p, q \in V, \\ p \neq q}} \text{Cov}(\Psi_p(x, y_p), \Psi_q(x, y_q))}_{\text{coherence}}.$$

369

370 Proof By expanding and simplifying the squares we get

$$371 \quad \Delta_I^R(x, y) - \Delta_{\text{MAM}}^R(x, y) = \frac{1}{T} \sum_t \left( \psi^*(x, y) - \psi^{(t)}(x, y) \right)^2 - (\psi^*(x, y) - \psi^{\text{MAM}}(x, y))^2$$

$$372 \quad = \frac{1}{T} \sum_t \left( \sum_{j \in V} \psi_j^*(x, y_j) - \sum_{j \in V} \psi_j^{(t)}(x, y_j) \right)^2$$

$$373 \quad - \left( \sum_{j \in V} \psi_j^*(x, y_j) - \sum_{j \in V} \frac{1}{T} \sum_t \psi_j^{(t)}(x, y_j) \right)^2$$

$$374 \quad = \frac{1}{T} \sum_t \left( \sum_{j \in V} \psi_j^{(t)}(x, y_j) \right)^2 - \left( \frac{1}{T} \sum_t \sum_{j \in V} \psi_j^{(t)}(x, y_j) \right)^2$$

$$375 \quad = \text{Var} \left( \sum_{j \in V} \Psi_j(x, y_j) \right)$$

$$376 \quad \geq 0.$$

378 The expression of variance can be further expanded as

$$379 \quad \text{Var} \left( \sum_{j \in V} \Psi_j(x, y_j) \right) = \sum_{p, q \in V} \text{Cov}(\Psi_p(x, y_p), \Psi_q(x, y_q))$$

$$380 \quad = \sum_{j \in V} \text{Var}(\Psi_j(x, y_j)) + \sum_{\substack{p, q \in V, \\ p \neq q}} \text{Cov}(\Psi_p(x, y_p), \Psi_q(x, y_q)).$$

381

382 The Theorem 1 states that the reconstruction error from MAM ensemble is guaranteed to  
 383 be less than or equal to the average reconstruction error from the individuals. In particular,  
 384 the improvement can be further addressed by two terms, namely *diversity* and *coherence*. The  
 385 classifier diversity measures the variance of predictions from base learners independently on  
 386 each single labels. It has been previously studied in single-label classifier ensemble context  
 387 by Krogh and Vedelsby (1995). The diversity term prefers the variabilities of individuals that  
 388 are learned from different perspectives. It is a well known factor to improve the ensemble  
 389 performance. The coherence term, that is specific to the multilabel classifiers, indicates that  
 390 the more the microlabel predictions vary together, the greater advantage multilabel ensemble  
 391 gets over the base learners. This supports our intuitive understanding that microlabel  
 392 correlations are keys to successful multilabel learning.

**Table 1** Statistics of multilabel datasets used in our experiments. For *NCI60* and *Fingerprint* dataset where there is no explicit feature representation, the rows of kernel matrix is assumed as feature vector

Dataset	Statistics				
	Instances	Labels	Features	Cardinality	Density
Emotions	593	6	72	1.87	0.31
Yeast	2417	14	103	4.24	0.30
Scene	2407	6	294	1.07	0.18
Enron	1702	53	1001	3.36	0.06
Cal500	502	174	68	26.04	0.15
Fingerprint	490	286	490	49.10	0.17
NCI60	4547	60	4547	11.05	0.18
Medical	978	45	1449	1.14	0.03
Circle10	1000	10	3	8.54	0.85
Circle50	1000	50	3	35.63	0.71

## 393 4 Experiments

### 394 4.1 Datasets

395 We experiment on a collection of ten multilabel datasets from different domains, includ-  
396 ing chemical, biological, and text classification problems. The *NCI60* dataset contains 4547  
397 drug candidates with their cancer inhibition potentials in 60 cell line targets. The *Finger-*  
398 *print* dataset links 490 molecular mass spectra together to 286 molecular substructures used  
399 as prediction targets. Four text classification datasets<sup>1</sup> are also used in our experiment. In  
400 addition, two artificial *Circle* dataset are generated according to [Bian et al. \(2012\)](#) with dif-  
401 ferent amount of labels. An overview of the datasets is shown in Table 1, where *cardinality*  
402 is defined as the average number of positive microlabels for each example

$$403 \quad cardinality = \frac{1}{m} \sum_{i=1}^m |\{j | y_{ij} = 1\}|,$$

405 and *density* is the average number of labels for each example divided by the size of label  
406 space defined as

$$407 \quad density = \frac{cardinality}{k}.$$

### 409 4.2 Kernels

410 We use kernel methods to describe the similarity between complex data objects in some  
411 experiment datasets. We calculate linear kernel on datasets where instants are described by  
412 feature vectors. For text classification datasets, we first compute weighted features with term  
413 frequency inverse document frequency model (TF-IDF) (c.f. [Rajaraman and Ullman 2011](#)).  
414 TF-IDF weights reflect how important a word is to a document in a collection of corpus  
415 defined as the ratio between the word frequency in a document and the word frequency in  
416 the a collection of corpus. We compute linear kernel of the weighted features.

<sup>1</sup> Available at <http://mulan.sourceforge.net/datasets.html>.

417 As the input kernel of the *Fingerprint* dataset where we have for each instant a mass  
 418 spectrometry (MS) data, we calculated quadratic kernel over the 'bag' of mass/charge peak  
 419 intensities. As the input kernel of the *cancer* dataset where each object is described as a  
 420 molecular graph, we used the hash fingerprint Tanimoto kernel (Ralaivola et al. 2005) that  
 421 enumerates all linear fragments up to length  $n$  in a molecule  $x$ . A hash function assigns each  
 422 fragment a hash value that determines its position in descriptor space  $\phi(x)$ . Given two binary  
 423 bit vectors  $\phi(x)$  and  $\phi(y)$  as descriptors, Tanimoto kernel is defined as

$$424 K(x, y) = \frac{|I(\phi(x)) \cap I(\phi(y))|}{|I(\phi(x)) \cup I(\phi(y))|},$$

425 where  $I(\phi(x))$  denotes the set of indices of 1-bits in  $\phi(x)$ .

426 In practice, some learning algorithms required kernelized input while others need feature  
 427 representation of input data. Due to the intractability of using explicit features for complex  
 428 data and in order to achieve a fair comparison, we take precomputed kernel matrix as rows  
 429 of feature vectors for the learning algorithms that required input of feature vectors.

#### 430 4.3 Obtaining random output graphs

431 The structure of the output graph is significant both in term of efficiency of learning and  
 432 inference, and the predictive performance. We consider the following two approaches to  
 433 generate random output graphs.

- 434 – In the random pair approach, one takes each vertex in turn, randomly draw another vertex  
 435 and couples the two with an edge.
- 436 – In the random spanning tree approach, one first draws a random  $k \times k$  weight matrix  $W$   
 437 with non-negative edge weights and then extracts a maximum weight spanning tree out  
 438 of the matrix, using  $w_{ij}$  as the weight for edge connecting labels  $i$  and  $j$ .

439 The random pair approach generally produces a set of disconnected graphs, which may  
 440 not let the base learner to fully benefit from complex multilabel dependencies. On the other  
 441 hand, the learning of the base classifier is potentially made more efficient due to the graph  
 442 simplicity. The random spanning tree approach connects all targets so that complex multilabel  
 443 dependencies can be learned. Also, the tree structure facilitates efficient inference.

#### 444 4.4 Compared classification methods

445 For comparison, we choose the following established classification methods form different  
 446 perspectives towards multilabel classification, accounting for single-label and multilabel, as  
 447 well as ensemble and standalone methods:

- 448 – **MMCRF** (Rousu et al. 2007) is used both as a standalone multilabel classifier and the  
 449 base classifier in the ensembles. Individual MMCRF models are trained with two kinds  
 450 of output graphs, random tree and random pair graph.
- 451 – **SVM** is a discriminative learning method that has become very popular over recent  
 452 years, described in several textbooks (Cristianini and Shawe-Taylor 2000; Schölkopf  
 453 and Smola 2001). For multilabel classification task, we split the multilabel task into a  
 454 collection of single-label classification problems. Then we apply SVM on each single  
 455 problem and compute the predictions. The drawback of SVM on multilabel classification  
 456 task is the computation becomes infeasible as the number of the labels increases. Beside,  
 457 this approach assumes independency between labels, it does not get any benefit from  
 458 dependencies defined by complex structures of the label space. SVM serves as the single-  
 459 label non-ensemble baseline learner.

- 460 – **MTL** is a multi-task feature learning methods developed in [Argyriou et al. \(2008\)](#), which  
 461 is used as multilabel baseline learner. The underlying assumption of MTL is that the task  
 462 specific functions are related such that they share a small subset of features.  
 463 – **Adaboost** is an ensemble method that has been extensively studied both empirically and  
 464 theoretically since it was developed in [Freund and Schapire \(1997\)](#). The idea behind  
 465 the model is that a distribution is assigned over data points. In each iteration, a weak  
 466 hypothesis is calculated based on current distribution, and the distribution is updated  
 467 according to the performance of the weak hypothesis. As a results, the difficult examples  
 468 will receive more weight (probability mass) after the update, and will be emphasized by  
 469 the base learner in the next round.  
 470 In addition, Adaboost for multilabel classification using Hamming loss (AdaboostMH),  
 471 is designed for incorporating multilabel learner into Adaboost framework ([Schapire and](#)  
 472 [Singer 1998](#)). The only difference is the distribution is assigned to each example and  
 473 microlabel pair and updated accordingly. In our study, we use real-valued decision tree  
 474 with at most 100 leaves as base learner of AdaboostMH, and generate an ensemble with  
 475 180 weak hypotheses.  
 476 – **Bagging** (bootstrapping aggregation) was introduced in [Breiman \(1996\)](#) as an ensemble  
 477 method of combining multiple weak learners. It creates individual weak hypotheses for  
 478 its ensemble by calling base learner repeatedly on the random subsets of the training set.  
 479 The training set for the weak learner in each round is generated by randomly sampling  
 480 with replacement. As a result, many original training examples may be repeated many  
 481 times while others may be left out. In our experiment, we randomly select 40% of the  
 482 data as input to SVM to compute a weak hypothesis, and repeat the process until we  
 483 collect an ensemble of 180 weak hypotheses.

484 **4.5 Parameter selection and evaluation measures**


485 We first sample 10 % data uniform at random from each experimental dataset for the purpose  
 486 of parameter selection. SVM, MMCRF and MAM ensemble each have a margin softness  
 487 parameter  $C$ , which potentially needs to be tuned. We tested the value of parameter  $C$  from  
 488 a set {0.01, 0.1, 0.5, 1, 5, 10} based on tuning data, then keep the best ones for the following  
 489 validation step. We also perform extensive selection on  $\gamma$  parameters in MTL model in the  
 490 same range as margin softness parameters.

491 We observe that most of the multilabel datasets are highly biased with regards to multilabel  
 492 density. Therefore, we use the following *stratified 5-fold cross validation* scheme in the  
 493 experiments reported, such that we group examples in equivalence classes based on the  
 494 number of positive labels they have. Each equivalence class is then randomly split into five  
 495 local folds, after that the local folds are merged to create five global folds. The proposed  
 496 procedure ensures that also the smaller classes have representations in all folds.


497 To quantitatively evaluate the performance of different classifiers, we adopt several per-  
 498 formance measures. We report *multilabel accuracy* which counts the proportion of multilabel  
 499 predictions that have all of the microlabels being correct, *microlabel accuracy* as the pro-  
 500 portion of microlabel being correct, and *microlabel F1 score* that is the harmonic mean of  
 501 microlabel precision and recall  $F_1 = 2 \cdot \frac{Pre \times Rec}{Pre + Rec}$ .

502 **4.6 Comparison of different ensemble approaches**

503 We evaluate our proposed ensemble approaches by learning ensemble with 180 base learners.  
 504 The learning curves as the size of ensemble on varying datasets are shown in Figs. 3, 4, and

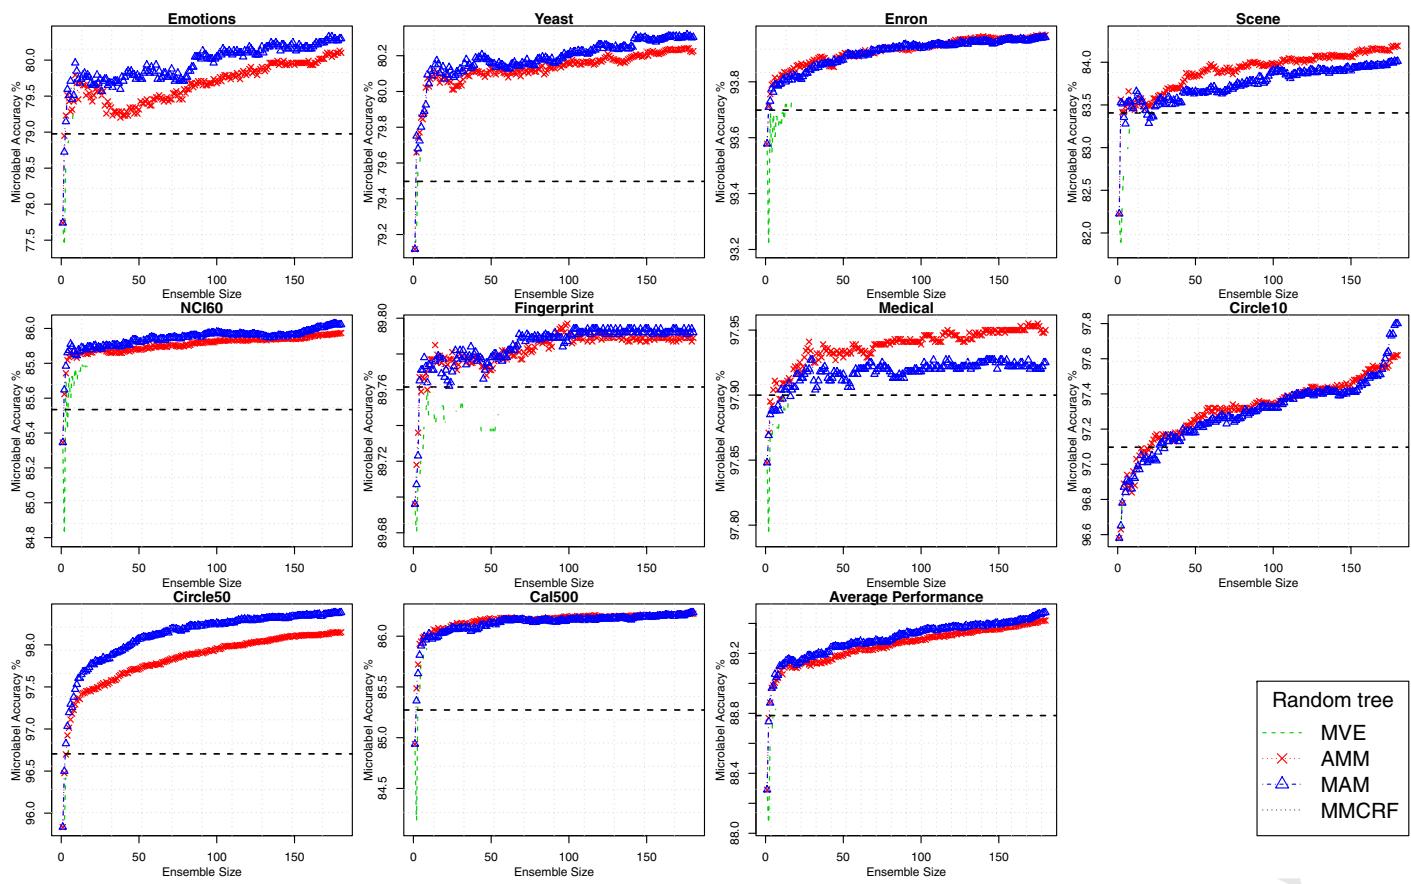

**Fig. 3** Ensemble learning curve (microlabel accuracy) plotted as the size of ensemble. Average performance over datasets is shown as the last plot

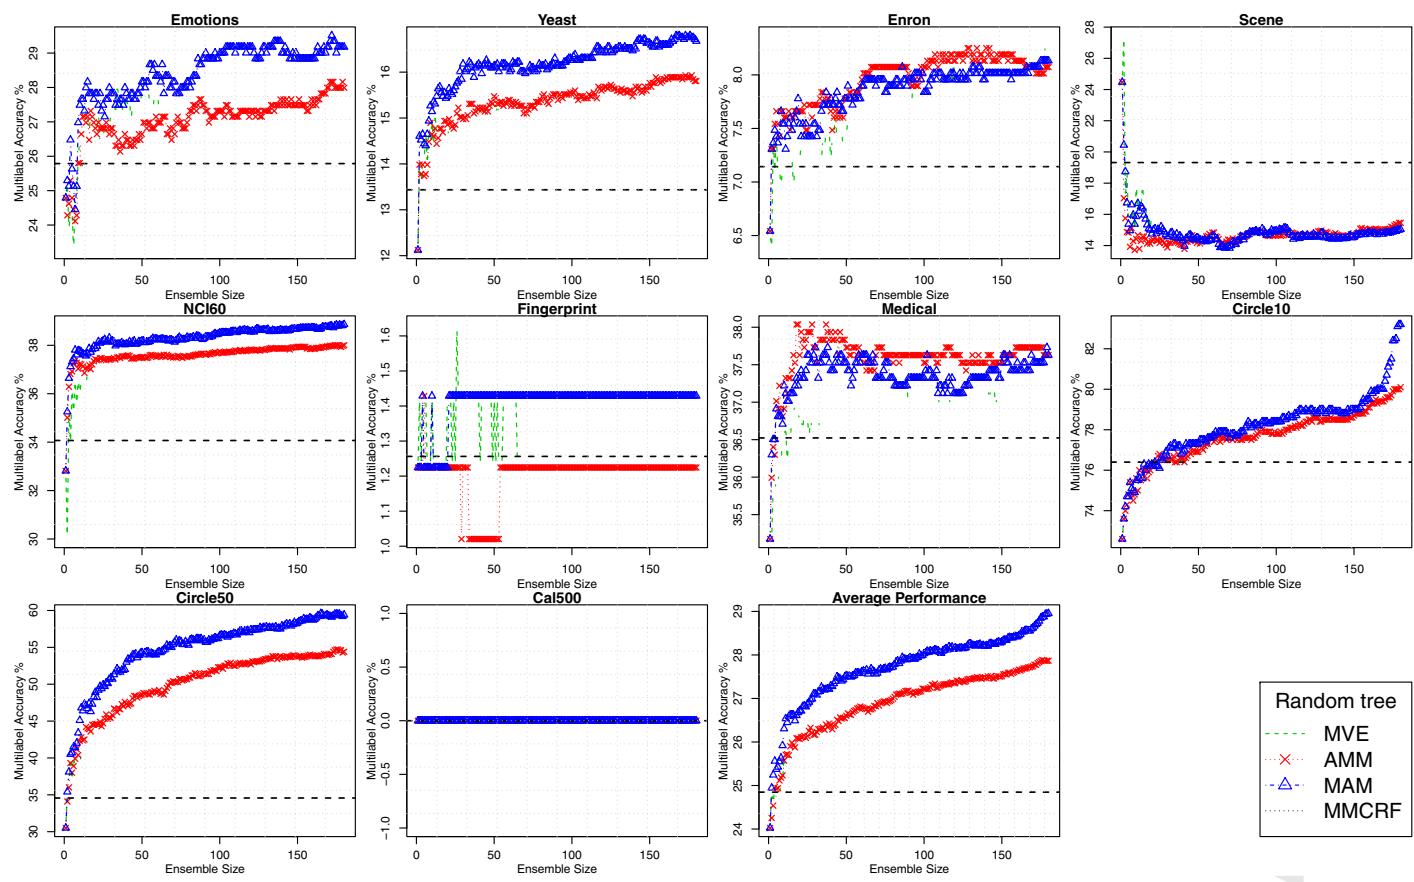

**Fig. 4** Ensemble learning curve (multilabel accuracy) plotted as the size of ensemble. Average performance over datasets is shown as the last plot

505 **5** for microlabel accuracy, multilabel accuracy, and microlabel  $F_1$  score, respectively. The  
 506 base learners are trained with random tree as output graph structure.

507 There is a clear trend of improving microlabel accuracy for proposed ensemble approaches  
 508 as more individual base models are combined. On most datasets and algorithms the ensemble  
 509 accuracy increases fast and levels off rather quickly, the most obvious exception being the  
 510 Circle10 dataset where improvement can be still seen beyond ensemble size 180. In addition,  
 511 all three proposed ensemble learners (MVE, AMM, MAM) outperform their base learner  
 512 MMCRF (horizontal dash lines) with consistent and noticeable margins, which is best seen  
 513 from the learning curves of the average performance.


514 Similar patterns of learning curves are also observed in microlabel  $F_1$  (Fig. 4) and multilabel  
 515 accuracy (Fig. 5), with a few exceptions. The Fingerprint and Cal500 datasets prove to  
 516 be difficult to learn in that very few multilabels are perfectly predicted, this is not surprising  
 517 as these datasets have a large number of microlabels. The datasets also have the largest pro-  
 518 portion of positive microlabels, which is reflected in the low  $F_1$  score. Scene dataset is the  
 519 only exception where increasing the number of base learners seems to hurt the ensemble per-  
 520 formance in microlabel  $F_1$  and multilabel accuracy. In fact Scene is practically a single-label  
 521 multiclass dataset, having very few examples with more than one positive microlabel. This  
 522 contradicts the implicit assumption of graph based learners that there are rich dependency  
 523 structures between different labels that could be revealed by the different random graphs.  
 524 Among the extreme label sparsity, the ensemble learners appear to predict more negative  
 525 labels for each example which leads to decreased performances in  $F_1$  and multilabel accu-  
 526 racy space. We also observe large fluctuations in the initial part of MVE learning curves of  
 527 Fingerprint and Cal500 datasets in  $F_1$  score space, implying MVE is not as stable as AMM  
 528 and MAM approaches.

529 In particular, the performance of MAM ensemble surpasses MVE and AMM in eight out of  
 530 ten datasets, the exceptions being Scene and Medical, making it the best among all proposed  
 531 ensemble approaches. Consequently, we choose MAM for the further studies described in  
 532 the following sections.

#### 533 4.7 Effect of the structure of output graph

534 To find out which is the more beneficial output graph structure, we carry out empirical studies  
 535 on MAM ensemble with random tree and random pair graph as output graph structure. Table 2  
 536 illustrates the performance of two output structures in terms of microlabel accuracy, multilabel  
 537 accuracy and microlabel  $F_1$  score. The results show that random tree and random pair graph  
 538 are competitive output graph structures in terms of microlabel accuracy and  $F_1$  score, with  
 539 random tree achieves slightly better results. In addition, we observe noticeable difference  
 540 in multilabel accuracy, where random tree behaves better than random pair graph. One way  
 541 to understand this is to realize that random tree is able to connect all output labels so that  
 542 learning and inference can work over the the whole label space. On the other hand, random  
 543 pair approach divides the label space into isolated pairs where there is no cross-talk between  
 544 pairs.

545 We continue by studying learning curves of average performance of MAM ensemble on  
 546 two different output structures. Fig. 6 illustrates that MAM ensemble with random tree as  
 547 output structure consistently outperforms random pair in accuracy space. The performance  
 548 differences in  $F_1$  space are not clear where we see the random pair approach fluctuating  
 549 around random tree curve. Base on the experiments, we deem random tree the better of the  
 550 two output graph structures.

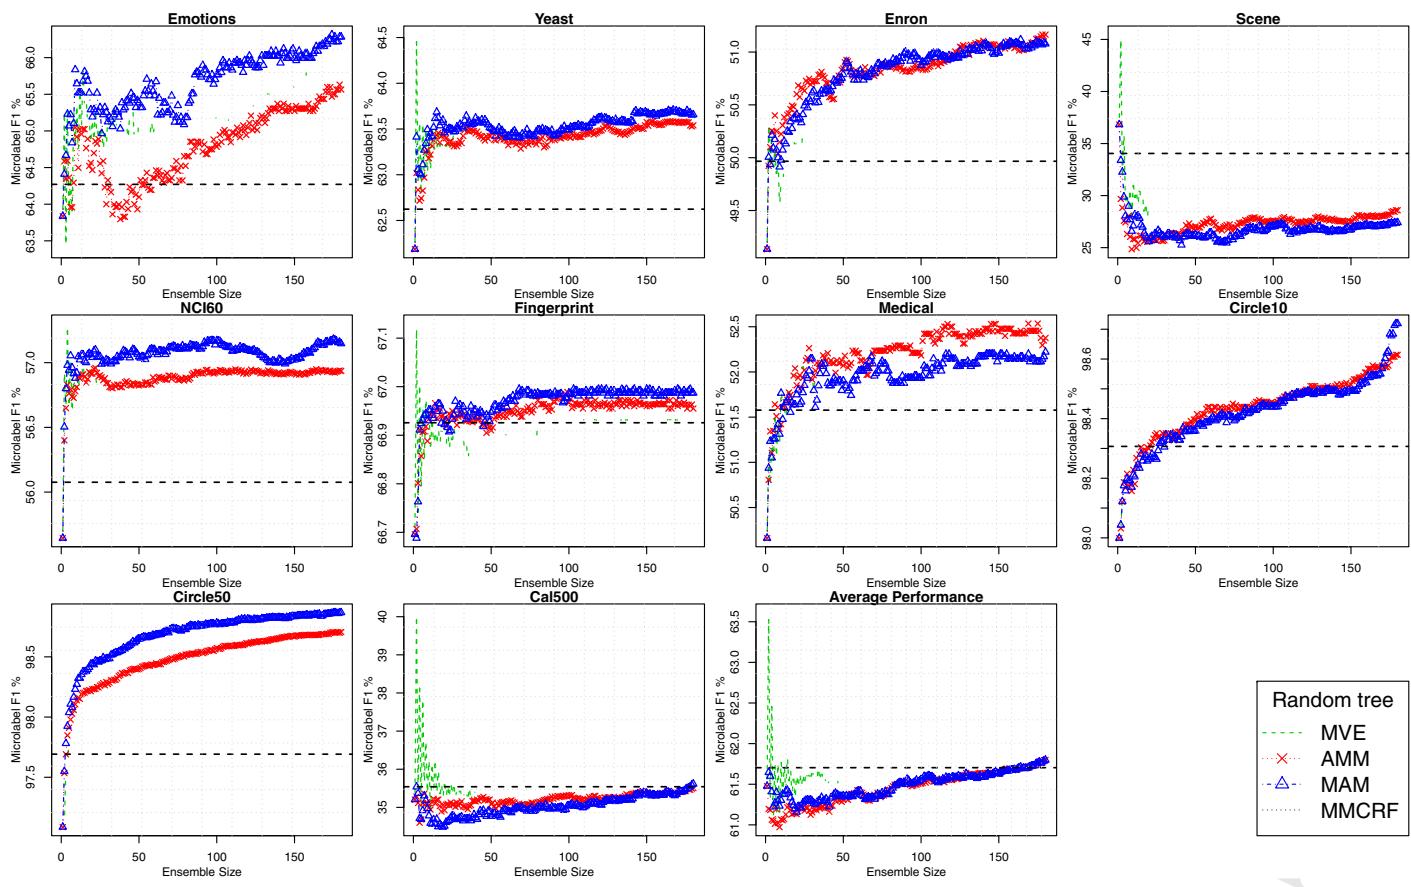

**Fig. 5** Ensemble learning curve (microlabel  $F_1$  score) plotted as the size of ensemble. Average performance over datasets is shown as the last plot

**Table 2** Prediction performance of MAM ensemble with random tree and random pair graph in terms of microlabel accuracy, multilabel accuracy, and microlabel  $F_1$  score

Dataset	Microlabel Acc %		Multilabel Acc %		Microlabel $F_1$ %	
	Pair	Tree	Pair	Tree	Pair	Tree
Emotions	<b>80.4</b> ± 2.4	80.3 ± 1.4	27.8 ± 3.4	<b>29.2</b> ± 4.2	65.7 ± 4.3	<b>66.3</b> ± 2.3
Yeast	80.2 ± 0.7	<b>80.3</b> ± 0.5	15.9 ± 1.1	<b>16.7</b> ± 0.4	63.5 ± 1.4	<b>63.7</b> ± 1.1
Scene	84.0 ± 0.5	<b>84.0</b> ± 0.1	<b>16.4</b> ± 1.9	15.0 ± 0.9	<b>28.9</b> ± 2.5	27.4 ± 2.4
Enron	<b>94.1</b> ± 0.1	94.0 ± 0.2	7.7 ± 1.0	<b>8.1</b> ± 2.3	51.1 ± 1.9	<b>51.1</b> ± 1.3
Cal500	<b>86.2</b> ± 0.1	86.2 ± 0.2	0.0 ± 0.0	0.0 ± 0.0	35.2 ± 0.8	<b>35.6</b> ± 0.4
Fingerprint	89.8 ± 0.5	<b>89.8</b> ± 0.3	1.2 ± 0.6	<b>1.4</b> ± 0.6	66.9 ± 2.5	<b>67.0</b> ± 1.9
NCI60	85.9 ± 0.8	<b>86.0</b> ± 0.9	37.9 ± 1.2	<b>38.9</b> ± 1.2	57.1 ± 3.8	<b>57.1</b> ± 3.2
Medical	97.9 ± 0.2	<b>97.9</b> ± 0.1	37.6 ± 4.3	<b>37.6</b> ± 2.5	52.2 ± 4.6	<b>52.2</b> ± 3.2
Circle10	97.5 ± 0.4	<b>97.8</b> ± 0.4	79.0 ± 2.0	<b>83.2</b> ± 3.5	98.5 ± 0.2	<b>98.7</b> ± 0.3
Circle50	97.6 ± 0.3	<b>98.4</b> ± 0.3	47.6 ± 5.9	<b>59.4</b> ± 5.6	98.3 ± 0.2	<b>98.9</b> ± 0.2

#### 551 4.8 Multilabel prediction performance


552 In the following experiments we examine whether our proposed ensemble model (MAM)  
 553 can boost the prediction performance in multilabel classification problems. Therefore, we  
 554 compare our model with other advanced methods including both single-label and multilabel  
 555 classifiers, both standalone and ensemble frameworks. Table 3 shows the performance of  
 556 difference methods in terms of microlabel accuracy, multilabel accuracy and microlabel  $F_1$   
 557 score, where the best performance in each dataset is emphasised in boldface and the second  
 558 best is shown in italics.

559 We observe from Table 3 that MAM receives in general higher evaluation scores than the  
 560 competitors. In particular, it achieves nine times as top two performing methods in microlabel  
 561 accuracy, eight times in multilabel accuracy, and eight times in microlabel  $F_1$  score. The only  
 562 datasets where MAM is consistently outside the top two is the *Scene* dataset. As discussed  
 563 above, the dataset is practically a single-label multiclass dataset. On this dataset the single  
 564 target classifiers SVM and Bagging outperform all compared multilabel classifiers.

565 In these experiments, MMCRF also performs robustly, being in top two on half of the  
 566 datasets with respect to microlabel and multilabel accuracy. However, it quite consistently  
 567 trails to MAM in all three evaluation scores, the *Scene* dataset again being the exception. We  
 568 also notice that the standalone single target classifier SVM is competitive against most multi-  
 569 label methods, performs better than Bagging, AdaBoost and MTL with respect to microlabel  
 570 and microlabel accuracy.

#### 571 4.9 Statistical evaluation

572 To statistically evaluate the performance of different methods over multiple datasets, we  
 573 first apply paired t-test on the values shown in Table 3. In particular, we compute a test  
 574 statistic (with a  $p$ -value) for each ordered pair of methods to assess whether the average  
 575 performance of the first is better than the second in a statistically significant manner. The  
 576 result, shown in Table 4, indicates that, in terms of microlabel accuracy, MAM significantly  
 577 outperforms MMCRF, AdaBoost and Bagging and almost significantly outperforms MTL,  
 578 while the performance is not significantly different from SVM. In multilabel accuracy, MAM

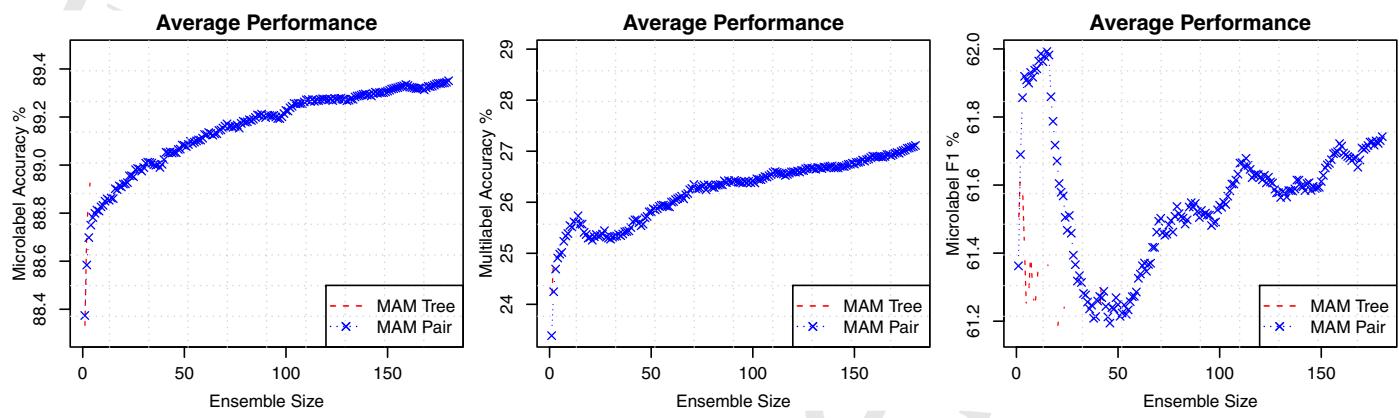

**Fig. 6** Performance of MAM ensemble with random tree and random pair as output graph. Performance is averaged over 10 datasets and plotted as the size of ensemble

**Table 3** Prediction performance of methods in terms of microlabel accuracy (top), microlabel  $F_1$  score (middle), and multilabel accuracy (bottom). ‘–’ represents no positive predictions. ‘Avg. Rank’ is the average rank of the performance over datasets

Dataset	Svm	Bagging	AdaBoost	Mtl	Mmcrf	Mam
Microlabel accuracy %						
Emotions	77.3±1.9	74.1±1.8	76.8±1.6	79.8±1.8	79.0±0.9	<b>80.3±1.4</b>
Yeast	<b>80.0±0.7</b>	78.4±0.9	74.8±0.7	79.3±0.5	79.5±0.6	<b>80.3±0.5</b>
Scene	<b>90.2±0.3</b>	87.8±0.5	84.3±0.9	<b>88.4±0.5</b>	83.4±0.3	84.0±0.1
Enron	93.6±0.2	<b>93.7±0.1</b>	86.2±0.3	93.5±0.2	93.7±0.2	<b>94.0±0.2</b>
Cal500	<b>86.3±0.3</b>	86.0±0.2	74.9±0.7	<b>86.2±0.3</b>	85.3±0.3	86.2±0.2
Fingerprint	89.7±0.3	85.0±0.4	84.1±0.7	82.7±0.6	<b>89.8±0.6</b>	<b>89.8±0.3</b>
NCI60	84.7±0.7	79.5±0.4	79.3±0.8	84.0±0.6	<b>85.5±1.3</b>	<b>86.0±0.9</b>
Medical	97.4±0.0	97.4±0.1	91.4±0.3	97.4±0.1	<b>97.9±0.1</b>	<b>97.9±0.1</b>
Circle10	94.8±0.9	92.9±0.7	<b>98.0±0.3</b>	93.7±0.7	97.1±0.3	97.8±0.4
Circle50	94.1±0.5	91.7±0.5	96.6±0.3	93.8±0.5	96.7±0.3	<b>98.4±0.3</b>
Avg. Rank	3.0	4.5 <sup>a</sup>	4.8 <sup>a</sup>	4.0 <sup>a</sup>	3.0	<b>1.8</b>
Microlabel $F_1$ score %						
Emotions	57.1±4.4	61.5±3.1	66.2±2.9	64.6±3.0	64.3±1.2	<b>66.3±2.3</b>
Yeast	62.6±1.1	<b>65.5±1.4</b>	63.5±1.2	60.2±1.2	62.6±1.2	63.7±1.1
Scene	<b>68.3±1.4</b>	<b>69.9±1.4</b>	64.8±2.1	61.5±2.1	34.0±2.7	27.4±2.4
Enron	29.4±1.5	38.8±1.0	42.3±1.1	–	50.0±1.0	<b>51.1±1.3</b>
Cal500	31.4±0.6	<b>40.1±0.8</b>	<b>44.3±1.5</b>	28.6±1.3	35.5±0.4	35.6±0.4
Fingerprint	66.3±0.7	64.4±0.5	62.8±1.2	0.4±0.3	66.9±0.8	<b>67.0±1.9</b>
NCI60	45.9±3.6	53.9±1.2	32.9±2.7	32.9±3.4	<b>56.1±3.7</b>	<b>57.1±3.2</b>
Medical	–	–	33.7±1.2	–	51.6±2.7	<b>52.2±3.2</b>
Circle10	97.0±0.6	96.0±0.4	<b>98.8±0.2</b>	96.4±0.4	98.3±0.2	98.7±0.3
Circle50	96.0±0.3	94.5±0.3	97.6±0.2	95.7±0.3	97.7±0.3	<b>98.9±0.2</b>
Avg. Rank	4.2 <sup>a</sup>	3.8 <sup>b</sup>	3.0	5.2 <sup>a</sup>	3.0	<b>1.9</b>
Multilabel accuracy %						
Emotions	21.2±3.4	20.9±2.6	23.8±2.3	25.5±3.5	25.8±3.1	<b>29.2±4.2</b>
Yeast	<b>14.0±2.8</b>	13.1±1.9	7.5±1.3	11.3±1.0	13.4±1.5	<b>16.7±0.4</b>
Scene	<b>52.8±1.4</b>	<b>46.5±1.9</b>	34.7±2.2	44.8±3.6	19.3±1.2	15.0±0.9
Enron	0.4±0.3	0.1±0.2	0.0±0.0	0.4±0.4	7.1±2.8	<b>8.1±2.3</b>
Cal500	0.0±0.0	0.0±0.0	0.0±0.0	0.0±0.0	0.0±0.0	0.0±0.0
Fingerprint	1.0±0.7	0.0±0.0	0.0±0.0	0.0±0.0	<b>1.2±0.5</b>	<b>1.4±0.6</b>
NCI60	<b>43.1±1.3</b>	21.1±0.9	2.5±0.6	<b>47.0±2.0</b>	34.1±1.4	38.9±1.2
Medical	8.2±2.1	8.2±2.7	5.1±2.0	8.2±2.3	<b>36.5±3.3</b>	<b>37.6±2.5</b>
Circle10	69.1±3.8	64.8±3.3	<b>86.0±2.7</b>	66.8±3.4	76.4±2.1	83.2±3.5
Circle50	29.7±2.0	21.7±3.9	28.9±3.4	27.7±3.3	<b>34.6±4.5</b>	<b>59.4±5.5</b>
Avg. Rank	3.1	4.7 <sup>a</sup>	4.5 <sup>a</sup>	3.9 <sup>b</sup>	2.9	<b>2.0</b>

The average rank is marked with <sup>a</sup> (resp. <sup>b</sup>) if the algorithm performs significantly different at  $p$ -value = 0.05 (resp. at  $p$ -value = 0.1.) from the top performing one according to two-tailed Bonferroni–Dunn test

**Table 4** Paired t-test to assess whether the method from group A outperforms the one from group B in a significant manner. By '†, \*, ‡' we denote the performance in microlabel accuracy, microlabel  $F_1$  score, and multilabel accuracy, respectively


Group A	Group B					
	Svm	Bagging	AdaBoost	Mtl	Mmcrf	Mam
Svm	—	††, ‡	††	*	—	—
Bagging	**	—	—	**	—	—
Adaboost	—	—	—	**	—	—
Mtl	—	†	††	—	—	—
Mmcrf	—	††	††	**	—	—
Mam	—	††, ‡	††, ‡	†, **	††, ‡	—

By double marks (e.g. '††') we denote  $p$ -value = 0.05, and by single mark (e.g. '†') we denote  $p$ -value = 0.1. By '—' we denote not significant given above  $p$ -values

579 outperforms Bagging, Adaboost and MMCRF in almost significant manner. SVM, MTL and  
 580 MMCRF perform similarly to each other, and are better than Bagging and Adaboost with  
 581 respect to microlabel accuracy. In addition, in microlabel  $F_1$  score, we notice that all methods  
 582 are competitive against MTL, and SVM performs better than Bagging.

583 As suggested by Demšar (2006), several critical assumptions might be violated when  
 584 performing paired t-test to compare classifiers over multiple datasets. Similarly, other com-  
 585 monly used statistical tests might also be ill-posed in this scope (e.g. sign test, Wilcoxon  
 586 signed-ranks test, ANOVA with post-hoc Tukey test). We therefore follow the test procedure  
 587 proposed in Demšar (2006). First, we compute the rank of each model based on the per-  
 588 formance on different datasets, where the best performing algorithm getting the rank of one. In  
 589 case of ties, averaged ranks are then assigned. Then we use Friedman test (Friedman 1937)  
 590 which compares the average rank of each algorithm, and under null hypothesis, states that  
 591 all algorithms are equivalent with equal average ranks.  $P$ -values calculated from Friedman  
 592 test for microlabel accuracy, microlabel  $F_1$  score, and multilabel accuracy are 0.001, 0.002  
 593 and 0.005, respectively. As a result, we reject the null-hypothesis and proceed with post-hoc  
 594 two-tailed Bonferroni-Dunn test (Dunn 1961), where all other methods are compared against  
 595 the top performing control (MAM). We compute the *critical difference*  $CD$  = 2.2 at  $p$ -value  
 596 = 0.05, and  $CD$  = 1.9 at  $p$ -value = 0.1 (see details in supplementary material). The per-  
 597 formance of an algorithm is significantly different from the control if the corresponding average  
 598 ranks differ by at least  $CD$ . The corresponding rank is marked with '†' (at  $p$ -value = 0.1)  
 599 or '††' (at  $p$ -value = 0.05) in Table 3. We observe from the results that in microlabel accu-  
 600 racy and multilabel accuracy, the performance differences of SVM and MMCRF to MAM  
 601 fail to be statistically significant. On the other hand, Bagging, Adaboost and MTL perform  
 602 significantly worse than MAM in terms of microlabel accuracy and multilabel accuracy. In  
 603 addition, with respect to microlabel  $F_1$  score, the performances of MMCRF and Adaboost  
 604 are not significantly different from MAM, while SVM, Bagging and MTL perform worse  
 605 than MAM in a significant manner.

606 Overall, the results indicate that ensemble by MAM is a robust and competitive alternative  
 607 for multilabel classification.

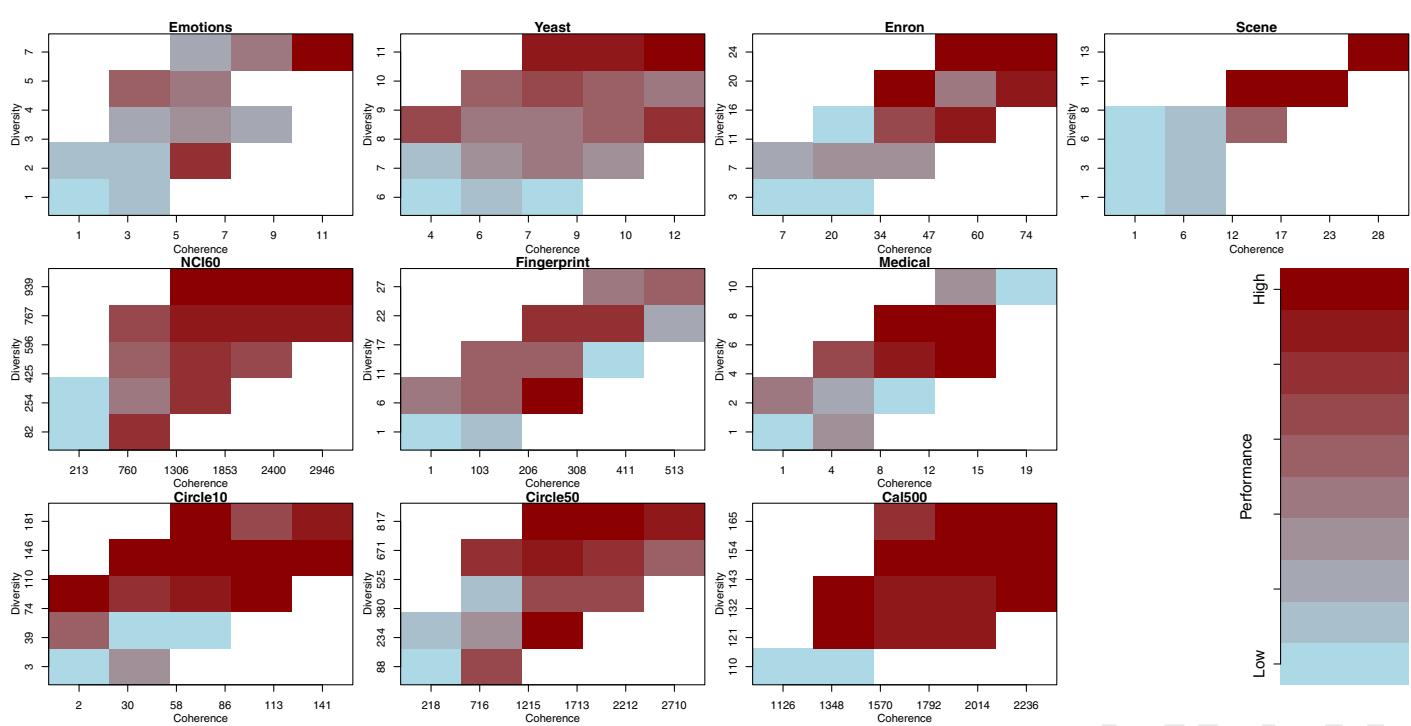

**Fig. 7** Performance of MAM ensemble plotted in diversity and coherence space. Color of the blocks depicts average performance in term of microlabel accuracy computed from the data points in the block. White area means there is no examples with corresponding diversity and coherence. Colors are normalized for datasets so that worst and best performances are shown as light blue and red

## 608 4.10 Effect of diversity and coherence

609 To explain the performance of MAM as well as to empirically validate the diversity and  
 610 coherence arguments stated in Theorem 1, we conduct the following experiment.

611 We train a MAM ensemble model for each dataset consist of 30 base learners with a  
 612 random spanning tree as output graph structure. For each example-label pair  $(x_i, \mathbf{y}_i)$  and  
 613 the corresponding set of microlabels  $\mathbf{y}_i = \{y_{i,1}, \dots, y_{i,l}\}$ , we then calculate from each base  
 614 learner  $t$  a set of node compatibility scores  $\{\psi^t(x_i, y_{i,1}), \dots, \psi^t(x_i, y_{i,l})\}$ . Next, the node  
 615 compatibility scores from different base learners are pooled together to get  $\Psi_j(x_i, y_{i,j}) =$   
 616  $\{\psi^1(x_i, y_{i,j}), \dots, \psi^{30}(x_i, y_{i,j})\}$  for all  $j \in \{1, \dots, l\}$ . Diversity and coherence of pair  
 617  $(x_i, \mathbf{y}_i)$  can be calculated from  $\{\Psi_j(x_i, y_{i,j})\}_{j=1}^l$  according to

$$618 \text{Diversity} = \sum_{j \in \{1 \dots l\}} \text{Var}(\Psi_j(x_i, y_{i,j})),$$

$$619 \text{Coherence} = \sum_{\substack{p,q \in \{1 \dots l\}, \\ p \neq q}} \text{Cov}(\Psi_p(x_i, y_{ip}), \Psi_q(x_i, y_{iq})),$$

620 which locates pair  $(x_i, \mathbf{y}_i)$  in the diversity-coherence space. We also compute the microlabel  
 621 accuracy from the microlabels in  $\mathbf{y}_i$  based on the prediction from MAM ensemble. The  
 622 accuracy of different diversity-coherence region in the space is computed as the average  
 623 microlabel accuracy of examples in that region. The results are shown in Fig. 7.

624 We observe from the results a pattern of increasing prediction performance from lower  
 625 left corner to upper right corner. In particular, microlabel accuracy are lower for examples  
 626 with both low diversity and coherence computed based on current set of base learners, shown  
 627 as the light blue blocks in lower left corner. On the other hand, we achieve higher prediction  
 628 accuracy on examples with high diversity and coherence, which are shown as red blocks in  
 629 the upper right corner. In addition, fixing one factor while increasing the other usually leads  
 630 to improved performance.

631 The observations demonstrates both diversity and coherence have positive effects on the  
 632 performance of MAM ensemble. They reflect different aspects of the ensemble. To improve  
 633 the quality of the prediction, one should aim to increase either the diversity of the base learner  
 634 on a single microlabel or the coherence among microlabel pairs.

## 636 5 Conclusions

637 In this paper we have put forward new methods for multilabel classification, relying on  
 638 ensemble learning on random output graphs. In our experiments, models thus created have  
 639 favourable predictive performances on a heterogeneous collection of multilabel datasets,  
 640 compared to several established methods. The theoretical analysis of the MAM ensemble  
 641 highlights the covariance of the compatibility scores between the inputs and microlabels  
 642 learned by the base learners as the quantity explaining the advantage of the ensemble pre-  
 643 diction over the base learners.

644 We note in passing that it is straightforward to generalize the theoretical analysis to any  
 645 multilabel classifiers that give scores to microlabels; there is no dependency on random graph  
 646 classifiers in the analysis.

647 The empirical evaluation supports the theoretical analysis, explaining the performance of  
 648 the proposed ensemble models. Our results indicate that structured output prediction methods

649 can be successfully applied to problems where no prior known output structure exists, and  
 650 thus widen the applicability of the structured output prediction.

651 **Acknowledgments** The work was financially supported by Helsinki Doctoral Programme in Computer Sci-  
 652 ence (Hecse), Academy of Finland grant 118653 (ALGODAN), IST Programme of the European Community  
 653 under the PASCAL2 Network of Excellence, ICT-2007-216886. This publication only reflects the authors'  
 654 views.

## 655 References

- 656 Argyriou, A., Evgeniou, T., & Pontil, M. (2008). Convex multi-task feature learning. *Machine Learning*, 73(3),  
 657 243–272.
- 658 Bian, W., Xie, B., & Tao, D. (2012). Corrlog: Correlated logistic models for joint prediction of multiple  
 659 labels. In: *Proceedings of the Fifteenth International Conference on Artificial Intelligence and Statistics*  
 660 (AISTATS-12), vol. 22, pp. 109–117.
- 661 Breiman, L. (1996). Bagging predictors. *Machine Learning*, 24, 123–140.
- 662 Brown, G., & Kuncheva, L.I. (2010). Good and bad diversity in majority vote ensembles. In: *Multiple classifier*  
 663 *systems* (pp. 124–133). Berlin: Springer.
- 664 Cristianini, N., & Shawe-Taylor, J. (2000). *An introduction to support vector machines and other kernel-based*  
 665 *learning methods* (1st ed.). Cambridge: Cambridge University Press.
- 666 Demšar, J. (2006). Statistical comparisons of classifiers over multiple data sets. *The Journal of Machine*  
 667 *Learning Research*, 7, 1–30.
- 668 Dunn, O. J. (1961). Multiple comparisons among means. *Journal of the American Statistical Association*,  
 669 56(293), 52–64.
- 670 Esuli, A., Fagni, T., & Sebastiani, F. (2008). Boosting multi-label hierarchical text categorization. *Information*  
 671 *Retrieval*, 11(4), 287–313.
- 672 Freund, Y., & Schapire, R. E. (1997). A decision-theoretic generalization of on-line learning and an application  
 673 to boosting. *Journal of Computer and System Sciences*, 55(1), 119–139.
- 674 Friedman, M. (1937). The use of ranks to avoid the assumption of normality implicit in the analysis of variance.  
 675 *Journal of the American Statistical Association*, 32(200), 675–701.
- 676 Krogh, A., & Vedelsby, J. (1995). Neural network ensembles, cross validation, and active learning. In: *Advances*  
 677 *in neural information processing systems* (pp. 231–238). Cambridge, MA: MIT Press.
- 678 Nemenyi, P. B. (1963). Distribution-free multiple comparisons. PhD thesis, Princeton University.
- 679 Rajaraman, A., & Ullman, J. (2011). *Mining of massive datasets*. Cambridge: Cambridge University Press.
- 680 Ralaivola, L., Swamidass, S., Saigo, H., & Baldi, P. (2005). Graph kernels for chemical informatics. *Neural*  
 681 *Networks*, 18, 1093–1110.
- 682 Rousu, J., Saunders, C., Szedmak, S., & Shawe-Taylor, J. (2006). Kernel-based learning of hierarchical mul-  
 683 tilabel classification models. *The Journal of Machine Learning Research*, 7, 1601–1626.
- 684 Rousu, J., Saunders, C., Szedmak, S., & Shawe-Taylor, J. (2007). Efficient algorithms for max-margin struc-  
 685 tured classification. *Predicting Structured Data*, 105–129.
- 686 Schapire, R., & Singer, Y. (1998). Improved boosting algorithms using confidence-rated predictions. In:  
 687 *Proceedings of the Annual Conference on Computational Learning Theory* (pp. 80–91). New York: ACM  
 688 Press.
- 689 Schapire, R. E., & Singer, Y. (2000). Boostexter: A boosting-based system for text categorization. *Machine*  
 690 *Learning*, 39(2/3), 135–168.
- 691 Schölkopf, B., & Smola, A. (2001). *Learning with Kernels*. Cambridge, MA: MIT Press.
- 692 Su, H., & Rousu, J. (2011). Multi-task drug bioactivity classification with graph labeling ensembles. *Pattern*  
 693 *Recognition in Bioinformatics*, 157–167.
- 694 Su, H., & Rousu, J. (2013). Multilabel classification through random graph ensembles. In: *Proceedings, 5th*  
 695 *Asian conference on machine learning (ACML2013)*, *Journal of Machine Learning Research W&CP*, vol.  
 696 29, pp. 404–418.
- 697 Taskar, B., Guestrin, C., & Koller, D. (2003). Max-margin markov networks. In: *Neural Information Processing*  
 698 *Systems*, 25–32.
- 699 Tschantaridis, I., Hofmann, T., Joachims, T., & Altun, Y. (2004). Support vector machine learning for inter-  
 700 dependent and structured output spaces. In: *Proceedings of the twenty-first international conference on*  
 701 *machine learning ICML04*, pp. 823–830.
- 702 Wainwright, M., Jaakkola, T., & Willsky, A. (2005). MAP estimation via agreement on trees: message-passing  
 703 and linear programming. *IEEE Transactions on Information Theory*, 51(11), 3697–3717.

- 704 Yan, R., Tesic, J., & Smith, J. (2007). Model-shared subspace boosting for multi-label classification. In:  
705 *Proceedings of the 13th ACM SIGKDD international conference on Knowledge discovery and data mining*,  
706 (pp. 834–843). ACM

uncorrected proof

Journal: 10994  
Article: 5465



## Author Query Form

**Please ensure you fill out your response to the queries raised below  
and return this form along with your corrections**

Dear Author

During the process of typesetting your article, the following queries have arisen. Please check your typeset proof carefully against the queries listed below and mark the necessary changes either directly on the proof/online grid or in the ‘Author’s response’ area provided below

Query	Details required	Author’s response
1.	Reference Nemenyi (1963) is given in list but not cited in text. Please cite in text or delete from list.	
2.	Please supply the volume number for Refs. Rousu et al. (2006) and Su and Rousu (2011) if possible.	
3.	Please provide complete details for Ref. Taskar et al. (2003).	

## Publication V

**Mario Marchand, Hongyu Su, Emilie Morvant, Juho Rousu, John Shawe-Taylor.** Multilabel Structured Output Learning with Random Spanning Trees of Max-Margin Markov Networks. In *Proceedings of the 28<sup>th</sup> Advances in Neural Information Processing Systems (NIPS 2014)*, to appear, December 2014.

© 2014 Copyright 2014 by the authors.

Reprinted with permission.



---

# Multilabel Structured Output Learning with Random Spanning Trees of Max-Margin Markov Networks

---

**Mario Marchand**

Département d'informatique et génie logiciel  
Université Laval  
Québec (QC), Canada  
mario.marchand@ift.ulaval.ca

**Hongyu Su**

Helsinki Institute for Information Technology  
Dept of Information and Computer Science  
Aalto University, Finland  
hongyu.su@aalto.fi

**Emilie Morvant\***

LaHC, UMR CNRS 5516  
Univ. of St-Etienne, France  
emilie.morvant@univ-st-etienne.fr

**Juho Rousu**

Helsinki Institute for Information Technology  
Dept of Information and Computer Science  
Aalto University, Finland  
juho.rousu@aalto.fi

**John Shawe-Taylor**

Department of Computer Science  
University College London  
London, UK  
j.shawe-taylor@ucl.ac.uk

## Abstract

We show that the usual score function for conditional Markov networks can be written as the expectation over the scores of their spanning trees. We also show that a small random sample of these output trees can attain a significant fraction of the margin obtained by the complete graph and we provide conditions under which we can perform tractable inference. The experimental results confirm that practical learning is scalable to realistic datasets using this approach.

## 1 Introduction

Finding an hyperplane that minimizes the number of misclassifications is  $\mathcal{NP}$ -hard. But the support vector machine (SVM) substitutes the hinge for the discrete loss and, modulo a margin assumption, can nonetheless efficiently find a hyperplane with a guarantee of good generalization. This paper investigates whether the problem of inference over a complete graph in structured output prediction can be avoided in an analogous way based on a margin assumption.

We first show that the score function for the complete output graph can be expressed as the expectation over the scores of random spanning trees. A sampling result then shows that a small random sample of these output trees can attain a significant fraction of the margin obtained by the complete graph. Together with a generalization bound for the sample of trees, this shows that we can obtain good generalization using the average scores of a sample of trees in place of the complete graph. We have thus reduced the intractable inference problem to a convex optimization not dissimilar to a SVM. The key inference problem to enable learning with this ensemble now becomes finding the maximum violator for the (finite sample) average tree score. We then provide the conditions under which the inference problem is tractable. Experimental results confirm this prediction and show that

---

\*Most of this work was carried out while E. Morvant was affiliated with IST Austria, Klosterneuburg.

practical learning is scalable to realistic datasets using this approach with the resulting classification accuracy enhanced over more naive ways of training the individual tree score functions.

The paper aims at exploring the potential ramifications of the random spanning tree observation both theoretically and practically. As such, we think that we have laid the foundations for a fruitful approach to tackle the intractability of inference in a number of scenarios. Other attractive features are that we do not require knowledge of the output graph's structure, that the optimization is convex, and that the accuracy of the optimization can be traded against computation. Our approach is firmly rooted in the maximum margin Markov network analysis [1]. Other ways to address the intractability of loopy graph inference have included using approximate MAP inference with tree-based and LP relaxations [2], semi-definite programming convex relaxations [3], special cases of graph classes for which inference is efficient [4], use of random tree score functions in heuristic combinations [5]. Our work is not based on any of these approaches, despite superficial resemblances to, *e.g.*, the trees in tree-based relaxations and the use of random trees in [5]. We believe it represents a distinct approach to a fundamental problem of learning and, as such, is worthy of further investigation.

## 2 Definitions and Assumptions

We consider supervised learning problems where the input space  $\mathcal{X}$  is arbitrary and the output space  $\mathcal{Y}$  consists of the set of all  $\ell$ -dimensional multilabel vectors  $(y_1, \dots, y_\ell) \stackrel{\text{def}}{=} \mathbf{y}$  where each  $y_i \in \{1, \dots, r_i\}$  for some finite positive integer  $r_i$ . Each example  $(x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$  is mapped to a joint feature vector  $\phi(x, \mathbf{y})$ . Given a weight vector  $\mathbf{w}$  in the space of joint feature vectors, the predicted output  $\mathbf{y}_\mathbf{w}(x)$  at input  $x \in \mathcal{X}$ , is given by the output  $\mathbf{y}$  maximizing the *score*  $F(\mathbf{w}, x, \mathbf{y})$ , *i.e.*,

$$\mathbf{y}_\mathbf{w}(x) \stackrel{\text{def}}{=} \underset{\mathbf{y} \in \mathcal{Y}}{\operatorname{argmax}} F(\mathbf{w}, x, \mathbf{y}) ; \quad \text{where} \quad F(\mathbf{w}, x, \mathbf{y}) \stackrel{\text{def}}{=} \langle \mathbf{w}, \phi(x, \mathbf{y}) \rangle , \quad (1)$$

and where  $\langle \cdot, \cdot \rangle$  denotes the inner product in the joint feature space. Hence,  $\mathbf{y}_\mathbf{w}(x)$  is obtained by solving the so-called *inference* problem, which is known to be  $\mathcal{NP}$ -hard for many output feature maps [6, 7]. Consequently, we aim at using an output feature map for which the inference problem can be solved by a polynomial time algorithm such as dynamic programming. The *margin*  $\Gamma(\mathbf{w}, x, \mathbf{y})$  achieved by predictor  $\mathbf{w}$  at example  $(x, \mathbf{y})$  is defined as,

$$\Gamma(\mathbf{w}, x, \mathbf{y}) \stackrel{\text{def}}{=} \min_{\mathbf{y}' \neq \mathbf{y}} [F(\mathbf{w}, x, \mathbf{y}) - F(\mathbf{w}, x, \mathbf{y}')] .$$

We consider the case where the feature map  $\phi$  is a potential function for a Markov network defined by a complete graph  $G$  with  $\ell$  nodes and  $\ell(\ell - 1)/2$  undirected edges. Each node  $i$  of  $G$  represents an output variable  $y_i$  and there exists an edge  $(i, j)$  of  $G$  for each pair  $(y_i, y_j)$  of output variables. For any example  $(x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ , its joint feature vector is given by

$$\phi(x, \mathbf{y}) = (\phi_{i,j}(x, y_i, y_j))_{(i,j) \in G} = (\varphi(x) \otimes \psi_{i,j}(y_i, y_j))_{(i,j) \in G} ,$$

where  $\otimes$  is the Kronecker product. Hence, any predictor  $\mathbf{w}$  can be written as  $\mathbf{w} = (\mathbf{w}_{i,j})_{(i,j) \in G}$  where  $\mathbf{w}_{i,j}$  is  $\mathbf{w}$ 's weight on  $\phi_{i,j}(x, y_i, y_j)$ . Therefore, for any  $\mathbf{w}$  and any  $(x, \mathbf{y})$ , we have

$$F(\mathbf{w}, x, \mathbf{y}) = \langle \mathbf{w}, \phi(x, \mathbf{y}) \rangle = \sum_{(i,j) \in G} \langle \mathbf{w}_{i,j}, \phi_{i,j}(x, y_i, y_j) \rangle = \sum_{(i,j) \in G} F_{i,j}(\mathbf{w}_{i,j}, x, y_i, y_j) ,$$

where we denote by  $F_{i,j}(\mathbf{w}_{i,j}, x, y_i, y_j) = \langle \mathbf{w}_{i,j}, \phi_{i,j}(x, y_i, y_j) \rangle$  the score of labeling the edge  $(i, j)$  by  $(y_i, y_j)$  given input  $x$ .

For any vector  $\mathbf{a}$ , let  $\|\mathbf{a}\|$  denote its  $L_2$  norm. Throughout the paper, we make the assumption that we have a normalized joint feature space such that  $\|\phi(x, \mathbf{y})\| = 1$  for all  $(x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$  and  $\|\phi_{i,j}(x, y_i, y_j)\|$  is the same for all  $(i, j) \in G$ . Since the complete graph  $G$  has  $\binom{\ell}{2}$  edges, it follows that  $\|\phi_{i,j}(x, y_i, y_j)\|^2 = \binom{\ell}{2}^{-1}$  for all  $(i, j) \in G$ .

We also have a training set  $S \stackrel{\text{def}}{=} \{(x_1, \mathbf{y}_1), \dots, (x_m, \mathbf{y}_m)\}$  where each example is generated independently according to some unknown distribution  $D$ . Mathematically, we do not assume the existence of a predictor  $\mathbf{w}$  achieving some positive margin  $\Gamma(\mathbf{w}, x, \mathbf{y})$  on each  $(x, \mathbf{y}) \in S$ . Indeed,

for some  $S$ , there might not exist any  $\mathbf{w}$  where  $\Gamma(\mathbf{w}, x, \mathbf{y}) > 0$  for all  $(x, \mathbf{y}) \in S$ . However, the generalization guarantee will be best when  $\mathbf{w}$  achieves a large margin on most training points.

Given any  $\gamma > 0$ , and any  $(x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ , the *hinge loss* (at scale  $\gamma$ ) incurred on  $(x, \mathbf{y})$  by a unit  $L_2$  norm predictor  $\mathbf{w}$  that achieves a (possibly negative) margin  $\Gamma(\mathbf{w}, x, \mathbf{y})$  is given by  $\mathcal{L}^\gamma(\Gamma(\mathbf{w}, x, \mathbf{y}))$ , where the so-called *hinge loss function*  $\mathcal{L}^\gamma$  is defined as  $\mathcal{L}^\gamma(s) \stackrel{\text{def}}{=} \max(0, 1 - s/\gamma)$   $\forall s \in \mathbb{R}$ . We will also make use of the *ramp loss function*  $\mathcal{A}^\gamma$  defined by  $\mathcal{A}^\gamma(s) \stackrel{\text{def}}{=} \min(1, \mathcal{L}^\gamma(s))$   $\forall s \in \mathbb{R}$ .

*The proofs of all the rigorous results of this paper are provided in the supplementary material.*

### 3 Superposition of Random Spanning Trees

Given a complete graph  $G$  of  $\ell$  nodes (representing the Markov network), let  $S(G)$  denote the set of all  $\ell^{l-2}$  spanning trees of  $G$ . Recall that each spanning tree of  $G$  has  $\ell - 1$  edges. Hence, for any edge  $(i, j) \in G$ , the number of trees in  $S(G)$  covering that edge  $(i, j)$  is given by  $\ell^{l-2}(\ell-1)/\binom{\ell}{2} = (2/\ell)\ell^{l-2}$ . Therefore, for any function  $f$  of the edges of  $G$  we have

$$\sum_{T \in S(G)} \sum_{(i,j) \in T} f((i,j)) = \ell^{l-2} \frac{2}{\ell} \sum_{(i,j) \in G} f((i,j)).$$

Given any spanning tree  $T$  of  $G$  and given any predictor  $\mathbf{w}$ , let  $\mathbf{w}_T$  denote the projection of  $\mathbf{w}$  on the edges of  $T$ . Namely,  $(\mathbf{w}_T)_{i,j} = \mathbf{w}_{i,j}$  if  $(i, j) \in T$ , and  $(\mathbf{w}_T)_{i,j} = 0$  otherwise. Let us also denote by  $\phi_T(x, \mathbf{y})$ , the projection of  $\phi(x, \mathbf{y})$  on the edges of  $T$ . Namely,  $(\phi_T(x, \mathbf{y}))_{i,j} = \phi_{i,j}(x, y_i, y_j)$  if  $(i, j) \in T$ , and  $(\phi_T(x, \mathbf{y}))_{i,j} = 0$  otherwise. Recall that  $\|\phi_{i,j}(x, y_i, y_j)\|^2 = \binom{\ell}{2}^{-1} \forall (i, j) \in G$ . Thus, for all  $(x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$  and for all  $T \in S(G)$ , we have

$$\|\phi_T(x, \mathbf{y})\|^2 = \sum_{(i,j) \in T} \|\phi_{i,j}(x, y_i, y_j)\|^2 = \frac{\ell-1}{\binom{\ell}{2}} = \frac{2}{\ell}.$$

We now establish how  $F(\mathbf{w}, x, \mathbf{y})$  can be written as an expectation over all the spanning trees of  $G$ .

**Lemma 1.** *Let  $\hat{\mathbf{w}}_T \stackrel{\text{def}}{=} \mathbf{w}_T/\|\mathbf{w}_T\|$ ,  $\hat{\phi}_T \stackrel{\text{def}}{=} \phi_T/\|\phi_T\|$ . Let  $\mathcal{U}(G)$  denote the uniform distribution on  $S(G)$ . Then, we have*

$$F(\mathbf{w}, x, \mathbf{y}) = \mathbf{E}_{T \sim \mathcal{U}(G)} a_T \langle \hat{\mathbf{w}}_T, \hat{\phi}_T(x, \mathbf{y}) \rangle, \quad \text{where } a_T \stackrel{\text{def}}{=} \sqrt{\frac{\ell}{2}} \|\mathbf{w}_T\|.$$

Moreover, for any  $\mathbf{w}$  such that  $\|\mathbf{w}\| = 1$ , we have:  $\mathbf{E}_{T \sim \mathcal{U}(G)} a_T^2 = 1$ , and  $\mathbf{E}_{T \sim \mathcal{U}(G)} a_T \leq 1$ .

Let  $\mathcal{T} \stackrel{\text{def}}{=} \{T_1, \dots, T_n\}$  be a sample of  $n$  spanning trees of  $G$  where each  $T_i$  is sampled independently according to  $\mathcal{U}(G)$ . Given any unit  $L_2$  norm predictor  $\mathbf{w}$  on the complete graph  $G$ , our task is to investigate how the margins  $\Gamma(\mathbf{w}, x, \mathbf{y})$ , for each  $(x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ , will be modified if we approximate the (true) expectation over all spanning trees by an average over the sample  $\mathcal{T}$ .

For this task, we consider any  $(x, \mathbf{y})$  and any  $\mathbf{w}$  of unit  $L_2$  norm. Let  $F_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y})$  denote the estimation of  $F(\mathbf{w}, x, \mathbf{y})$  on the tree sample  $\mathcal{T}$ ,

$$F_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y}) \stackrel{\text{def}}{=} \frac{1}{n} \sum_{i=1}^n a_{T_i} \langle \hat{\mathbf{w}}_{T_i}, \hat{\phi}_{T_i}(x, \mathbf{y}) \rangle,$$

and let  $\Gamma_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y})$  denote the estimation of  $\Gamma(\mathbf{w}, x, \mathbf{y})$  on the tree sample  $\mathcal{T}$ ,

$$\Gamma_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y}) \stackrel{\text{def}}{=} \min_{\mathbf{y}' \neq \mathbf{y}} [F_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y}) - F_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y}')].$$

The following lemma states how  $\Gamma_{\mathcal{T}}$  relates to  $\Gamma$ .

**Lemma 2.** *Consider any unit  $L_2$  norm predictor  $\mathbf{w}$  on the complete graph  $G$  that achieves a margin of  $\Gamma(\mathbf{w}, x, \mathbf{y})$  for each  $(x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ , then we have*

$$\Gamma_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y}) \geq \Gamma(\mathbf{w}, x, \mathbf{y}) - 2\epsilon \quad \forall (x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y},$$

whenever we have  $|F_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y}) - F(\mathbf{w}, x, \mathbf{y})| \leq \epsilon$  for all  $(x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ .

Lemma 2 has important consequences whenever  $|F_{\mathcal{T}}(\mathbf{w}, \mathbf{x}, \mathbf{y}) - F(\mathbf{w}, \mathbf{x}, \mathbf{y})| \leq \epsilon$  for all  $(\mathbf{x}, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ . Indeed, if  $\mathbf{w}$  achieves a hard margin  $\Gamma(\mathbf{w}, \mathbf{x}, \mathbf{y}) \geq \gamma > 0$  for all  $(\mathbf{x}, \mathbf{y}) \in S$ , then we have that  $\mathbf{w}$  also achieves a hard margin of  $\Gamma_{\mathcal{T}}(\mathbf{w}, \mathbf{x}, \mathbf{y}) \geq \gamma - 2\epsilon$  on each  $(\mathbf{x}, \mathbf{y}) \in S$  when using the tree sample  $\mathcal{T}$  instead of the full graph  $G$ . More generally, if  $\mathbf{w}$  achieves a ramp loss of  $\mathcal{A}^{\gamma}(\Gamma(\mathbf{w}, \mathbf{x}, \mathbf{y}))$  for each  $(\mathbf{x}, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ , then  $\mathbf{w}$  achieves a ramp loss of  $\mathcal{A}^{\gamma}(\Gamma_{\mathcal{T}}(\mathbf{w}, \mathbf{x}, \mathbf{y})) \leq \mathcal{A}^{\gamma}(\Gamma(\mathbf{w}, \mathbf{x}, \mathbf{y}) - 2\epsilon)$  for all  $(\mathbf{x}, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$  when using the tree sample  $\mathcal{T}$  instead of the full graph  $G$ . This last property follows directly from the fact that  $\mathcal{A}^{\gamma}(s)$  is a non-increasing function of  $s$ .

The next lemma tells us that, apart from a slow  $\ln^2(\sqrt{n})$  dependence, a sample of  $n \in \Theta(\ell^2/\epsilon^2)$  spanning trees is sufficient to assure that the condition of Lemma 2 holds with high probability for all  $(\mathbf{x}, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ . Such a fast convergence rate was made possible by using PAC-Bayesian methods which, in our case, prevented us of using the union bound over all possible  $\mathbf{y} \in \mathcal{Y}$ .

**Lemma 3.** *Consider any  $\epsilon > 0$  and any unit  $L_2$  norm predictor  $\mathbf{w}$  for the complete graph  $G$  acting on a normalized joint feature space. For any  $\delta \in (0, 1)$ , let*

$$n \geq \frac{\ell^2}{\epsilon^2} \left( \frac{1}{16} + \frac{1}{2} \ln \frac{8\sqrt{n}}{\delta} \right)^2. \quad (2)$$

*Then with probability of at least  $1 - \delta/2$  over all samples  $\mathcal{T}$  generated according to  $\mathcal{U}(G)^n$ , we have, simultaneously for all  $(\mathbf{x}, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ , that  $|F_{\mathcal{T}}(\mathbf{w}, \mathbf{x}, \mathbf{y}) - F(\mathbf{w}, \mathbf{x}, \mathbf{y})| \leq \epsilon$ .*

Given a sample  $\mathcal{T}$  of  $n$  spanning trees of  $G$ , we now consider an arbitrary set  $\mathcal{W} \stackrel{\text{def}}{=} \{\hat{\mathbf{w}}_{T_1}, \dots, \hat{\mathbf{w}}_{T_n}\}$  of unit  $L_2$  norm weight vectors where each  $\hat{\mathbf{w}}_{T_i}$  operates on a unit  $L_2$  norm feature vector  $\hat{\phi}_{T_i}(\mathbf{x}, \mathbf{y})$ . For any  $\mathcal{T}$  and any such set  $\mathcal{W}$ , we consider an arbitrary unit  $L_2$  norm conical combination of each weight in  $\mathcal{W}$  realized by a  $n$ -dimensional weight vector  $\mathbf{q} \stackrel{\text{def}}{=} (q_1, \dots, q_n)$ , where  $\sum_{i=1}^n q_i^2 = 1$  and each  $q_i \geq 0$ . Given any  $(\mathbf{x}, \mathbf{y})$  and any  $\mathcal{T}$ , we define the score  $F_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, \mathbf{x}, \mathbf{y})$  achieved on  $(\mathbf{x}, \mathbf{y})$  by the conical combination  $(\mathcal{W}, \mathbf{q})$  on  $\mathcal{T}$  as

$$F_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, \mathbf{x}, \mathbf{y}) \stackrel{\text{def}}{=} \frac{1}{\sqrt{n}} \sum_{i=1}^n q_i \langle \hat{\mathbf{w}}_{T_i}, \hat{\phi}_{T_i}(\mathbf{x}, \mathbf{y}) \rangle, \quad (3)$$

where the  $\sqrt{n}$  denominator ensures that we always have  $F_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, \mathbf{x}, \mathbf{y}) \leq 1$  in view of the fact that  $\sum_{i=1}^n q_i$  can be as large as  $\sqrt{n}$ . Note also that  $F_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, \mathbf{x}, \mathbf{y})$  is the score of the feature vector obtained by the concatenation of all the weight vectors in  $\mathcal{W}$  (and weighted by  $\mathbf{q}$ ) acting on a feature vector obtained by concatenating each  $\hat{\phi}_{T_i}$  multiplied by  $1/\sqrt{n}$ . Hence, given  $\mathcal{T}$ , we define the margin  $\Gamma_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, \mathbf{x}, \mathbf{y})$  achieved on  $(\mathbf{x}, \mathbf{y})$  by the conical combination  $(\mathcal{W}, \mathbf{q})$  on  $\mathcal{T}$  as

$$\Gamma_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, \mathbf{x}, \mathbf{y}) \stackrel{\text{def}}{=} \min_{\mathbf{y}' \neq \mathbf{y}} [F_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, \mathbf{x}, \mathbf{y}) - F_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, \mathbf{x}, \mathbf{y}')]. \quad (4)$$

For any unit  $L_2$  norm predictor  $\mathbf{w}$  that achieves a margin of  $\Gamma(\mathbf{w}, \mathbf{x}, \mathbf{y})$  for all  $(\mathbf{x}, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ , we now show that there exists, with high probability, a unit  $L_2$  norm conical combination  $(\mathcal{W}, \mathbf{q})$  on  $\mathcal{T}$  achieving margins that are not much smaller than  $\Gamma(\mathbf{w}, \mathbf{x}, \mathbf{y})$ .

**Theorem 4.** *Consider any unit  $L_2$  norm predictor  $\mathbf{w}$  for the complete graph  $G$ , acting on a normalized joint feature space, achieving a margin of  $\Gamma(\mathbf{w}, \mathbf{x}, \mathbf{y})$  for each  $(\mathbf{x}, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ . Then for any  $\epsilon > 0$ , and any  $n$  satisfying Lemma 3, for any  $\delta \in (0, 1]$ , with probability of at least  $1 - \delta$  over all samples  $\mathcal{T}$  generated according to  $\mathcal{U}(G)^n$ , there exists a unit  $L_2$  norm conical combination  $(\mathcal{W}, \mathbf{q})$  on  $\mathcal{T}$  such that, simultaneously for all  $(\mathbf{x}, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ , we have*

$$\Gamma_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, \mathbf{x}, \mathbf{y}) \geq \frac{1}{\sqrt{1+\epsilon}} [\Gamma(\mathbf{w}, \mathbf{x}, \mathbf{y}) - 2\epsilon].$$

From Theorem 4, and since  $\mathcal{A}^{\gamma}(s)$  is a non-increasing function of  $s$ , it follows that, with probability at least  $1 - \delta$  over the random draws of  $\mathcal{T} \sim \mathcal{U}(G)^n$ , there exists  $(\mathcal{W}, \mathbf{q})$  on  $\mathcal{T}$  such that, simultaneously for all  $\forall (\mathbf{x}, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ , for any  $n$  satisfying Lemma 3 we have

$$\mathcal{A}^{\gamma}(\Gamma_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, \mathbf{x}, \mathbf{y})) \leq \mathcal{A}^{\gamma}([\Gamma(\mathbf{w}, \mathbf{x}, \mathbf{y}) - 2\epsilon] (1 + \epsilon)^{-1/2}).$$

Hence, instead of searching for a predictor  $\mathbf{w}$  for the complete graph  $G$  that achieves a small expected ramp loss  $\mathbf{E}_{(\mathbf{x}, \mathbf{y}) \sim D} \mathcal{A}^{\gamma}(\Gamma(\mathbf{w}, \mathbf{x}, \mathbf{y}))$ , Theorem 4 tells us that we can settle the search for a

unit  $L_2$  norm conical combination  $(\mathcal{W}, \mathbf{q})$  on a sample  $\mathcal{T}$  of randomly-generated spanning trees of  $G$  that achieves small  $\mathbf{E}_{(x,y) \sim D} \mathcal{A}^\gamma(\Gamma_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, x, y))$ . But recall that  $\Gamma_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, x, y)$  is the margin of a weight vector obtained by the concatenation of all the weight vectors in  $\mathcal{W}$  (weighted by  $\mathbf{q}$ ) on a feature vector obtained by the concatenation of the  $n$  feature vectors  $(1/\sqrt{n})\hat{\phi}_{T_i}$ . It thus follows that any standard risk bound for the SVM applies directly to  $\mathbf{E}_{(x,y) \sim D} \mathcal{A}^\gamma(\Gamma_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, x, y))$ . Hence, by adapting the SVM risk bound of [8], we have the following result.

**Theorem 5.** *Consider any sample  $\mathcal{T}$  of  $n$  spanning trees of the complete graph  $G$ . For any  $\gamma > 0$  and any  $0 < \delta \leq 1$ , with probability of at least  $1 - \delta$  over the random draws of  $S \sim D^m$ , simultaneously for all unit  $L_2$  norm conical combinations  $(\mathcal{W}, \mathbf{q})$  on  $\mathcal{T}$ , we have*

$$\mathbf{E}_{(x,y) \sim D} \mathcal{A}^\gamma(\Gamma_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, x, y)) \leq \frac{1}{m} \sum_{i=1}^m \mathcal{A}^\gamma(\Gamma_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, x_i, y_i)) + \frac{2}{\gamma \sqrt{m}} + 3 \sqrt{\frac{\ln(2/\delta)}{2m}}.$$

Hence, according to this theorem, the conical combination  $(\mathcal{W}, \mathbf{q})$  having the best generalization guarantee is the one which minimizes the sum of the first two terms on the right hand side of the inequality. Note that the theorem is still valid if we replace, in the empirical risk term, the non-convex ramp loss  $\mathcal{A}^\gamma$  by the convex hinge loss  $\mathcal{L}^\gamma$ . This provides the theoretical basis of the proposed optimization problem for learning  $(\mathcal{W}, \mathbf{q})$  on the sample  $\mathcal{T}$ .

## 4 A $L_2$ -Norm Random Spanning Tree Approximation Approach

If we introduce the usual slack variables  $\xi_k \stackrel{\text{def}}{=} \gamma \cdot \mathcal{L}^\gamma(\Gamma_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, x_k, y_k))$ , Theorem 5 suggests that we should minimize  $\frac{1}{\gamma} \sum_{k=1}^m \xi_k$  for some fixed margin value  $\gamma > 0$ . Rather than performing this task for several values of  $\gamma$ , we show in the supplementary material that we can, equivalently, solve the following optimization problem for several values of  $C > 0$ .

**Definition 6. Primal  $L_2$ -norm Random Tree Approximation.**

$$\begin{aligned} \min_{\mathbf{w}_{T_i}, \xi_k} \quad & \frac{1}{2} \sum_{i=1}^n \|\mathbf{w}_{T_i}\|_2^2 + C \sum_{k=1}^m \xi_k \\ \text{s.t.} \quad & \sum_{i=1}^n \langle \mathbf{w}_{T_i}, \hat{\phi}_{T_i}(x_k, y_k) \rangle - \max_{y \neq y_k} \sum_{i=1}^n \langle \mathbf{w}_{T_i}, \hat{\phi}_{T_i}(x_k, y) \rangle \geq 1 - \xi_k, \\ & \xi_k \geq 0, \forall k \in \{1, \dots, m\}, \end{aligned}$$

where  $\{\mathbf{w}_{T_i} | T_i \in \mathcal{T}\}$  are the feature weights to be learned on each tree,  $\xi_k$  is the margin slack allocated for each  $x_k$ , and  $C$  is the slack parameter that controls the amount of regularization.

This primal form has the interpretation of maximizing the joint margins from individual trees between (correct) training examples and all the other (incorrect) examples.

The key for the efficient optimization is solving the 'argmax' problem efficiently. In particular, we note that the space of all multilabels is exponential in size, thus forbidding exhaustive enumeration over it. In the following, we show how exact inference over a collection  $\mathcal{T}$  of trees can be implemented in  $\Theta(Kn\ell)$  time per data point, where  $K$  is the smallest number such that the average score of the  $K$ 'th best multilabel for each tree of  $\mathcal{T}$  is at most  $F_{\mathcal{T}}(x, y) \stackrel{\text{def}}{=} \frac{1}{n} \sum_{i=1}^n \langle \mathbf{w}_{T_i}, \hat{\phi}_{T_i}(x, y) \rangle$ . Whenever  $K$  is polynomial in the number of labels, this gives us exact polynomial-time inference over the ensemble of trees.

### 4.1 Fast inference over a collection of trees

It is well known that the exact solution to the inference problem

$$\hat{y}_{T_i}(x) = \operatorname{argmax}_{y \in \mathcal{Y}} F_{\mathbf{w}_{T_i}}(x, y) \stackrel{\text{def}}{=} \operatorname{argmax}_{y \in \mathcal{Y}} \langle \mathbf{w}_{T_i}, \hat{\phi}_{T_i}(x, y) \rangle, \quad (5)$$

on an individual tree  $T_i$  can be obtained in  $\Theta(\ell)$  time by dynamic programming. However, there is no guarantee that the maximizer  $\hat{y}_{T_i}$  of Equation (5) is also a maximizer of  $F_{\mathcal{T}}$ . In practice,  $\hat{y}_{T_i}$

can differ for each spanning tree  $T_i \in \mathcal{T}$ . Hence, instead of using only the best scoring multilabel  $\hat{\mathbf{y}}_{T_i}$  from each individual  $T_i \in \mathcal{T}$ , we consider the set of the  $K$  highest scoring multilabels  $\mathcal{Y}_{T_i, K} = \{\hat{\mathbf{y}}_{T_i, 1}, \dots, \hat{\mathbf{y}}_{T_i, K}\}$  of  $F_{\mathbf{w}_{T_i}}(x, \mathbf{y})$ . In the supplementary material we describe a dynamic programming to find the  $K$  highest multilabels in  $\Theta(K\ell)$  time. Running this algorithm for all of the trees gives us a candidate set of  $\Theta(Kn)$  multilabels  $\mathcal{Y}_{\mathcal{T}, K} = \mathcal{Y}_{T_1, K} \cup \dots \cup \mathcal{Y}_{T_n, K}$ . We now state a key lemma that will enable us to verify if the candidate set contains the maximizer of  $F_{\mathcal{T}}$ .

**Lemma 7.** *Let  $\mathbf{y}_K^* = \operatorname{argmax}_{\mathbf{y} \in \mathcal{Y}_{\mathcal{T}, K}} F_{\mathcal{T}}(x, \mathbf{y})$  be the highest scoring multilabel in  $\mathcal{Y}_{\mathcal{T}, K}$ . Suppose that*

$$F_{\mathcal{T}}(x, \mathbf{y}_K^*) \geq \frac{1}{n} \sum_{i=1}^n F_{\mathbf{w}_{T_i}}(x, \mathbf{y}_{T_i, K}) \stackrel{\text{def}}{=} \theta_x(K).$$

*It follows that  $F_{\mathcal{T}}(x, \mathbf{y}_K^*) = \max_{\mathbf{y} \in \mathcal{Y}} F_{\mathcal{T}}(x, \mathbf{y})$ .*

We can use any  $K$  satisfying the lemma as the length of  $K$ -best lists, and be assured that  $\mathbf{y}_K^*$  is a maximizer of  $F_{\mathcal{T}}$ .

We now examine the conditions under which the highest scoring multilabel is present in our candidate set  $\mathcal{Y}_{\mathcal{T}, K}$  with high probability. For any  $x \in \mathcal{X}$  and any predictor  $\mathbf{w}$ , let  $\hat{\mathbf{y}} \stackrel{\text{def}}{=} \mathbf{y}_{\mathbf{w}}(x) \stackrel{\text{def}}{=} \operatorname{argmax}_{\mathbf{y} \in \mathcal{Y}} F(\mathbf{w}, x, \mathbf{y})$  be the highest scoring multilabel in  $\mathcal{Y}$  for predictor  $\mathbf{w}$  on the complete graph  $G$ .

For any  $\mathbf{y} \in \mathcal{Y}$ , let  $K_T(\mathbf{y})$  be the rank of  $\mathbf{y}$  in tree  $T$  and let  $\rho_T(\mathbf{y}) \stackrel{\text{def}}{=} K_T(\mathbf{y})/|\mathcal{Y}|$  be the normalized rank of  $\mathbf{y}$  in tree  $T$ . We then have  $0 < \rho_T(\mathbf{y}) \leq 1$  and  $\rho_T(\mathbf{y}') = \min_{\mathbf{y} \in \mathcal{Y}} \rho_T(\mathbf{y})$  whenever  $\mathbf{y}'$  is a highest scoring multilabel in tree  $T$ . Since  $\mathbf{w}$  and  $x$  are arbitrary and fixed, let us drop them momentarily from the notation and let  $F(\mathbf{y}) \stackrel{\text{def}}{=} F(\mathbf{w}, x, \mathbf{y})$ , and  $F_T(\mathbf{y}) \stackrel{\text{def}}{=} F_{\mathbf{w}_T}(x, \mathbf{y})$ . Let  $\mathcal{U}(\mathcal{Y})$  denote the uniform distribution of multilabels on  $\mathcal{Y}$ . Then, let  $\mu_T \stackrel{\text{def}}{=} \mathbf{E}_{\mathbf{y} \sim \mathcal{U}(\mathcal{Y})} F_T(\mathbf{y})$  and  $\mu \stackrel{\text{def}}{=} \mathbf{E}_{T \sim \mathcal{U}(G)} \mu_T$ .

Let  $\mathcal{T} \sim \mathcal{U}(G)^n$  be a sample of  $n$  spanning trees of  $G$ . Since the scoring function  $F_T$  of each tree  $T$  of  $G$  is bounded in absolute value, it follows that  $F_T$  is a  $\sigma_T$ -sub-Gaussian random variable for some  $\sigma_T > 0$ . We now show that, with high probability, there exists a tree  $T \in \mathcal{T}$  such that  $\rho_T(\hat{\mathbf{y}})$  is decreasing exponentially rapidly with  $(F(\hat{\mathbf{y}}) - \mu)/\sigma$ , where  $\sigma^2 \stackrel{\text{def}}{=} \mathbf{E}_{T \sim \mathcal{U}(G)} \sigma_T^2$ .

**Lemma 8.** *Let the scoring function  $F_T$  of each spanning tree of  $G$  be a  $\sigma_T$ -sub-Gaussian random variable under the uniform distribution of labels; i.e., for each  $T$  on  $G$ , there exists  $\sigma_T > 0$  such that for any  $\lambda > 0$  we have*

$$\mathbf{E}_{\mathbf{y} \sim \mathcal{U}(\mathcal{Y})} e^{\lambda(F_T(\mathbf{y}) - \mu_T)} \leq e^{\frac{\lambda^2}{2} \sigma_T^2}.$$

*Let  $\sigma^2 \stackrel{\text{def}}{=} \mathbf{E}_{T \sim \mathcal{U}(G)} \sigma_T^2$ , and let  $\alpha \stackrel{\text{def}}{=} \Pr_{T \sim \mathcal{U}(G)} (\mu_T \leq \mu \wedge F_T(\hat{\mathbf{y}}) \geq F(\hat{\mathbf{y}}) \wedge \sigma_T^2 \leq \sigma^2)$ . Then,*

$$\Pr_{T \sim \mathcal{U}(G)^n} \left( \exists T \in \mathcal{T}: \rho_T(\hat{\mathbf{y}}) \leq e^{-\frac{1}{2} \frac{(F(\hat{\mathbf{y}}) - \mu)^2}{\sigma^2}} \right) \geq 1 - (1 - \alpha)^n.$$

Thus, even for very small  $\alpha$ , when  $n$  is large enough, there exists, with high probability, a tree  $T \in \mathcal{T}$  such that  $\hat{\mathbf{y}}$  has a small  $\rho_T(\hat{\mathbf{y}})$  whenever  $[F(\hat{\mathbf{y}}) - \mu]/\sigma$  is large for  $G$ . For example, when  $|\mathcal{Y}| = 2^\ell$  (the multiple binary classification case), we have with probability of at least  $1 - (1 - \alpha)^n$ , that there exists  $T \in \mathcal{T}$  such that  $K_T(\hat{\mathbf{y}}) = 1$  whenever  $F(\hat{\mathbf{y}}) - \mu \geq \sigma\sqrt{2\ell \ln 2}$ .

## 4.2 Optimization

To optimize the  $L_2$ -norm RTA problem (Definition 6) we convert it to the marginalized dual form (see the supplementary material for the derivation), which gives us a polynomial-size problem (in the number of microlabels) and allows us to use kernels to tackle complex input spaces efficiently.

**Definition 9.**  *$L_2$ -norm RTA Marginalized Dual*

$$\max_{\boldsymbol{\mu} \in \mathcal{M}^m} \frac{1}{|E_{\mathcal{T}}|} \sum_{e, k, \mathbf{u}_e} \mu(k, e, \mathbf{u}_e) - \frac{1}{2} \sum_{\substack{e, k, \mathbf{u}_e, \\ k', \mathbf{u}'_e}} \mu(k, e, \mathbf{u}_e) K_{\mathcal{T}}^e(x_k, \mathbf{u}_e; x'_{k'}, \mathbf{u}'_e) \mu(k', e, \mathbf{u}'_e),$$

where  $E_{\mathcal{T}}$  is the union of the sets of edges appearing in  $\mathcal{T}$ , and  $\boldsymbol{\mu} \in \mathcal{M}^m$  are the marginal dual variables  $\boldsymbol{\mu} \stackrel{\text{def}}{=} (\mu(k, e, \mathbf{u}_e))_{k, e, \mathbf{u}_e}$ , with the triplet  $(k, e, \mathbf{u}_e)$  corresponding to labeling the edge

DATASET	MICROLABEL LOSS (%)					0/1 LOSS (%)				
	SVM	MTL	MMCRF	MAM	RTA	SVM	MTL	MMCRF	MAM	RTA
EMOTIONS	22.4	20.2	20.1	<i>19.5</i>	<b>18.8</b>	77.8	74.5	71.3	<i>69.6</i>	<b>66.3</b>
YEAST	<i>20.0</i>	20.7	21.7	20.1	<b>19.8</b>	85.9	88.7	93.0	86.0	<b>77.7</b>
SCENE	9.8	11.6	18.4	17.0	<b>8.8</b>	47.2	55.2	72.2	94.6	<b>30.2</b>
ENRON	6.4	6.5	6.2	<b>5.0</b>	<i>5.3</i>	99.6	99.6	92.7	87.9	<b>87.7</b>
CAL500	<b>13.7</b>	<i>13.8</i>	<b>13.7</b>	<b>13.7</b>	<i>13.8</i>	100.0	100.0	100.0	100.0	100.0
FINGERPRINT	<b>10.3</b>	17.3	<i>10.5</i>	<i>10.5</i>	10.7	99.0	100.0	<i>99.6</i>	<i>99.6</i>	<b>96.7</b>
NCI60	15.3	16.0	14.6	<b>14.3</b>	14.9	56.9	53.0	63.1	60.0	<b>52.9</b>
MEDICAL	2.6	2.6	<b>2.1</b>	<b>2.1</b>	<b>2.1</b>	91.8	91.8	63.8	<i>63.1</i>	<b>58.8</b>
CIRCLE10	4.7	6.3	2.6	2.5	<b>0.6</b>	28.9	33.2	20.3	<i>17.7</i>	<b>4.0</b>
CIRCLE50	5.7	6.2	<b>1.5</b>	2.1	3.8	69.8	72.3	<b>38.8</b>	46.2	52.8

Table 1: Prediction performance of each algorithm in terms of microlabel loss and 0/1 loss. The best performing algorithm is highlighted with **boldface**, the second best is in *italic*.

$e = (v, v') \in E_{\mathcal{T}}$  of the output graph by  $\mathbf{u}_e = (u_v, u_{v'}) \in \mathcal{Y}_v \times \mathcal{Y}_{v'}$  for the training example  $x_k$ . Also,  $\mathcal{M}^m$  is the marginal dual feasible set and

$$K_{\mathcal{T}}^e(x_k, \mathbf{u}_e; x_{k'}, \mathbf{u}'_e) \stackrel{\text{def}}{=} \frac{N_{\mathcal{T}}(e)}{|E_{\mathcal{T}}|^2} K(x_k, x_{k'}) \langle \psi_e(y_{kv}, y_{kv'}) - \psi_e(u_v, u_{v'}), \psi_e(y_{k'v}, y_{k'v'}) - \psi_e(u'_v, u'_{v'}) \rangle$$

is the joint kernel of input features and the differences of output features of true and competing multilabels ( $y_k, \mathbf{u}$ ), projected to the edge  $e$ . Finally,  $N_{\mathcal{T}}(e)$  denotes the number of times  $e$  appears among the trees of the ensemble.

The master algorithm described in the supplementary material iterates over each training example until convergence. The processing of each training example  $x_k$  proceeds by finding the worst violating multilabel of the ensemble defined as

$$\bar{\mathbf{y}}_k \stackrel{\text{def}}{=} \underset{\mathbf{y} \neq \mathbf{y}_k}{\operatorname{argmax}} F_{\mathcal{T}}(x_k, \mathbf{y}), \quad (6)$$

using the  $K$ -best inference approach of the previous section, with the modification that the correct multilabel is excluded from the  $K$ -best lists. The worst violator  $\bar{\mathbf{y}}_k$  is mapped to a vertex

$$\bar{\mu}(x_k) = C \cdot ([\bar{\mathbf{y}}_e = \mathbf{u}_e])_{e, \mathbf{u}_e} \in \mathcal{M}_k$$

corresponding to the steepest feasible ascent direction (c.f, [9]) in the marginal dual feasible set  $\mathcal{M}_k$  of example  $x_k$ , thus giving us a subgradient of the objective of Definition 9. An exact line search is used to find the saddle point between the current solution and  $\bar{\mu}$ .

## 5 Empirical Evaluation

We compare our method RTA to Support Vector Machine (SVM) [10, 11], Multitask Feature Learning (MTL) [12], Max-Margin Conditional Random Fields (MMCRF) [9] which uses the loopy belief propagation algorithm for approximate inference on the general graph, and Maximum Average Marginal Aggregation (MAM) [5] which is a multilabel ensemble model that trains a set of random tree based learners separately and performs the final approximate inference on a union graph of the edge potential functions of the trees. We use ten multilabel datasets from [5]. Following [5], MAM is constructed with 180 tree based learners, and for MMCRF a consensus graph is created by pooling edges from 40 trees. We train RTA with up to 40 spanning trees and with  $K$  up to 32. The linear kernel is used for methods that require kernelized input. Margin slack parameters are selected from  $\{100, 50, 10, 1, 0.5, 0.1, 0.01\}$ . We use 5-fold cross-validation to compute the results.

**Prediction performance.** Table 1 shows the performance in terms of microlabel loss and 0/1 loss. The best methods are highlighted in '**boldface**' and the second best in '*italics*' (see supplementary material for full results). RTA quite often improves over MAM in 0/1 accuracy, sometimes with noticeable margin except for *Enron* and *Circle50*. The performances in microlabel accuracy are quite similar while RTA is slightly above the competition. This demonstrates the advantage of RTA that gains by optimizing on a collection of trees simultaneously rather than optimizing on individual trees as MAM. In addition, learning using approximate inference on a general graph seems less

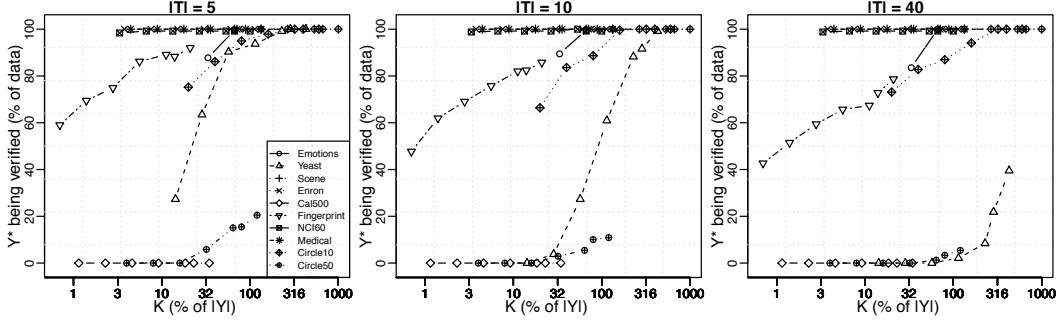


Figure 1: Percentage of examples with provably optimal  $y^*$  being in the  $K$ -best lists plotted as a function of  $K$ , scaled with respect to the number of microlabels in the dataset.

favorable as the tree-based methods, as MMCRF quite consistently trails to RTA and MAM in both microlabel and 0/1 error, except for *Circle50* where it outperforms other models. Finally, we notice that SVM, as a single label classifier, is very competitive against most multilabel methods for microlabel accuracy.

**Exactness of inference on the collection of trees.** We now study the empirical behavior of the inference (see Section 4) on the collection of trees, which, if taken as a single general graph, would call for solving an  $\mathcal{NP}$ -hard inference problem. We provide here empirical evidence that we can perform exact inference on most examples in most datasets in polynomial time. We ran the  $K$ -best inference on eleven datasets where the RTA models were trained with different amounts of spanning trees  $|\mathcal{T}| = \{5, 10, 40\}$  and values for  $K = \{2, 4, 8, 16, 32, 40, 60\}$ . For each parameter combination and for each example, we recorded whether the  $K$ -best inference was provably exact on the collection (*i.e.*, if Lemma 7 was satisfied). Figure 1 plots the percentage of examples where the inference was indeed provably exact. The values are shown as a function of  $K$ , expressed as the percentage of the number of microlabels in each dataset. Hence, 100% means  $K = \ell$ , which denotes low polynomial ( $\Theta(n\ell^2)$ ) time inference in the exponential size multilabel space.

We observe, from Figure 1, on some datasets (*e.g.*, *Medical*, *NCI60*), that the inference task is very easy since exact inference can be computed for most of the examples even with  $K$  values that are below 50% of the number of microlabels. By setting  $K = \ell$  (*i.e.*, 100%) we can perform exact inference for about 90% of the examples on nine datasets with five trees, and eight datasets with 40 trees. On two of the datasets (*Cal500*, *Circle50*), inference is not (in general) exact with low values of  $K$ . Allowing  $K$  to grow superlinearly on  $\ell$  would possibly permit exact inference on these datasets. However, this is left for future studies.

Finally, we note that the difficulty of performing provably exact inference slightly increases when more spanning trees are used. We have observed that, in most cases, the optimal multilabel  $y^*$  is still on the  $K$ -best lists but the conditions of Lemma 7 are no longer satisfied, hence forbidding us to prove exactness of the inference. Thus, working to establish alternative proofs of exactness is a worthy future research direction.

## 6 Conclusion

The main theoretical result of the paper is the demonstration that if a large margin structured output predictor exists, then combining a small sample of random trees will, with high probability, generate a predictor with good generalization. The key attraction of this approach is the tractability of the inference problem for the ensemble of trees, both indicated by our theoretical analysis and supported by our empirical results. However, as a by-product, we have a significant added benefit: we do not need to know the output structure *a priori* as this is generated implicitly in the learned weights for the trees. This is used to significant advantage in our experiments that automatically leverage correlations between the multiple target outputs to give a substantive increase in accuracy. It also suggests that the approach has enormous potential for applications where the structure of the output is not known but is expected to play an important role.

## References

- [1] Ben Taskar, Carlos Guestrin, and Daphne Koller. Max-margin markov networks. In S. Thrun, L.K. Saul, and B. Schölkopf, editors, *Advances in Neural Information Processing Systems 16*, pages 25–32. MIT Press, 2004.
- [2] Martin J. Wainwright, Tommy S. Jaakkola, and Alan S. Willsky. MAP estimation via agreement on trees: message-passing and linear programming. *IEEE Transactions on Information Theory*, 51(11):3697–3717, 2005.
- [3] Michael I. Jordan and Martin J Wainwright. Semidefinite relaxations for approximate inference on graphs with cycles. In S. Thrun, L.K. Saul, and B. Schölkopf, editors, *Advances in Neural Information Processing Systems 16*, pages 369–376. MIT Press, 2004.
- [4] Amir Globerson and Tommi S. Jaakkola. Approximate inference using planar graph decomposition. In B. Schölkopf, J.C. Platt, and T. Hoffman, editors, *Advances in Neural Information Processing Systems 19*, pages 473–480. MIT Press, 2007.
- [5] Hongyu Su and Juho Rousu. Multilabel classification through random graph ensembles. *Machine Learning*, dx.doi.org/10.1007/s10994-014-5465-9, 2014.
- [6] Robert G. Cowell, A. Philip Dawid, Steffen L. Lauritzen, and David J. Spiegelhalter. *Probabilistic Networks and Expert Systems*. Springer, New York, 1999.
- [7] Thomas Gärtner and Shankar Vembu. On structured output training: hard cases and an efficient alternative. *Machine Learning*, 79:227–242, 2009.
- [8] John Shawe-Taylor and Nello Cristianini. *Kernel Methods for Pattern Analysis*. Cambridge University Press, 2004.
- [9] J. Rousu, C. Saunders, S. Szegedy, and J. Shawe-Taylor. Efficient algorithms for max-margin structured classification. *Predicting Structured Data*, pages 105–129, 2007.
- [10] Kristin P. Bennett. Combining support vector and mathematical programming methods for classifications. In B. Schölkopf, C. J. C. Burges, and A. J. Smola, editors, *Advances in Kernel Methods—Support Vector Learning*, pages 307–326. MIT Press, Cambridge, MA, 1999.
- [11] Nello Cristianini and John Shawe-Taylor. *An Introduction to Support Vector Machines and Other Kernel-Based Learning Methods*. Cambridge University Press, Cambridge, U.K., 2000.
- [12] Andreas Argyriou, Theodoros Evgeniou, and Massimiliano Pontil. Convex multi-task feature learning. *Machine Learning*, 73(3):243–272, 2008.
- [13] Yevgeny Seldin, François Laviolette, Nicolò Cesa-Bianchi, John Shawe-Taylor, and Peter Auer. PAC-Bayesian inequalities for martingales. *IEEE Transactions on Information Theory*, 58:7086–7093, 2012.
- [14] Andreas Maurer. A note on the PAC Bayesian theorem. *CoRR*, cs.LG/0411099, 2004.
- [15] David McAllester. PAC-Bayesian stochastic model selection. *Machine Learning*, 51:5–21, 2003.
- [16] Juho Rousu, Craig Saunders, Sandor Szegedy, and John Shawe-Taylor. Kernel-based learning of hierarchical multilabel classification models. *Journal of Machine Learning Research*, 7:1601–1626, December 2006.



**Multilabel Structured Output Learning with Random Spanning Trees of Max-Margin Markov Networks (supplementary material) by: Mario Marchand, Hongyu Su, Emilie Morvant, Juho Rousou, and John Shawe-Taylor**

**Lemma 1**

Let  $\hat{\mathbf{w}}_T \stackrel{\text{def}}{=} \mathbf{w}_T / \|\mathbf{w}_T\|$ ,  $\hat{\boldsymbol{\phi}}_T \stackrel{\text{def}}{=} \boldsymbol{\phi}_T / \|\boldsymbol{\phi}_T\|$ . Let  $\mathcal{U}(G)$  denote the uniform distribution on  $S(G)$ . Then, we have

$$F(\mathbf{w}, x, \mathbf{y}) = \mathbf{E}_{T \sim \mathcal{U}(G)} a_T \langle \hat{\mathbf{w}}_T, \hat{\boldsymbol{\phi}}_T(x, \mathbf{y}) \rangle, \text{ where } a_T \stackrel{\text{def}}{=} \sqrt{\frac{\ell}{2}} \|\mathbf{w}_T\|.$$

Moreover, for any  $\mathbf{w}$  such that  $\|\mathbf{w}\| = 1$ , we have

$$\mathbf{E}_{T \sim \mathcal{U}(G)} a_T^2 = 1 ; \quad \mathbf{E}_{T \sim \mathcal{U}(G)} a_T \leq 1.$$

*Proof.*

$$\begin{aligned} F(\mathbf{w}, x, \mathbf{y}) &= \langle \mathbf{w}, \boldsymbol{\phi}(x, \mathbf{y}) \rangle \\ &= \sum_{(i,j) \in G} \langle \mathbf{w}_{i,j}, \boldsymbol{\phi}_{i,j}(x, y_i, y_j) \rangle = \frac{1}{\ell^{\ell-2}} \frac{\ell}{2} \sum_{T \in S(G)} \sum_{(i,j) \in T} \langle \mathbf{w}_{i,j}, \boldsymbol{\phi}_{i,j}(x, y_i, y_j) \rangle \\ &= \frac{\ell}{2} \mathbf{E}_{T \sim \mathcal{U}(G)} \langle \mathbf{w}_T, \boldsymbol{\phi}_T(x, \mathbf{y}) \rangle = \frac{\ell}{2} \mathbf{E}_{T \sim \mathcal{U}(G)} \|\mathbf{w}_T\| \|\boldsymbol{\phi}_T(x, \mathbf{y})\| \langle \hat{\mathbf{w}}_T, \hat{\boldsymbol{\phi}}_T(x, \mathbf{y}) \rangle \\ &= \mathbf{E}_{T \sim \mathcal{U}(G)} \sqrt{\frac{\ell}{2}} \|\mathbf{w}_T\| \langle \hat{\mathbf{w}}_T, \hat{\boldsymbol{\phi}}_T(x, \mathbf{y}) \rangle = \mathbf{E}_{T \sim \mathcal{U}(G)} a_T \langle \hat{\mathbf{w}}_T, \hat{\boldsymbol{\phi}}_T(x, \mathbf{y}) \rangle, \end{aligned}$$

where

$$a_T \stackrel{\text{def}}{=} \sqrt{\frac{\ell}{2}} \|\mathbf{w}_T\|.$$

Now, for any  $\mathbf{w}$  such that  $\|\mathbf{w}\| = 1$ , we have

$$\begin{aligned} \mathbf{E}_{T \sim \mathcal{U}(G)} a_T^2 &= \frac{\ell}{2} \mathbf{E}_{T \sim \mathcal{U}(G)} \|\mathbf{w}_T\|^2 = \frac{\ell}{2} \frac{1}{\ell^{\ell-2}} \sum_{T \in S(G)} \|\mathbf{w}_T\|^2 = \frac{\ell}{2} \frac{1}{\ell^{\ell-2}} \sum_{T \in S(G)} \sum_{(i,j) \in T} \|\mathbf{w}_{i,j}\|^2 \\ &= \sum_{(i,j) \in G} \|\mathbf{w}_{i,j}\|^2 = \|\mathbf{w}\|^2 = 1. \end{aligned}$$

Since the variance of  $a_T$  must be positive, we have, for any  $\mathbf{w}$  of unit  $L_2$  norm, that

$$\mathbf{E}_{T \sim \mathcal{U}(G)} a_T \leq 1.$$

□

**Lemma 2**

Consider any unit  $L_2$  norm predictor  $\mathbf{w}$  on the complete graph  $G$  that achieves a margin of  $\Gamma(\mathbf{w}, x, \mathbf{y})$  for each  $(x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ , then we have

$$\Gamma_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y}) \geq \Gamma(\mathbf{w}, x, \mathbf{y}) - 2\epsilon \quad \forall (x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y},$$

whenever for all  $(x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ , we have

$$|F_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y}) - F(\mathbf{w}, x, \mathbf{y})| \leq \epsilon.$$

*Proof.* From the condition of the lemma, we have simultaneously for all  $(x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$  and  $(x, \mathbf{y}') \in \mathcal{X} \times \mathcal{Y}$ , that

$$F_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y}) \geq F(\mathbf{w}, x, \mathbf{y}) - \epsilon \quad \text{AND} \quad F_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y}') \leq F(\mathbf{w}, x, \mathbf{y}') + \epsilon.$$

Therefore,

$$F_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y}) - F_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y}') \geq F(\mathbf{w}, x, \mathbf{y}) - F(\mathbf{w}, x, \mathbf{y}') - 2\epsilon.$$

Hence, for all  $(x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ , we have

$$\Gamma_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y}) \geq \Gamma(\mathbf{w}, x, \mathbf{y}) - 2\epsilon.$$

□

### Lemma 3

Consider any  $\epsilon > 0$  and any unit  $L_2$  norm predictor  $\mathbf{w}$  for the complete graph  $G$  acting on a normalized joint feature space. For any  $\delta \in (0, 1)$ , let

$$n \geq \frac{\ell^2}{\epsilon^2} \left( \frac{1}{16} + \frac{1}{2} \ln \frac{8\sqrt{n}}{\delta} \right)^2. \quad (2)$$

Then with probability of at least  $1 - \delta/2$  over all samples  $\mathcal{T}$  generated according to  $\mathcal{U}(G)^n$ , we have, simultaneously for all  $(x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ , that

$$|F_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y}) - F(\mathbf{w}, x, \mathbf{y})| \leq \epsilon.$$

*Proof.* Consider an isotropic Gaussian distribution of joint feature vectors of variance  $\sigma^2$ , centred on  $\phi(x, \mathbf{y})$ , with a density given by

$$Q_{\phi}(\zeta) \stackrel{\text{def}}{=} \left( \frac{1}{\sqrt{2\pi}\sigma} \right)^N \exp - \frac{\|\zeta - \phi\|^2}{2\sigma^2},$$

where  $N$  is the dimension of the feature vectors. When the feature space is infinite-dimensional, we can consider  $Q$  to be a Gaussian process. The end results will not depend on  $N$ .

Given the fixed  $\mathbf{w}$  stated in the theorem, let us define the risk  $R(Q_{\phi}, \mathbf{w}_T)$  of  $Q_{\phi}$  on the tree  $T$  by  $\mathbf{E}_{\zeta \sim Q_{\phi}} \langle \mathbf{w}_T, \zeta \rangle$ . By the linearity of  $\langle \cdot, \cdot \rangle$ , we have

$$R(Q_{\phi}, \mathbf{w}_T) \stackrel{\text{def}}{=} \mathbf{E}_{\zeta \sim Q_{\phi}} \langle \mathbf{w}_T, \zeta \rangle = \langle \mathbf{w}_T, \mathbf{E}_{\zeta \sim Q_{\phi}} \zeta \rangle = \langle \mathbf{w}_T, \phi \rangle,$$

which is independent of  $\sigma$ .

Gibbs' risk  $R(Q_{\phi})$  and its empirical estimate  $R_{\mathcal{T}}(Q_{\phi})$  are defined as

$$\begin{aligned} R(Q_{\phi}) &\stackrel{\text{def}}{=} \mathbf{E}_{T \sim \mathcal{U}(G)} R(Q_{\phi}, \mathbf{w}_T) = \mathbf{E}_{T \sim \mathcal{U}(G)} \langle \mathbf{w}_T, \phi \rangle \\ R_{\mathcal{T}}(Q_{\phi}) &\stackrel{\text{def}}{=} \frac{1}{n} \sum_{i=1}^n R(Q_{\phi}, \mathbf{w}_{T_i}) = \frac{1}{n} \sum_{i=1}^n \langle \mathbf{w}_{T_i}, \phi \rangle. \end{aligned}$$

Consequently, from the definitions of  $F$  and  $F_{\mathcal{T}}$ , we have

$$\begin{aligned} F(\mathbf{w}, x, \mathbf{y}) &= \frac{\ell}{2} R(Q_{\phi(x, \mathbf{y})}) \\ F_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y}) &= \frac{\ell}{2} R_{\mathcal{T}}(Q_{\phi(x, \mathbf{y})}). \end{aligned}$$

Recall that  $\phi$  is a normalized feature map that applies to all  $(x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ . Therefore, if we have with probability  $\geq 1 - \delta/2$  that, simultaneously for all  $\phi$  of unit  $L_2$  norm,

$$\frac{\ell}{2} |R_{\mathcal{T}}(Q_{\phi}) - R(Q_{\phi})| \leq \epsilon, \quad (7)$$

then, with the same probability, we will have simultaneously  $\forall(x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ , that

$$|F_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y}) - F(\mathbf{w}, x, \mathbf{y})| \leq \epsilon,$$

and, consequently, the lemma will be proved.

To prove that we satisfy Equation (7) with probability  $\geq 1 - \delta/2$  simultaneously for all  $\phi$  of unit  $L_2$  norm, let us adapt some elements of PAC-Bayes theory to our case. Note that we cannot use the usual PAC-Bayes bounds, such as those proposed by [13] because, in our case, the loss  $\langle \mathbf{w}_T, \zeta \rangle$  of each individual “predictor”  $\zeta$  is unbounded.

The distribution  $Q_\phi$  defined above constitutes the posterior distribution. For the prior  $P$ , let us use an isotropic Gaussian with variance  $\sigma^2$  centered at the origin. Hence  $P = Q_0$ . In that case we have

$$\text{KL}(Q_\phi \| P) = \frac{\|\phi\|^2}{2\sigma^2} = \frac{1}{2\sigma^2}.$$

Given a tree sample  $\mathcal{T}$  of  $n$  spanning trees, let

$$\Delta \mathbf{w} \stackrel{\text{def}}{=} \frac{1}{n} \sum_{k=1}^n \mathbf{w}_{T_k} - \underset{T \sim \mathcal{U}(G)}{\mathbf{E}} \mathbf{w}_T,$$

and consider the Gaussian quadrature

$$\begin{aligned} \mathcal{I} &\stackrel{\text{def}}{=} \underset{\zeta \sim P}{\mathbf{E}} e^{\sqrt{n} |\langle \Delta \mathbf{w}, \zeta \rangle|} \\ &= e^{\frac{1}{2} n \sigma^2 \|\Delta \mathbf{w}\|^2} \left( 1 + \text{Erf} \left[ \sqrt{\frac{n}{2}} \|\Delta \mathbf{w}\| \sigma \right] \right) \\ &\leq 2 e^{\frac{1}{2} n \sigma^2 \|\Delta \mathbf{w}\|^2}. \end{aligned}$$

We can then use this result for  $\mathcal{I}$  to upper bound the Laplace transform  $\mathcal{L}$  in the following way.

$$\begin{aligned} \mathcal{L} &\stackrel{\text{def}}{=} \underset{\mathcal{T} \sim \mathcal{U}(G)^n}{\mathbf{E}} \underset{\zeta \sim P}{\mathbf{E}} e^{\sqrt{n} |\langle \Delta \mathbf{w}, \zeta \rangle|} \\ &\leq 2 \underset{\mathcal{T} \sim \mathcal{U}(G)^n}{\mathbf{E}} e^{\frac{1}{2} n \sigma^2 \|\Delta \mathbf{w}\|^2} \\ &= 2 \underset{\mathcal{T} \sim \mathcal{U}(G)^n}{\mathbf{E}} e^{\frac{1}{2} n \sigma^2 \sum_{(i,j) \in G} \|(\Delta \mathbf{w})_{i,j}\|^2}. \end{aligned}$$

Since

$$\underset{T \sim \mathcal{U}(G)}{\mathbf{E}} \mathbf{w}_T = \frac{2}{\ell} \mathbf{w},$$

we can write

$$\|(\Delta \mathbf{w})_{i,j}\|^2 = \left\| \frac{1}{n} \sum_{k=1}^n (\mathbf{w}_{T_k})_{i,j} - \frac{2}{\ell} \mathbf{w}_{i,j} \right\|^2.$$

Note that for each  $(i, j) \in G$ , any sample  $\mathcal{T}$ , and each  $T_k \in \mathcal{T}$ , we can write

$$(\mathbf{w}_{T_k})_{i,j} = \mathbf{w}_{i,j} Z_{i,j}^k.$$

where  $Z_{i,j}^k = 1$  if  $(i, j) \in T_k$  and  $Z_{i,j}^k = 0$  if  $(i, j) \notin T_k$ . Hence, we have

$$\|(\Delta \mathbf{w})_{i,j}\|^2 = \|\mathbf{w}_{i,j}\|^2 \left( \frac{1}{n} \sum_{k=1}^n Z_{i,j}^k - \frac{2}{\ell} \right)^2.$$

Hence, for  $\sigma^2 \leq 4$  and  $p \stackrel{\text{def}}{=} 2/\ell$ , we have

$$\begin{aligned} \mathcal{L} &\leq 2 \underset{\mathcal{T} \sim \mathcal{U}(G)^n}{\mathbf{E}} e^{\frac{1}{2} n \sigma^2 \sum_{(i,j) \in G} \|\mathbf{w}_{i,j}\|^2 \left( \frac{1}{n} \sum_{k=1}^n Z_{i,j}^k - \frac{2}{\ell} \right)^2} \\ &\leq 2 \underset{\mathcal{T} \sim \mathcal{U}(G)^n}{\mathbf{E}} e^{2n \sum_{(i,j) \in G} \|\mathbf{w}_{i,j}\|^2 \left( \frac{1}{n} \sum_{k=1}^n Z_{i,j}^k - p \right)^2} \\ &\leq 2 \sum_{(i,j) \in G} \|\mathbf{w}_{i,j}\|^2 \underset{\mathcal{T} \sim \mathcal{U}(G)^n}{\mathbf{E}} e^{2n \left( \frac{1}{n} \sum_{k=1}^n Z_{i,j}^k - p \right)^2}, \end{aligned}$$

where the last inequality is obtained by using  $\sum_{(i,j) \in G} \|\mathbf{w}_{i,j}\|^2 = 1$  and by using Jensen's inequality on the convexity of the exponential.

Now, for any  $(q, p) \in [0, 1]^2$ , let

$$\text{kl}(q\|p) \stackrel{\text{def}}{=} q \ln \frac{q}{p} + (1-q) \ln \frac{1-q}{1-p}.$$

Then, by using  $2(q-p)^2 \leq \text{kl}(q\|p)$  (Pinsker's inequality), we have for  $n \geq 8$ ,

$$\mathcal{L} \leq 2 \sum_{(i,j) \in G} \|\mathbf{w}_{i,j}\|^2 \mathbf{E}_{\mathcal{T} \sim \mathcal{U}(G)^n} e^{n\text{kl}\left(\frac{1}{n} \sum_{k=1}^n Z_{i,j}^k \| p\right)} \leq 4\sqrt{n},$$

where the last inequality follows from Maurer's lemma [14] applied, for any fixed  $(i, j) \in G$ , to the collection of  $n$  independent Bernoulli variables  $Z_{i,j}^k$  of probability  $p$ .

The rest of the proof follows directly from standard PAC-Bayes theory [15, 13], which, for completeness, we briefly outline here.

Since

$$\mathbf{E}_{\zeta \sim P} e^{\sqrt{n}|\langle \Delta \mathbf{w}, \zeta \rangle|}$$

is a non negative random variable, Markov's inequality implies that with probability  $> 1 - \delta/2$  over the random draws of  $\mathcal{T}$ , we have

$$\ln \mathbf{E}_{\zeta \sim P} e^{\sqrt{n}|\langle \Delta \mathbf{w}, \zeta \rangle|} \leq \ln \frac{8\sqrt{n}}{\delta}.$$

By the change of measure inequality, we have with probability  $> 1 - \delta/2$  over the random draws of  $\mathcal{T}$ , simultaneously for all  $\phi$ ,

$$\sqrt{n} \mathbf{E}_{\zeta \sim Q_\phi} |\langle \Delta \mathbf{w}, \zeta \rangle| \leq \text{KL}(Q_\phi\|P) + \ln \frac{8\sqrt{n}}{\delta}.$$

Hence, by using Jensen's inequality on the convex absolute value function, we have with probability  $> 1 - \delta/2$  over the random draws of  $\mathcal{T}$ , simultaneously for all  $\phi$ ,

$$|\langle \Delta \mathbf{w}, \phi \rangle| \leq \frac{1}{\sqrt{n}} \left[ \text{KL}(Q_\phi\|P) + \ln \frac{8\sqrt{n}}{\delta} \right].$$

Note that we have  $\text{KL}(Q_\phi\|P) = 1/8$  for  $\sigma^2 = 4$  (which is the value we shall use). Also note that the left hand side of this equation equals to  $|R_{\mathcal{T}}(Q_\phi) - R(Q_\phi)|$ . In that case, we satisfy Equation (7) with probability  $1 - \delta/2$  simultaneously for all  $\phi$  of unit  $L_2$  norm whenever we satisfy

$$\frac{\ell}{2\sqrt{n}} \left[ \frac{1}{8} + \ln \frac{8\sqrt{n}}{\delta} \right] \leq \epsilon,$$

which is the condition on  $n$  given by the theorem.  $\square$

## Theorem 4

Consider any unit  $L_2$  norm predictor  $\mathbf{w}$  for the complete graph  $G$ , acting on a normalized joint feature space, achieving a margin of  $\Gamma(\mathbf{w}, x, \mathbf{y})$  for each  $(x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ . Then for any  $\epsilon > 0$ , and any  $n$  satisfying Lemma 3, for any  $\delta \in (0, 1]$ , with probability of at least  $1 - \delta$  over all samples  $\mathcal{T}$  generated according to  $\mathcal{U}(G)^n$ , there exists a unit  $L_2$  norm conical combination  $(\mathcal{W}, \mathbf{q})$  on  $\mathcal{T}$  such that, simultaneously  $\forall (x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ , we have

$$\Gamma_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, x, \mathbf{y}) \geq \frac{1}{\sqrt{1+\epsilon}} [\Gamma(\mathbf{w}, x, \mathbf{y}) - 2\epsilon].$$

*Proof.* For any  $\mathcal{T}$ , consider a conical combination  $(\mathcal{W}, \mathbf{q})$  where each  $\hat{\mathbf{w}}_{T_i} \in \mathcal{W}$  is obtained by projecting  $\mathbf{w}$  on  $T_i$  and normalizing to unit  $L_2$  norm and where

$$q_i = \frac{a_{T_i}}{\sqrt{\sum_{i=1}^n a_{T_i}^2}}.$$

Then, from equations (3) and (4), and from the definition of  $\Gamma_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y})$ , we find that for all  $(x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ , we have

$$\Gamma_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, x, \mathbf{y}) = \sqrt{\frac{n}{\sum_{i=1}^n a_{T_i}^2}} \Gamma_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y}).$$

Now, by using Hoeffding's inequality, it is straightforward to show that for any  $\delta \in (0, 1]$ , we have

$$\Pr_{\mathcal{T} \sim \mathcal{U}(G)^n} \left( \frac{1}{n} \sum_{i=1}^n a_{T_i}^2 \leq 1 + \epsilon \right) \geq 1 - \delta/2.$$

whenever  $n \geq \frac{\ell^2}{8\epsilon} \ln \left( \frac{2}{\delta} \right)$ . Since  $n$  satisfies the condition of Lemma 3, we see that it also satisfies this condition whenever  $\epsilon \leq 1/2$ . Hence, with probability of at least  $1 - \delta/2$ , we have

$$\sum_{i=1}^n a_{T_i}^2 \leq n(1 + \epsilon).$$

Moreover Lemma 2 and Lemma 3 imply that, with probability of at least  $1 - \delta/2$ , we have simultaneously for all  $(x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ ,

$$\Gamma_{\mathcal{T}}(\mathbf{w}, x, \mathbf{y}) \geq \Gamma(\mathbf{w}, x, \mathbf{y}) - 2\epsilon.$$

Hence, from the union bound, with probability of at least  $1 - \delta$ , simultaneously  $\forall (x, \mathbf{y}) \in \mathcal{X} \times \mathcal{Y}$ , we have

$$\Gamma_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, x, \mathbf{y}) \geq \frac{1}{\sqrt{1 + \epsilon}} [\Gamma(\mathbf{w}, x, \mathbf{y}) - 2\epsilon].$$

□

## Derivation of the Primal $L_2$ -norm Random Tree Approximation

If we introduce the usual slack variables  $\xi_i \stackrel{\text{def}}{=} \gamma \cdot \mathcal{L}^\gamma(\Gamma_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, x_i, \mathbf{y}_i))$ , Theorem 5 suggests that we should minimize  $\frac{1}{\gamma} \sum_{k=1}^m \xi_k$  for some fixed margin value  $\gamma > 0$ . Rather than performing this task for several values of  $\gamma$ , we can, equivalently, solve the following optimization problem for several values of  $C > 0$ .

$$\begin{aligned} \min_{\xi, \gamma, \mathbf{q}, \mathcal{W}} \quad & \frac{1}{2\gamma^2} + \frac{C}{\gamma} \sum_{k=1}^m \xi_k \\ \text{s.t. :} \quad & \Gamma_{\mathcal{T}}(\mathcal{W}, \mathbf{q}, x_k, \mathbf{y}_k) \geq \gamma - \xi_k, \quad \xi_k \geq 0, \quad \forall k \in \{1, \dots, m\}, \\ & \sum_{i=1}^n q_i^2 = 1, \quad q_i \geq 0, \quad \|\mathbf{w}_{T_i}\|^2 = 1, \quad \forall i \in \{1, \dots, n\}. \end{aligned} \tag{8}$$

If we now use instead  $\zeta_k \stackrel{\text{def}}{=} \xi_k/\gamma$ , and  $\mathbf{v}_{T_i} \stackrel{\text{def}}{=} q_i \mathbf{w}_{T_i}/\gamma$ , we then have  $\sum_{i=1}^n \|\mathbf{v}_{T_i}\|^2 = 1/\gamma^2$  (under the constraints of problem (8)). If  $\mathcal{V} \stackrel{\text{def}}{=} \{\mathbf{v}_{T_1}, \dots, \mathbf{v}_{T_n}\}$ , optimization problem (8) is then equivalent to

$$\begin{aligned} \min_{\zeta, \mathcal{V}} \quad & \frac{1}{2} \sum_{i=1}^n \|\mathbf{v}_{T_i}\|^2 + C \sum_{k=1}^m \zeta_k \\ \text{s.t. :} \quad & \Gamma_{\mathcal{T}}(\mathcal{V}, \mathbf{1}, x_k, \mathbf{y}_k) \geq 1 - \zeta_k, \quad \zeta_k \geq 0, \quad \forall k \in \{1, \dots, m\}. \end{aligned} \tag{9}$$

Note that, following our definitions, we now have

$$\Gamma_{\mathcal{T}}(\mathcal{V}, \mathbf{1}, x, \mathbf{y}) = \frac{1}{\sqrt{n}} \sum_{i=1}^n \langle \mathbf{v}_{T_i}, \hat{\phi}_{T_i}(x, \mathbf{y}) \rangle - \max_{\mathbf{y}' \neq \mathbf{y}} \frac{1}{\sqrt{n}} \sum_{i=1}^n \langle \mathbf{v}_{T_i}, \hat{\phi}_{T_i}(x, \mathbf{y}') \rangle.$$

We then obtain the optimization problem of Property 6 with the change of variables  $\mathbf{w}_{T_i} \leftarrow \mathbf{v}_{T_i}/\sqrt{n}$ ,  $\xi_k \leftarrow \zeta_k$ , and  $C \leftarrow C/\sqrt{n}$ .

## Lemma 7

Let  $\mathbf{y}_K^* = \operatorname{argmax}_{\mathbf{y} \in \mathcal{Y}_{\mathcal{T}, K}} F_{\mathcal{T}}(x, \mathbf{y})$  be the highest scoring multilabel in  $\mathcal{Y}_{\mathcal{T}, K}$ . Suppose that

$$F_{\mathcal{T}}(x, \mathbf{y}_K^*) \geq \frac{1}{n} \sum_{i=1}^n F_{\mathbf{w}_{T_i}}(x, \mathbf{y}_{T_i, K}) \stackrel{\text{def}}{=} \theta_x(K)$$

It follows that  $F_{\mathcal{T}}(x, \mathbf{y}_K^*) = \max_{\mathbf{y} \in \mathcal{Y}} F_{\mathcal{T}}(x, \mathbf{y})$ .

*Proof.* Consider a multilabel  $\mathbf{y}^\dagger \notin \mathcal{Y}_{\mathcal{T}, K}$ . It follows that for all  $T_i$  we have

$$F_{\mathbf{w}_{T_i}}(x, \mathbf{y}^\dagger) \leq F_{\mathbf{w}_{T_i}}(x, \mathbf{y}_{T_i, K}).$$

Hence,

$$F_{\mathcal{T}}(x, \mathbf{y}^\dagger) = \frac{1}{n} \sum_{i=1}^n F_{\mathbf{w}_{T_i}}(x, \mathbf{y}^\dagger) \leq \frac{1}{n} \sum_{i=1}^n F_{\mathbf{w}_{T_i}}(x, \mathbf{y}_{T_i, K}) \leq F_{\mathcal{T}}(x, \mathbf{y}_K^*),$$

as required.  $\square$

## Lemma 8

Let the scoring function  $F_T$  of each spanning tree of  $G$  be a  $\sigma_T$ -sub-Gaussian random variable under the uniform distribution of labels; i.e., for each  $T$  on  $G$ , there exists  $\sigma_T > 0$  such that for any  $\lambda > 0$  we have

$$\mathbf{E}_{\mathbf{y} \sim \mathcal{U}(\mathcal{Y})} e^{\lambda(F_T(\mathbf{y}) - \mu_T)} \leq e^{\frac{\lambda^2}{2}\sigma_T^2}.$$

Let  $\sigma^2 \stackrel{\text{def}}{=} \mathbf{E}_{T \sim \mathcal{U}(G)} \sigma_T^2$ , and let

$$\alpha \stackrel{\text{def}}{=} \Pr_{T \sim \mathcal{U}(G)} (\mu_T \leq \mu \wedge F_T(\hat{\mathbf{y}}) \geq F(\hat{\mathbf{y}}) \wedge \sigma_T^2 \leq \sigma^2).$$

Then

$$\Pr_{T \sim \mathcal{U}(G)^n} \left( \exists T \in \mathcal{T}: \rho_T(\hat{\mathbf{y}}) \leq e^{-\frac{1}{2}\frac{(F(\hat{\mathbf{y}}) - \mu)^2}{\sigma^2}} \right) \geq 1 - (1 - \alpha)^n.$$

*Proof.* From the definition of  $\rho(\hat{\mathbf{y}})$  and for any  $\lambda > 0$ , we have

$$\begin{aligned} \rho_T(\mathbf{y}^*) &= \Pr_{\mathbf{y} \sim \mathcal{U}(\mathcal{Y})} (F_T(\mathbf{y}) \geq F_T(\hat{\mathbf{y}})) \\ &= \Pr_{\mathbf{y} \sim \mathcal{U}(\mathcal{Y})} (F_T(\mathbf{y}) - \mu_T \geq F_T(\hat{\mathbf{y}}) - \mu_T) \\ &= \Pr_{\mathbf{y} \sim \mathcal{U}(\mathcal{Y})} \left( e^{\lambda(F_T(\mathbf{y}) - \mu_T)} \geq e^{\lambda(F_T(\hat{\mathbf{y}}) - \mu_T)} \right) \\ &\leq e^{-\lambda(F_T(\hat{\mathbf{y}}) - \mu_T)} \mathbf{E}_{\mathbf{y} \sim \mathcal{U}(\mathcal{Y})} e^{\lambda(F_T(\mathbf{y}) - \mu_T)} \tag{10} \\ &\leq e^{-\lambda(F_T(\hat{\mathbf{y}}) - \mu_T)} e^{\frac{\lambda^2}{2}\sigma_T^2}, \tag{11} \end{aligned}$$

where we have used Markov's inequality for line (10) and the fact that  $F_T$  is a  $\sigma_T$ -sub-Gaussian variable for line (11). Hence, from this equation and from the definition of  $\alpha$ , we have that

$$\Pr_{T \sim \mathcal{U}(G)} \left( \rho_T(\hat{\mathbf{y}}) \leq e^{-\lambda(F_T(\hat{\mathbf{y}}) - \mu_T)} e^{\frac{\lambda^2}{2}\sigma_T^2} \leq e^{-\lambda(F(\hat{\mathbf{y}}) - \mu)} e^{\frac{\lambda^2}{2}\sigma^2} \right) \geq \alpha.$$

Hence,

$$\Pr_{T \sim \mathcal{U}(G)^n} \left( \forall T \in \mathcal{T}: \rho_T(\hat{\mathbf{y}}) > e^{-\lambda(F(\hat{\mathbf{y}}) - \mu)} e^{\frac{\lambda^2}{2}\sigma^2} \right) \leq (1 - \alpha)^n,$$

which is equivalent to the statement of the lemma when we choose  $\lambda = [F(\hat{\mathbf{y}}) - \mu]/\sigma^2$ .  $\square$

## The $K$ -best Inference Algorithm

Algorithm 1 depicts the  $K$ -best inference algorithm for the ensemble of rooted spanning trees. The algorithm takes as input the collection of spanning trees  $T_i \in \mathcal{T}$ , the edge labeling scores

$$F_{E\mathcal{T}} = \{F_{T_i, v, v'}(y_v, y_{v'})\}_{(v, v') \in E_i, y_v \in \mathcal{Y}_v, y_{v'} \in \mathcal{Y}_{v'}, T_i \in \mathcal{T}}$$

for fixed  $x_k$  and  $\mathbf{w}$ , the length of  $K$ -best list, and optionally (for training) also the true multilabel  $\mathbf{y}_k$  for  $x_k$ .

As a rooted tree implicitly orients the edges, for convenience we denote the edges as directed  $v \rightarrow pa(v)$ , where  $pa(v)$  denotes the parent (i.e. the adjacent node on the path towards the root) of  $v$ . By  $ch(v)$  we denote the set of children of  $v$ . Moreover, we denote the subtree of  $T_i$  rooted at a node  $v$  as  $T_v$  and by  $T_{v' \rightarrow v}$  the subtree consisting of  $T_{v'}$  plus the edge  $v' \rightarrow v$  and the node  $v$ .

The algorithm performs a dynamic programming over each tree in turn, extracting the  $K$ -best list of multilabels and their scores, and aggregates the results of the trees, retrieving the highest scoring multilabel of the ensemble, the worst violating multilabel and the threshold score of the  $K$ -best lists.

The dynamic programming is based on traversing the tree in post-order, so that children of the node are always processed before the parent. The algorithm maintains sorted  $K$  best lists of candidate labelings of the subtrees  $T_v$  and  $T_{v' \rightarrow v}$ , using the following data structures:

- Score matrix  $P_v$ , where element  $P_v(y, r)$  records the score of the  $r$ 'th best multilabel of the subtree  $T_v$  when node  $v$  is labeled as  $y$ .
- Pointer matrix  $C_v$ , where element  $C_v(y, r)$  keeps track of the ranks of the child nodes  $v' \in ch(v)$  in the message matrix  $M_{v' \rightarrow v}$  that contributes to the score  $P_v(y, r)$ .
- Message matrix  $M_{v \rightarrow pa(v)}$ , where element  $M_{v \rightarrow pa(v)}(y', r)$  records the score of  $r$ 'th best multilabel of the subtree  $T_{v \rightarrow pa(v)}$  when the label of  $pa(v)$  is  $y'$ .
- Configuration matrix  $C_{v \rightarrow pa(v)}$ , where element  $C_{v \rightarrow pa(v)}(y', r)$  traces the label and rank  $(y, r)$  of child  $v$  that achieves  $M_{v \rightarrow pa(v)}(y', r)$ .

The processing of a node  $v$  entails the following steps. First, the  $K$ -best lists of the children of the node stored in  $M_{v' \rightarrow v}$  are merged in amortized  $\Theta(K)$  time per child node. This is achieved by processing two child lists in tandem starting from the top of the lists and in each step picking the best pair of items to merge. This process results in the score matrix  $P_v$  and the pointer matrix  $C_v$ .

Second, the  $K$ -best lists of  $T_{v \rightarrow pa(v)}$  corresponding to all possible labels  $y'$  of  $pa(v)$  are formed. This is achieved by keeping the label of the head of the edge  $v \rightarrow pa(v)$  fixed, and picking the best combination of labeling the tail of the edge and selecting a multilabel of  $T_v$  consistent with that label. This process results in the matrices  $M_{v \rightarrow pa(v)}$  and  $C_{v \rightarrow pa(v)}$ . Also this step can be performed in  $\Theta(K)$  time.

The iteration ends when the root  $v_{root}$  has updated its score  $P_{v_{root}}$ . Finally, the multilabels in form  $\mathcal{Y}_{T_i, K}$  are traced using the pointers stored in  $C_v$  and  $C_{v \rightarrow pa(v)}$ . The time complexity for a single tree is  $\Theta(K\ell)$ , and repeating the process for  $n$  trees gives total time complexity of  $\Theta(nK\ell)$ .

## Master algorithm for training the model

The master algorithm (Algorithm 2) iterates over each training example until convergence. The processing of each training example proceeds by identifying the  $K$  worst violators of each tree together with the threshold score  $\theta_i = \theta_{x_i}$  (line 5), determining the worst ensemble violator from among them (line 6) and updating each tree by the worst ensemble violator (line 8). During the early stages of the algorithm, it is not essential to identify the worst violator. We therefore propose that initially  $K = 2$ , and the iterations continue until no violators are identified (line 7). We then increment  $K$  and continue until the condition (line 10-12) given by Lemma 7 is satisfied so that we are assured of having converged to the global optimum.

---

**Algorithm 1** Algorithm to obtain top  $K$  multilabels on a collection of spanning trees.

---

*FindKBest*( $\mathcal{T}, F_{E_{\mathcal{T}}}, K, \mathbf{y}_i$ )

**Input:** Collection of rooted spanning trees  $T_i = (E_i, V_i)$ ,  
edge labeling scores  $F_{E_{\mathcal{T}}} = \{F_{T,v,v'}(y_v, y_{v'})\}$

**Output:** The best scoring multilabel  $\mathbf{y}^*$ , worst violator  $\bar{\mathbf{y}}$ , threshold  $\theta_i$

```

1: for  $T_i \in \mathcal{T}$  do
2:   Initialize  $P_v, C_v, M_{v \rightarrow pa(v)}, C_{v \rightarrow pa(v)}$ ,  $\forall v \in V_i$ 
3:    $I =$  nodes indices in post-order of the tree  $T_i$ 
4:   for  $j = 1 : |I|$  do
5:      $v = v_{I(j)}$ 
6:     % Collect and merge  $K$ -best lists of children
7:     if  $ch(v) \neq \emptyset$  then
8:        $P_v(y) = P_v(y) + \underset{r_v, v' \in ch(v)}{\text{kmax}} \left( \sum_{v' \in ch(v)} (M_{v' \rightarrow v}(y, r_v)) \right)$ 
9:        $C_v(y) = P_v(y) + \underset{r_v, v' \in ch(v)}{\text{argkmax}} \left( \sum_{v' \in ch(v)} (M_{v' \rightarrow v}(y, r_v)) \right)$ 
10:    end if
11:    % Form the  $K$ -best list of  $T_{v \rightarrow pa(v)}$ 
12:     $M_{v \rightarrow pa(v)}(y_{pa(v)}) = \underset{y, r}{\text{kmax}} (P_v(y, r) + F_{T, v \rightarrow pa(v)}(y_v, y_{pa(v)}))$ 
13:     $C_{v \rightarrow pa(v)}(y_{pa(v)}) = \underset{u_v, r}{\text{argkmax}} (P_v(u_v, r) + F_{T, v \rightarrow pa(v)}(u_v, y_{pa(v)}))$ 
14:   end for
15:   Trace back with  $C_v$  and  $C_{v \rightarrow pa(v)}$  to get  $\mathcal{Y}_{T_i, K}$ .
16: end for
17:  $\mathcal{Y}_{\mathcal{T}, K} = \bigcup_{T_i \in \mathcal{T}} \mathcal{Y}_{T_i, K}$ 
18:  $\mathbf{y}^* = \underset{\mathbf{y} \in \mathcal{Y}_{\mathcal{T}, K}}{\text{argmax}} \sum_{i=1}^n \sum_{\substack{(v, v') = \\ e \in E_i}} F_{T_i, v, v'}(y_v, y_{v'})$ 
19:  $\bar{\mathbf{y}} = \underset{\mathbf{y} \in \mathcal{Y}_{\mathcal{T}, K} \setminus \mathbf{y}_i}{\text{argmax}} \sum_{i=1}^n \sum_{\substack{(v, v') = \\ e \in E_i}} F_{T_i, v, v'}(y_v, y_{v'})$ 
20:  $\theta_i = \sum_{i=1}^n \sum_{\substack{(v, v') = \\ e \in E_i}} F_{T_i, v, v'}(y_{T_i, K, v}, y_{T_i, k, v'})$ 

```

---

---

**Algorithm 2** Master algorithm.

---

**Input:** Training sample  $\{(x_k, \mathbf{y}_k)\}_{k=1}^m$ , collection of spanning trees  $\mathcal{T}$ , minimum violation  $\gamma_0$   
**Output:** Scoring function  $F_{\mathcal{T}}$

```

1:  $K_k = 2, \forall k \in \{1, \dots, m\}; \mathbf{w}_{T_i} = 0, \forall T_i \in \mathcal{T}; converged = false$ 
2: while not(converged) do
3:   converged = true
4:   for  $k = \{1, \dots, m\}$  do
5:      $S_{\mathcal{T}} = \{S_{T_i,e}(k, \mathbf{u}_e) | S_{T_i,e}(k, \mathbf{u}_e) = \langle \mathbf{w}_{T_i,e}, \phi_{T_i,e}(x_k, \mathbf{u}_e) \rangle, \forall (e \in E_i, T_i \in \mathcal{T}, \mathbf{u}_e \in \mathcal{Y}_v \times \mathcal{Y}_{v'})\}$ 
6:      $[\mathbf{y}^*, \bar{\mathbf{y}}, \theta_i] = FindKBest(\mathcal{T}, S_{\mathcal{T}}, K_i, \mathbf{y}_i)$ 
7:     if  $F_{\mathcal{T}}(x_i, \bar{\mathbf{y}}) - F_{\mathcal{T}}(x_i, \mathbf{y}_i) \geq \gamma_0$  then
8:        $\{\mathbf{w}_{T_i}\}_{T_i \in \mathcal{T}} = updateTrees(\{\mathbf{w}_{T_i}\}_{T_i \in \mathcal{T}}, x_i, \bar{\mathbf{y}})$ 
9:       converged = false
10:    else
11:      if  $\theta_i > F_{\mathcal{T}}(x_i, \bar{\mathbf{y}})$  then
12:         $K_i = \min(2K_i, |\mathcal{Y}|)$ 
13:        converged = false
14:      end if
15:    end if
16:  end for
17: end while

```

---

## Derivation of the Marginal Dual

### Definition 6. Primal $L_2$ -norm Random Tree Approximation

$$\begin{aligned} \min_{\mathbf{w}_{T_i}, \xi_k} \quad & \frac{1}{2} \sum_{i=1}^n \|\mathbf{w}_{T_i}\|_2^2 + C \sum_{k=1}^m \xi_k \\ \text{s.t.} \quad & \sum_{i=1}^n \langle \mathbf{w}_{T_i}, \hat{\phi}_{T_i}(x_k, \mathbf{y}_k) \rangle - \max_{\mathbf{y} \neq \mathbf{y}_k} \sum_{i=1}^n \langle \mathbf{w}_{T_i}, \hat{\phi}_{T_i}(x_k, \mathbf{y}) \rangle \geq 1 - \xi_k \\ & \xi_k \geq 0, \forall k \in \{1, \dots, m\}, \end{aligned}$$

where  $\{\mathbf{w}_{T_i} | T_i \in \mathcal{T}\}$  are the feature weights to be learned on each tree,  $\xi_k$  is the margin slack allocated for each example  $x_k$ , and  $C$  is the slack parameter that controls the amount of regularization in the model. This primal form has the interpretation of maximizing the joint margins from individual trees between (correct) training examples and all the other (incorrect) examples.

The Lagrangian of the primal form (Definition 6) is

$$\begin{aligned} \mathcal{L}(\mathbf{w}_{T_i}, \xi, \boldsymbol{\alpha}, \boldsymbol{\beta}) = & \frac{1}{2} \sum_{i=1}^n \|\mathbf{w}_{T_i}\|_2^2 + C \sum_{k=1}^m \xi_k - \sum_{k=1}^m \beta_k \xi_k \\ & - \sum_{k=1}^m \sum_{\mathbf{y} \neq \mathbf{y}_k} \alpha_{k,\mathbf{y}} \left( \sum_{i=1}^n \langle \mathbf{w}_{T_i}, \Delta \hat{\phi}_{T_i}(x_k, \mathbf{y}_k) \rangle - 1 + \xi_k \right), \end{aligned}$$

where  $\alpha_k$  and  $\beta_k$  are Lagrangian multipliers that correspond to the constraints of the primal form, and  $\Delta \hat{\phi}_{T_i}(x_k, \mathbf{y}_k) = \hat{\phi}_{T_i}(x_k, \mathbf{y}_k) - \hat{\phi}_{T_i}(x_k, \mathbf{y})$ . Note that given a training example-label pair  $(x_k, \mathbf{y}_k)$  there are exponential number of  $\alpha_{k,\mathbf{y}}$  one for each constraint defined by incorrect example-label pair  $(x_k, \mathbf{y})$ .

Setting the gradient of Lagrangian with respect to primal variables to zero, we obtain the following equalities:

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial \mathbf{w}_{T_i}} &= \mathbf{w}_{T_i} - \sum_{k=1}^m \sum_{\mathbf{y} \neq \mathbf{y}_k} \alpha_{k,\mathbf{y}} \Delta \hat{\phi}_{T_i}(x_k, \mathbf{y}_k) = 0, \\ \frac{\partial \mathcal{L}}{\partial \xi_k} &= C - \sum_{\mathbf{y} \neq \mathbf{y}_k} \alpha_{k,\mathbf{y}} - \beta_k = 0, \end{aligned}$$

which give the following dual optimization problem.

**Definition 10. Dual  $L_2$ -norm Random Tree Approximation**

$$\begin{aligned} \max_{\boldsymbol{\alpha} \geq 0} \quad & \boldsymbol{\alpha}^\top \mathbf{1} - \frac{1}{2} \boldsymbol{\alpha}^\top \left( \sum_{i=1}^n K_{T_i} \right) \boldsymbol{\alpha} \\ \text{s.t.} \quad & \sum_{\mathbf{y} \neq \mathbf{y}_k} \alpha_{k,\mathbf{y}} \leq C, \forall k \in \{1, \dots, m\}, \end{aligned}$$

where  $\boldsymbol{\alpha} = (\alpha_{k,\mathbf{y}})_{k,\mathbf{y}}$  is the vector of dual variables. The joint kernel

$$\begin{aligned} K_{T_i}(x_k, \mathbf{y}; x_{k'}, \mathbf{y}') &= \langle \hat{\phi}_{T_i}(x_k, \mathbf{y}_k) - \hat{\phi}_{T_i}(x_k, \mathbf{y}), \hat{\phi}_{T_i}(x_{k'}, \mathbf{y}_{k'}) - \hat{\phi}_{T_i}(x_{k'}, \mathbf{y}') \rangle \\ &= \langle \varphi(x_k), \varphi(x_{k'}) \rangle_\varphi \cdot \langle \psi_{T_i}(\mathbf{y}_k) - \psi_{T_i}(\mathbf{y}), \psi_{T_i}(\mathbf{y}_{k'}) - \psi_{T_i}(\mathbf{y}') \rangle_\psi \\ &= K^\varphi(x_k, x_{k'}) \cdot \left( K_{T_i}^\psi(\mathbf{y}_k, \mathbf{y}_{k'}) - K_{T_i}^\psi(\mathbf{y}_k, \mathbf{y}') - K_{T_i}^\psi(\mathbf{y}, \mathbf{y}_{k'}) + K_{T_i}^\psi(\mathbf{y}, \mathbf{y}') \right) \\ &= K^\varphi(x_k, x_{k'}) \cdot K_{T_i}^{\Delta\psi}(\mathbf{y}_k, \mathbf{y}; \mathbf{y}_{k'}, \mathbf{y}') \end{aligned}$$

is composed by input kernel  $K^\varphi$  and output kernel  $K_{T_i}^\psi$  defined by

$$\begin{aligned} K^\varphi(x_k, x_{k'}) &= \langle \varphi(x_k), \varphi(x_{k'}) \rangle_\varphi \\ K_{T_i}^{\Delta\psi}(\mathbf{y}_k, \mathbf{y}; \mathbf{y}_{k'}, \mathbf{y}') &= K_{T_i}^\psi(\mathbf{y}_k, \mathbf{y}_{k'}) - K_{T_i}^\psi(\mathbf{y}_k, \mathbf{y}') - K_{T_i}^\psi(\mathbf{y}_{k'}, \mathbf{y}) + K_{T_i}^\psi(\mathbf{y}, \mathbf{y}'). \end{aligned}$$

To take advantage of the spanning tree structure in solving the problem, we further factorize the dual (Definition 10) according to the output structure [9, 16]. by defining a marginal dual variable  $\mu$  as

$$\mu(k, e, \mathbf{u}_e) = \sum_{\mathbf{y} \neq \mathbf{y}_k} \mathbf{1}_{\{\psi(\mathbf{y})=\mathbf{u}_e\}} \alpha_{k,\mathbf{y}},$$

where  $e = (j, j') \in E$  is an edge in the output graph and  $\mathbf{u}_e \in \mathcal{Y} \times \mathcal{Y}'$  is a possible label of edge  $e$ . As each marginal dual variable  $\mu(k, e, \mathbf{u}_e)$  is the sum of a collection of dual variables  $\alpha_{k,\mathbf{y}}$  that has consistent label  $(u_j, u_{j'}) = \mathbf{u}_e$ , we have the following

$$\sum_{\mathbf{u}_e} \mu(k, e, \mathbf{u}_e) = \sum_{\mathbf{y} \neq \mathbf{y}_k} \alpha_{k,\mathbf{y}} \tag{12}$$

for an arbitrary edge  $e$ , independently of the structure of the trees.

The linear part of the objective (Definition 10) can be stated in term of  $\boldsymbol{\mu}$  for an arbitrary collection of trees as

$$\boldsymbol{\alpha}^\top \mathbf{1} = \sum_{k=1}^m \sum_{\mathbf{y} \neq \mathbf{y}_k} \alpha_{k,\mathbf{y}} = \frac{1}{|E_{\mathcal{T}}|} \sum_{k=1}^m \sum_{e \in E_{\mathcal{T}}} \sum_{\mathbf{u}_e} \mu(k, e, \mathbf{u}_e) = \frac{1}{|E_{\mathcal{T}}|} \sum_{e,k,\mathbf{u}_e} \mu(k, e, \mathbf{u}_e),$$

where edge  $e = (j, j') \in E_{\mathcal{T}}$  appearing in the collection of trees  $\mathcal{T}$ .

We observe that the label kernel of tree  $T_i$ ,  $K_{T_i}^\psi$ , decomposes on the edges of the tree as

$$K_{T_i}^\psi(\mathbf{y}, \mathbf{y}') = \langle \mathbf{y}, \mathbf{y}' \rangle_\psi = \sum_{e \in E_i} \langle y_e, y'_e \rangle_\psi = \sum_{e \in E_i} K^{\psi,e}(y_e, y'_e).$$

Thus, the output kernel  $K_{T_i}^{\Delta\psi}$  and the joint kernel  $K_{T_i}$  also decompose

$$\begin{aligned} K_{T_i}^{\Delta\psi}(\mathbf{y}_k, \mathbf{y}; \mathbf{y}_{k'}, \mathbf{y}') &= \left( K_{T_i}^\psi(\mathbf{y}_k, \mathbf{y}_{k'}) - K_{T_i}^\psi(\mathbf{y}_k, \mathbf{y}') - K_{T_i}^\psi(\mathbf{y}_{k'}, \mathbf{y}) + K_{T_i}^\psi(\mathbf{y}, \mathbf{y}') \right) \\ &= \sum_{e \in E_i} \left( K_{T_i}^{\psi,e}(y_{ke}, y'_{k'e}) - K_{T_i}^{\psi,e}(y_{ke}, y'_e) - K_{T_i}^{\psi,e}(y_e, y'_{k'e}) + K_{T_i}^{\psi,e}(y_e, y'_e) \right) \\ &= \sum_{e \in E_i} K_{T_i}^{\Delta\psi,e}(y_{ke}, y_e; y'_{k'e}, y'_e), \end{aligned}$$

$$\begin{aligned} K_{T_i}(x_k, \mathbf{y}; x_{k'}, \mathbf{y}') &= K^\psi(x_k, x_{k'}) \cdot K_{T_i}^{\Delta\psi}(\mathbf{y}_k, \mathbf{y}; \mathbf{y}_{k'}, \mathbf{y}') \\ &= K^\psi(x_k, x_{k'}) \cdot \sum_{e \in E_i} K^{\Delta\psi,e}(y_{ke}, y_e; y'_{k'e}, y'_e) \\ &= \sum_{e \in E_i} K^e(x_k, y_e; x_{k'}, y'_e). \end{aligned}$$

The sum of joint kernels of the trees can be expressed as

$$\begin{aligned}
\sum_{i=1}^n K_{T_i}(x_k, \mathbf{y}; x_{k'}, \mathbf{y}') &= \sum_{i=1}^n \sum_{e \in E_i} K^e(x_k, y_e; x_{k'}, y'_e) \\
&= \sum_{e \in E_{\mathcal{T}}} \sum_{\substack{T_i \in \mathcal{T}: \\ e \in E_i}} K^e(x_k, y_e; x_{k'}, y'_e) \\
&= \sum_{e \in E_{\mathcal{T}}} N_{\mathcal{T}}(e) K^e(x_k, y_e; x_{k'}, y'_e)
\end{aligned}$$

where  $N_{\mathcal{T}}(e)$  denotes the number of occurrences of edge  $e$  in the collection of trees  $\mathcal{T}$ .

Taking advantage of the above decomposition and of the Equation (12) the quadratic part of the objective (Definition 10) can be stated in term of  $\boldsymbol{\mu}$  as

$$\begin{aligned}
&- \frac{1}{2} \boldsymbol{\alpha}^\top \left( \sum_{i=1}^n K_{T_i} \right) \boldsymbol{\alpha} \\
&= - \frac{1}{2} \boldsymbol{\alpha}^\top \left( \sum_{e \in E_{\mathcal{T}}} N_{\mathcal{T}}(e) K^e(x_k, \mathbf{y}; x_{k'}, \mathbf{y}') \right) \boldsymbol{\alpha} \\
&= - \frac{1}{2} \sum_{k, k'=1}^m \sum_{e \in E_{\mathcal{T}}} N_{\mathcal{T}}(e) \sum_{\substack{\mathbf{y} \neq \mathbf{y}_k \\ \mathbf{y}' \neq \mathbf{y}_{k'}}} \alpha(k, \mathbf{y}) K^e(x_k, y_e; x_{k'}, y'_e) \alpha(k', \mathbf{y}') \\
&= - \frac{1}{2} \sum_{k, k'=1}^m \sum_{e \in E_{\mathcal{T}}} N_{\mathcal{T}}(e) \sum_{\mathbf{u}_e, \mathbf{u}'_e} \sum_{\substack{\mathbf{y} \neq \mathbf{y}_k : y_e = \mathbf{u}_e \\ \mathbf{y}' \neq \mathbf{y}_{k'} : y'_e = \mathbf{u}'_e}} \alpha(k, \mathbf{y}) K^e(x_k, \mathbf{u}_e; x_{k'}, \mathbf{u}'_e) \alpha(k', \mathbf{y}') \\
&= - \frac{1}{2} \sum_{k, k'=1}^m \sum_{e \in E_{\mathcal{T}}} \frac{N_{\mathcal{T}}(e)}{|E_{\mathcal{T}}|^2} \sum_{\mathbf{u}_e, \mathbf{u}'_e} \mu(k, e, \mathbf{u}_e) K^e(x_k, \mathbf{u}_e; x_{k'}, \mathbf{u}'_e) \mu(k', e, \mathbf{u}'_e) \\
&= - \frac{1}{2} \sum_{\substack{e, k, \mathbf{u}_e, \\ k', \mathbf{u}'_e}} \mu(k, e, \mathbf{u}_e) K_{\mathcal{T}}^e(x_k, \mathbf{u}_e; x_{k'}, \mathbf{u}'_e) \mu(k', e, \mathbf{u}'_e),
\end{aligned}$$

where  $E_{\mathcal{T}}$  is the union of the sets of edges appearing in  $\mathcal{T}$ .

We then arrive at the following definition.

#### Definition 9. Marginalized Dual $L_2$ -norm Random Tree Approximation

$$\max_{\boldsymbol{\mu} \in \mathcal{M}^m} \quad \frac{1}{|E_{\mathcal{T}}|} \sum_{e, k, \mathbf{u}_e} \mu(k, e, \mathbf{u}_e) - \frac{1}{2} \sum_{\substack{e, k, \mathbf{u}_e, \\ k', \mathbf{u}'_e}} \mu(k, e, \mathbf{u}_e) K_{\mathcal{T}}^e(x_k, \mathbf{u}_e; x'_{k'}, \mathbf{u}'_e) \mu(k', e, \mathbf{u}'_e),$$

where  $\mathcal{M}^m$  is marginal dual feasible set defined as (c.f., [9])

$$\mathcal{M}^m = \left\{ \boldsymbol{\mu} \mid \mu(k, e, \mathbf{u}_e) = \sum_{\mathbf{y} \neq \mathbf{y}_k} \mathbf{1}_{\{\mathbf{y}_{k_e} = \mathbf{u}_e\}} \alpha(k, \mathbf{y}), \forall (k, e, \mathbf{u}_e) \right\}.$$

The feasible set is composed of a Cartesian product of  $m$  identical polytopes  $\mathcal{M}^m = \mathcal{M} \times \cdots \times \mathcal{M}$ , one for each training example. Furthermore, each  $\boldsymbol{\mu} \in \mathcal{M}$  corresponds to some dual variable  $\boldsymbol{\alpha}$  in the original dual feasible set  $\mathcal{A} = \{\boldsymbol{\alpha} \mid \alpha(k, \mathbf{y}) \geq 0, \sum_{\mathbf{y} \neq \mathbf{y}_k} \alpha(k, \mathbf{y}) \leq C, \forall k\}$ .

## Experimental Results

Table 2 provides the standard deviation results of the prediction performance results of Table 1 for each algorithm in terms of the microlabel and 0/1 error rates. Values are obtained by five fold cross-validation.

DATASET	MICROLABEL LOSS (%)					0/1 LOSS (%)				
	SVM	MTL	MMCRF	MAM	RTA	SVM	MTL	MMCRF	MAM	RTA
EMOTIONS	1.9	1.8	0.9	1.4	0.6	3.4	3.5	3.1	4.2	1.5
YEAST	0.7	0.5	0.6	0.5	0.6	2.8	1.0	1.5	0.4	1.2
SCENE	0.3	0.5	0.3	0.1	0.3	1.4	3.6	1.2	0.9	0.6
ENRON	0.2	0.2	0.2	0.2	0.2	0.3	0.4	2.8	2.3	0.9
CAL500	0.3	0.3	0.3	0.2	0.4	0.0	0.0	0.0	0.0	0.0
FINGERPRINT	0.3	0.6	0.6	0.3	0.6	0.7	0.0	0.5	0.6	1.3
NCI60	0.7	0.6	1.3	0.9	1.6	1.3	2.0	1.4	1.2	2.2
MEDICAL	0.0	0.1	0.1	0.1	0.2	2.1	2.3	3.3	2.5	3.6
CIRCLE10	0.9	0.7	0.3	0.4	0.3	3.8	3.4	2.1	3.5	1.7
CIRCLE50	0.5	0.5	0.3	0.3	0.6	2.0	3.3	4.5	5.5	2.2

Table 2: Standard deviation of prediction performance for each algorithm in terms of microlabel loss and 0/1 loss.