I. Two attention pathways carry motion-token content into the action tokens

Motion model, PatternLock | RouteStick, seed 42, 100 episodes / 495 inferences with full attention stored; numbers are PatternLock | RouteStick, layer-mean over heads, episode-equal. (a) token layout in sequence order, the attention mask (grey), and the strong edges by layer (colour); (b) the same edges layer by layer, both tasks pooled.

(a)

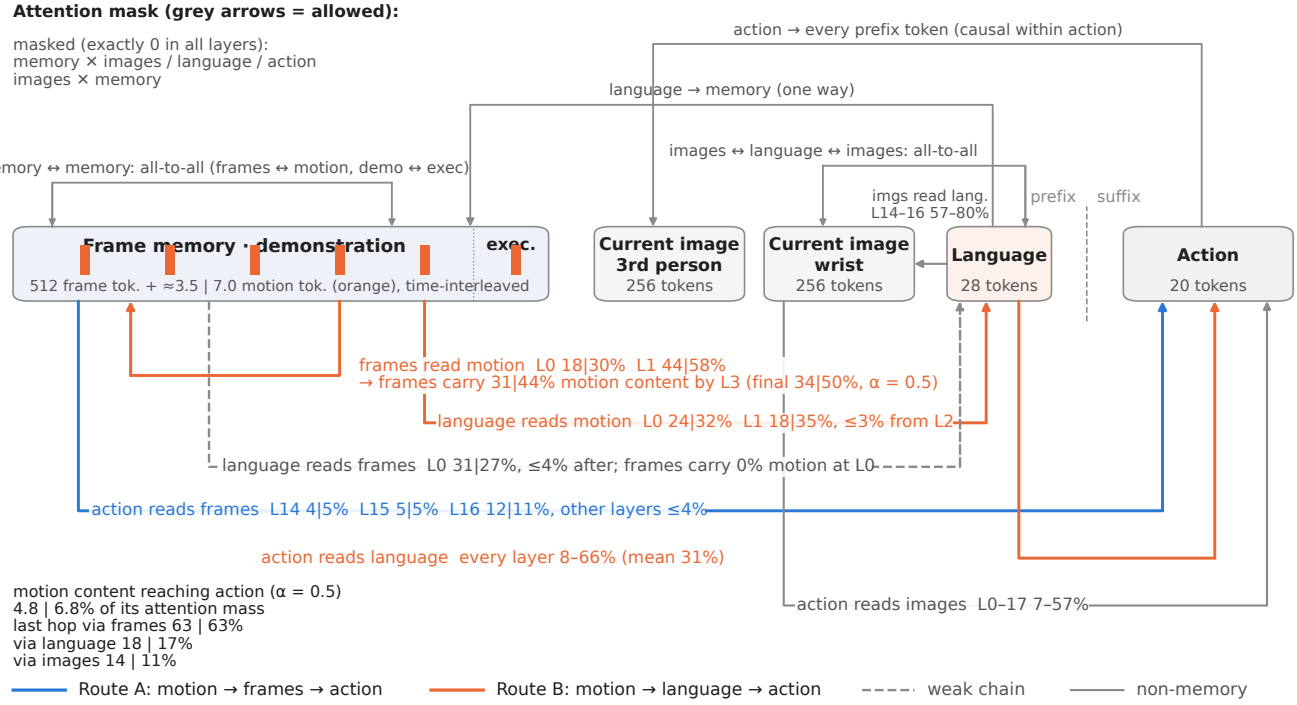

(b)

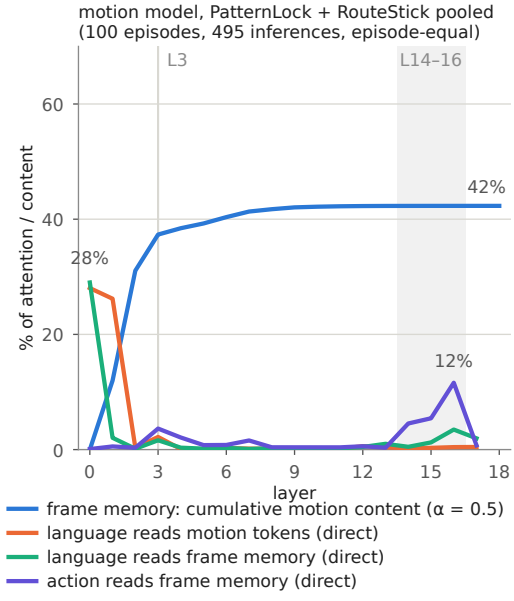

II. The pathways exist, but which demo segment is read shows no sub-goal alignment

RouteStick, motion model unless noted, 50 episodes per model, all inferences; rows pool episodes with different numbers of sub-goals m (n = episodes per row); frame stream weighted 'single', motion stream 'overlap'; D = diagonal enrichment, episode-level 95% CI.
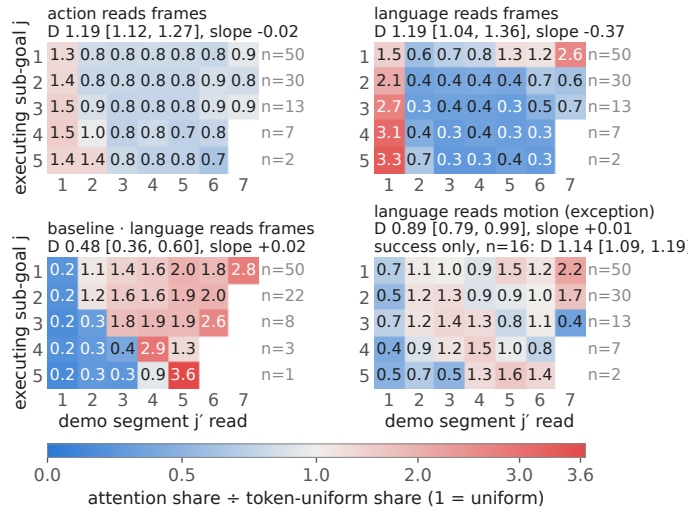
(c)