



Five-family synthetic benchmark

PSS CADEE KL KSG UM-tKL UM-tKSG


(a) Sample size: $d = 5, \rho = 0$

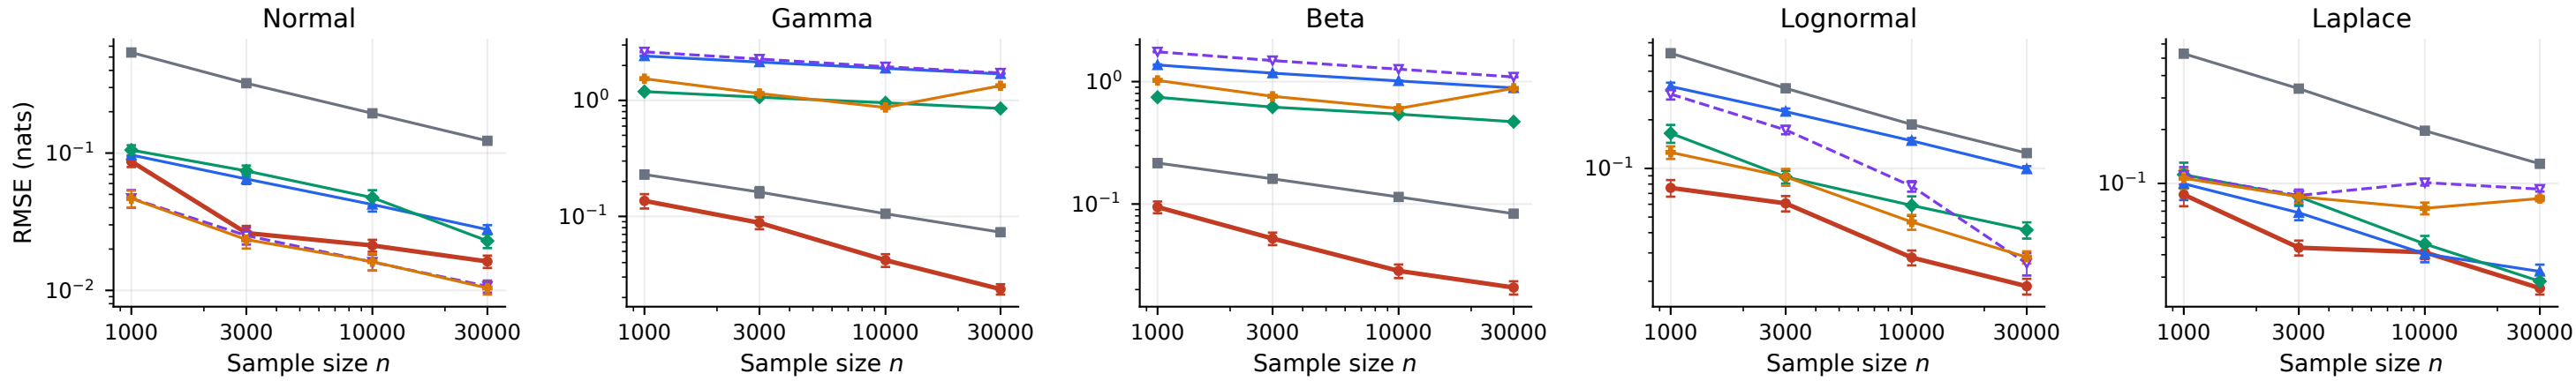


(b) Runtime: selected-parameter evaluation plus flow training

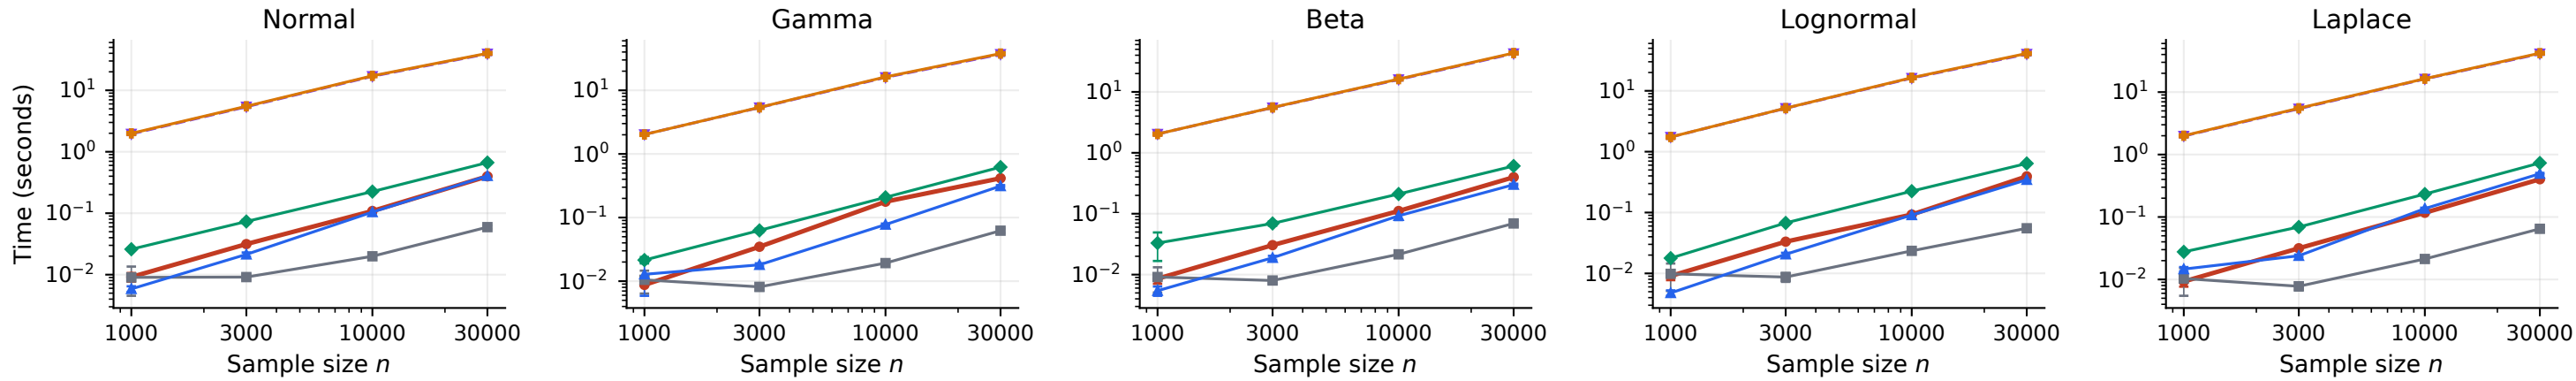

(c) Dimension: $n = 20,000, \rho = 0$

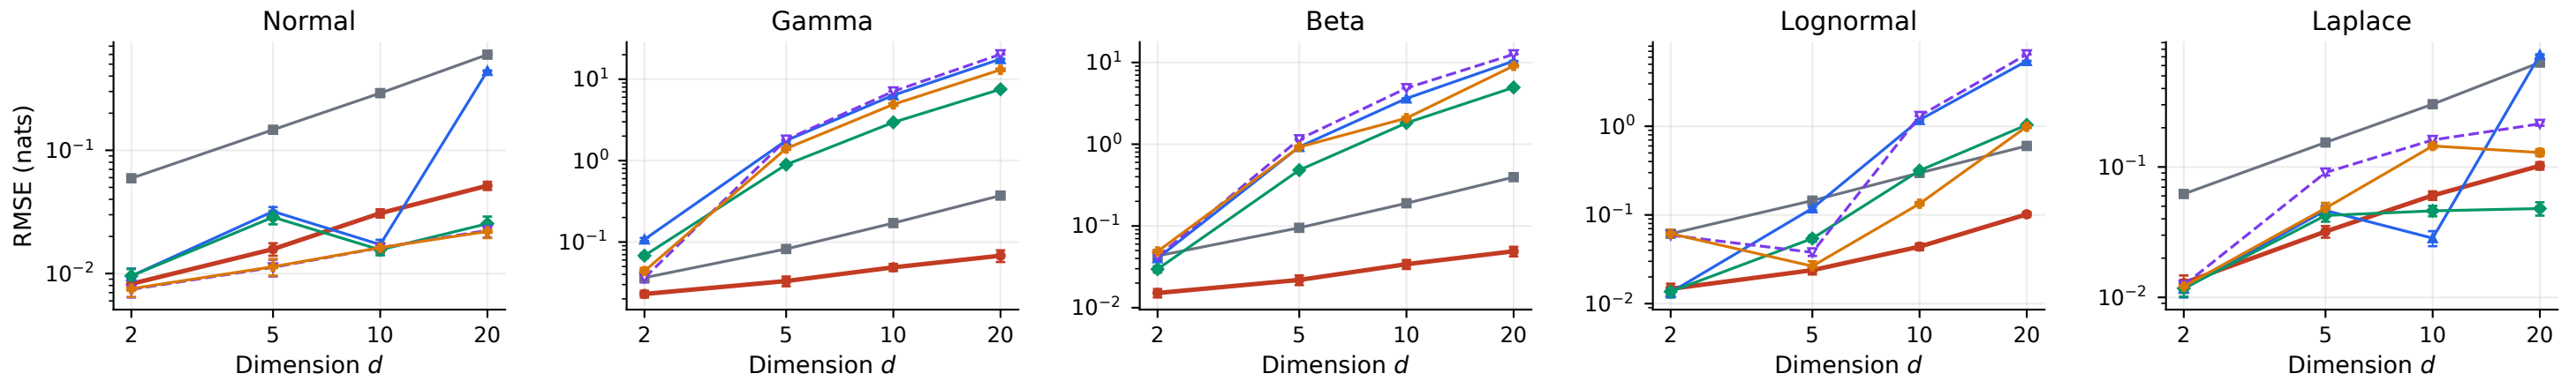

(d) Dependence: $n = 20,000, d = 5$

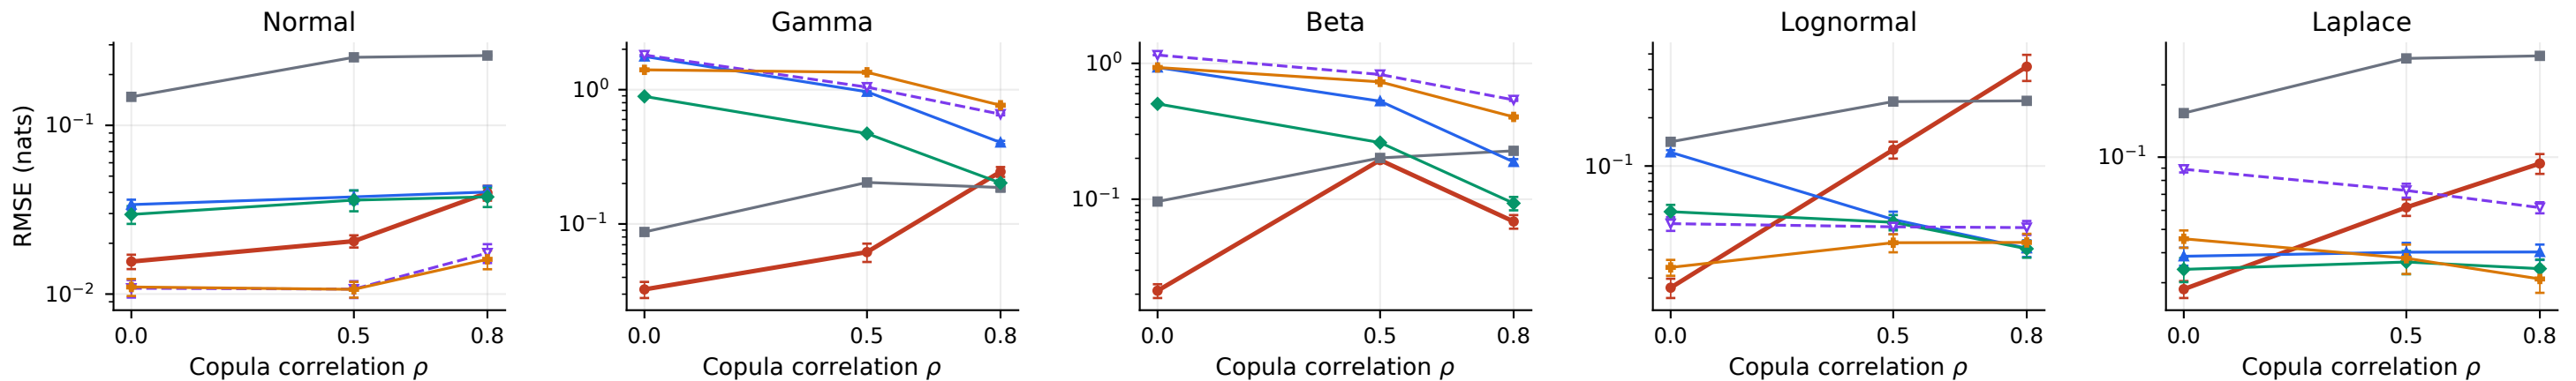

Saved original results; 30 repetitions per condition. Error bars: ± 1 Monte Carlo SE, conditional on the selected oracle parameter.

PSS uses the historical rank-spacing / n estimator. PSS and kNN-based methods use same-repetition RMSE oracle selection.

Runtime excludes parameter search; flow methods include training plus their own evaluation. rho is latent Gaussian-copula correlation.