





Partition sensitivity under bounded dependence ($d = 2$)

$n = 10^4$ $n = 10^5$

(a) Frequency $k = 1$

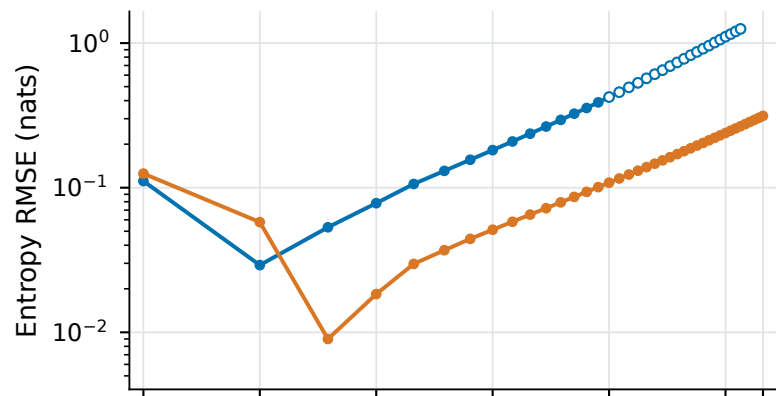

(b) Frequency $k = 2$

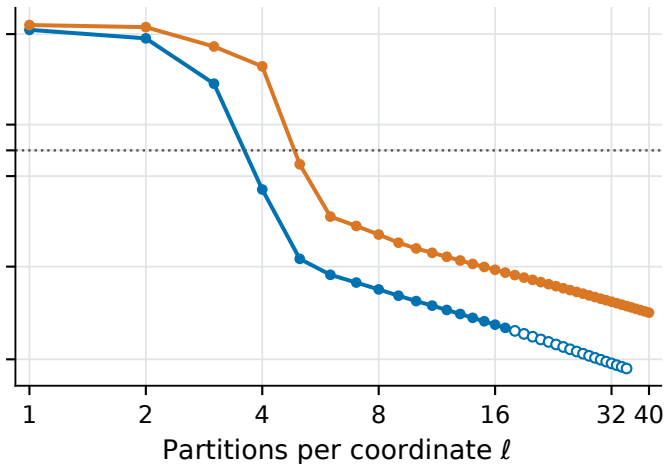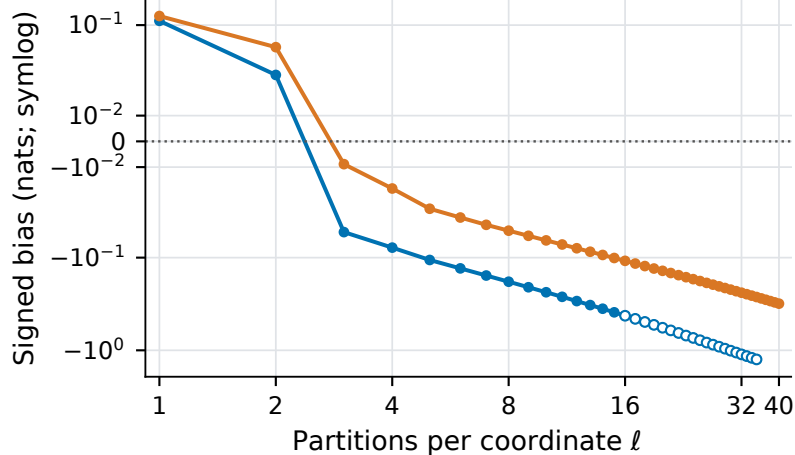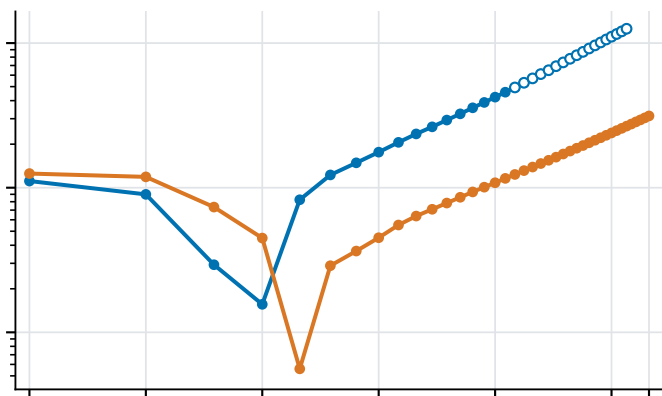

All saved partition levels; 100 repeats. Shading: pointwise 95% bootstrap intervals.


Hollow markers: at least one repeat has coverage < 1 ; minimum training coverage = 97.9%.

Bias = mean estimate - truth; symlog is linear near zero. The estimator averages covered points.




Partition sensitivity under bounded dependence ($d = 5$)

$n = 10^4$ $n = 10^5$

(a) Frequency $k = 1$

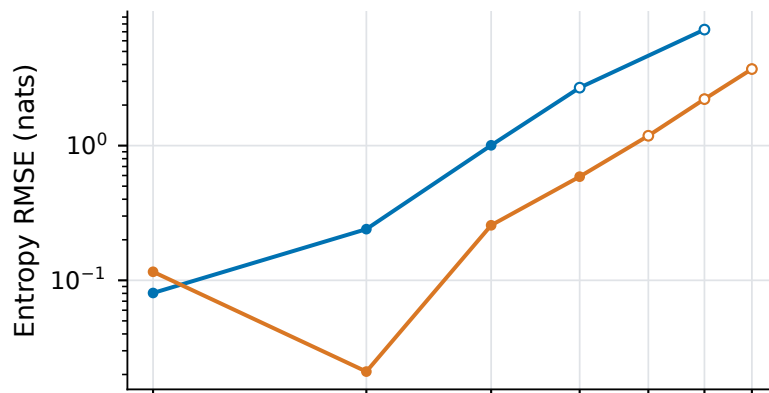

(b) Frequency $k = 2$

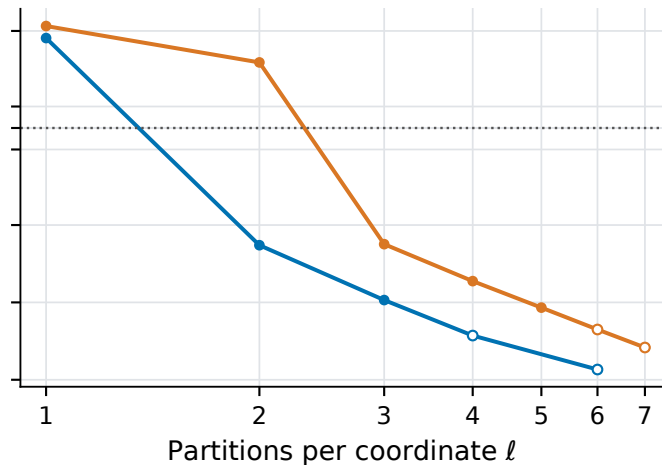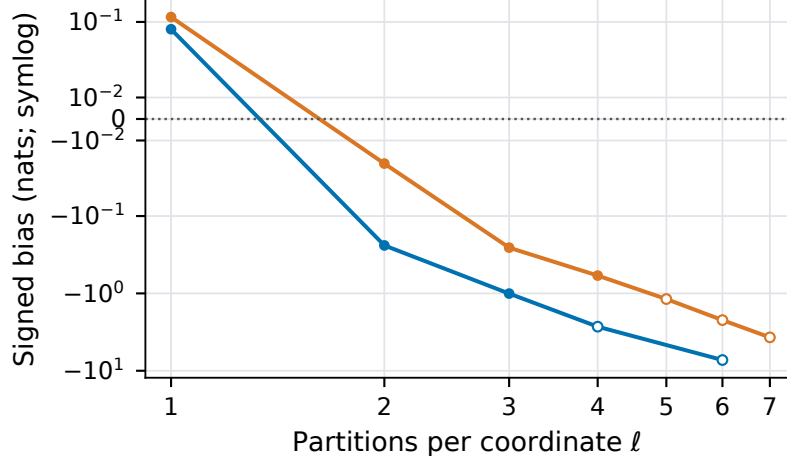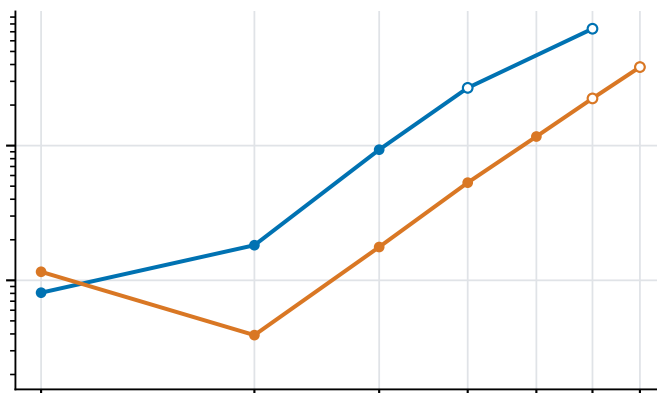

All saved partition levels; 100 repeats. Shading: pointwise 95% bootstrap intervals.

Hollow markers: at least one repeat has coverage < 1 ; minimum training coverage = 40.3%.

Bias = mean estimate - truth; symlog is linear near zero. The estimator averages covered points.