

# Flower Species Classification Based on Iris Dataset

Suryash Chakravarty, Hooman Esteki & Bright Arafat Bello

2025-12-06

## Table of contents

<b>Summary</b>	<b>1</b>
<b>Introduction</b>	<b>2</b>
<b>Methods</b>	<b>2</b>
Data Source and Preprocessing . . . . .	2
Exploratory Data Analysis . . . . .	2
Model Building . . . . .	3
<b>Results &amp; Discussion</b>	<b>3</b>
Interpretation . . . . .	4
Future Work . . . . .	4
<b>References</b>	<b>4</b>

GitHub URL: <https://github.com/hoomanesteki/iris-ml-predictor>

## Summary

The present endeavor constructs a model that classifies iris flower species through the classic Iris dataset Fisher (1936). It was a four-dimensional feature set, which consisted of sepal length, sepal width, petal length, and petal width that was employed to get a Decision Tree Classifier. The model’s performance was determined using a separate test set, and accuracy levels of 86.67% were observed, which is quite a strong one.

The Iris dataset is often utilized for teaching machine learning because of its uncomplicated nature and distinct class structure. Nevertheless, the limitations of the small dataset containing

150 samples and the overlap of features between *versicolor* and *virginica* make it harder to generalize. Our model, regardless of these restrictions, still manages to exhibit high classification performance and serve as a robust baseline for multilabel prediction tasks.

## Introduction

The 150 samples in the Iris dataset are determined by four numerical characteristics which together give the dimensions of the iris flowers. The target variable consists of three species: *Iris setosa*, *Iris versicolor*, and *Iris virginica*. In the main, the analysis has the aim of identifying if the machine learning model—in this case, a Decision Tree Classifier—can make correct predictions of species identity relying only on these measurements.

The machine learning process outlined in this report is an entire cycle consisting of data exploration, cleaning, and transformation, modeling and finally, evaluation. Access to the full code and scripts that were used for the analysis is provided through the GitHub repository: <https://github.com/hoomanesteki/iris-ml-predictor>.

## Methods

### Data Source and Preprocessing

The collection of data was obtained from the UCI Machine Learning Repository Fisher (1936). There are no missing values in the dataset, and 50 samples represent each of the three classes. The class labels were converted into numbers (0 = setosa, 1 = versicolor, 2 = virginica). A train-test split was done to assess the model's performance on previously unseen data.

### Exploratory Data Analysis

Seaborn Waskom (2021) was used to create exploratory visualizations to know the distributions and separability of features:

- Pairplot to see class clustering
- Correlation heatmap to find correlations among quantitative features
- Distribution plot indicating differences in petal length among species

The above-mentioned visualizations indicate that *setosa* is completely isolated from the remaining two species whereas *versicolor* and *virginica* have slightly overlapping areas.

## Model Building

A `DummyClassifier` (actually a classifier with no intelligence at all) was employed as a reference point for the performance comparison (nearly 33% correct predictions for the three equally balanced classes). Subsequently, a Decision Tree Classifier was fitted to capture the nonlinear patterns through the four input features.

Table 1: Decision Tree Classifier Performance Metrics

Table 1

	accuracy	precision_weighted	recall_weighted	f1_weighted
0	0.866667	0.866667	0.866667	0.866667

## Results & Discussion

The Decision Tree classifier produced a test accuracy of 86.67%, which is a considerable improvement over the baseline dummy model. This is a strong indication that the model was able to recognize and utilize the underlying patterns in the data.

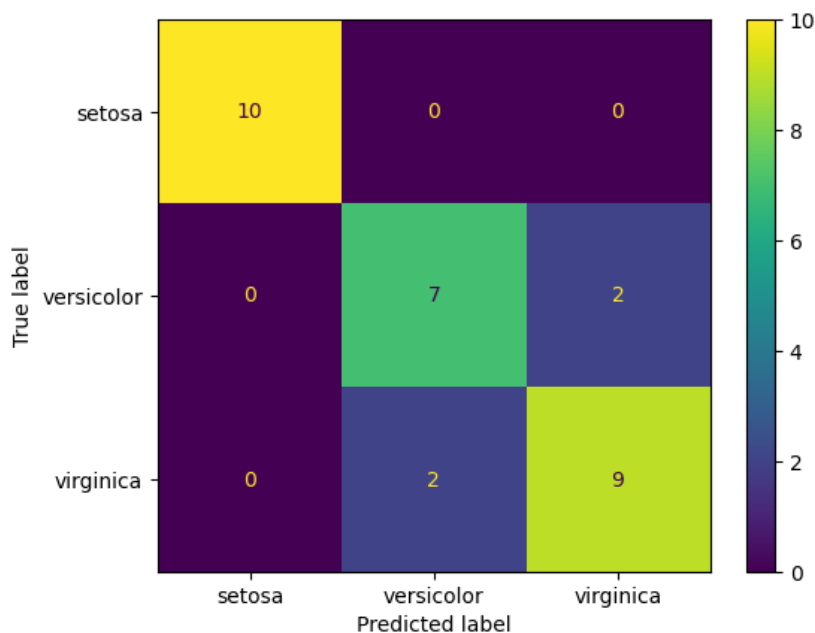


Figure 1: Confusion matrix

The confusion matrix (Figure [Figure 1](#)) highlights:

- The classification of *setosa* is perfect.
- There are some misclassifications between *versicolor* and *virginica*, which is in line with the feature distributions that overlap.

## Interpretation

Setosa is distinguished without doubt by its distinct petal features. The mentioned mix-up between *versicolor* and *virginica* indicates:

- Feature intersection hampers the linear or rule based separation
- A more complex or regularized decision tree might be beneficial
- More sophisticated models (such as Random Forest, SVM) might have better performance

## Future Work

In order to elevate the model's power and generalization:

- Tune the hyperparameters (maximum depth, minimum samples split)
- Try out other classifiers and evaluate them
- Apply k-fold cross-validation to obtain a stability of results
- Look into the importance of features and concentrates on misclassified samples
- Consider the use of ensemble models as a means of improving robustness

## References

1. Milestone 1 of DSCI 522.
2. DSCI 571 course materials.

Fisher, R. A. 1936. "Iris." UCI Machine Learning Repository.

Waskom, Michael L. 2021. "Seaborn: Statistical Data Visualization." *Journal of Open Source Software* 6 (60): 3021. <https://doi.org/10.21105/joss.03021>.