

SYSTEMS ENGINEERS • CONTRIBUTORS

ARCHITECTURE MANUAL

ADRs, topologies, state namespaces, AXIS $\neq$ engine

Open charting PWA — own the axes, swap the engine



CONTENTS

01 Overview

02 Overview

03 Evaluation

04 Adrs

05 Topologies

06 State Namespaces

07 Drawings and plot parity

OVERVIEW

COPYRIGHT (C) 2024-2026 JANGO_BLOCKCHAINED

THIS FILE IS PART OF PYNESCRYPT.

PYNESCRYPT IS FREE SOFTWARE: YOU CAN REDISTRIBUTE IT AND/OR MODIFY

IT UNDER THE TERMS OF THE GNU AFFERO GENERAL PUBLIC LICENSE AS PUBLISHED BY

THE FREE SOFTWARE FOUNDATION, EITHER VERSION 3 OF THE LICENSE, OR

(AT YOUR OPTION) ANY LATER VERSION.

PYNESCRYPT IS DISTRIBUTED IN THE HOPE THAT IT WILL BE USEFUL, BUT WITHOUT ANY WARRANTY; WITHOUT EVEN THE IMPLIED WARRANTY OF

MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SEE THE GNU AFFERO GENERAL PUBLIC LICENSE FOR MORE DETAILS.

YOU SHOULD HAVE RECEIVED A COPY OF THE GNU AFFERO GENERAL PUBLIC LICENSE

ALONG WITH PYNESCRYPT. IF NOT, SEE

[HTTPS://WWW.GNU.ORG/LICENSES/](https://www.gnu.org/licenses/).

SPDX-LICENSE-IDENTIFIER: AGPL-3.0-ONLY

title: "Architecture" description: "AXIS system architecture: AXIS vs engine, plugin registry, topologies, ADRs, and state namespaces."

ARCHITECTURE

AXIS architecture is the discipline of **separable axes**—price history, live time, calculation, and library storage—coordinated by a Solid AXIS UI that never owns a closed interpreter.



Abstract

Layer	Responsibility
AXIS	UI, store, plugin orchestration, chart apply
Plugin contracts	<code>source</code> <code>stream</code> <code>engine</code> <code>storage</code> <code>dataset</code> (+ reserved component)
Engines	PYNE evaluation (browser Pyodide or remote <code>/run</code>)
On-chain plane	Parallel non-OHLCV datasets (TVL, DEX, events) via Worker allowlist proxy — ADR-015
Optional edge	Cloudflare Pages + Worker + DO/KV/D1/R2
Optional desk API	Flask Pro API

Invariant: `AXIS` $\neq$ engine. Evaluation always crosses an engine plugin boundary.

Track map

Page	Contents
Overview	End-to-end data/control flow
ADRs	ADR-001 ... ADR-015
Topologies	Dev, static, edge deploy shapes
State namespaces	Keys, migration, hash, IDB
Drawings and plot parity	User tools vs Pine plots/drawings vs PYNE export

Conceptual model

```
flowchart TB
    subgraph AxisUI["Browser AXIS"]
        UI[Solid UI]
        ST["store pyonescript.axis.v1"]
        REG[PluginRegistry]
        UI --> ST
        UI --> REG
    end
    REG --> SRC[Sources]
    REG --> STR[Streams]
    REG --> ENG[Engines]
    REG --> STO[Storages]
    ENG -->|server| API["Flask or Worker proxy"]
    ENG -->|pyodide| PY["In-browser PYNE"]
    STO -->|cloud| API
    STO -->|git| FORGE["GitHub/GitLab"]
    STO -->|local| IDB["IndexedDB"]
```



Formal namespaces

```
Contract namespace:  pynescrypt.axis.plugins.v1
App state key:       pynescrypt.axis.v1
App state prefix:    pynescrypt.axis.*
Pages project id:    axis
Pages URL:           https://axis.hoox.sh
Worker script id:    worker-axis
Worker URL:          https://worker.axis.hoox.sh
Health service id:   worker-axis
```

Related tracks

- [End User](#) — operator workflows
- [UI](#) — UI subsystem design
- [Plugins](#) — contracts & catalogs
- [Worker](#) — edge data plane
- [DevOps](#) — build & CORS
- [PYNE runtime](#) — language evaluation

See also

- Root `README.md` — package-level map
- `LEGACY.md` — pre-Solid shell boundary
- [AXIS CLI](#) — operator install / deploy

OVERVIEW

COPYRIGHT (C) 2024-2026 JANGO_BLOCKCHAINED

THIS FILE IS PART OF PYNESCRYPT.

PYNESCRYPT IS FREE SOFTWARE: YOU CAN REDISTRIBUTE IT AND/OR MODIFY

IT UNDER THE TERMS OF THE GNU AFFERO GENERAL PUBLIC LICENSE AS PUBLISHED BY

THE FREE SOFTWARE FOUNDATION, EITHER VERSION 3 OF THE LICENSE, OR

(AT YOUR OPTION) ANY LATER VERSION.

PYNESCRYPT IS DISTRIBUTED IN THE HOPE THAT IT WILL BE USEFUL, BUT WITHOUT ANY WARRANTY; WITHOUT EVEN THE IMPLIED WARRANTY OF

MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SEE THE GNU AFFERO GENERAL PUBLIC LICENSE FOR MORE DETAILS.

YOU SHOULD HAVE RECEIVED A COPY OF THE GNU AFFERO GENERAL PUBLIC LICENSE

ALONG WITH PYNESCRYPT. IF NOT, SEE

[HTTPS://WWW.GNU.ORG/LICENSES/](https://www.gnu.org/licenses/).

SPDX-LICENSE-IDENTIFIER: AGPL-3.0-ONLY

title: "Architecture overview" description: "End-to-end AXIS architecture: Solid AXIS UI, unified registry, three built-in engines, chart apply pipeline, and optional edge plane."

ARCHITECTURE OVERVIEW

Abstract

AXIS is a **composition host**. The product thesis: own the axes (history, live, calc, library), swap the implementations. Shipping UI is Solid + Vite + lightweight-charts + CodeMirror 6; calculation is never inlined into UI components.



Conceptual model

```
flowchart TB
  subgraph Boot
    I[index.tsx] --> A[app.tsx]
    A --> B[registerBuiltins]
    A --> R[restoreInstalledPlugins]
    A --> L[loadSymbolData]
    A --> P[prefetch/preload Pyodide]
    A --> MCP[startMcpHost]
  end
  subgraph Runtime
    TOP[Topbar] -->|Load| SRC[SourcePlugin.fetchHistorical]
    SRC --> BARS[store.bars]
    BARS --> CH[PaneManager / ChartHost]
    TOP -->|Run| RUN[runAndApply]
    RUN --> ENG[EnginePlugin.run]
    ENG --> LR[lastRun]
    LR --> CH
    LR --> RES[ResultsPanel]
    TOP -->|Live| MUX[streams/multiplex]
    MUX --> BARS
    LIB[ScriptLibrary] --> STO[StoragePlugin]
  end
```

Interface surface (module map)

Concern	Primary paths
Entry	src/index.tsx , app.tsx
State	src/store/
Plugins	src/plugins/{registry,types,loader,bootstrap,active}.ts
Catalogs	sources/catalog.ts , streams/* , engines/catalog.ts , storage/*
Chart	chart/ChartHost.tsx , pane-manager.ts , drawing-layer.ts , price-precision.ts
Editor	editor/*
Run apply	indicators/runner.ts
Results	results/* , ui/ResultsPanel.tsx
Studio pages	ui/studio/ , ui/runtime/ , ui/wire/ , ui/settings/ , ui/workers/ , ui/plugins/
Workers catalog	workers/*
Worker	worker/
CLI	packages/cli/
Desktop	src-tauri/ , src/desktop/

Legacy parallel: state.js , registry.js , main.js — not product path. See repo LEGACY.md .



Control plane vs data plane

Plane	What moves	Who owns it
Control	activePlugins, endpoint, theme, layout	Solid store + localStorage
Historical data	Bar arrays	Source plugins → <code>store.bars</code>
Live data	Bar updates	Stream plugins → multiplex → bars/chart
Calculation	script + bars → RunResult	Engine plugins
Library	ScriptDocument	Storage plugins
Telemetry	plane connectivity / latency / ticks	Ephemeral <code>store.telemetry</code> + Connection HUD

Transport preference (ADR-014)

Path	Preferred transport	Notes
Load (history)	REST / local	Venue kline HTTP, CSV, mock walk
Live	WebSocket	Venue WSS with reconnect; mock-poll local; DO = brokered
Engine server	HTTP	<code>POST /run</code> batch; latency in HUD
Engine pyodide	Local	Offline-capable after asset cache

Live pairs with history via `defaultStreamForSource` . `live.preferAfterLoad` auto-starts WS after Load and on boot when bars exist (default `on`).

Built-in engines

Engine	Transport	Fidelity host
<code>server</code>	WebSocket <code>/ws/run</code> , then <code>POST /run</code>	Flask Pro API or AXIS Worker
<code>pyne-worker</code>	<code>POST /run</code> (optional WS)	HOOX pyne-worker. Built-in. Not a pasted Backend URL on <code>server</code> .
<code>pyodide</code>	In-browser Python	Self-hosted Pyodide 0.26.2 + vendored wheel + <code>pynescrypt_runtime.py</code>

Timeout policy in runner scales with bar length (clamped). Live re-runs use shorter silent timeouts.

Chart apply pipeline

`runAndApply` :

1. `getActiveEngine().run(...)`
2. `setLastRun`
3. Optionally open results
4. **Sync** overlays in place (`syncOverlayLines`) — no blank destroy frame
5. Markers + strategy report side effects
6. Atomic Pine script drawings replace
7. Equity pane when appropriate (skip hide thrash on silent live re-runs)



History vs live data path: `loadBars` bumps `chartDataGen` → `ChartHost` full `setDataToChart` + fit. Live ticks only `manager.appendBar` (never full `setData/fitContent`).

`PaneManager` is imperative DOM under a Solid-owned outer shell—**Solid must not reconcile the pane root** (`ChartHost` invariant).

Plugin registry

`PluginRegistry` holds ordered maps per kind; events `registered` / `unregistered`. Built-ins register once (`ensureBuiltins` / `catalog ensureRegistered`). Dynamic plugins via `loadPluginFromUrl`. Active selection is **not** inside the registry—it is store state.

Contract namespace conceptually: `pynescrypt.axis.plugins.v1` (fields: `id`, `name`, `kind`, `configSchema`, `capabilities`, kind-specific methods).

Edge plane (optional)

Cloudflare split:

- Pages project `axis` (`https://axis.hoox.sh`): static `dist/`
- Worker script `worker-axis` (`https://worker.axis.hoox.sh`): `/api/run` proxy, keys/usage KV, scripts D1, stream DO fan-out
- AXIS still speaks engine/storage plugins—not raw CF APIs in UI components

Invariants

1. AXIS ≠ engine
2. Bars/logs/lastRun not fully persisted
3. Storage and engine endpoints may coincide (Worker) but remain separate plugin roles
4. Older keys migrate forward, never the reverse on write

Failure modes (architectural)

Mode	Manifestation	Mitigation
God-object UI	Logic in components	Keep runner/registry pure modules
Engine leakage	Fetch <code>/run</code> from random widgets	Only engine plugins perform calc I/O
Registry/store split brain	Flat <code>engine</code> ≠ <code>activePlugins.engine</code>	<code>setActivePlugin</code> keeps alignment
SPA asset fallback	Pyodide loads HTML	Assert ZIP magic on assets

See also

- [ADRs](#)
- [Topologies](#)
- [State namespaces](#)
- [AXIS store](#)

EVALUATION

COPYRIGHT (C) 2024-2026 JANGO_BLOCKCHAINED

THIS FILE IS PART OF PYNESCRYPT.

PYNESCRYPT IS FREE SOFTWARE: YOU CAN REDISTRIBUTE IT AND/OR MODIFY

IT UNDER THE TERMS OF THE GNU AFFERO GENERAL PUBLIC LICENSE AS PUBLISHED BY

THE FREE SOFTWARE FOUNDATION, EITHER VERSION 3 OF THE LICENSE, OR

(AT YOUR OPTION) ANY LATER VERSION.

PYNESCRYPT IS DISTRIBUTED IN THE HOPE THAT IT WILL BE USEFUL, BUT WITHOUT ANY WARRANTY; WITHOUT EVEN THE IMPLIED WARRANTY OF

MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SEE THE GNU AFFERO GENERAL PUBLIC LICENSE FOR MORE DETAILS.

YOU SHOULD HAVE RECEIVED A COPY OF THE GNU AFFERO GENERAL PUBLIC LICENSE

ALONG WITH PYNESCRYPT. IF NOT, SEE

[HTTPS://WWW.GNU.ORG/LICENSES/](https://www.gnu.org/licenses/).

SPDX-LICENSE-IDENTIFIER: AGPL-3.0-ONLY

title: "Evaluation map" description: "How AXIS runs Pine: Flask Pro API, Worker proxy, in-browser Pyodide. AXIS does not import PyneTS and does not place HOOX orders."

EVALUATION MAP

Abstract

AXIS is a charting PWA, not a language rewrite. Every Pine evaluation goes through an **engine plugin**. Built-ins are `server` (HTTP/WS to PYNE) and `pyodide` (in-browser Python wheel). Optional HOOX **pyne-worker** is just another Backend URL.



AXIS does not import @hoox-sh/pynets . **AXIS does not call trade-worker .** Drawing a strategy on the chart is research, not execution.

Conceptual model

```
flowchart TB
    UI[Chart / Editor / Run] --> ENG{engine id}
    ENG -->|server| WS["WS /ws/run preferred"]
    ENG -->|server| HTTP["POST /run?mode="]
    WS --> FLASK["PYNE Flask :5002"]
    HTTP --> FLASK
    HTTP --> AXW["AXIS Worker /api/run"]
    AXW -->|EXTERNAL_BACKEND| FLASK
    AXW -->|no backend| E503["503 NO_BACKEND"]
    ENG -->|pyodide| WASM["Pyodide 0.26.2 + pynescrypt wheel"]
    ENG -->|pyne-worker| PYW["HOOX pyne-worker POST /run"]
    UI -.->|not an engine| PYNETS["PyneTS library"]
    PYW -->|if TRADE_SERVICE| HOOX["HOOX trade-worker"]
```

Interface surface

Path	Implementation	Notes
Engine server	src/engines/catalog.ts	Prefer WS ws(s)://{endpoint}/ws/run (preferWs default true),else POST {endpoint}/run?mode= with { script, data, mode, inputs?, profiler?, libraries? }.Modes interpret compile auto . Timeout scales with bar count (45–180s). Default endpoint http://localhost:5002 . Strategy HPO uses POST {endpoint}/optimize .
Engine pyodide	same file	Self-hosted Pyodide 0.26.2 (/pyodide/v0.26.2/), wheels /vendor/pynescrypt-0.5.0-py3-none-any.whl + antlr4_python3_runtime-4.13.2 , runtime /pyodide/pynescrypt_runtime.py . Numba is not in Wasm ; compile / auto is object-mode. Cold load ~20–30s.
AXIS Worker /api/run	worker/src/runtime.ts	PYODIDE_IN_WORKER=enabled scaffold; else proxy EXTERNAL_BACKEND/run ; else 503 NO_BACKEND . Caps: 512 KiB script, 50k bars, 30 req/min/IP, 60s upstream.
Engine pyne-worker	src/engines/catalog.ts	Built-in (builtIn: true). POST /run to the HOOX edge worker. Default origin https://pyne-worker.cryptolinx.workers.dev . Distinct from engine server and from the AXIS Worker (worker-axis).
PyneTS	—	TypeScript library. PYNE docs . Not referenced in AXIS source.

Payloads follow the [PYNE evaluate contract](#). Defaults: Flask **POST /run** uses mode **auto** . See [modes](#).



Internals

Path	Role
src/engines/catalog.ts	server, pyne-worker, pyodide
src/workers/catalog.ts	Workers page catalog entries
worker/src/runtime.ts	Edge /api/run
public/pyodide/	Wasm runtime + wheel
scripts/sync-pyne-wheel.sh	Refresh vendored wheel

Invariants & edge cases

1. **AXIS ≠ engine** (ADR-002). The shell never embeds a closed interpreter.
2. **AXIS ≠ execution**. Strategy events on the Results panel are not HOOX orders. See [AXIS and HOOX](#).
3. No **none** stream plugin in `src/streams/catalog.ts`. Pausing live data is `stopLive()`, not a plugin id.
4. The vendored wheel is `pynescrypt-0.5.0-py3-none-any.whl`. Live PyPI `hoox-pyne` can be newer (0.6.7 as of this writing). Check `public/vendor/`.
5. CORS: Worker allows localhost, `*.hoox.sh`, `*.pynescrypt.online`, `*.axis.pages.dev` (plus legacy `*.pynescrypt-axis.pages.dev`) only.

Worked examples

Local desk

```
# terminal 1 – PYNE Pro API
cd ../pyne && make run      # :5002 – sister repo hoox-sh/pyne; some checkouts are still named pynesc

# terminal 2 – AXIS
cd axis && bun run dev
```

Manager → engine `server`, Backend URL `http://localhost:5002`.

Offline

Switch engine to `pyodide`. First run downloads/caches the self-hosted runtime. Do not expect Numba.

Edge proxy

Deploy AXIS Worker with `EXTERNAL_BACKEND` pointing at Flask or pyne-worker. Engine stays `server`; endpoint is the Worker origin. Still no trade-worker hop unless **that** backend forwards events.

Pyodide in Worker (scaffold — not production yet)

Goal: a fully-CF deployment (no Flask) with the Worker evaluating Pine itself.

```
# worker/wrangler.toml
PYODIDE_IN_WORKER = "enabled"    # default "disabled" – leave it there for now
```



Status: Pyodide boots per isolate, but the wheel install + `run_script` bridge are stubbed, so every run returns an error envelope (HTTP 200) and does **not** fall through to `EXTERNAL_BACKEND` . Enabling the flag today breaks evaluation. Completion checklist (R2 wheel, `BUNDLES` binding, micropip install, bridge, fail-open semantics) lives in `worker/RUNTIME.md` . Production recommendation stays `EXTERNAL_BACKEND` .

Failure modes

Symptom	Cause	Fix
503 <code>NO_BACKEND</code>	Worker has no <code>EXTERNAL_BACKEND</code> and Pyodide-in-worker off	Set backend or use browser Pyodide
503 body <code>{ status: 'error', code: 'NO_BACKEND' }</code> to API consumers	Same as above, machine shape	Do not retry — the backend is absent, not busy. Fix config, then resend. (PYNE Agent treats this as skipped-with-note after 1 attempt.)
Compile "slow / different" in Pyodide	No Numba	Use Flask for numeric compile
Expecting pynets in the PWA	Not wired	Import <code>@hoox-sh/pynets</code> in your own app
Strategy PnL on chart, no CEX fill	AXIS does not execute	pyne-worker live trading

See also

- Engines
- Worker runtime
- PYNE Pro API
- PyneTS
- HOOX pyne-worker
- AXIS and HOOX

ADRS

COPYRIGHT (C) 2024-2026 JANGO_BLOCKCHAINED

THIS FILE IS PART OF PYNESCRYPT.

PYNESCRYPT IS FREE SOFTWARE: YOU CAN REDISTRIBUTE IT AND/OR MODIFY

IT UNDER THE TERMS OF THE GNU AFFERO GENERAL PUBLIC LICENSE AS PUBLISHED BY

THE FREE SOFTWARE FOUNDATION, EITHER VERSION 3 OF THE LICENSE, OR

(AT YOUR OPTION) ANY LATER VERSION.

PYNESCRYPT IS DISTRIBUTED IN THE HOPE THAT IT WILL BE USEFUL, BUT WITHOUT ANY WARRANTY; WITHOUT EVEN THE IMPLIED WARRANTY OF

MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SEE THE GNU AFFERO GENERAL PUBLIC LICENSE FOR MORE DETAILS.

YOU SHOULD HAVE RECEIVED A COPY OF THE GNU AFFERO GENERAL PUBLIC LICENSE

ALONG WITH PYNESCRYPT. IF NOT, SEE

[HTTPS://WWW.GNU.ORG/LICENSES/](https://www.gnu.org/licenses/).

SPDX-LICENSE-IDENTIFIER: AGPL-3.0-ONLY

title: "Architecture Decision Records" description: "ADR-001 through ADR-015 for AXIS: registry, AXIS#engine, Solid+Vite, three built-in engines, configSchema, URL load, storage, CF project id, proxies, DO fan-out, migration, CORS, results export, transport preference + telemetry, on-chain data plane."

ARCHITECTURE DECISION RECORDS

Formal ADRs for AXIS (product + the repo root). Status values: **Accepted** unless noted. Dates are conceptual product epochs, not git archaeology.



Index

ID	Title
ADR-001	Pluggable unified registry
ADR-002	AXIS ≠ engine
ADR-003	Solid + Vite product UI
ADR-004	Three built-in engines (server, pyne-worker, Pyodide)
ADR-005	Declarative configSchema
ADR-006	URL-loadable plugins
ADR-007	Storage as a plugin
ADR-008	CF ids: Pages <code>axis</code> , Worker <code>worker-axis</code>
ADR-009	Worker proxies first
ADR-010	Durable Object stream fan-out
ADR-011	State namespace migration
ADR-012	CORS as deploy concern
ADR-013	Results export in AXIS
ADR-014	Transport preference + connection telemetry
ADR-015	On-chain data plane
ADR-016	Provider-locked market data; CCXT on the server

ADR-001: Pluggable unified registry

Context

Early AXIS registered sources/streams/engines in separate ad hoc maps. Operators and authors needed one mental model and one install path.

Decision

Adopt a **unified `PluginRegistry`** (`src/plugins/registry.ts`) with kinds:

```
source | stream | engine | storage | component(reserved)
```

Every plugin shares `PluginBase` (`id`, `name`, `kind`, `description`, `version`, `builtIn`, `configSchema`, `capabilities`, lifecycle hooks). Registration is ordered; listeners observe register/unregister.

Consequences

- Active selection lives in the Solid store, not the registry.
- Built-ins protected from casual unregister.
- Catalogs (`sources/catalog.ts`, ...) become registration facades.
- Contract docs under [Plugins](#).



ADR-002: AXIS ≠ engine

Context

Closed chart hosts couple rendering and language runtime. That blocks offline mode, alternate evaluators, and headless reuse of PYNE.

Decision

AXIS never embeds a closed interpreter. All evaluation goes through `EnginePlugin.run`. UI modules call `getActiveEngine()` / `runAndApply`, not Python bindings directly (except inside the pyodide engine module).

Consequences

- Language fidelity owned by [PYNE](#).
 - AXIS docs do not duplicate grammar theory.
 - New engines (tiny demo, remote Worker, future WASM) are additive plugins.
-

ADR-003: Solid + Vite product UI

Context

Legacy vanilla JS shell (`main.js`, `style.css`) mixed DOM wiring with business logic and aged TV-blue tokens.

Decision

Product path is **SolidJS + Vite + Tailwind 4**, entry `src/index.tsx` / `app.tsx`. Imperative chart library (lightweight-charts) is isolated in `ChartHost` / `PaneManager` so Solid reconciliation does not thrash canvas DOM.

Consequences

- Legacy files retained for smoke/static tests only (`LEGACY.md`).
 - Icons via `lucide-solid`.
 - Deploy artifact is Vite `dist/`, not repo-root static tree.
-

ADR-004: Built-in engines

Context

Researchers need server fidelity, an edge evaluator, and offline demos. A single transport cannot satisfy all three.

Decision

Ship three built-in engines (`BUILTIN_ENGINES` in `src/engines/catalog.ts`). `pyne-worker` is `builtIn: true`. It is not a URL you paste onto the `server` engine.



Id	Role
server	WebSocket <code>/ws/run</code> , then <code>POST {endpoint}/run</code> . Default endpoint <code>http://localhost:5002</code> (Flask Pro API) or the AXIS Worker.
pyne-worker	HOOX edge evaluator. Same <code>/run</code> contract, default origin the production pyne-worker.
pyodide	In-browser Python + vendored pynescrypt / antlr wheels.

All three implement `EnginePlugin` and return `RunResult` .

Consequences

- Endpoint field only for server-like engines.
- Pyodide requires correct static asset deployment (ZIP integrity checks).
- Timeouts unified at runner layer.

ADR-005: Declarative configSchema

Context

Per-plugin settings UIs do not scale; custom React/Solid forms per plugin forks the manager.

Decision

Plugins declare optional `configSchema` : map of field name → `{ type, default, label, options, min, max, ... }` . Settings and library panels resolve defaults + `pluginsConfig` overrides via shared resolve helpers.

Consequences

- New plugins get settings UI without shell changes (within field types).
- Types: `string` | `number` | `boolean` | `select` initially.
- Invalid user values remain a plugin responsibility at runtime.

ADR-006: URL-loadable plugins

Context

Third-party sources/engines should not require rebuild of the PWA for experiments.

Decision

Support `loadPluginFromUrl` : fetch ES module, validate shape, register, persist install metadata for restore on boot. Example plugins published under `public/plugins/` .

Consequences

- Browser origin trust model: URL plugins are code execution.
- Security tests constrain schemes and storage-via-URL footguns.
- Offline restore needs prior successful fetch/cache.



ADR-007: Storage as a plugin

Context

Script library began as localStorage-only; cloud and git were bolted differently.

Decision

Storage is a first-class plugin kind with `list/read/write/remove` (+ optional draft/sync/status). Built-ins: `local` (IDB), `cloud` (Worker `/api/scripts`), `git` (GitHub/GitLab Contents API). Active storage in `activePlugins.storage`.

Consequences

- Manager Script Library is backend-agnostic.
 - Git commits only on explicit save; drafts local.
 - Cloud uses Bearer Pro keys and optional optimistic concurrency.
-

ADR-008: Frozen CF project id

Context

Renaming Cloudflare Pages/Worker projects severs KV/D1/R2 bindings, custom domains, and CI secrets. Product brand evolved to AXIS. The original freeze used a single id `pynescrypt-axis` for both Pages and the Worker.

Decision

Pages project is `axis`. Canonical URL `https://axis.hoox.sh` (custom domain). Preview hashes live on `*.axis.pages.dev`. The previous Pages id `pynescrypt-axis` remains a CORS legacy alias for old preview hosts.

Worker script is `worker-axis`. Canonical URL `https://worker.axis.hoox.sh` (custom domain). Health JSON `service` is `worker-axis`. The pre-rename workers.dev host (`pynescrypt-axis.<account>.workers.dev`) is treated as a legacy alias in client host matching.

Brand in UI/manifest/docs is AXIS.

Consequences

- `wrangler.toml` `name` is `worker-axis`; Pages `--project-name` is `axis`.
 - Canonical hosts: Pages `https://axis.hoox.sh`, Worker `https://worker.axis.hoox.sh`.
 - Docs call out the split explicitly (this ADR).
 - npm package name (`axis-worker`) may lag brand.
-

ADR-009: Worker proxies first

Context

In-Worker Pyodide is attractive but heavy; production needed a path immediately.



Decision

Worker `/api/run` proxies to an external Python backend first (`EXTERNAL_BACKEND`). In-Worker runtime remains scaffolded/gated. Keys, usage metering, scripts API, and stream DO can ship independently of full edge evaluation.

Consequences

- AXIS `server` engine talks to Worker URL transparently.
 - Operational dependency on Flask (or equivalent) until edge runtime matures.
 - Clear layering: Worker is data plane + auth, not necessarily the interpreter.
-

ADR-010: Durable Object stream fan-out

Context

N browser clients each opening venue WebSockets waste connections and risk rate limits.

Decision

SessionDO Durable Object: one upstream WS per session key; fan-out to N client sockets via `/api/stream`. Hibernation-friendly design on CF.

Consequences

- Stream plugins may target DO URLs (example plugin provided).
 - Session/symbol/interval query params are part of the contract.
 - Not a historical source—live only.
-

ADR-011: State namespace migration

Context

Hard-renaming storage namespaces would brick user layouts and libraries if keys changed hard.

Decision

Canonical key `pynascript.axis.v1`. On read, fall back to `pynascript.axis.v2` (and parallel library/draft keys), then **write forward**. Do not keep dual-write forever.

Consequences

- Seamless upgrade for existing browsers.
 - Persistence strips bars/lastRun/logs.
 - Tests cover migration (`tests/state.test.ts` patterns).
-



ADR-012: CORS as deploy concern

Context

Browser AXIS on origin A calling Pro API on origin B fails without CORS. Hardcoding origins in AXIS is wrong.

Decision

CORS is a backend/deploy configuration (`ALLOWED_ORIGINS` on Flask; Worker headers as deployed). AXIS documents required origins; ops sets explicit lists in production (avoid perpetual `*` outside demos).

Consequences

- Localhost regex for dev.
 - Troubleshooting centers on preflight, not engine code.
 - Static file server does not replace API CORS.
-

ADR-013: Results export in AXIS

Context

Researchers need artifacts (trades CSV, run JSON) without a separate analytics service.

Decision

Results panel owns export: download JSON of `lastRun`, CSV of closed trades, clipboard helpers. Strategy pairing and stats run client-side from engine events (`results/strategy.ts`, `results/events.ts`).

Consequences

- Export fidelity bounded by engine event quality.
 - No server-side report store required for MVP.
 - Viewer metrics $\neq$ broker statements (documented for operators).
-

ADR-014: Transport preference + connection telemetry

Context

Operators need to see **how** data and calculation move (WS vs REST vs local vs brokered), whether the live socket is actually open, and engine run latency. Naively “prefer WebSocket everywhere” is wrong: venues expose **history over REST** and **live klines over WSS**. Server engines batch-run over HTTP; Pyodide is local WASM.

Decision

1. Transport policy

- History $\rightarrow$ REST (or local mock/CSV).
- Live $\rightarrow$ **WebSocket first**, paired per source via `defaultStreamForSource` (`binance-rest` $\rightarrow$ `binance-ws`, ...).
- Engine $\rightarrow$ **prefer WS** `/ws/run` on the Pro API when available (`flask-sock`); fall back to HTTP `POST /run`. Pyodide remains local.



- Brokered → CF Durable Object / `needsProxy` streams surface as transport class `broker`.
- 2. **Honest stream state** — `connecting` until `onStatus({ state: 'open' })`; reconnect uses `reconnecting` / degraded telemetry, not false green.
- 3. **Venue streams use reconnect with exponential backoff** (`streams/reconnect-ws.ts`).
- 4. **Connection HUD** — StatusBar second row (`ConnectionHud`) reads ephemeral `store.telemetry` (SRC/STR/ENG/STO chips, tick pulse, engine latency). Persist only `telemetry.hud` prefs + `live.preferAfterLoad` / `live.rerunOn`.
- 5. **Live re-run modes** — `every-tick` (default) or `bar-close` (venue `Bar.closed` or bar time advance).
- 6. **Chart stability** — full `setDataToChart` only on history load (`chartDataGen`); live uses `appendBar`; overlay/script drawings update in place to avoid hide/show flash.

Consequences

- UI never claims WS for historical load.
- Auto-live after Load is **on by default** (`preferAfterLoad`). Turn off in Settings → Live stream.
- Plugin capabilities may declare `transport`; otherwise HUD classifies from id/capabilities.
- See [Streams](#), [UI shell](#), [Overview](#).

ADR-015: On-chain data plane

Context

AXIS began as an **OHLCV-first** chart host: `SourcePlugin` / `StreamPlugin` deliver `Bar[]` (open, high, low, close, volume) for CEX and similar venues, then engines run Pine against that series. Operators also need **non-price market structure**:

Need	Why <code>Bar</code> alone fails
Protocol TVL (USD)	Single scalar liquidity total, not OHLC
DEX pool candles	Same shape as bars, but different venue semantics, address/network keys, and page caps
Spike / unlock-style events	Discrete time markers with severity, not candles
Honest provenance	Provider, snapshot cadence, finality — not implied by “the chart symbol”

Forcing these into the primary `Bar` pipeline would corrupt scale semantics (TVL vs price), invent fake OHLC for scalar metrics, and couple wallet/signing UX to read-only analytics.

Decision

Ship a **parallel on-chain data plane** orthogonal to the OHLCV source/stream path:

1. **Plugin kind `dataset`** on the unified registry (`DatasetPlugin` in `src/plugins/types.ts`):
 - `fetchDataset(opts)` → `OnchainDataset`
 - optional `searchInstruments`
 - payload kinds: `ohlcv` | `scalar_series` | `multi_series` | `events` | `table`
 - required **provenance + finality** (`pending` | `safe` | `finalized` | `unknown`)
2. **Parallel plane modules** under `src/onchain/` (types, cache, keys, adapters, catalog, manager, events, alerts bridge) — not a new `Bar` field and not Pine output.



3. Worker allowlist proxy (`worker/src/onchain.ts` , routes under `/api/onchain/...`):

- rewrite only known DefiLlama / GeckoTerminal paths
- validate network ids and pool addresses
- short-TTL isolate cache (`X-Axis-Onchain-Cache`)
- client default bases from `store.endpoint` (`src/onchain/proxy.ts`)

4. Chart UX: attach as host-side overlays (left scale for scalars; separate series keys `onchain_*`); main market OHLCV stays on the right scale. Not wallet, not Pine plots.

```
flowchart LR
    UI[On-Chain panel / DSM] --> DS[DatasetPlugin]
    DS -->|browser| W["Worker /api/onchain/*"]
    W -->|allowlist| UP[DefiLlama / GeckoTerminal]
    DS --> OD[OnchainDataset]
    OD --> CH[Chart overlays / markers]
    OD --> AL[Alerts bridge]
    SRC[SourcePlugin Bar] --> CH
```

Alternatives considered

Alternative	Rejected because
Force into <code>Bar</code> / active source	TVL is not OHLC; faking open=high=low=close lies to engines and the price scale. Multi-protocol attach becomes multi-symbol load thrash.
Piggyback Pine <code>request.security</code> only	Needs engine + script for every host overlay; no attach UI, no provider search, no finality UI.
Browser → provider direct	Public DefiLlama / GeckoTerminal hosts often lack CORS for arbitrary AXIS origins (ADR-012).
Open reverse proxy (any URL)	SSRF risk; Worker must allowlist path shape, not pass-through arbitrary upstream.
Wallet-connected RPC as the plane	Different product (signing, accounts, private RPC). On-chain here means public analytics APIs , not MetaMask.

Consequences

- **CORS / deploy** — browsers should use `{endpoint}/api/onchain/llama|gecko` ; local Worker on `:8787` or deployed edge. Direct `baseUrl` overrides are for Node tests / trusted environments only.
- **Finality honesty** — DefiLlama TVL is typically a **daily snapshot**, not block-final chain state; Gecko OHLCV is **pool** sampling, not CEX marks. UI shows provenance lines; `synthetic` flags fabricated OHLC.
- **Not a wallet** — no signing, no injected providers, no private keys for this plane.
- **Not Pine** — overlays are host datasets; they do not replace `indicator()` / `strategy()` plots from the engine.
- **Engines unchanged** — active OHLCV source still feeds `EnginePlugin.run` ; on-chain series do not silently become script `close` .
- **Cache** — client IDB dataset cache (`instrumentCacheKey`) plus Worker short-TTL memory; operators may see stale TVL briefly after large DeFi moves.
- **Security** — Worker rejects path traversal, invalid slugs/addresses, non-GET, and non-allowlisted Gecko paths.



Phases shipped

Phase	Capability	Primary surfaces
1 — TVL	DefiLlama protocol TVL scalar history + search	<code>defillama-tvl</code> dataset, <code>src/onchain/defillama.ts</code> , llama proxy
2 — DEX	GeckoTerminal pool OHLCV + pool search	source <code>geckoterminal-ohlcv</code> , <code>src/onchain/geckoterminal.ts</code> , gecko proxy. Not a <code>DatasetPlugin</code> .
3 — Events	Derived day-over-day TVL spike/drop events (<code>tv1_spike</code> / <code>tv1_drop</code>)	<code>src/onchain/events.ts</code> → chart markers
4 — Alerts	Bridge events into alerts engine (<code>onchain_tv1_spike</code> / <code>onchain_event</code>)	<code>src/onchain/alerts-bridge.ts</code> , <code>src/alerts/engine.ts</code>

Pro-only DefiLlama surfaces (raises, unlocks via `pro-api.llama.fi`) remain out of the free Worker allowlist.

Code map

Path	Role
<code>src/onchain/types.ts</code>	<code>OnchainDataset</code> , instruments, finality
<code>src/onchain/catalog.ts</code>	Built-in dataset registration
<code>src/onchain/manager.ts</code>	Attach / hide / detach store wiring
<code>src/onchain/proxy.ts</code>	Resolve Worker llama/gecko bases
<code>worker/src/onchain.ts</code>	Allowlisted proxy + health
<code>src/plugins/types.ts</code>	<code>DatasetPlugin</code> contract

Related docs

- [Datasets](#) — plugin contract
- [On-Chain data \(end user\)](#) — operator guide
- [Worker](#) — `/api/onchain/...` on the edge route table
- [ADR-001](#), [ADR-009](#), [ADR-012](#)

ADR-016: Provider-locked market data

Context

AXIS composes source × stream × engine, but **OHLCV aggregation is not composable**. Mixing Binance history with OKX live (or Kraken watchlist quotes on a Binance chart) silently poisons indicators, compare, watchlist, and cache. Prior to this ADR, source and stream were independently selectable, venue detection used plugin-id substrings, and the Binance synthetic fallback made network errors look like real data.

Key problems:



Issue	Risk
Source and stream independently selectable in Topbar	User loads Binance REST + OKX WS — mixed candles
DSM <code>sourceId</code> seeded once from <code>store.source</code>	Backfill targets a different venue than the chart
Watchlist Kraken → Binance tickers	Mixed-provider quotes
Coinbase WS ticker → synthetic bars	Not exchange candles; OHLCV ≠ REST history
Binance <code>fallback: true</code> synthesizes random walk	Chart looks "live" with fake prices


Decision

Introduce `ProviderSession` — a first-class locked market-data identity that all aggregators inherit:

1. **ProviderSession** (`src/data/provider.ts`): `{ id, sourceId, streamId, venue, market, authMode, credentialId, gateway }`. Persisted without secrets. Every aggregator reads `getActiveProvider()` instead of raw URLs or plugin-id substrings.
2. **Auto-pairing**: Source changes always re-pair the stream via `defaultStreamForSource`. Explicit mismatch is allowed but shows a HUD `⚠ pair · Fix` chip.
3. **Plugin capabilities**: `venue, market, klineStream` on `PluginCapabilities`. Venues with `klineStream: true` emit exchange candles (not ticker buckets).
4. **Coinbase WS**: switched from ticker buckets to Advanced Trade venue candles, folded into chart interval via `foldVenueCandle`.
5. **Binance fallback**: defaults `off` (`fallback: false`). Network errors must not look like real data.
6. **Watchlist lock**: no silent Binance fallback for Kraken, Gecko, or unknown venues. Each shows a clear "no live mux" message.
7. **Credential vault** (`src/data/credentials.ts`): in-memory session-only vault for API key/secret/passphrase. Secrets never reach `persist()`, `pluginsConfig`, error-share, or CHANGELOG dumps. `redactSecrets` and `stripSecretKeys` enforce this.
8. **Venue HMAC signers** (`src/data/venues/`): thin Binance / OKX / Bybit / Coinbase / Kraken / MEXC signers. No CCXT in the browser.
9. **Signed Binance klines**: vault key → HMAC direct fetch → Worker `/api/market/binance/signed/klines` (request-scoped `X-Exchange-Key` / `X-Exchange-Secret`). 401/403 stays thrown — bad keys must not silently mix public klines.
10. **Cache key**: includes `providerId|market|authMode|symbol|interval`. Authenticated and public candles do not share cache slots.



Ownership

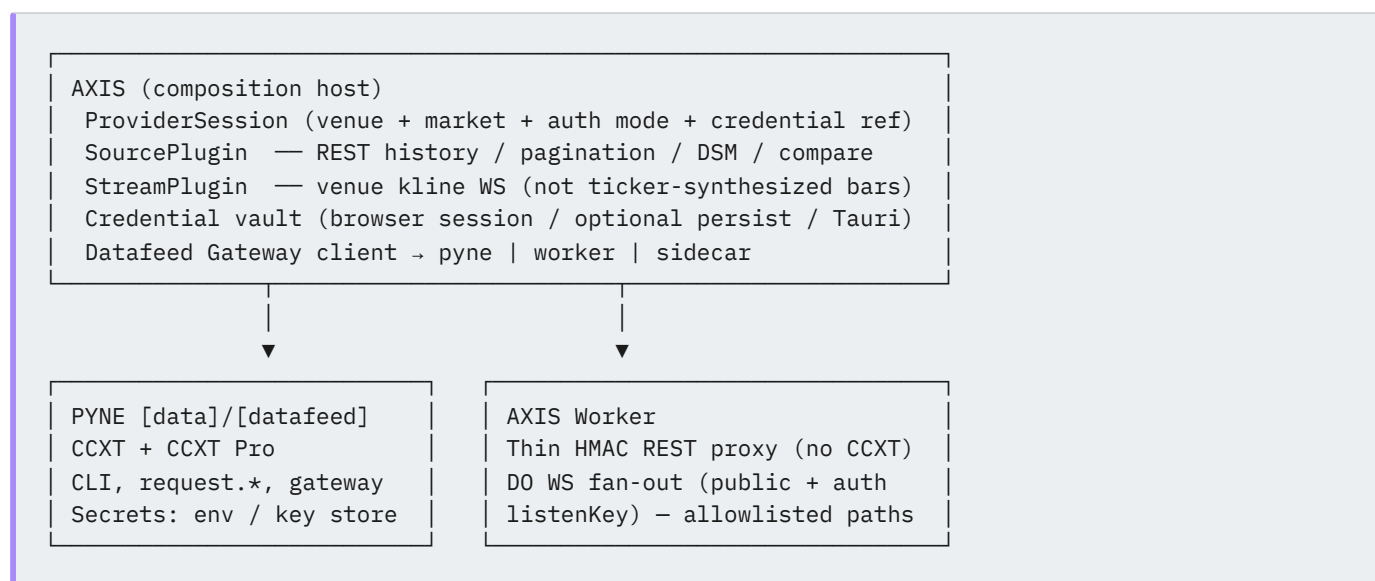

Alternatives considered

Alternative	Rejected because
Bundle CCXT in browser	~1 MB+ bundle, Node APIs, isolate CPU, CORS issues
CCXT in Cloudflare Worker	Bundle size, 128 MB memory, shared rate-limit IP, not designed for 100-exchange routing
Keep venues as raw URL substrings	Silent venue mismatches poison aggregation correctness
Pluggable venue resolver	Over-engineered; first-party venues are a fixed set of 5

Consequences

- **Correctness** — aggregation (indicators, compare, watchlist, cache, DSM) inherits a locked venue. Mixed-provider bugs are structurally prevented.
- **Auth path** — public remains the default. Auth is a capability upgrade on the same provider, not a second source id.
- **Secret safety** — vault is RAM-only in v1. Tauri keychain / AES-GCM durable wrap is Phase 1.5. `pluginsConfig` and error-share are stripped of secret keys.
- **CCXT stays in PYNE** — server-side only. AXIS calls the gateway with session handles, never raw secrets in `/run`.
- **Long-tail exchanges** — AXIS `ccxt-rest` / `ccxt-ws` plugins that talk to a PYNE or Bun sidecar gateway. First-party venues stay thin native adapters.



Key files

Path	Role
src/data/provider.ts	ProviderSession type, buildProviderSession, defaultStreamForSource
src/data/credentials.ts	In-memory vault, putCredential, redactSecrets
src/data/signed-fetch.ts	Vault → HMAC → direct or Worker proxy
src/data/venues/	Per-venue HMAC signers (binance, okx, bybit, coinbase, kraken)
src/plugins/active.ts	getActiveProvider()
src/plugins/types.ts	PluginCapabilities.venue, .market, .klineStream
src/store/index.ts	setActivePlugin auto-pairing, syncProviderSession
src/ui/ConnectionHud.tsx	Venue label, pairing Fix button
src/ui/SettingsDialog.tsx	Data tab (exchange credentials)
src/ui/error-share.ts	stripSecretKeys redaction
worker/src/market.ts	Signed Binance klines proxy

Related docs

- [Sources](#) — source plugin catalog
- [Streams](#) — stream plugin catalog
- [Data Source Manager](#) — DSM guide
- [Topologies](#) — composition models
- [ADR-001](#), [ADR-009](#)

ADR lifecycle

New ADRs should:

1. State context, decision, consequences.
2. Cross-link code paths.
3. Avoid re-litigating ADR-002 without supersession note.

See also

- [Overview](#)
- [Topologies](#)
- [Plugins contracts](#)
- [Datasets](#)

TOPOLOGIES

COPYRIGHT (C) 2024-2026 JANGO_BLOCKCHAINED

THIS FILE IS PART OF PYNESCRYPT.

PYNESCRYPT IS FREE SOFTWARE: YOU CAN REDISTRIBUTE IT AND/OR MODIFY

IT UNDER THE TERMS OF THE GNU AFFERO GENERAL PUBLIC LICENSE AS PUBLISHED BY

THE FREE SOFTWARE FOUNDATION, EITHER VERSION 3 OF THE LICENSE, OR

(AT YOUR OPTION) ANY LATER VERSION.

PYNESCRYPT IS DISTRIBUTED IN THE HOPE THAT IT WILL BE USEFUL, BUT WITHOUT ANY WARRANTY; WITHOUT EVEN THE IMPLIED WARRANTY OF

MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SEE THE GNU AFFERO GENERAL PUBLIC LICENSE FOR MORE DETAILS.

YOU SHOULD HAVE RECEIVED A COPY OF THE GNU AFFERO GENERAL PUBLIC LICENSE

ALONG WITH PYNESCRYPT. IF NOT, SEE

[HTTPS://WWW.GNU.ORG/LICENSES/](https://www.gnu.org/licenses/).

SPDX-LICENSE-IDENTIFIER: AGPL-3.0-ONLY

title: "Topologies" description: "AXIS deploy and dev topologies: Vite+Flask, static PWA, Cloudflare Pages+Worker, offline Pyodide lab, and local Bun sidecar."

TOPOLOGIES

Concrete process and network shapes for AXIS. Choose a topology; then compose plugins inside it ([recipes](#)).



Abstract

Topology	AXIS	Calc	Live	Library
Dev desk	Vite :3000	Flask :5002	Binance WS direct	local
Static demo	axis_pwa_server :8081	Flask or remote	venue / mock	local
Edge	CF Pages	Worker → Flask	DO fan-out optional	cloud
Offline lab	any AXIS	Pyodide	mock-poll	local
Dev desk + sidecar	Vite :3000	Flask :5002	Bun sidecar :5003	local

Topology A — Dev desk

```
flowchart LR
  V[Vite AXIS app :3000] -->|REST klines| BN[Binance]
  V -->|WS klines| BN
  V -->|POST /run| F[Flask :5002]
  F --> PYNE[pynescrypt runtime]
```

Bring-up

```
make run
bun install && bun run dev
```

Notes: Vite may proxy `/run` ; Settings endpoint can still point absolute at `:5002` . CORS must allow Vite origin.

Topology B — Static PWA + Pro API

```
flowchart LR
  S[axis_pwa_server :8081] --> DIST[dist/]
  DIST -->|browser| API[Flask :5002]
  DIST --> BN[Venue APIs]
```

```
bun run build
python3 axis_pwa_server.py
make run    # separate process
```

VPS demo pattern: systemd units for `axis-pwa` and `pynescrypt-api` ; `ALLOWED_ORIGINS` includes AXIS origin.



Topology C — Cloudflare AXIS at the edge

```
flowchart TB
    U[Browser] --> P[CF Pages axis.hoox.sh]
    U --> W[Worker worker.axis.hoox.sh]
    W -->|proxy /api/run| F[EXTERNAL_BACKEND Flask]
    W --> KV[KV keys/usage]
    W --> D1[D1 scripts]
    W --> DO[SessionDO stream]
    DO --> UP[Upstream venue WS]
    U -->|optional direct| BN[Venue REST/WS]
```

Deploy sketch

```
axis deploy
# or: cd worker && bun run deploy
bun run build
wrangler pages deploy dist --project-name=axis
```

Ids: Pages project `axis` at `https://axis.hoox.sh`; Worker script `worker-axis` at `https://worker.axis.hoox.sh` (ADR-008).

AXIS config:

- Engine `server`, endpoint = Worker origin
- Storage `ccloud`, same origin + API key
- Stream: direct venue or DO-backed plugin

Topology D — Offline lab

```
flowchart LR
    G[UI] --> MW[mock-walk]
    G --> MP[mock-poll]
    G --> PY[pyodide engine]
    G --> IDB[(local storage plugin)]
```

No Flask, no venue. Requires vendored pyodide + wheels on origin once.

Topology E — Git-centric research

Any of A–C for calc/data; storage axis = `git`. Forges are orthogonal network peers:

```
AXIS --storage:git--> api.github.com | gitlab
AXIS --engine:server--> Flask/Worker
AXIS --source--> venue or CSV
```

Topology F — Dev desk + Bun sidecar (CCXT Pro)

For users who want authenticated WS feeds from any CCXT-supported exchange without running Flask. The sidecar (`packages/datafeed/`) mirrors the PYNE datafeed gateway contract.



```
flowchart LR
  V[Vite AXIS app :3000] --> S[Bun sidecar :5003]
  S --> REST[REST OHLCV]
  S --> WS[WS watch]
  S --> EX[EX[CCXT exchanges]]
  V --> POST[POST /run]
  POST --> F[Flask :5002]
  F --> PYNE[pynescrypt runtime]
  V --> direct[direct WS]
  direct --> BN[Venue APIs]
```

```
bun run dev          # Vite :3000
bun run dev:datafeed # Bun sidecar :5003
# in separate terminals, or combine in a Procfile
```

Gateway contract (same as PYNE datafeed):

Endpoint	Method	Description
/datafeed/ohlcv?exchange=&symbol=&timeframe=	GET	Historical OHLCV
/datafeed/markets?exchange=	GET	Available markets
/datafeed/watch?exchange=&symbol=&timeframe=	WS	Live bar stream
/datafeed/session	POST	Store credentials (RAM only)
/health	GET	Sidecar health

Notes: Credentials stay in RAM only (never persisted). The sidecar is optional — public venues work without it via direct browser WS.

Port map (defaults)

Service	Port
Vite dev	3000
Flask Pro API	5002
Bun datafeed sidecar	5003
Static PWA server	8081
Wrangler Worker	8787

Comparison

Concern	A Dev	B Static	C Edge	D Offline	F Sidecar
HMR	yes	no	no	n/a	yes
PWA SW realism	partial	full	full	full	partial
Multi-tenant keys	no	no	yes	no	local only
Ops complexity	low	medium	high	low	low
Fidelity	high (Flask)	high	high via proxy	engine-dependent	high (CCXT Pro)



Failure modes by topology

Topology	Typical break
A	Flask not running; CORS localhost vs 127.0.0.1 mismatch
B	Stale SW; missing <code>dist</code> pyodide assets
C	Unbound KV/D1; wrong project name; EXTERNAL_BACKEND down
D	First visit offline; SPA fallback for wheels

Internals

Path	Role
<code>vite.config.ts</code>	Dev/build
<code>axis_pwa_server.py</code>	Static host
<code>worker/wrangler.toml</code>	CF name + bindings
<code>packages/cli/</code>	AXIS CLI (setup / deploy / health)
<code>worker/README.md</code>	Edge ops

See also

- [ADR-008, 009, 010, 012](#)
- [Installation](#)
- [Worker](#)
- [DevOps](#)

STATE NAMESPACES

COPYRIGHT (C) 2024-2026 JANGO_BLOCKCHAINED

THIS FILE IS PART OF PYNESCRYPT.

PYNESCRYPT IS FREE SOFTWARE: YOU CAN REDISTRIBUTE IT AND/OR MODIFY

IT UNDER THE TERMS OF THE GNU AFFERO GENERAL PUBLIC LICENSE AS PUBLISHED BY

THE FREE SOFTWARE FOUNDATION, EITHER VERSION 3 OF THE LICENSE, OR

(AT YOUR OPTION) ANY LATER VERSION.

PYNESCRYPT IS DISTRIBUTED IN THE HOPE THAT IT WILL BE USEFUL, BUT WITHOUT ANY WARRANTY; WITHOUT EVEN THE IMPLIED WARRANTY OF

MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SEE THE GNU AFFERO GENERAL PUBLIC LICENSE FOR MORE DETAILS.

YOU SHOULD HAVE RECEIVED A COPY OF THE GNU AFFERO GENERAL PUBLIC LICENSE

ALONG WITH PYNESCRYPT. IF NOT, SEE

[HTTPS://WWW.GNU.ORG/LICENSES/](https://www.gnu.org/licenses/).

SPDX-LICENSE-IDENTIFIER: AGPL-3.0-ONLY

title: "State namespaces" description: "AXIS persistence keys, key migration, pluginsConfig, editor docs, library IDB, and URL hash state."

STATE NAMESPACES

AXIS persistence is multi-homed: **layout/config** in localStorage, **script library** in IndexedDB (or remotes), **ephemeral run data** in memory, optional **URL hash** for shareable slices.



Abstract

Namespace	Medium	Purpose
pynescrypt.axis.v1	localStorage	App shell state
pynescrypt.axis.editor.doc	localStorage	Editor document backup
pynescrypt.axis.storage	IndexedDB	Local library
pynescrypt.axis.library.v1	localStorage fallback	Library if no IDB
pynescrypt.axis.library.draft	localStorage	Draft buffer
Plugin install list	localStorage	URL plugins restore
store.bars / lastRun / logs	memory	Session only

Contract / product identifiers (not storage keys):

```
pynescrypt.axis.plugins.v1  # conceptual plugin contract id
axis                        # CF Pages project id
axis.hoox.sh                # Pages custom domain
worker-axis                 # CF Worker script id
worker.axis.hoox.sh         # Worker custom domain
```

Conceptual model

```
flowchart TB
    subgraph Persist
        LS[localStorage axis.v1]
        ED[editor.doc]
        IDB[(IDB scripts)]
    end
    subgraph Memory
        BARS[bars]
        LR[lastRun]
        LOGS[logs]
    end
    UI[UI] --> LS
    UI --> BARS
    UI --> LR
    LIB[storage local] --> IDB
    LEG[older keys] -->|migrate on read| LS
```

App state key pynescrypt.axis.v1

Solid store (src/store/index.ts):

Persisted (representative):

- Market: symbol , interval , exchange , source , engine , endpoint
- activePlugins { source , stream , engine , storage }
- pluginsConfig
- Layout: theme , editor , watchlist (named lists + active symbols), panel open/width/height



- `panes` , `scripts` (indicator list metadata)
- `live.streamId` (and related live flags carefully)
- `drawings` (user annotations)
- Flat mirrors: `source` / `engine` aligned via `setActivePlugin`

Explicitly omitted on persist:

- `bars`
- `lastRun`
- `logs`

Debounced write (~200ms).

Legacy migration

Read order:

1. `pynescrypt.axis.v1`
2. else `pynescrypt.axis.v2`

On older-key hit: copy forward into `pynescrypt.axis.v1`.

Legacy vanilla `state.js` uses the same `STORAGE_KEY` constant for the pre-Solid shell.

pluginsConfig

Map of configuration objects. Preferred keys:

```
`${kind}:${id}` e.g. storage:cloud, storage:git, engine:server
```

Bare ids may still be read for compatibility (`cloud` , `git`). Values feed `configSchema` resolution inside plugins.

Sensitive fields: `apiKey` , `git token` — browser-local; treat profile as secret store.

Editor document

Key	Role
<code>pynescrypt.axis.editor.doc</code>	Draft / shared doc
Bridge messages	Popout synchronization

Popout mode uses `editor-bridge` + shared storage so detached windows share source without re-fetching library.

Local library IDB

Constant	Value
DB name	<code>pynescrypt.axis.storage</code>
Version	1
Stores	<code>scripts</code> , <code>kv</code>



Migration flags (`pynescrypt.axis.library.migrated`) prevent re-import loops from older library keys:

- `pynescrypt.axis.library.v1`
- `pynescrypt.axis.library.legacy`

Cloud / git (remote namespaces)

Not browser keys—server-side partitions:

Backend	Partitioning
cloud	Hash of API key on Worker; D1 table or memory
git	<code>owner/repo@branch</code> + <code>basePath</code>

Revisions: cloud may expose `revision` / If-Match; git uses blob SHAs via forge APIs.

URL hash state (legacy helper)

`src/state-hash.js` (legacy state path):

Feature	Detail
Keys	symbol, interval, engine, source, stream, timeRange
Script	base64 in hash if short
Cap	~2000 chars
API	<code>applyHashState</code> , <code>pushHashState</code> , <code>watchHashState</code>

Solid-first product may not wire this by default; treat as optional share mechanism. Prefer library export + recipe docs for durable shares.

Invariants

1. Migration is **read-repair** to AXIS keys.
2. Never persist full OHLCV in `axis.v1` .
3. `setActivePlugin` keeps flat fields coherent.
4. Logs panel open state forced closed on hydrate (noise control).
5. Drawing tool resets to `cursor` on hydrate; geometries restore.

Failure modes

Issue	Effect	Mitigation
QuotaExceeded	persist no-op	Export library; shrink drawings
Poisoned JSON	load defaults	Security tests; clear key
Split profiles	“missing” library	Same browser profile
Stale activePlugins id	missing plugin	Fall back / reselect built-in



Internals

Path	Role
src/store/index.ts	Solid persistence
src/store/types.ts	AppState
src/state.js	Legacy state
src/state-hash.js	Hash sync
src/storage/local.ts	IDB library
src/plugins/loader.ts	Installed plugin list

See also

- [ADR-011](#)
- [AXIS store](#)
- [Script library](#)



DRAWINGS AND PLOT PARITY

Plan to make user drawing tools and Pine plot/drawing outputs match PYNE and render with correct pane, color, geometry, and settings.

DRAWINGS AND PLOT PARITY

AXIS has two independent render paths:

Path	Source	Paint
User drawings	Toolbar tools	<code>DrawingLayer</code> user SVG group, editable
Pine output	PYNE <code>RunResult</code>	plots → LWC series; shapes/barcolor → candle markers; bgcolor → histogram; fill → SVG; line/label/box/polyline/linefill → script SVG; tables → HUD

This plan is the work list from a four-agent audit of AXIS (`src/chart` , `src/results` , `src/indicators/runner.ts`) against PYNE (`pynescrypt` `drawing.py` , `evaluator.py` , `host.py`).

Phases

P0 — AXIS correctness (this pass)

User tools and apply-pipeline bugs that do not wait on a PYNE export change.

- 1-point body-move** — `shiftDrawing` only special-cased `text` / `priceLabel` . Shift any drawing with `p1` (and `points[]` when present): note, flag, crossline, anchoredText, arrowMarkUp/Down.
- p3 / extra vertex handles** — `hitTestHandle` / `resizeDrawing` only `p1/p2`. Add `p3` (and remaining `points[i]` as `p3` for the third anchor). Paint extra handles after registry paint.
- Linefill GC** — `garbageCollectScriptDrawings` early-return ignored `skip.linefill` .
- Polyline / linefill overlay** — copy `force_overlay` and polyline `fill_color` → `bgcolor` .
- Stale SVG** — silent live re-run with `drawings: []` must clear script drawings.
- Pane routing** — `bgcolor` and `fill()` use the script pane when `overlay=false` (`syncBgcolorBands(paneId)` , `ensureScriptPaneLayer` for fills). `plotshape` / `plotchar` / `plotarrow` attach to a series on that pane when possible; otherwise stay on price (LWC markers need a host series).

P1 — User-tool settings (AXIS)

Done:

- Shared style bar: color (presets + custom), width, dash, fill for shapes / ranges / fib / highlighter / positions.
- Per-tool extras via `src/chart/drawings/tool-settings.ts` + settings popover (`axis-drawing-settings`).
- Last-used style per kind (`drawingPrefs.byKind`).
- `extendLeft` / `extendRight` UI + paint (trend, ray, extend, info line, channel, fib).
- Fib level editor, reverse, show % / price, fill between levels.
- Text re-edit (popover + double-click), font size.
- Per-drawing lock in the style bar (unlock bypasses `updateSelected` lock gate).
- Long/short risk-reward (`meta.rr`).



- Highlighter width honors `style.width` (create default 8).
- hray: 1-click (price only).
- xabcd / headShoulders: commit on 5th point.

P2 — PYNE export (pynescrypt repo)

AXIS cannot paint fields the engine never serializes.

Gap	Where	Needed on the wire
Table cell keys <code>(row,col)</code> vs <code>(col,row)</code>	<code>drawing.py</code> <code>table.cell</code> vs <code>cell_set_*</code>	One index order
Table style	<code>export_for_api</code>	halign, valign, width, tooltip, text_size, borders
<code>table.cell</code> kwargs	ctor	width, halign, valign, size
plotshape Y / <code>location.absolute</code>	<code>_coerce_plot_shape</code>	keep numeric series (or <code>{y, on}</code> cells)
plotbar / plotcandle	evaluator	open/high/low/close (or sibling titles in <code>plot_meta</code>)
<code>fill()</code> compile / untitled plots	host + evaluator	<code>plot1</code> / <code>plot2</code> series keys + per-bar fill color column
Positional <code>plot(..., linewidth)</code>	<code>evaluator.py</code> ~425	Pine order: series, title, color, linewidth, style
plotarrow	evaluator	<code>colorup</code> / <code>colordown</code> / minheight / maxheight
<code>offset</code> , <code>force_overlay</code> , <code>histbase</code>	<code>_pack_interpret_plot_columns</code>	remaining plot_meta fields (display is packed)
Polyline	export	<code>fill_color</code> , <code>curved</code> , <code>force_overlay</code>
Box / label extras	export	closed, extend, text_*, tooltip, border

P3 — Remaining Pine paint

Done this pass:

- Hide-drawings toggle includes script SVG + fill bands (all pane layers).
- Label `yloc` pad (8px off wick); `label.style_text_outline` as outlined text.
- First `addIndicator` re-owns plot fills / script drawings / plotshape (`EDITOR_RUN_KEY` → script id).
- Histogram `histbase` from `plot_meta` (default 0). PYNE still needs to serialize it for live values.
- Pine `display.*` (`none` / `pane` / `data_window` / `price_scale` / `status_line` / `all`) on plot, hline, shapes, fill, bgcolor, barcolor.

Still open:

- `location.top` / `bottom` = pane edges, not bar (LWC markers only have above/below/in bar).
- Per-bar `plot(..., color=expr)`, plotarrow length (`colorup` / `colordown` / minheight / maxheight wait on PYNE).



Invariants

- User drawings $\neq$ Pine drawings. Do not share hit-testing or magnet with script SVG (`pointer-events: none`).
- `overlay=false` plots, fills, bgcolor, and shapes belong on `ind_*` unless `force_overlay` .
- `barcolor()` stays on price candles.
- Color sanitize: `#rgb(a)` , `#rrggbb(aa)` , `rgb/rgba` . Unknown $\rightarrow$ VOID indigo for **user** tools; Pine should keep engine hex (including `#RRGGBBAA`).
- GC caps match Pine: 50 default, 500 lines/labels/boxes, 100 polylines. Linefill cap is AXIS-only until PYNE emits `max_lines_fills_count` .

Tests

- `shiftDrawing` / `resizeDrawing` for 1-pt and 3-pt kinds.
- Linefill GC overflow.
- Polyline `force_overlay` + `fill_color` .
- Runner: bgcolor/fill target pane when `overlay=false` (unit with a fake manager if needed).
- PYNE: table cell key, fill meta, plotshape Y (in the pynescrypt repo).