


Authorization code function description document

```
D:\BaiduNetdiskDownload\0714>java -jar ruoyi-admin.jar
=====
LICENSE VERIFICATION FAILED - System cannot start!
Reason: License verification failed
Machine Code: CFE8-A30E-97ED-7A03-9D05

Contact your supplier for a valid license code.
Put the license code into config/license.key and restart.
=====
```

UserWhen running the jar package without an authorization code, with an invalid code, or with an expired code

The user can send the machine code shown in the figure (which collects the CPU serial number, motherboard serial number, first valid MAC address, and disk serial number, then formats them into a human-readable machine code after SHA-256 hashing) to the vendor. The vendor can generate an authorization code by running a specific jar file for authorization code generation.

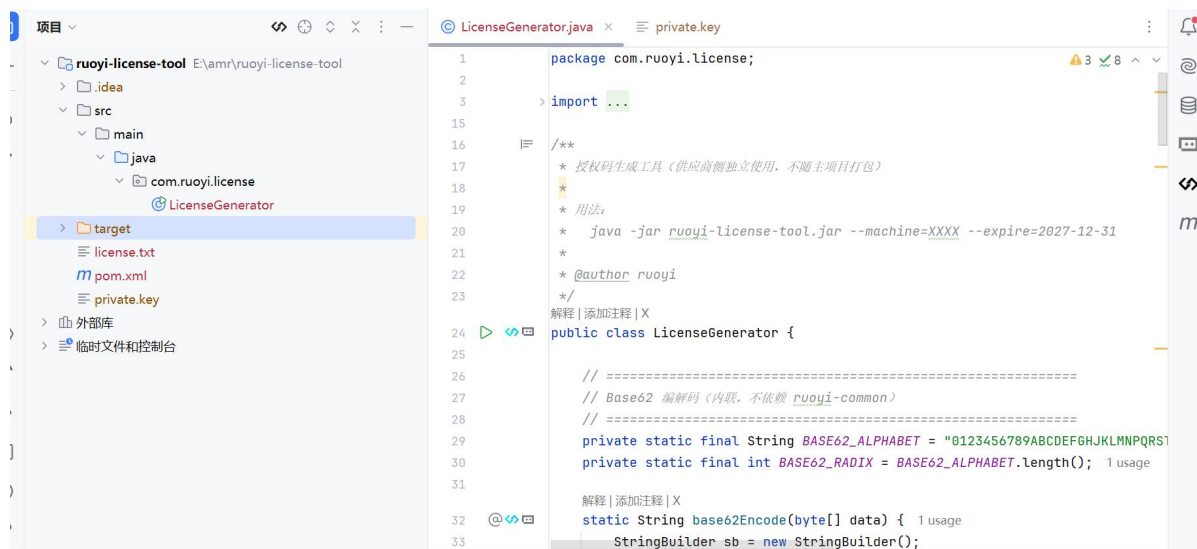

Authorization code function description document

```
E:\amr\ruoyi-license-tool\target>java -jar ruoyi-license-tool-1.0.0.jar --machine=CFE8-A30E-97ED-7A03-9D05 --expire=2027-12-31
=====
License generated successfully
=====
Machine : CFE8-A30E-97ED-7A03-9D05
Expire : 2027-12-31
License : GQ9PgxnHn1RJyM56jw5pkgWjREnUp8vwpRnL1WF61JeAHFsTbsPUhcN68iQKtKrCWUZvYN7v6FtoEt5U3oz1okbZ9nY6BNGtLvF0WAsfVzK
7hoqXKNSw38eZqozVcxkaXX6NP0MLaGaEfAVDPixMNuyz4jsyePnoaMabCu0wyRnBADzknuXZzw7SbwyVDS1q3bQMtkekQ1gsgrqxGY2rY2Z53zLwgjsnMQ
heVfnCvt8C364ixPvCshnBUZ73Hw489TPA9pvPKu1XkDR7gyhi2Pxfw8FjAymocx2qth5FB7Wx3jjf8FeMVRXaXUnqqfKv5FgeXon3MkEauGZKuMX2Sb0ViC
aLF7K4YXhoxF9VydiUHJyE8A0uAKMuadWVvsjpEM6aPCfuZXPpXTeEau7m1cqY7xWvmsAC6H45rHqRyNfRSPRUh9PBYaS1V7WUFSNa6A8HgMGvqbbsR9Aahg
VnzPC03xuhc2Q3xg05BFKuePLkTxrhg47WTFwFD3AibPbXPTQdL46hb9Tii9cg
Saved to : E:\amr\ruoyi-license-tool\target\license.txt

Send [license.txt] to the customer.
Customer puts it as config/license.key

E:\amr\ruoyi-license-tool\target>
```

At runtime, specify the user's machine code and expiration time (the private key is stored in the private.key file shown above and can be read automatically by the program). In the figure, "machine" represents the user's machine code, "expire" represents the expiration time, and "license" represents the authorization code.



此电脑 > Data (D:) > BaiduNetdiskDownload > 0714 >			
排序 查看 ...			
名称	修改日期	类型	大小
config	2026/7/15 18:10	文件夹	
nginx	2026/7/14 11:39	文件夹	
Redis-x64-3.0.504	2026/7/14 14:17	文件夹	
Ezhan.jar	2026/7/14 17:48	Executable Jar File	96,324 K
Ezhan_backup.sql	2026/7/14 18:02	SQL 文件	94 K
ruoyi-admin.jar	2026/7/15 18:06	Executable Jar File	96,336 K
ry_20250522.sql	2026/7/11 10:25	SQL 文件	72 K
start.bat	2026/7/2 12:11	Windows 批处理文件	2 K
stop.bat	2026/7/2 12:09	Windows 批处理文件	1 K

Place
the

authorization code in \config\license.key to run normally.

```
D:\BaiduNetdiskDownload\0714>java -jar ruoyi-admin.jar
=====
License verified successfully
Expires at: 2027-12-31T23:59:59
=====
Application Version: 3.9.1
Spring Boot Version: 4.0.3
EZHAN
? Ezhan ?
=== 一站式解决方案 ===

19:18:46.038 [background-preinit] INFO  o.h.v.i.util.Version - [<clinit>,18] - HV000001: Hibernate Validator 9.0.1.Final
19:18:46.086 [main] INFO  c.r.RuoYiApplication - [logStarting,54] - Starting RuoYiApplication using Java 21.0.5 with PID
35608 (D:\BaiduNetdiskDownload\0714\ruoyi-admin.jar started by 龔?in D:\BaiduNetdiskDownload\0714)
19:18:46.086 [main] DEBUG c.r.RuoYiApplication - [logStarting,55] - Running with Spring Boot v4.0.3, Spring v7.0.5
19:18:46.086 [main] INFO  c.r.RuoYiApplication - [logStartupProfileInfo,658] - The following 1 profile is active: "druid"
19:18:47.931 [main] INFO  o.a.c.h.Http11NioProtocol - [log,168] - Initializing ProtocolHandler ["http-nio-8080"]
19:18:47.932 [main] INFO  o.a.c.c.StandardService - [log,168] - Starting service [Tomcat]
19:18:47.932 [main] INFO  o.a.c.c.StandardEngine - [log,168] - Starting Servlet engine: [Apache Tomcat/11.0.18]
19:18:48.614 [main] DEBUG c.r.f.s.f.JwtAuthenticationTokenFilter - [init,236] - Filter 'jwtAuthenticationTokenFilter' co
```