```sql
--airline -- flights -- airport -- passengers -- booking -- baggage --baggage_check

---task 1
SELECT * FROM airline;

SELECT * FROM flights f
JOIN airline a ON f.airline_id = a.airline_id
WHERE a.airline_name = 'KazAir';


---- task 2
SELECT
    f.flight_id,
    f.sch_departure_time,
    f.sch_arrival_time,
    ap.airport_name AS departing_airport_name,
    ap.city AS departing_city
FROM flights f
JOIN airport ap ON f.departing_airport_id = ap.airport_id;

---- ещё 3


SELECT a.airline_id, a.airline_name
FROM airline a
LEFT JOIN flights f
       ON f.airline_id = a.airline_id
      AND f.sch_departure_time >= DATE_TRUNC('month', CURRENT_DATE) + INTERVAL '1 month'
      AND f.sch_departure_time <  DATE_TRUNC('month', CURRENT_DATE) + INTERVAL '2 months'
WHERE f.flight_id IS NULL



----- task4
SELECT p.passenger_id, p.first_name, p.last_name, p.passport_number
FROM booking b
JOIN passengers p ON p.passenger_id = b.passenger_id
WHERE b.flight_id = 10
ORDER BY p.last_name;

-------- 5

SELECT f.flight_id,
       ROUND(AVG(b.ticket_price), 2) AS avg_price,
       SUM(b.ticket_price)           AS total_price,
       MAX(b.ticket_price)           AS max_price,
       MIN(b.ticket_price)           AS min_price
FROM flights f
JOIN booking b ON b.flight_id = f.flight_id
GROUP BY f.flight_id
ORDER BY f.flight_id;
```

```sql
---------- 6

SELECT f.flight_id, al.airline_name, dep.airport_name AS departure_airport,
       arr.airport_name AS arrival_airport, arr.country AS destination_country
FROM flights f
JOIN airline al  ON al.airline_id  = f.airline_id
JOIN airport dep ON dep.airport_id = f.departing_airport_id
JOIN airport arr ON arr.airport_id = f.arriving_airport_id
WHERE arr.country = 'Kazakhstan'
ORDER BY f.flight_id;

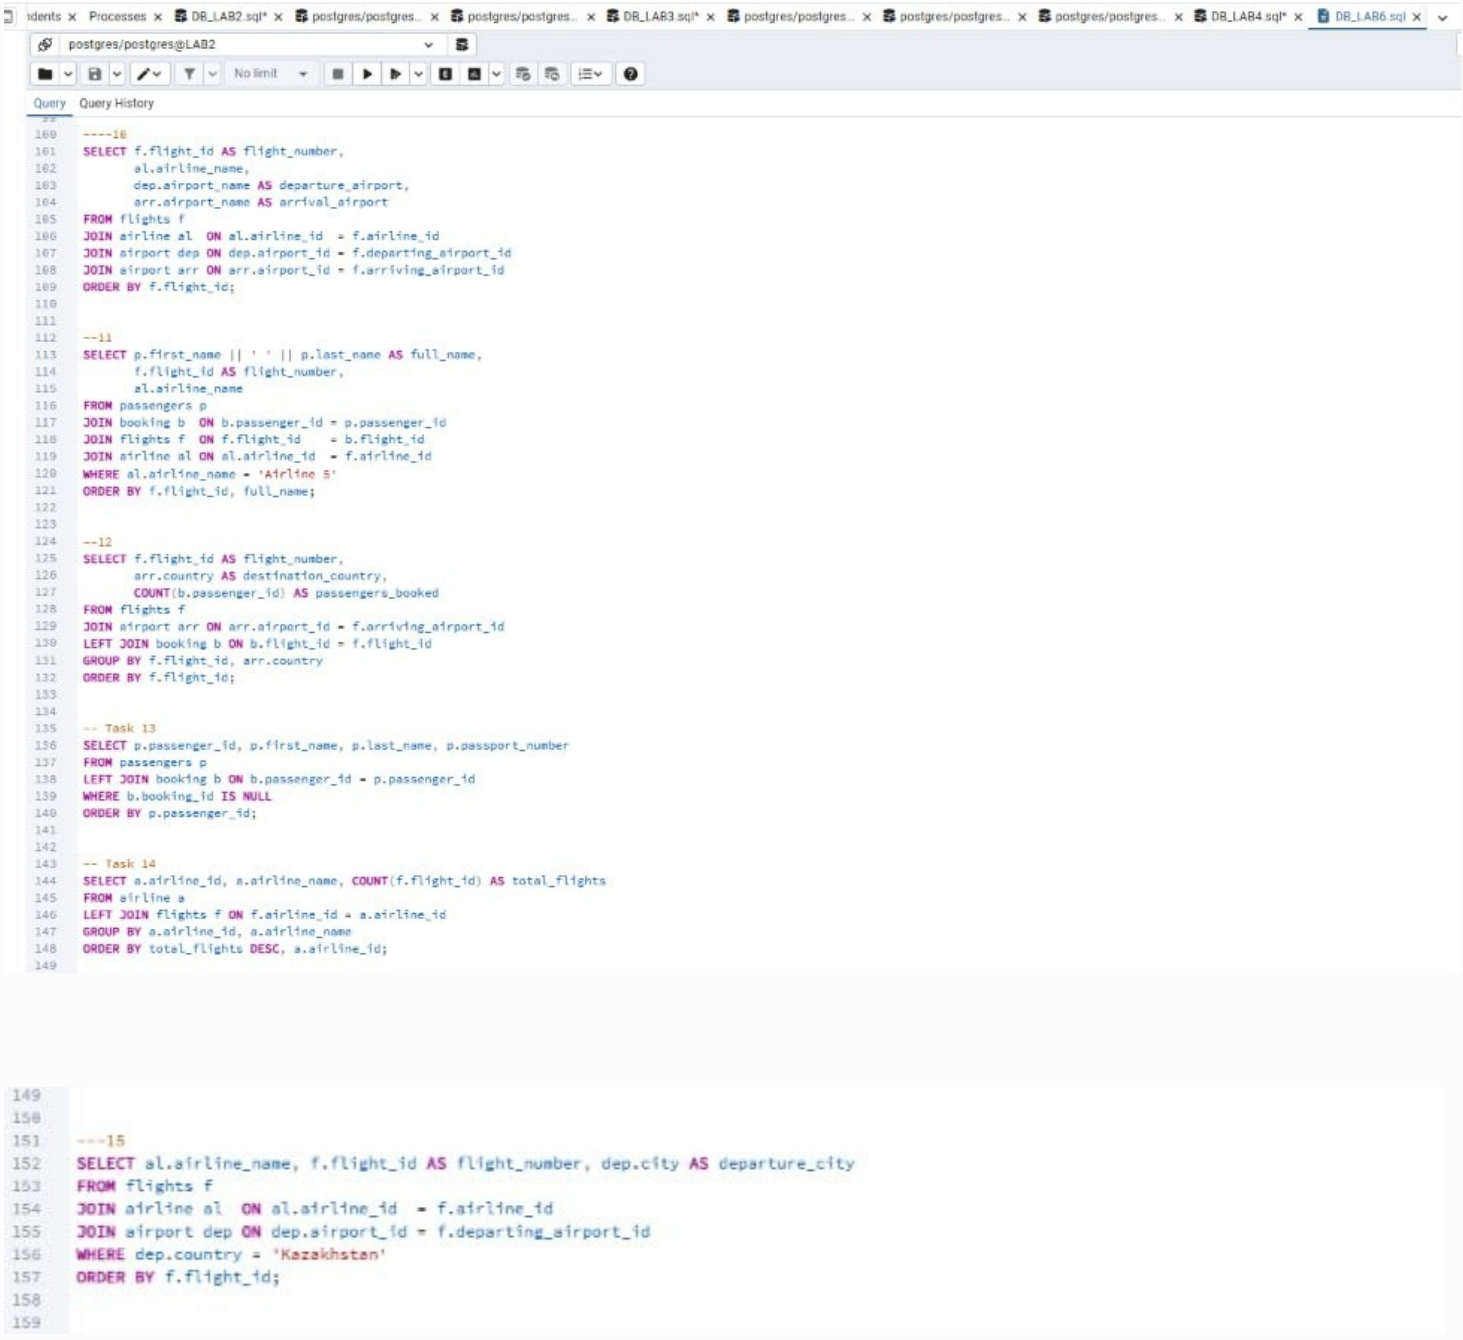

---------7
SELECT DISTINCT p.passenger_id, p.first_name, p.last_name, p.date_of_birth,
       arr.city AS arrival_city, arr.country AS arrival_country
FROM passengers p
JOIN booking b   ON b.passenger_id = p.passenger_id
JOIN flights f   ON f.flight_id    = b.flight_id
JOIN airport arr ON arr.airport_id = f.arriving_airport_id
WHERE p.date_of_birth > CURRENT_DATE - INTERVAL '18 years'
ORDER BY p.passenger_id;


------8
SELECT p.first_name || ' ' || p.last_name AS full_name,
       p.passport_number,
       f.act_arrival_time AS current_arrival_time
FROM passengers p
JOIN booking b ON b.passenger_id = p.passenger_id
JOIN flights f ON f.flight_id    = b.flight_id
ORDER BY full_name;


-----9
SELECT dep.country AS airport_country,
       COUNT(*)      AS flights_count,
       STRING_AGG(f.flight_id::TEXT, ', ' ORDER BY f.flight_id) AS flight_ids
FROM flights f
JOIN airline al  ON al.airline_id  = f.airline_id
JOIN airport dep ON dep.airport_id = f.departing_airport_id
WHERE al.airline_country = dep.country
GROUP BY dep.country
ORDER BY dep.country;



----10
```




```sql
---15
SELECT al.airline_name, f.flight_id AS flight_number, dep.city AS departure_city
FROM flights f
JOIN airline al  ON al.airline_id  = f.airline_id
JOIN airport dep ON dep.airport_id = f.departing_airport_id
WHERE dep.country = 'Kazakhstan'
ORDER BY f.flight_id;
```