


Horizon::Zone::CZ\_REG  
\_CHANGE\_GUILD\_POSITIONINFO  
::deserialize

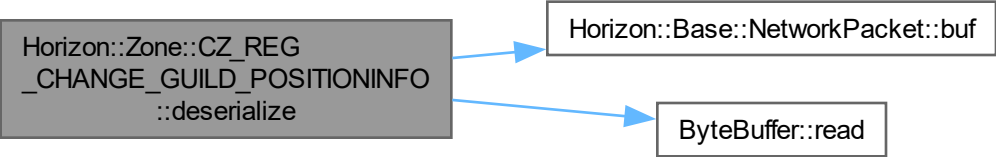

```
graph LR; A[Horizon::Zone::CZ_REG_CHANGE_GUILD_POSITIONINFO::deserialize] --> B[Horizon::Base::NetworkPacket::buf]; A --> C[ByteBuffer::read];
```

The diagram illustrates a call graph. A central grey box on the left represents the function `Horizon::Zone::CZ_REG_CHANGE_GUILD_POSITIONINFO::deserialize`. Two blue arrows originate from the right side of this box. The top arrow points to a white box labeled `Horizon::Base::NetworkPacket::buf`. The bottom arrow points to another white box labeled `ByteBuffer::read`.

Horizon::Base::NetworkPacket::buf

ByteBuffer::read