Node *N* (9 bytes) - *stored in neostore.nodestore.db*

inUse	firstRelationshipID				firstPropertyID			
	R				P			
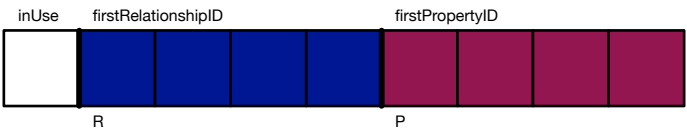
Relationship *R* (33 bytes) - *stored in neostore.relationshipstore.db*

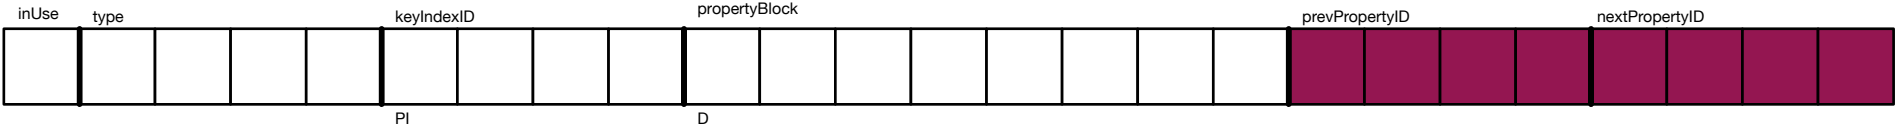| inUse	startNode				endNode				relationshipType				startNodePrevRelID (SP)				startNodeNextRelID (SN)				endNodePrevRelID (EP)				endNodeNextRelID (EN)				firstPropertyID			
	N				N				RT				R				R				R				R				P			
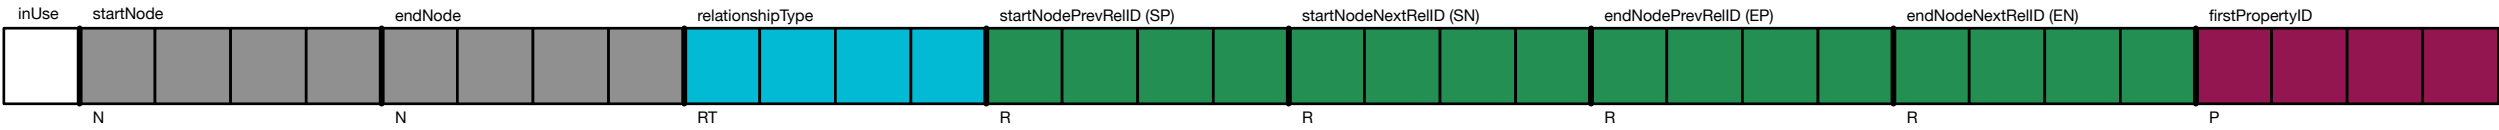
Relationship Type *RT* (5 bytes) - *stored in neostore.relationshiptypestore.db*

inUse	typeBlockID			
	D *references to a Block in neostore.relationshiptypestore.db.names containing a String*			

Property *P* (25 bytes)

inUse	type				keyIndexID				propertyBlock								prevPropertyID				nextPropertyID			
					PI				D															
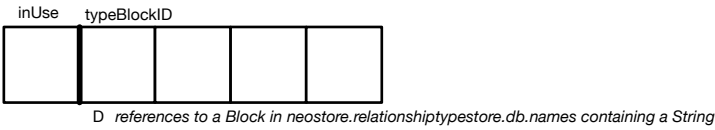
Property Index *PI* (9 bytes)

inUse	propertyCount				keyBlockID			
					D			
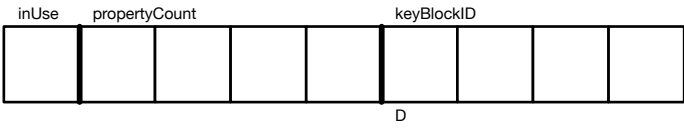
Dynamic Store *D* (13+blockSize bytes)

inUse	previous				length				next				data	
	D				D				blockSize					

NeoStore (5 bytes)

inUse	datum			