

besmeAllah

Changing the Basemap and Adding Legends


Maptor tutorial series

<https://github.com/hosseinnarimanirad/Maptor/tree/master/docs>

Hossein Narimani Rad @ **maptor**

swipe →

Final Output Preview

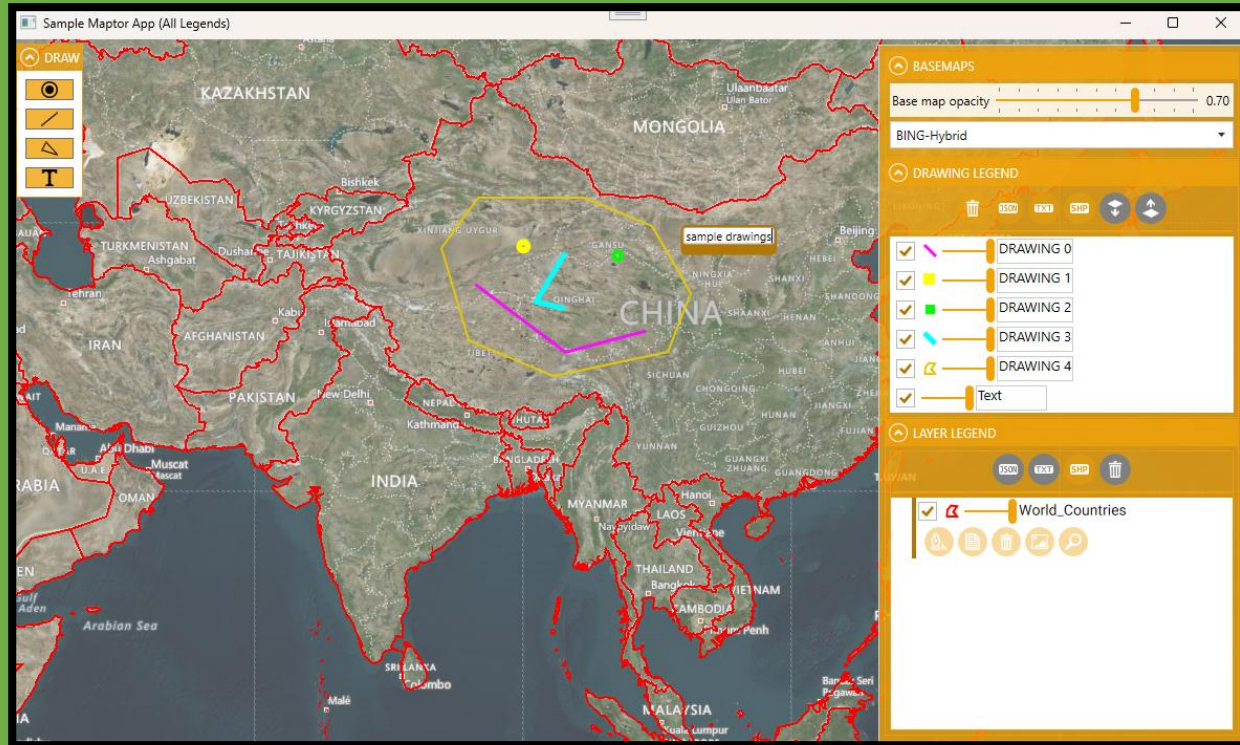

What You'll Learn

By the end of this tutorial, you will be able to:

- Change the **basemap** using a simple *ComboBox* and adjust its transparency.
- Add a **map legend for drawing items** (points, lines, polygons).
- Add a **map legend** for layers (shapefiles and ...), so you can:
 - View the list of layers
 - Change their visibility, opacity, or symbology.
 - Zoom to specific layers.
 - Select features on the map by drawing a polygon.
 - Export a layer as an image.

Note: *You can also create custom commands for the drawing and normal legends. However, that goes beyond the scope of this tutorial and will be covered in a future lesson.*

Change the Basemap in XAML

1. Define the **Maptor namespace** in your *MainWindow.xaml* (or the window where you want to add the legend and have set the DataContext for it. check the first tutorial if you are not familiar).

```
<Window ...  
    xmlns:maptor="clr-namespace:IRI.Maptor.Jab.Controls.View;assembly=IRI.Maptor.Jab.Controls">  
    . . .  
</Window>
```

2. Add a *ComboBox* and bind its *ItemsSource* to '*MapProviders*' and its *SelectedItem* to '*SelectedMapProvider*', also set the *DisplayMemberPath* to '*Title*'.

```
<ComboBox ItemsSource="{Binding MapProviders}" SelectedItem="{Binding SelectedMapProvider, Mode=TwoWay}"  
    DisplayMemberPath="Title"/>
```

Add Drawing and Layer Legends

1. To add a **legend for drawing items**, use the *MapDrawingLegendView* control.
2. To add a **legend for normal layers**, use the *MapLegendWithOptionsView* control, then bind its Layers property to Layers in presenter or any other custom list of layers.



```
<maptor:MapDrawingLegendView MinHeight="90"/>
```


```
<maptor:MapLegendWithOptionsView EnableFilterMode="True" Layers="{Binding Layers}" GroupName="B" />
```

☑ With just these simple steps, you can provide users with powerful controls to manage both **drawn features** and **map layers**—while also allowing them to switch basemaps dynamically.

Full Sample Code

A full example is available on [GitHub](#)¹.

After cloning the project, update your *App.xaml* to set *ALLLegendsWindow.xaml* Window as the *StartupUri*:

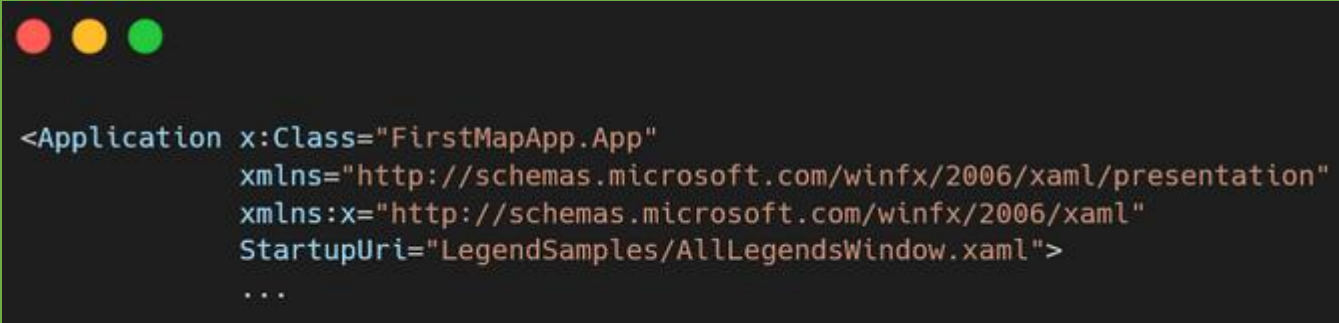

```
<Application x:Class="FirstMapApp.App"
    xmlns="http://schemas.microsoft.com/winfx/2006/xaml/presentation"
    xmlns:x="http://schemas.microsoft.com/winfx/2006/xaml"
    StartupUri="LegendSamples/AllLegendsWindow.xaml">
    ...
```

¹ <https://github.com/hosseinnarimanirad/MaptorSamples>



Hossein Narimani Rad

