

~/kube

k8s








kubectl get pods

DEV

QA

PRD

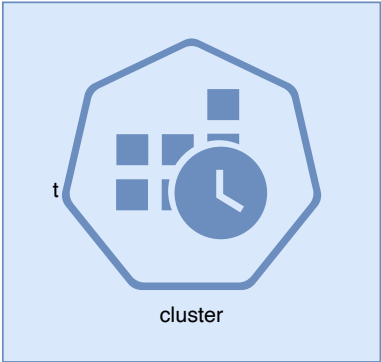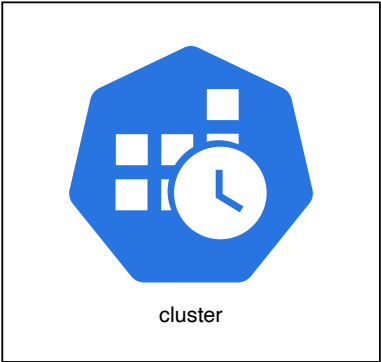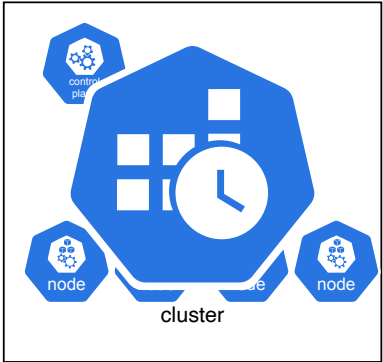


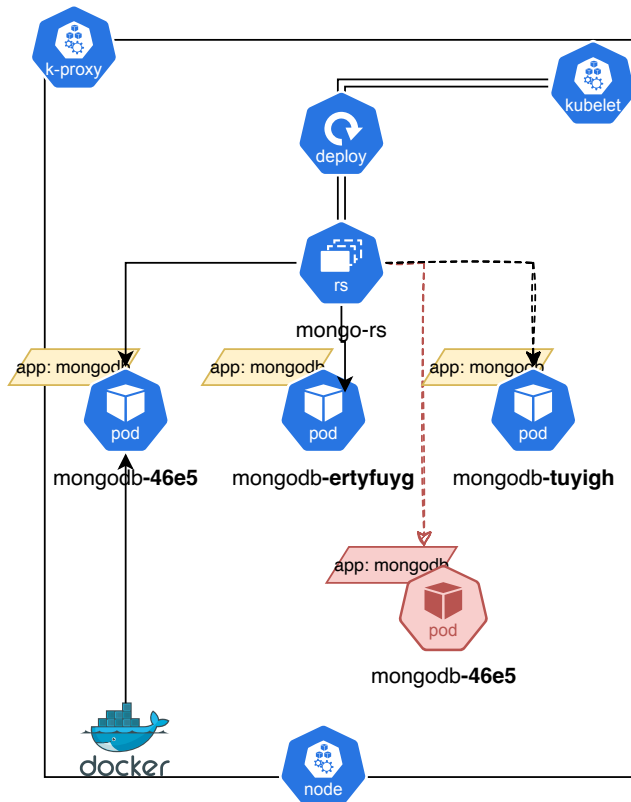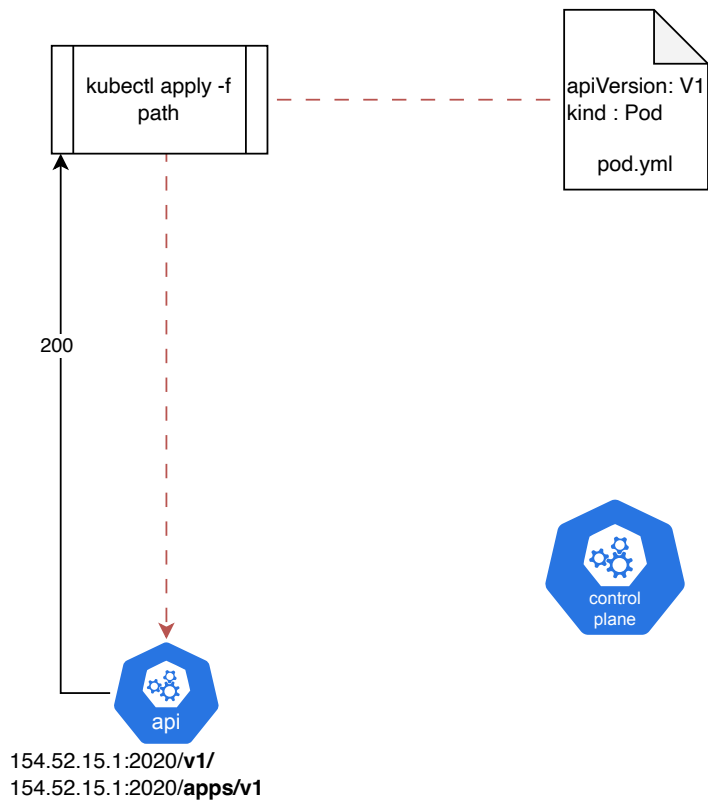

```
name: mongodb
namespace: default
labels:
  app: mongodb
```

```
containers:
  - name: mongodb-container
    image: mongo:9.1
    ports:
      - containerPort: 27017
    env:
      - name: MONGO_INITDB_ROOT_USERNAME
        value: hodi
      - name: MONGO_INITDB_ROOT_PASSWORD
        value: hodi
```

```
docker run --name hodi /
-e MONGO_INITDB_ROOT_USERNAME=hodi /
-e MONGO_INITDB_ROOT_PASSWORD=hodi /
mongo
```

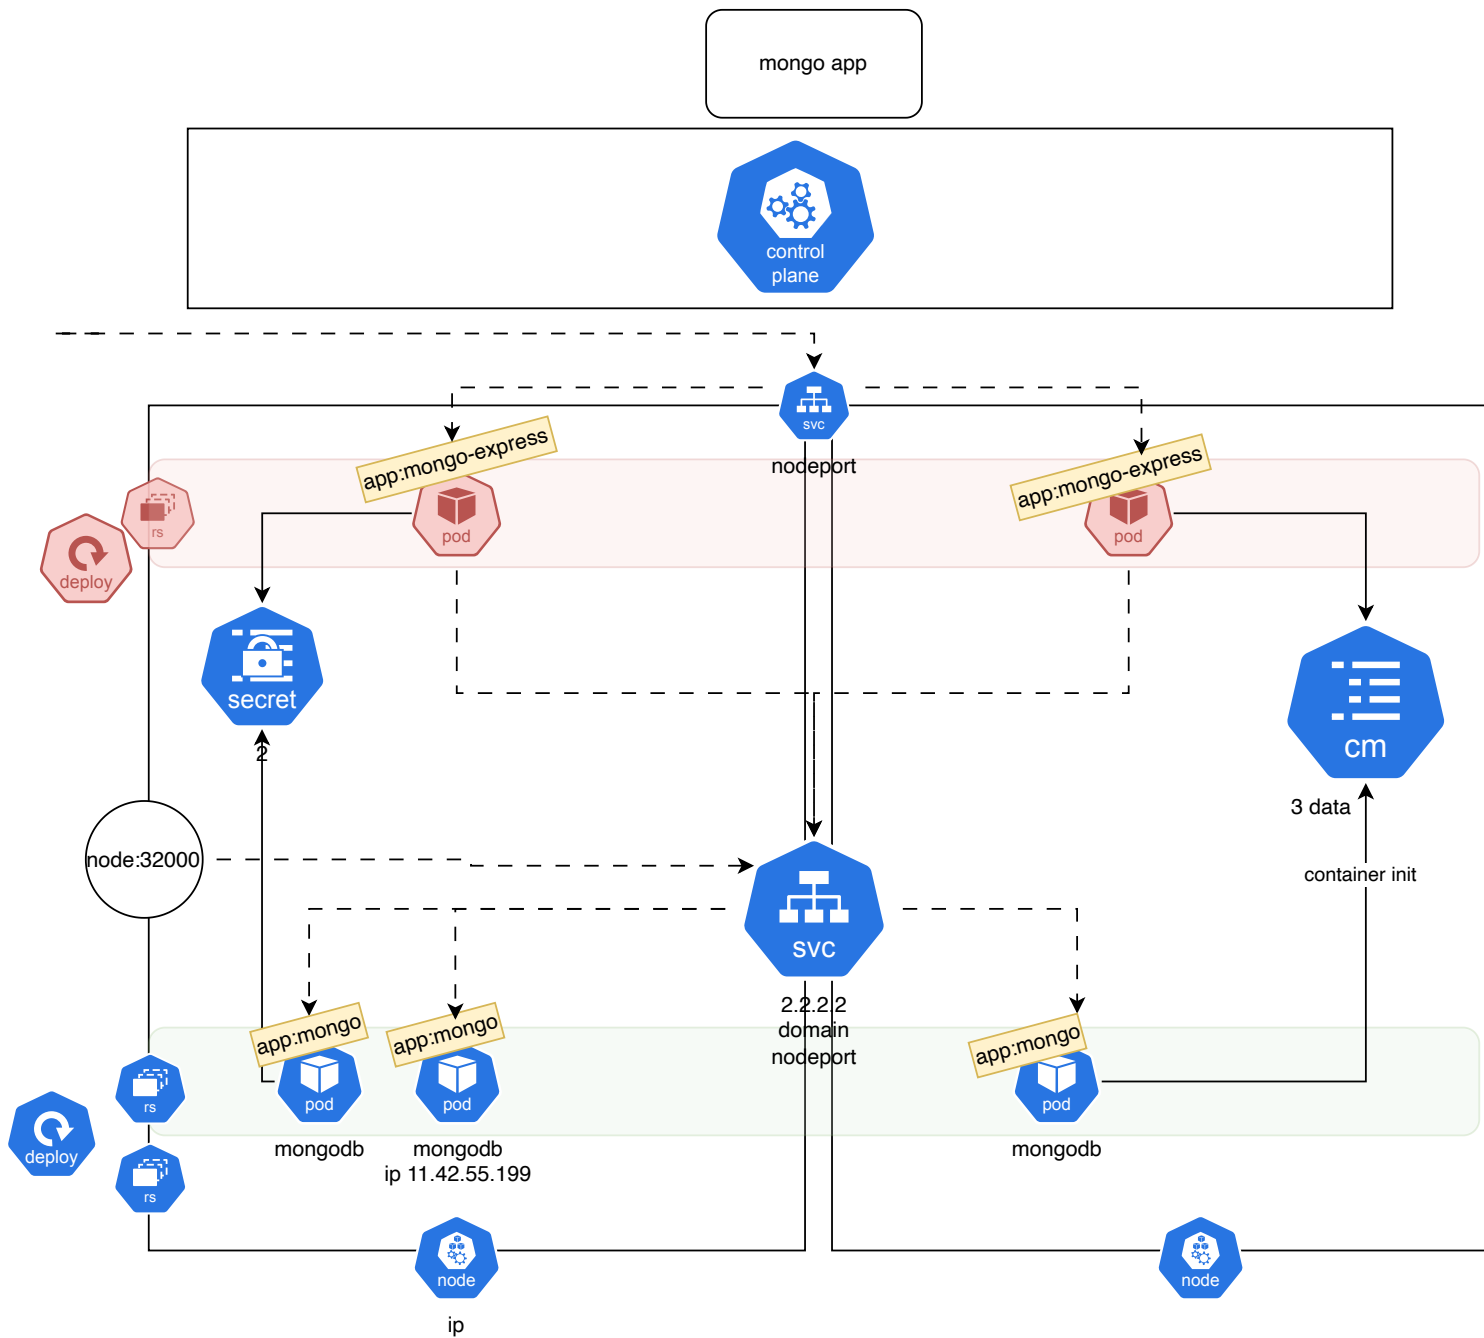

k8s services

clusterip

nodeport

loadbalacer

external name

