


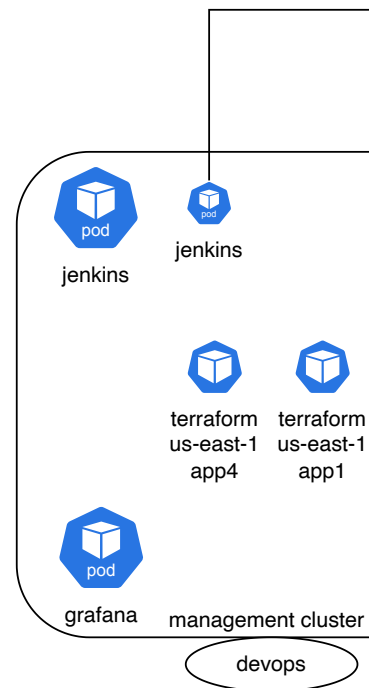
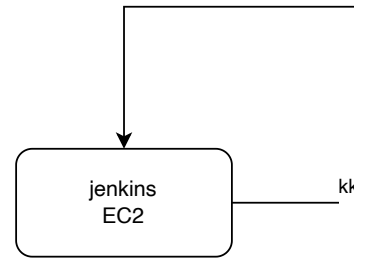


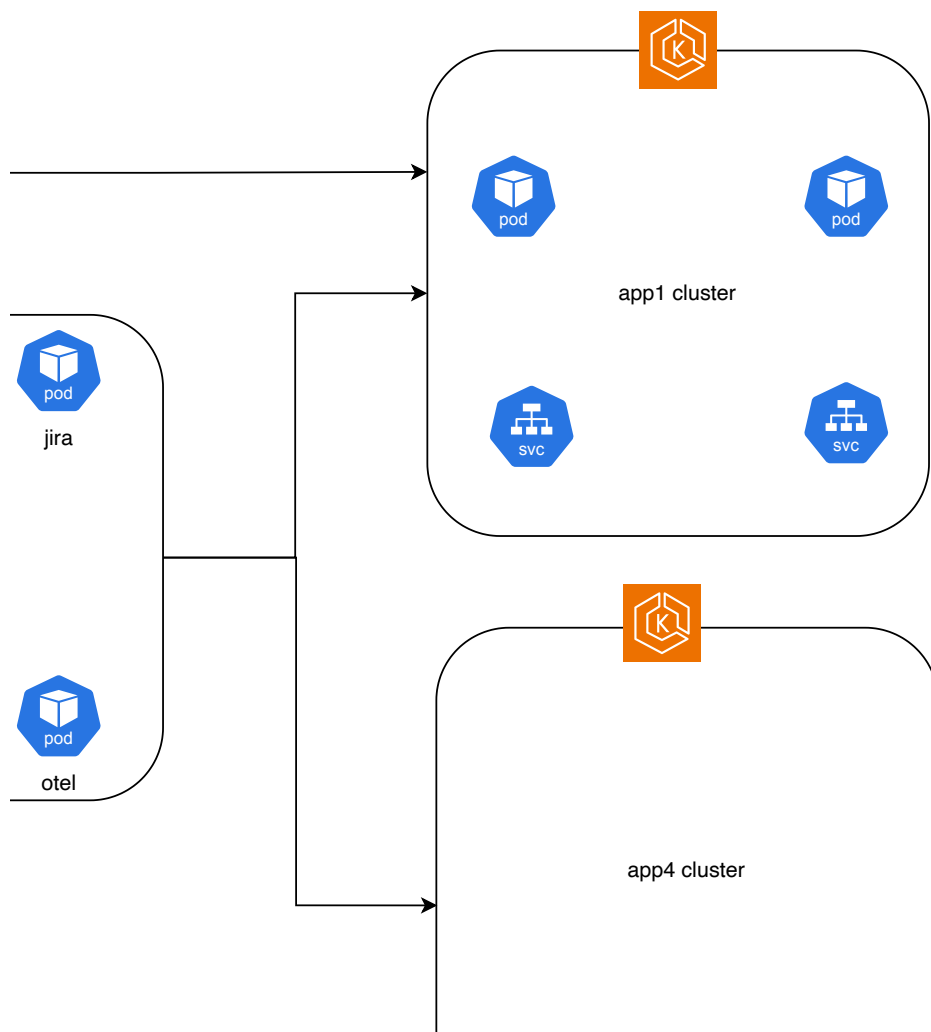


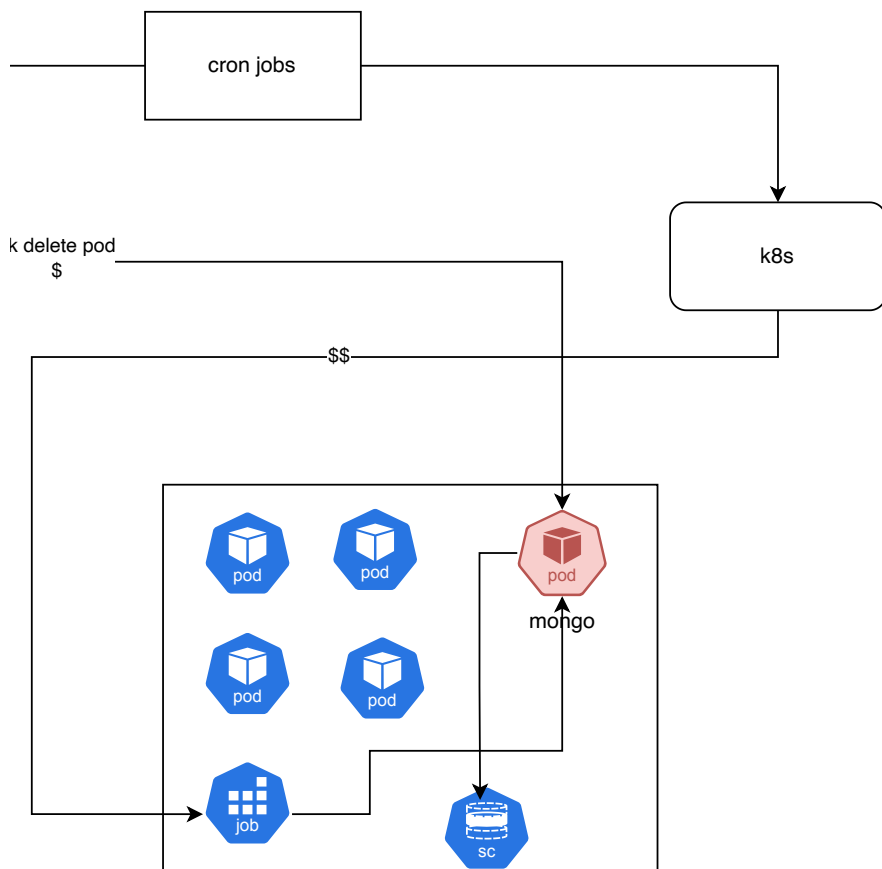

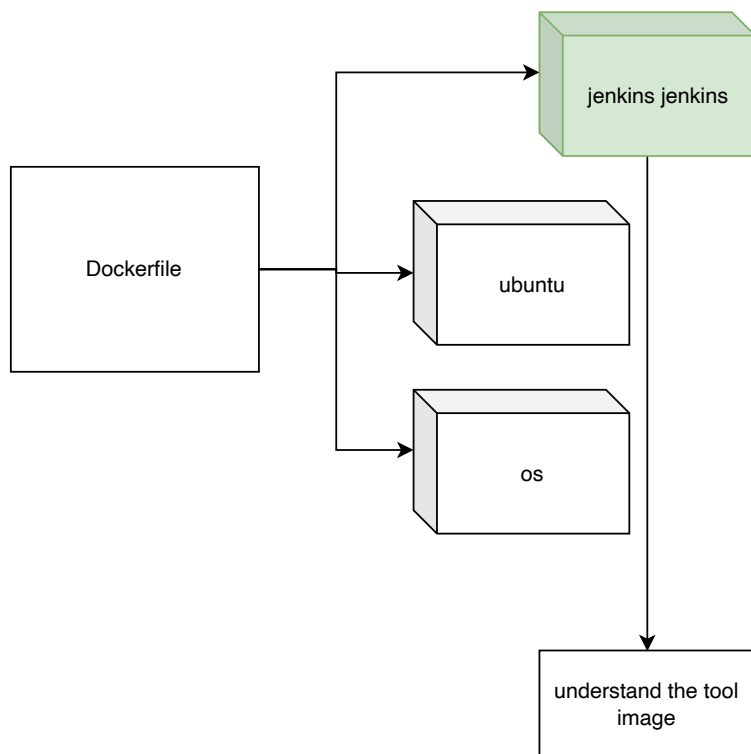

#1 jenkins C

build a new custom jenkins
with python aws cli docker
inside it and kubectl
-- all in one container
--privileged




#3 jenkins pi

<https://github.com/devopsP/devsedcops20>


build a pipeline for the front
the stages must be

- build image
- test the application in parallel
- push the image to dockerhub
- deploy to minikube using

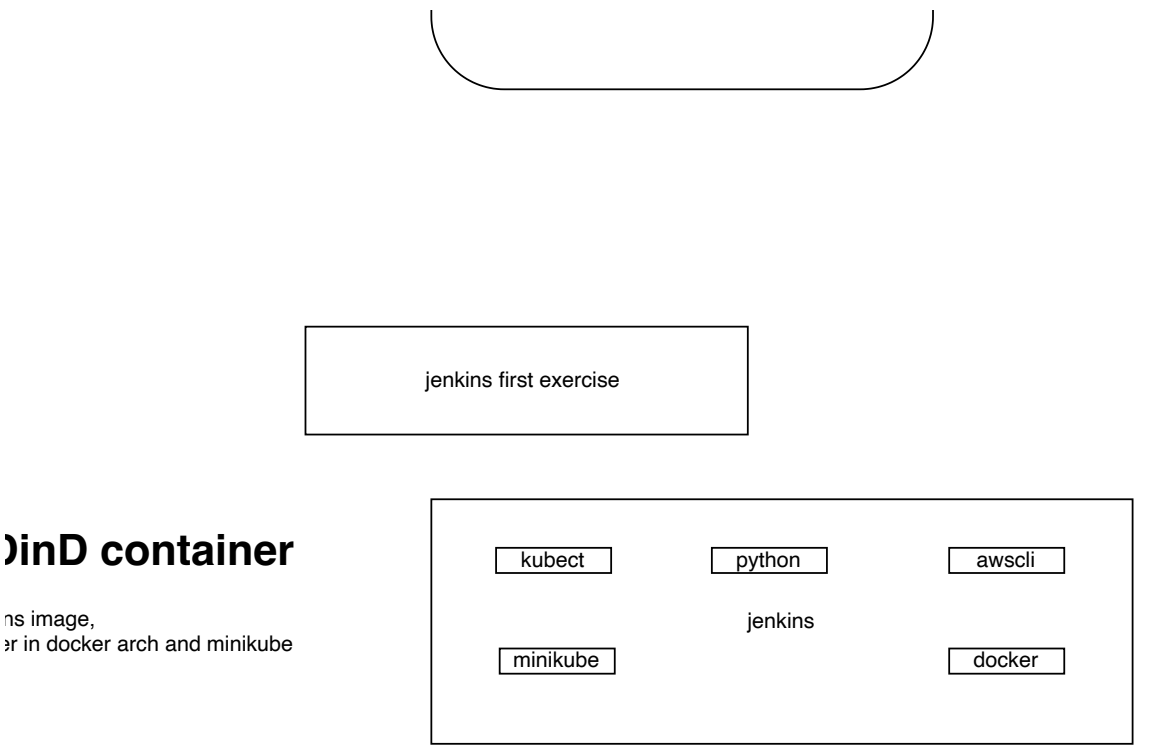

Docker container

ns image,
or in docker arch and minikube

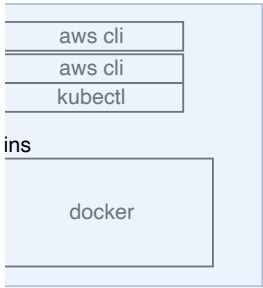

#2 jenkins pipeline

to save the pipeline from any mistakes or shutdowns we gonna build 2 agents
one with docker permissions the other without


- create a jenkins network to run one master and 2 agents of jenkins as a docker containers

- run jenkins controller (master) with :
 - * volumes
 - * ports 8080, 50000
 - * networks
- run 2 jenkins agent form this image- jenkins/inbound-agent with:
 - * network
 - * env:
 - * JENKINS_AGENT_NAME,JENKINS_SECRET

how to get the agent

In Jenkins master

1. **Manage Jenkins**
2. **Manage Nodes and Clouds**
3. **New Node**
4. Name: agent-1
5. Type: **Permanent Agent**
6. Launch method: **Launch agent by connecting it to the controller**
7. Save → copy the **secret**

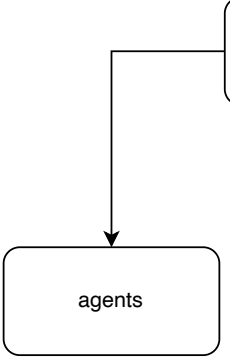

pipeline

'RO27/full-exercise-

t end part of this project

allel
hub/ECR (optional)
kubectl commands

