


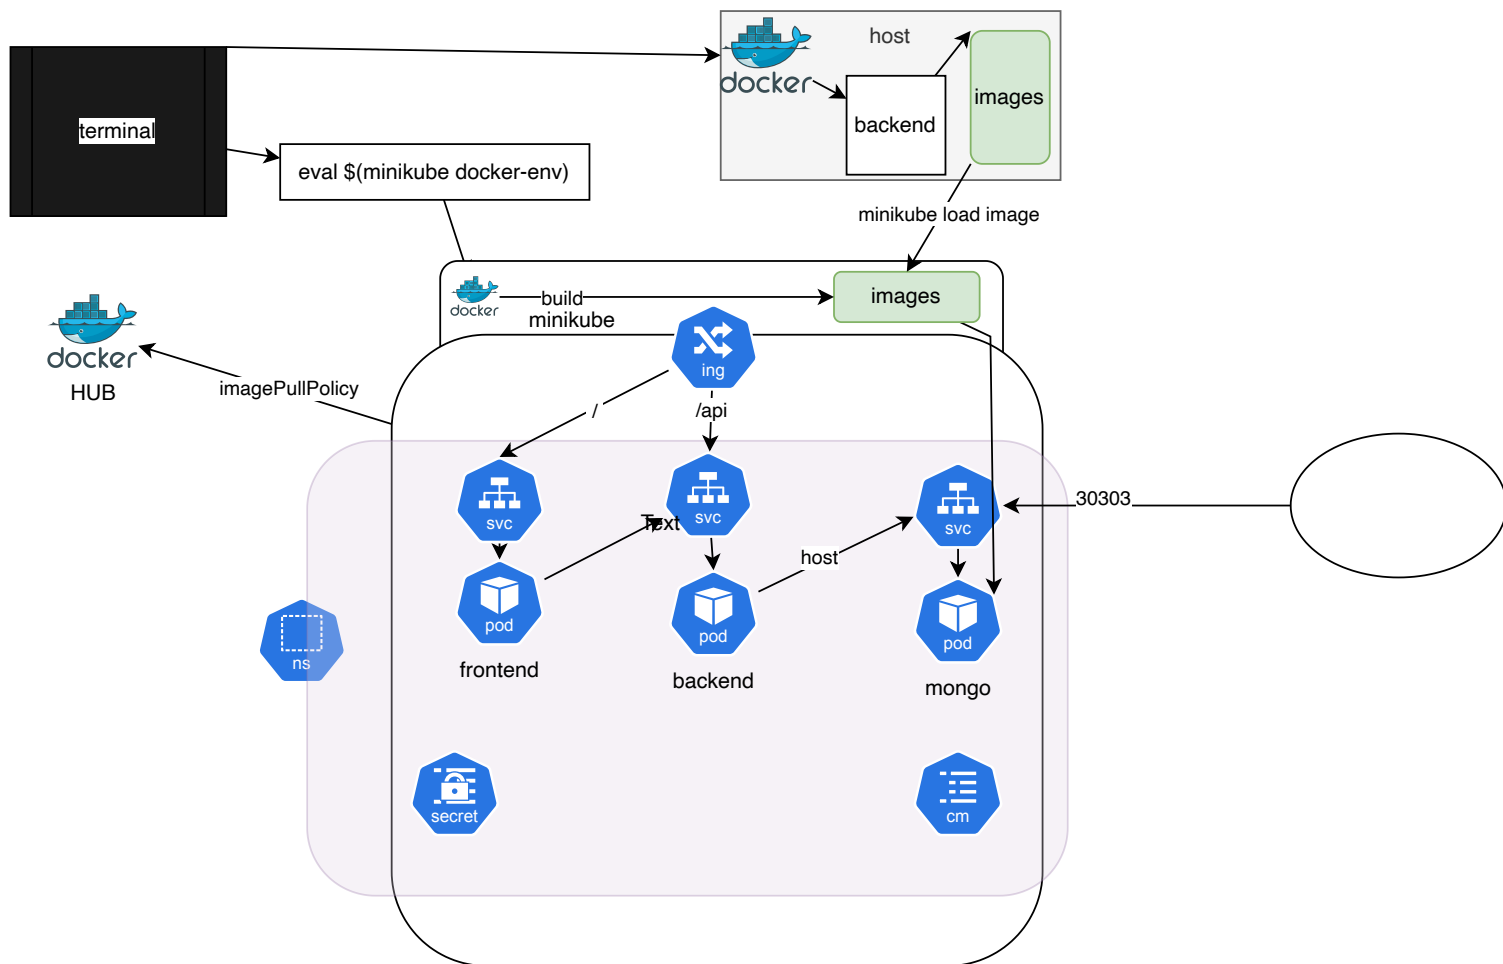

```

`PORT`           | literal `3000`           | HTTP listen port           |
| `MONGO_URI`    | `app-secrets` Secret    | Full MongoDB connection string |
| `REDIS_HOST`   | `app-config` ConfigMap  | Redis service name         |
| `REDIS_PORT`   | `app-config` ConfigMap  | Redis service port         |
| `FILE_STORE_PATH` | literal `"/shared/data"` | Shared PVC mount path      |

```

Variable	Should come from	Purpose
-----	-----	-----
<code>`PORT`</code>	literal <code>`80`</code>	HTTP listen port
<code>`API_BASE`</code>	<code>`app-config`</code> ConfigMap	Base path for API calls
<code>`APP_TITLE`</code>	<code>`app-config`</code> ConfigMap	Page title