







```
a = 7
b = 19

how can we swap the values of a
and b
a,b =b,a
names = ['hodi','matan','noy','tarek']
a,*d=names
```

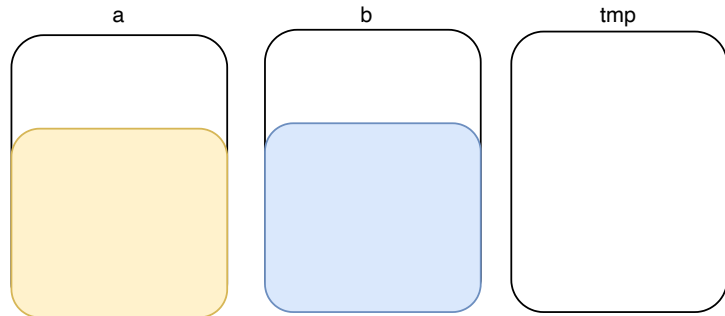

minikube in windows
mac linux

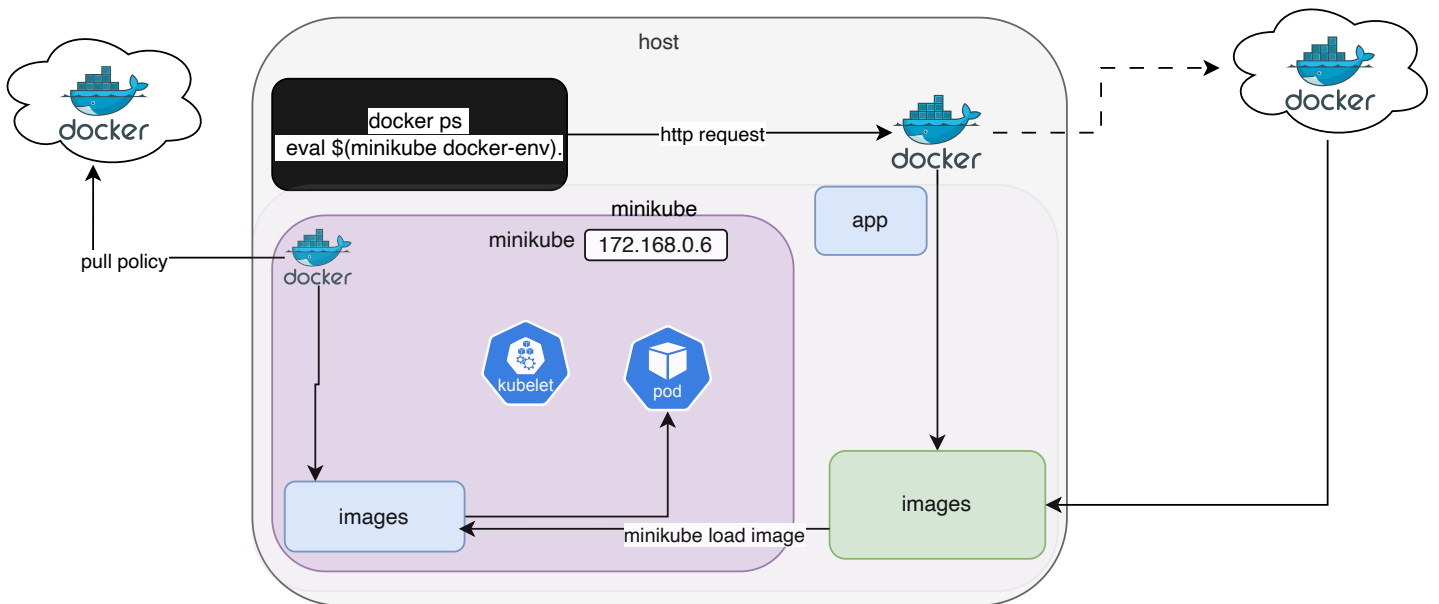

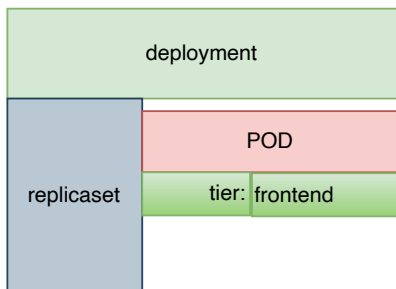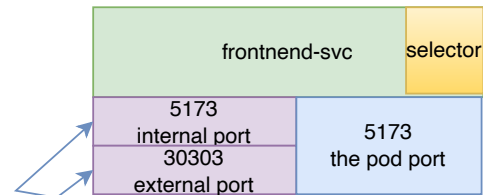

```
apiVersion: v1
kind: Service
metadata:
  name: frontend-svc
  namespace: class-exercise
spec:
  type: NodePort
  selector:
    tier: frontend
  ports:
    - port: 5173
      targetPort: 5173
      nodePort: 30303 #30K-32.7K
```

class-exercise



replicas 1

