


Lab 8. Application LAYER.

Configure application layer services in Packet Tracer.

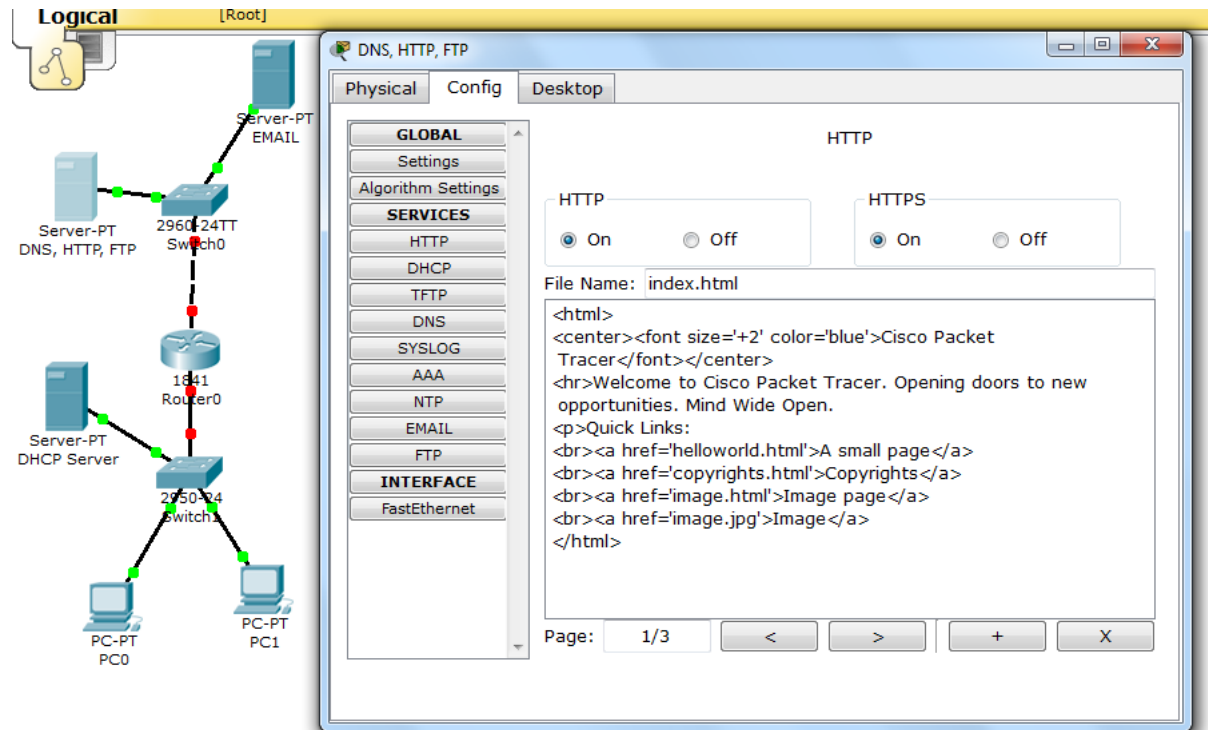

With reference to the above diagram, configure the following:

1. DHCP Server so that PC0 and PC1 can get their IP address setting automatically from DHCP server.
2. PC0 DNS name is PC0.mmu.edu.my , PC1 DNS name is PC1.mmu.edu.my
3. PC0 can ping PC1 using the domain name
4. ali@mail.mmu.edu.my use PC0 to send an email to john@mail.mmu.edu.my . John can retrieve his email at PC1 & reply. Ali should be able to get the reply.
5. All DNS, HTTP/HTTPS and FTP server must be properly configured.
6. When john open the web browser and point to <http://www.mmu.edu.my> a text “Welcome to MMU Network” Should be display on the PC1 browser.