

A

One dictionary, five instantiations




addresses A_U
on one arbor


- A_U address matrix
delivery model (Figs 1, 2)
- Haar route basis
operator screens (Fig. 3)
- $\Phi^{(K)}$ context routes
eight-context task (Fig. 5)
- A_K anatomical subtrees
reconstructed arbors (Fig. 7)
- fitted subtree routes
measured responses (Fig. 9)

B

Dictionary gallery on a [3,3] arbor

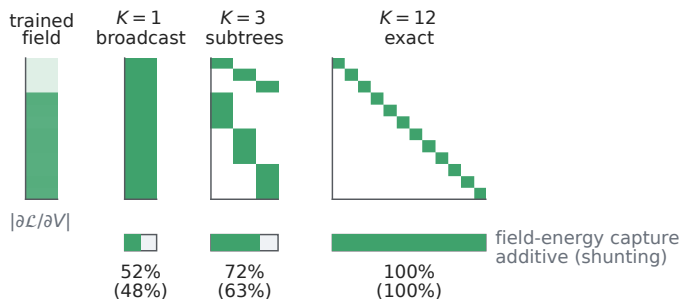**C**

Anatomical routes (MICrONS)

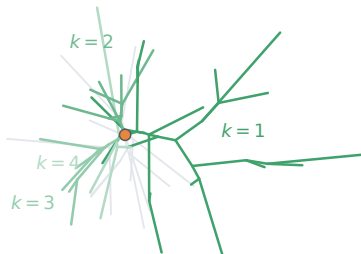

4 of 9 depth-1 routes cover 58/77 segments

D

Alignment $\times$ bandwidth, predicted optimum

