

**A**

## One dictionary, five instantiations

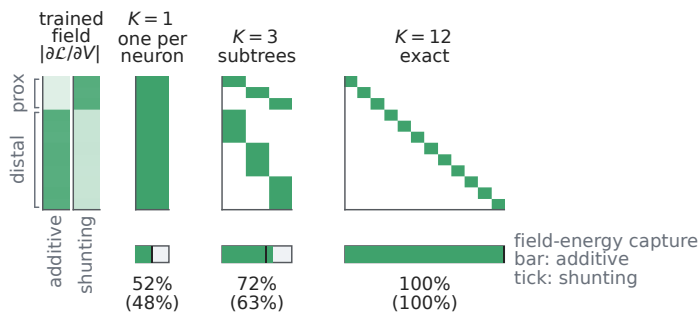


addresses  $A_U$  ( $K = 4$ )  
on one arbor

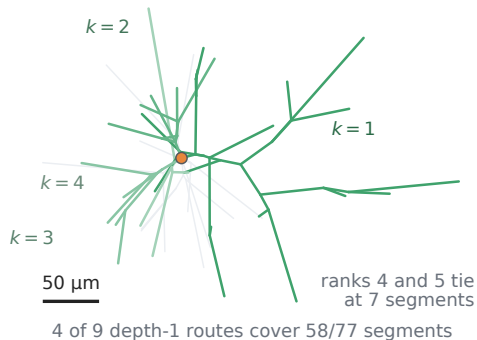
- $A_U$  address matrix  
delivery model (Figs 1, 3)
- Haar route basis  
operator screens (Fig. 4)
- $\Phi^{(K)}$  context routes  
eight-context task (Fig. 6)
- $A_K$  anatomical subtrees  
reconstructed arbors (Fig. 7)
- fitted subtree routes  
measured responses (Fig. 9)

**B**

## Dictionary gallery on a [3,3] arbor

**C**

## Anatomical routes (MICrONS)

**D**

## Which dictionary a task demands

