РОССИЙСКИЙ УНИВЕРСИТЕТ ДРУЖБЫ НАРОДОВ

Факультет физико-математических и естественных наук

ОТЧЁТ

ПО ЛАБОРАТОРНОЙ РАБОТЕ №6

дисциплина: Администрирование сетевых подсистем

Студент: Талебу Тенке

Студ. билет № 1032224534

Группа: НФИбд-02-23

МОСКВА

2025 г.

Цель работы:

Целью данной работы является приобретение практических навыков по установке и конфигурированию системы управления базами данных на примере программного обеспечения MariaDB.

Выполнение работы:

```
root@server:~
[vagrant@server ~]$ sudo -i
[root@server ~]# dnf -y install mariadb mariadb-server
Last metadata expiration check: 2:13:44 ago on Mon 09 Mar 2026 06:25:46 AM UTC.
Dependencies resolved.
================================================================================
 Package                    Arch      Version                Repository    Size
================================================================================
Installing:
 mariadb                    x86_64    3:10.5.29-3.el9_7      appstream    1.6 M
 mariadb-server             x86_64    3:10.5.29-3.el9_7      appstream    9.7 M
Upgrading:
 selinux-policy             noarch    38.1.65-1.el9_7.1      baseos        37 k
 selinux-policy-targeted    noarch    38.1.65-1.el9_7.1      baseos       6.5 M
Installing dependencies:
 mariadb-common             x86_64    3:10.5.29-3.el9_7      appstream     27 k
 mariadb-errmsg             x86_64    3:10.5.29-3.el9_7      appstream    210 k
 mysql-selinux              noarch    1.0.14-1.el9_6         appstream     36 k
 perl-DBD-MariaDB           x86_64    1.21-17.el9            appstream    149 k
 perl-Sys-Hostname          x86_64    1.23-481.1.el9_6       appstream     15 k
Installing weak dependencies:
 mariadb-backup             x86_64    3:10.5.29-3.el9_7      appstream    6.5 M
 mariadb-gssapi-server      x86_64    3:10.5.29-3.el9_7      appstream     14 k
 mariadb-server-utils       x86_64    3:10.5.29-3.el9_7      appstream    210 k

Transaction Summary
================================================================================
Install  10 Packages
Upgrade   2 Packages

Total download size: 25 M
Downloading Packages:
(1/12): mariadb-common-10.5.29-3.el9_7.x86_64.r  87 kB/s |  27 kB     00:00
(2/12): mariadb-errmsg-10.5.29-3.el9_7.x86_64.r  56 kB/s | 210 kB     00:03
(3/12): mariadb-10.5.29-3.el9_7.x86_64.rpm      395 kB/s | 1.6 MB     00:04
(4/12): mariadb-gssapi-server-10.5.29-3.el9_7.x  76 kB/s |  14 kB     00:00
(5/12): mariadb-server-utils-10.5.29-3.el9_7.x8 713 kB/s | 210 kB     00:00
(6/12): mysql-selinux-1.0.14-1.el9_6.noarch.rpm 185 kB/s |  36 kB     00:00
(7/12): perl-DBD-MariaDB-1.21-17.el9.x86_64.rpm 562 kB/s | 149 kB     00:00
(8/12): mariadb-backup-10.5.29-3.el9_7.x86_64.r 1.2 MB/s | 6.5 MB     00:05
(9/12): perl-Sys-Hostname-1.23-481.1.el9_6.x86_  32 kB/s |  15 kB     00:00
(10/12): selinux-policy-38.1.65-1.el9_7.1.noarc  56 kB/s |  37 kB     00:00
(11/12): mariadb-server-10.5.29-3.el9_7.x86_64. 3.5 MB/s | 9.7 MB     00:02
(12/12): selinux-policy-targeted-38.1.65-1.el9_ 2.4 MB/s | 6.5 MB     00:02
```

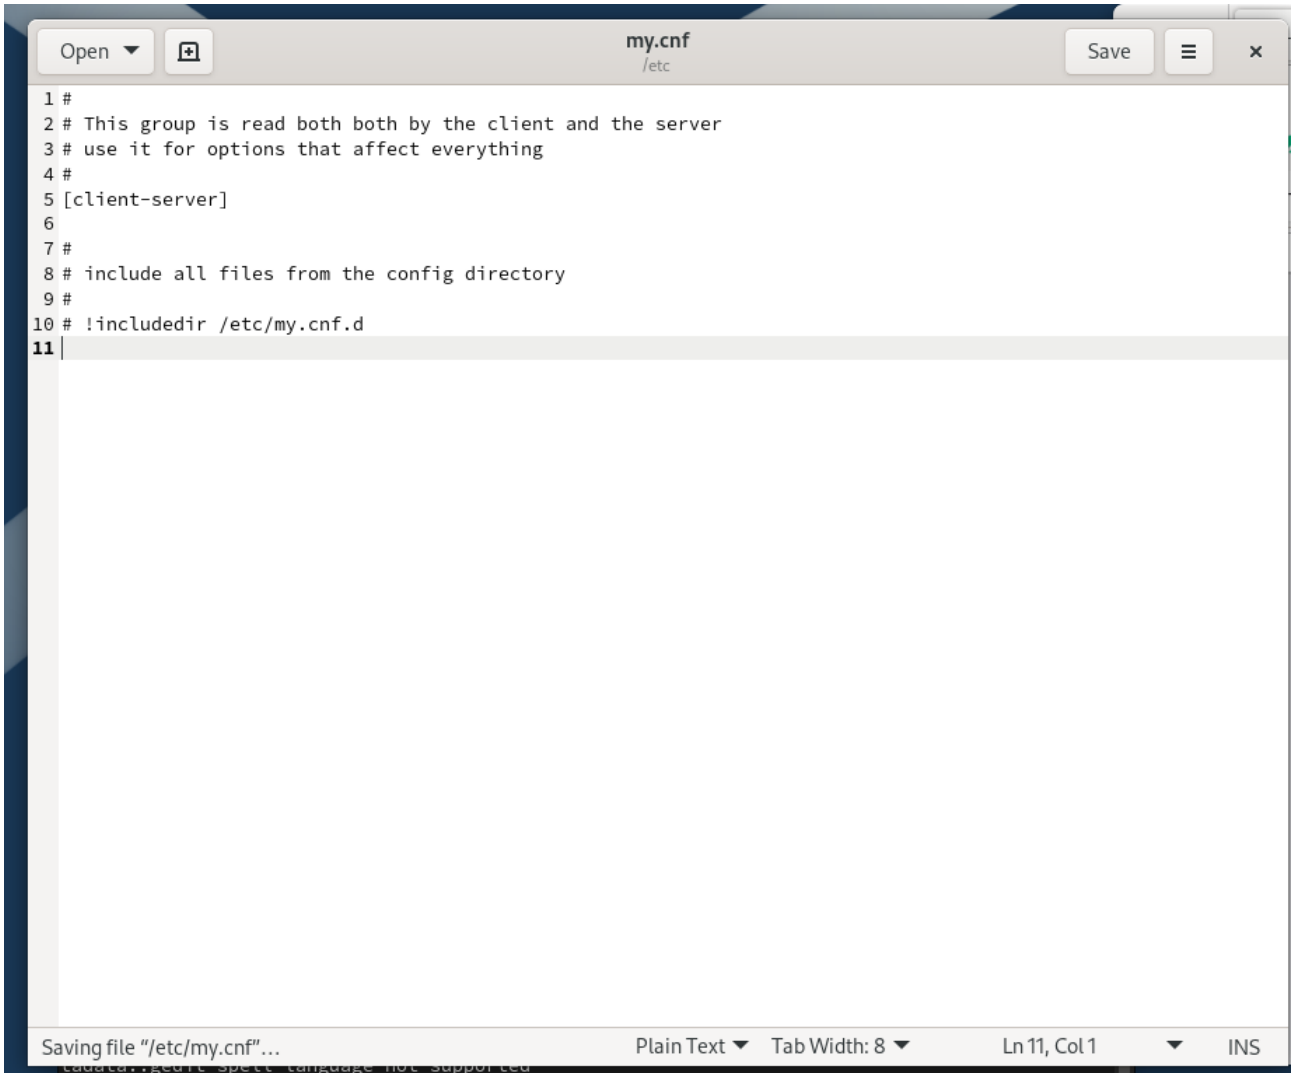
Open
my.cnf
/etc
Save
#
This group is read both both by the client and the server
use it for options that affect everything
#
[client-server]
#
include all files from the config directory
#
!includedir /etc/my.cnf.d
Saving file "/etc/my.cnf"...
Plain Text
Tab Width: 8
Ln 11, Col 1
INS

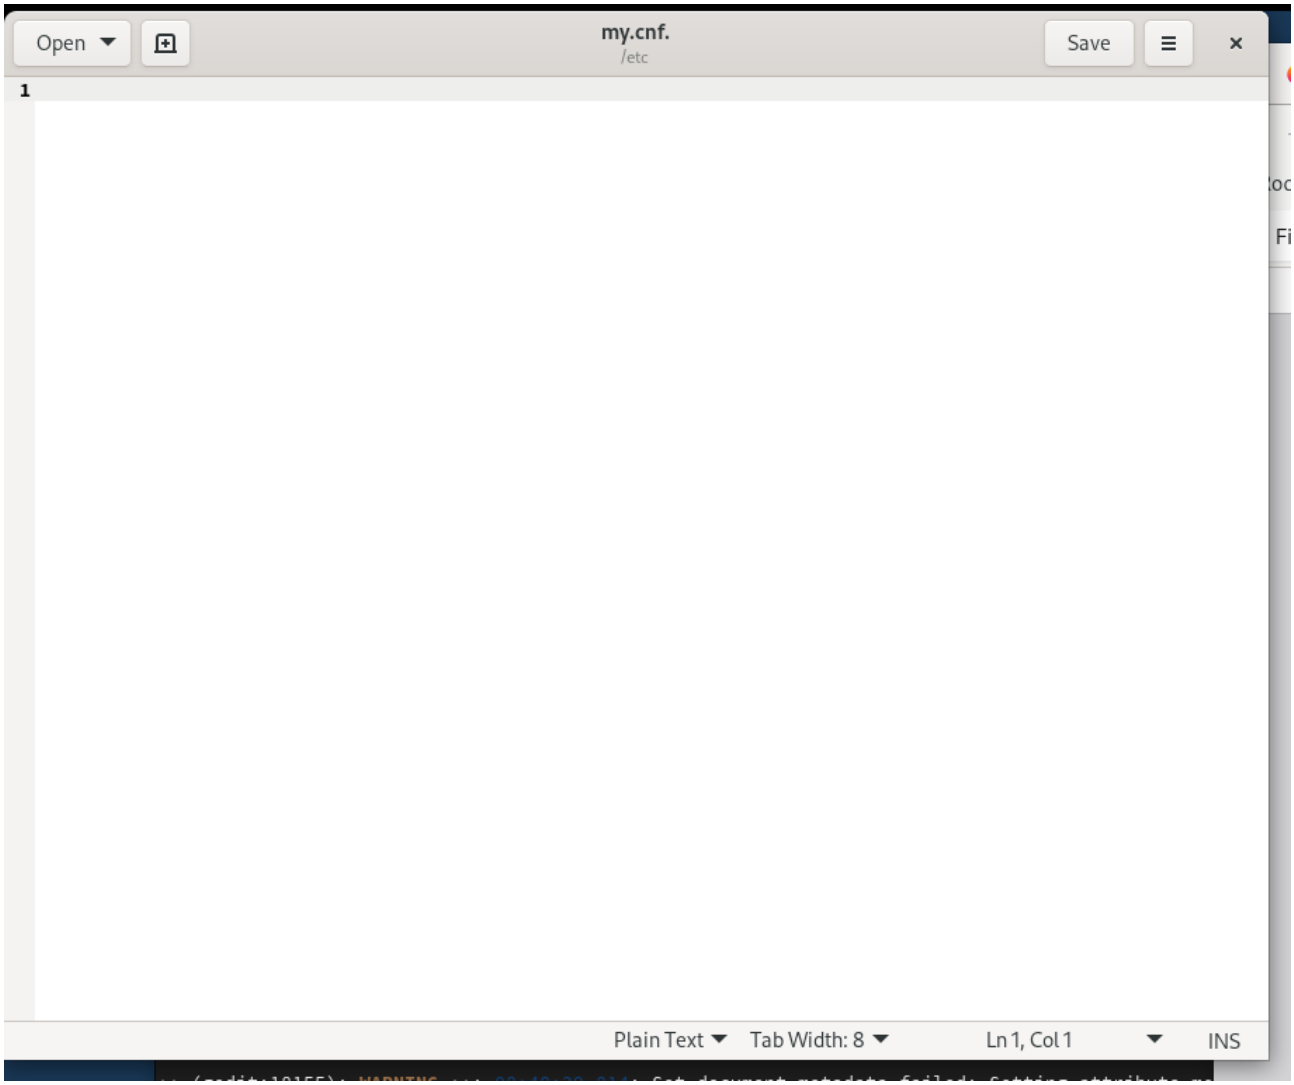


```
** (gedit:18155): WARNING **: 08:48:46.983: Set document metadata failed: Setting attribute metadata
::gedit-position not supported

(gedit:18155): dconf-WARNING **: 08:48:47.002: failed to commit changes to dconf: Failed to execute
child process “dbus-launch” (No such file or directory)
[root@server etc]# systemctl start mariadb
[root@server etc]# systemctl enable mariadb
Created symlink /etc/systemd/system/mysql.service → /usr/lib/systemd/system/mariadb.service.
Created symlink /etc/systemd/system/mysqld.service → /usr/lib/systemd/system/mariadb.service.
Created symlink /etc/systemd/system/multi-user.target.wants/mariadb.service → /usr/lib/systemd/syste
m/mariadb.service.
[root@server etc]# ss -tulpen | grep mysql
[root@server etc]# netstat -turpn | prep-w 3306
bash: prep-w: command not found...
[root@server etc]# netstat -turpn | grep 3306
[root@server etc]# netstat -tulpen | grep 3306
tcp6       0      0 :::3306                 :::*                    LISTEN      27         781624
  18288/mariadbd
[root@server etc]#
```

```
** (gedit:18155): WARNING **: 08:48:46.983: Set document metadata failed: Setting attribute metadata
::gedit-position not supported

(gedit:18155): dconf-WARNING **: 08:48:47.002: failed to commit changes to dconf: Failed to execute
child process “dbus-launch” (No such file or directory)
[root@server etc]# systemctl start mariadb
[root@server etc]# systemctl enable mariadb
Created symlink /etc/systemd/system/mysql.service → /usr/lib/systemd/system/mariadb.service.
Created symlink /etc/systemd/system/mysqld.service → /usr/lib/systemd/system/mariadb.service.
Created symlink /etc/systemd/system/multi-user.target.wants/mariadb.service → /usr/lib/systemd/syste
m/mariadb.service.
[root@server etc]# ss -tulpen | grep mysql
[root@server etc]# netstat -turpn | prep-w 3306
bash: prep-w: command not found...
[root@server etc]# netstat -turpn | grep 3306
[root@server etc]# netstat -tulpen | grep 3306
tcp6       0      0 :::3306                 :::*                    LISTEN      27         781624
  18288/mariadbd
[root@server etc]#
```

```
NOTE: RUNNING ALL PARTS OF THIS SCRIPT IS RECOMMENDED FOR ALL MariaDB
      SERVERS IN PRODUCTION USE!  PLEASE READ EACH STEP CAREFULLY!

In order to log into MariaDB to secure it, we'll need the current
password for the root user. If you've just installed MariaDB, and
haven't set the root password yet, you should just press enter here.

Enter current password for root (enter for none):
OK, successfully used password, moving on...

Setting the root password or using the unix_socket ensures that nobody
can log into the MariaDB root user without the proper authorisation.

You already have your root account protected, so you can safely answer 'n'.

Switch to unix_socket authentication [Y/n] Y
Enabled successfully!
Reloading privilege tables..
 ... Success!


You already have your root account protected, so you can safely answer 'n'.

Change the root password? [Y/n] Y
New password:
Re-enter new password:
Sorry, you can't use an empty password here.

New password:
Re-enter new password:
Password updated successfully!
Reloading privilege tables..
 ... Success!


By default, a MariaDB installation has an anonymous user, allowing anyone
to log into MariaDB without having to have a user account created for
them.  This is intended only for testing, and to make the installation
go a bit smoother.  You should remove them before moving into a
production environment.

Remove anonymous users? [Y/n]
```

Examine

root@server:/etc

Low Disk Space
This computer has only 4

Examine

```
Reloading privilege tables..
 ... Success!


By default, a MariaDB installation has an anonymous user, allowing anyone
to log into MariaDB without having to have a user account created for
them.  This is intended only for testing, and to make the installation
go a bit smoother.  You should remove them before moving into a
production environment.

Remove anonymous users? [Y/n] Y
 ... Success!

Normally, root should only be allowed to connect from 'localhost'.  This
ensures that someone cannot guess at the root password from the network.

Disallow root login remotely? [Y/n] T
Disallow root login remotely? [Y/n] Y
 ... Success!

By default, MariaDB comes with a database named 'test' that anyone can
access.  This is also intended only for testing, and should be removed
before moving into a production environment.

Remove test database and access to it? [Y/n] Y
 - Dropping test database...
 ... Success!
 - Removing privileges on test database...
 ... Success!

Reloading the privilege tables will ensure that all changes made so far
will take effect immediately.

Reload privilege tables now? [Y/n] Y
 ... Success!

Cleaning up...

All done!  If you've completed all of the above steps, your MariaDB
installation should now be secure.

Thanks for using MariaDB!
[root@server etc]#
```

```
Server version: 10.5.29-MariaDB MariaDB Server

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> \h

General information about MariaDB can be found at
http://mariadb.org

List of all client commands:
Note that all text commands must be first on line and end with ';'
?         (\?) Synonym for `help'.
charset   (\C) Switch to another charset. Might be needed for processing binlog with multi-byte char
sets.
clear     (\c) Clear the current input statement.
connect   (\r) Reconnect to the server. Optional arguments are db and host.
delimiter (\d) Set statement delimiter.
edit      (\e) Edit command with $EDITOR.
ego       (\G) Send command to MariaDB server, display result vertically.
exit      (\q) Exit mysql. Same as quit.
go        (\g) Send command to MariaDB server.
help      (\h) Display this help.
nopager   (\n) Disable pager, print to stdout.
notee     (\t) Don't write into outfile.
nowarning (\w) Don't show warnings after every statement.
pager     (\P) Set PAGER [to_pager]. Print the query results via PAGER.
print     (\p) Print current command.
prompt    (\R) Change your mysql prompt.
quit      (\q) Quit mysql.
rehash    (\#) Rebuild completion hash.
sandbox   (\-) Disallow commands that access the file system (except \P without an argument and \e).
source    (\.) Execute an SQL script file. Takes a file name as an argument.
status    (\s) Get status information from the server.
system    (\!) Execute a system shell command.
tee       (\T) Set outfile [to_outfile]. Append everything into given outfile.
use       (\u) Use another database. Takes database name as argument.
warnings  (\W) Show warnings after every statement.

For server side help, type 'help contents'

MariaDB [(none)]>
```

Examine

```
For server side help, type 'help contents'

MariaDB [(none)]> SHOW DATABASES
    -> SHOW DATABASES;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your
MariaDB server version for the right syntax to use near 'SHOW DATABASES' at line 2
MariaDB [(none)]>  SHOW DATABASES;
+--------------------+
| Database           |
+--------------------+
| information_schema |
| mysql              |
| performance_schema |
+--------------------+
3 rows in set (0.014 sec)

MariaDB [(none)]>
```

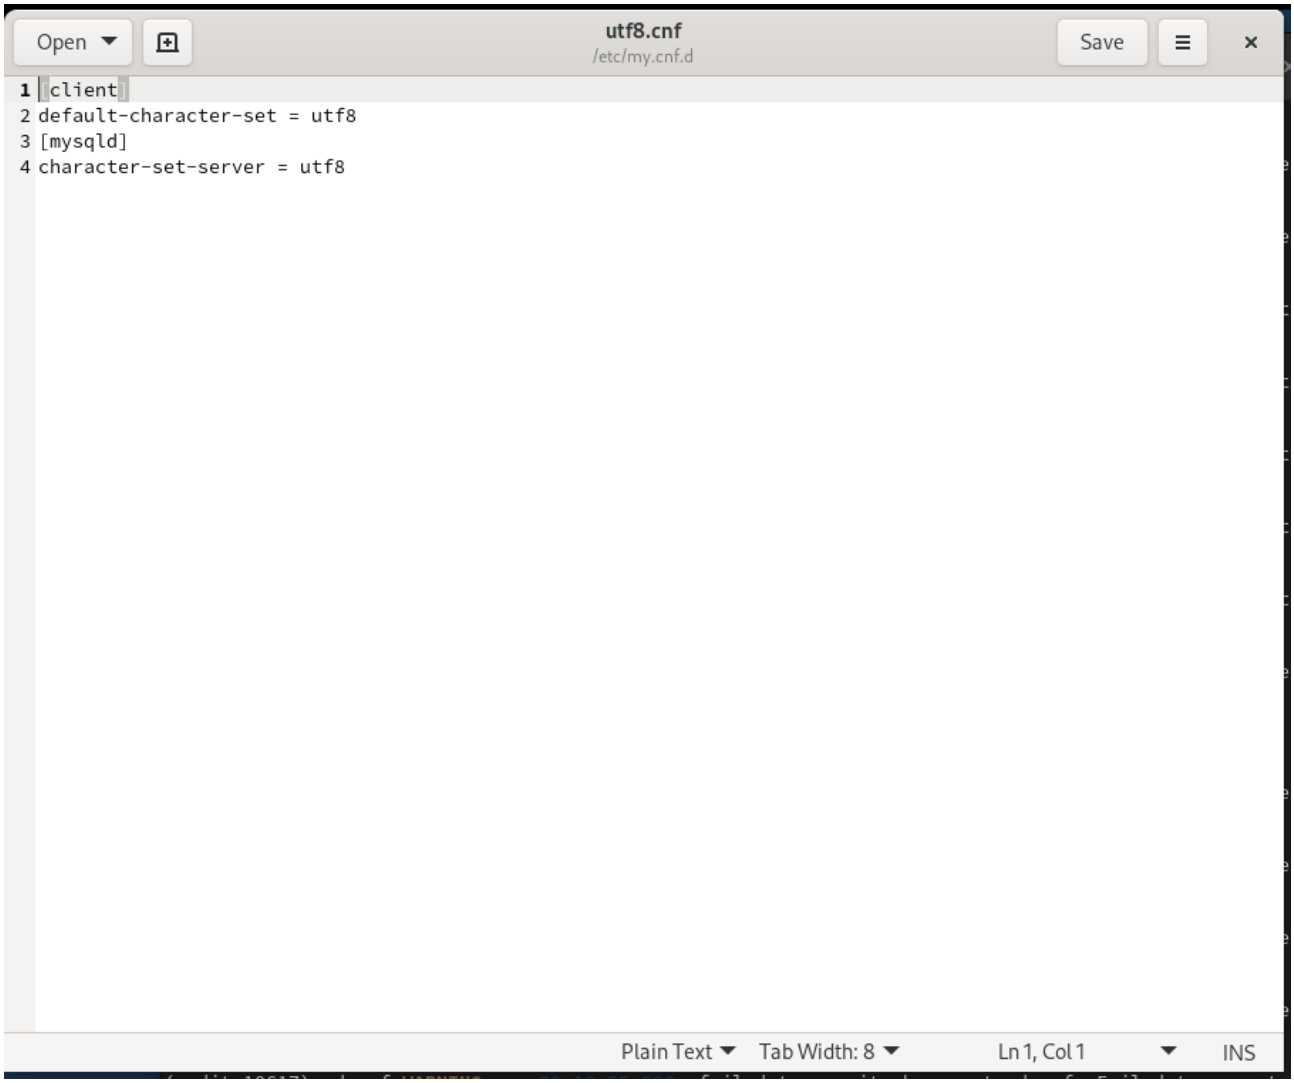
Open
utf8.cnf
/etc/my.cnf.d
Save
1 [client]
2 default-character-set = utf8
3 [mysqld]
4 character-set-server = utf8
Plain Text
Tab Width: 8
Ln 1, Col 1
INS

```
(gedit:18481): dconf-WARNING **: 09:10:12.511: failed to commit changes to dconf: Failed to execute
child process “dbus-launch” (No such file or directory)
[root@server my.cnf.d]# systemctl restart mariadb
[root@server my.cnf.d]# gedit utf8.cnf

(gedit:18617): dconf-WARNING **: 09:10:55.372: failed to commit changes to dconf: Failed to execute
child process “dbus-launch” (No such file or directory)

(gedit:18617): dconf-WARNING **: 09:10:55.376: failed to commit changes to dconf: Failed to execute
child process “dbus-launch” (No such file or directory)

(gedit:18617): dconf-WARNING **: 09:10:55.578: failed to commit changes to dconf: Failed to execute
child process “dbus-launch” (No such file or directory)

(gedit:18617): dconf-WARNING **: 09:10:55.579: failed to commit changes to dconf: Failed to execute
child process “dbus-launch” (No such file or directory)

(gedit:18617): dconf-WARNING **: 09:10:55.580: failed to commit changes to dconf: Failed to execute
child process “dbus-launch” (No such file or directory)

** (gedit:18617): WARNING **: 09:11:08.717: Set document metadata failed: Setting attribute metadata
::gedit-position not supported

(gedit:18617): dconf-WARNING **: 09:11:08.766: failed to commit changes to dconf: Failed to execute
child process “dbus-launch” (No such file or directory)
[root@server my.cnf.d]# systemctl restart mariadb
[root@server my.cnf.d]# mysql -u root -p
Enter password:
```

```
(gedit:18617): dconf-WARNING **: 09:11:08.766: failed to commit changes to dconf: Failed to execute
child process “dbus-launch” (No such file or directory)
[root@server my.cnf.d]# systemctl restart mariadb
[root@server my.cnf.d]# mysql -u root -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 3
Server version: 10.5.29-MariaDB MariaDB Server

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> status
--------------
mysql  Ver 15.1 Distrib 10.5.29-MariaDB, for Linux (x86_64) using  EditLine wrapper

Connection id:          3
Current database:
Current user:           root@localhost
SSL:                    Not in use
Current pager:          stdout
Using outfile:          ''
Using delimiter:        ;
Server:                 MariaDB
Server version:         10.5.29-MariaDB MariaDB Server
Protocol version:       10
Connection:             Localhost via UNIX socket
Server characterset:    latin1
Db     characterset:    latin1
Client characterset:    utf8
Conn.  characterset:    utf8
UNIX socket:            /var/lib/mysql/mysql.sock
Uptime:                 12 min 24 sec

Threads: 1  Questions: 4  Slow queries: 0  Opens: 17  Open tables: 10  Queries per second avg: 0.005
--------------

MariaDB [(none)]>
```

root@server:/etc/my.cnf.d

```
SSL:                    Not in use
Current pager:          stdout
Using outfile:          ''
Using delimiter:        ;
Server:                 MariaDB
Server version:         10.5.29-MariaDB MariaDB Server
Protocol version:       10
Connection:             Localhost via UNIX socket
Server characterset:    latin1
Db     characterset:    latin1
Client characterset:    utf8
Conn.  characterset:    utf8
UNIX socket:            /var/lib/mysql/mysql.sock
Uptime:                 12 min 24 sec

Threads: 1  Questions: 4  Slow queries: 0  Opens: 17  Open tables: 10  Queries per second avg: 0.005
--------------

MariaDB [(none)]> CREATE DATABASE addressbook CHARACTER SET utf8 COLLATE utf8_general_ci;
Query OK, 1 row affected (0.001 sec)

MariaDB [(none)]> USE addressbook;
Database changed
MariaDB [addressbook]> SHOW TABLES;
Empty set (0.003 sec)

MariaDB [addressbook]> CREATE TABLE city(name VARCHAR(40), city VARCHAR(40));
Query OK, 0 rows affected (0.097 sec)

MariaDB [addressbook]> NSERT INTO city(name,city) VALUES ('Иванов','Москва');
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your
MariaDB server version for the right syntax to use near 'NSERT INTO city(name,city) VALUES ('Иванов'
,'Москва')' at line 1
MariaDB [addressbook]> INSERT INTO city(name,city) VALUES ('Иванов','Москва');
Query OK, 1 row affected (0.026 sec)

MariaDB [addressbook]> INSERT INTO city(name,city) VALUES ('Петров','Сочи');
Query OK, 1 row affected (0.014 sec)

MariaDB [addressbook]> INSERT INTO city(name,city) VALUES ('Сидоров','Дубна');
Query OK, 1 row affected (0.013 sec)

MariaDB [addressbook]>
```

```
Threads: 1  Questions: 4  Slow queries: 0  Opens: 17  Open tables: 10  Queries per second avg: 0.005
--------------

MariaDB [(none)]> CREATE DATABASE addressbook CHARACTER SET utf8 COLLATE utf8_general_ci;
Query OK, 1 row affected (0.001 sec)

MariaDB [(none)]> USE addressbook;
Database changed
MariaDB [addressbook]> SHOW TABLES;
Empty set (0.003 sec)

MariaDB [addressbook]> CREATE TABLE city(name VARCHAR(40), city VARCHAR(40));
Query OK, 0 rows affected (0.097 sec)

MariaDB [addressbook]> NSERT INTO city(name,city) VALUES ('Иванов','Москва');
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your
MariaDB server version for the right syntax to use near 'NSERT INTO city(name,city) VALUES ('Иванов'
,'Москва')' at line 1
MariaDB [addressbook]> INSERT INTO city(name,city) VALUES ('Иванов','Москва');
Query OK, 1 row affected (0.026 sec)

MariaDB [addressbook]> INSERT INTO city(name,city) VALUES ('Петров','Сочи');
Query OK, 1 row affected (0.014 sec)

MariaDB [addressbook]> INSERT INTO city(name,city) VALUES ('Сидоров','Дубна');
Query OK, 1 row affected (0.013 sec)

MariaDB [addressbook]> SELECT * FROM city;
+----------------+--------------+
| name           | city         |
+----------------+--------------+
| Иванов         | Москва       |
| Петров         | Сочи         |
| Сидоров        | Дубна        |
+----------------+--------------+
3 rows in set (0.001 sec)

MariaDB [addressbook]>
```

```
MariaDB [addressbook]> CREATE USER user@'%' IDENTIFIED BY 'password';
Query OK, 0 rows affected (0.012 sec)

MariaDB [addressbook]> GRANT SELECT,INSERT,UPDATE,DELETE ON addressbook.* TO frank@'%';
ERROR 1133 (28000): Can't find any matching row in the user table
MariaDB [addressbook]> GRANT SELECT,INSERT,UPDATE,DELETE ON addressbook.* TO user'%';
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your
MariaDB server version for the right syntax to use near ''%'' at line 1
MariaDB [addressbook]> GRANT SELECT,INSERT,UPDATE,DELETE ON addressbook.* TO user"%";
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your
MariaDB server version for the right syntax to use near '"%"' at line 1
MariaDB [addressbook]> GRANT SELECT,INSERT,UPDATE,DELETE ON addressbook.* TO user"%";
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your
MariaDB server version for the right syntax to use near '"%"' at line 1
MariaDB [addressbook]> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.001 sec)

MariaDB [addressbook]> DESCRIBE city;
+-------+-------------+------+-----+---------+-------+
| Field | Type        | Null | Key | Default | Extra |
+-------+-------------+------+-----+---------+-------+
| name  | varchar(40) | YES  |     | NULL    |       |
| city  | varchar(40) | YES  |     | NULL    |       |
+-------+-------------+------+-----+---------+-------+
2 rows in set (0.002 sec)

MariaDB [addressbook]> quit
Bye
[root@server my.cnf.d]# mysqlshow -u root -p
Enter password:
+--------------------+
|     Databases      |
+--------------------+
| addressbook        |
| information_schema |
| mysql              |
| performance_schema |
+--------------------+
[root@server my.cnf.d]#
```

```
root@server:/etc/my.cnf.d

| city   | varchar(40) | YES  |      | NULL     |        |
+--------+-------------+------+-----+---------+--------+
2 rows in set (0.002 sec)

MariaDB [addressbook]> quit
Bye
[root@server my.cnf.d]# mysqlshow -u root -p
Enter password:
+--------------------+
|     Databases      |
+--------------------+
| addressbook        |
| information_schema |
| mysql              |
| performance_schema |
+--------------------+
[root@server my.cnf.d]# mysqlshow -u root -p addressbook
Enter password:
Database: addressbook
+---------+
| Tables |
+---------+
| city   |
+---------+
[root@server my.cnf.d]# mysqlshow -u user -p addressbook
Enter password:
mysqlshow: Access denied for user 'user'@'localhost' (using password: YES)
[root@server my.cnf.d]# mysqlshow -u user -p addressbook
Enter password:
mysqlshow: Access denied for user 'user'@'localhost' (using password: YES)
[root@server my.cnf.d]# mkdir -p /var/backup
[root@server my.cnf.d]# mysqldump -u root -p addressbook > /var/backup/addressbook.sql
Enter password:
[root@server my.cnf.d]# mysqldump -u root -p addressbook | gzip > /var/backup/addressbook.sq
Enter password:
[root@server my.cnf.d]# mysqldump -u root -p addressbook | gzip > $(date+/var/backup/address
m%d.%H%M%S.sql.gz)
-bash: date+/var/backup/addressbook.%Y%m%d.%H%M%S.sql.gz: No such file or directory
-bash: $(date+/var/backup/addressbook.%Y%m%d.%H%M%S.sql.gz): ambiguous redirect
Enter password:
mysqldump: Got errno 32 on write
[root@server my.cnf.d]#
```

```
MariaDB [addressbook]> GRANT SELECT,INSERT,UPDATE,DELETE ON addressbook.* TO user'%';
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your
MariaDB server version for the right syntax to use near ''%'' at line 1
MariaDB [addressbook]> GRANT SELECT,INSERT,UPDATE,DELETE ON addressbook.* TO user"%";
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your
MariaDB server version for the right syntax to use near '"%"' at line 1
MariaDB [addressbook]> GRANT SELECT,INSERT,UPDATE,DELETE ON addressbook.* TO user"%";
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your
MariaDB server version for the right syntax to use near '"%"' at line 1
MariaDB [addressbook]> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.001 sec)

MariaDB [addressbook]> DESCRIBE city;
+-------+-------------+------+-----+---------+-------+
| Field | Type        | Null | Key | Default | Extra |
+-------+-------------+------+-----+---------+-------+
| name  | varchar(40) | YES  |     | NULL    |       |
| city  | varchar(40) | YES  |     | NULL    |       |
+-------+-------------+------+-----+---------+-------+
2 rows in set (0.002 sec)

MariaDB [addressbook]> quit
Bye
[root@server my.cnf.d]# mysqlshow -u root -p
Enter password:
+--------------------+
|     Databases      |
+--------------------+
| addressbook        |
| information_schema |
| mysql              |
| performance_schema |
+--------------------+
[root@server my.cnf.d]# mysqlshow -u root -p addressbook
Enter password:
Database: addressbook
+--------+
| Tables |
+--------+
| city   |
+--------+
[root@server my.cnf.d]# mysqlshow -u user -p addressbook
```

```
Try `gzip --help' for more information.

mysqldump: Got errno 32 on write
[root@server my.cnf.d]# mysql -u root -p addressbook < /var/backup/addressbook.sql
Enter password:
[root@server my.cnf.d]# zcat /var/backup/addressbook.sql.gz | mysql -u root -p addressbook
Enter password:
[root@server my.cnf.d]# mkdir -p /var/backup
[root@server my.cnf.d]# mysqldump -u root -p addressbook > /var/backup/addressbook.sql
Enter password:
[root@server my.cnf.d]# mysqldump -u root -p addressbook | gzip > /var/backup/addressbook.sq
Enter password:
[root@server my.cnf.d]# cd /vagrant/provision/server
[root@server server]# mkdir -p /vagrant/provision/server/mysql/etc/my.cnf.d
[root@server server]# mkdir -p /vagrant/provision/server/mysql/var/backup
[root@server server]# cp -R /etc/my.cnf.d/utf8.cnf /vagrant/provision/server/mysql/etc/my.cn
[root@server server]# cp -R /var/backup/* /vagrant/provision/server/mysql/var/backup/
[root@server server]# cd /vagrant/provision/server
[root@server server]# touch mysql.sh
[root@server server]# chmod +x mysql.sh
[root@server server]# gedit mysql.sh

(gedit:18973): dconf-WARNING **: 10:25:53.744: failed to commit changes to dconf: Failed to
child process “dbus-launch” (No such file or directory)

(gedit:18973): dconf-WARNING **: 10:25:53.751: failed to commit changes to dconf: Failed to
child process “dbus-launch” (No such file or directory)

(gedit:18973): dconf-WARNING **: 10:25:53.979: failed to commit changes to dconf: Failed to
child process “dbus-launch” (No such file or directory)

(gedit:18973): dconf-WARNING **: 10:25:53.980: failed to commit changes to dconf: Failed to
child process “dbus-launch” (No such file or directory)

(gedit:18973): dconf-WARNING **: 10:25:53.980: failed to commit changes to dconf: Failed to
child process “dbus-launch” (No such file or directory)

** (gedit:18973): WARNING **: 10:26:21.627: Set document metadata failed: Setting attribute
::gedit-spell-language not supported

** (gedit:18973): WARNING **: 10:26:21.632: Set document metadata failed: Setting attribute
::gedit-encoding not supported
```

.

Вывод:

В ходе выполнения лабораторной работы были приобретены практические навыки по установке и конфигурированию системы управления базами данных на примере программного обеспечения MariaDB.

Ответы на контрольные вопросы:

1. Какая команда отвечает за настройки безопасности в MariaDB? - **Настройки безопасности в MariaDB обычно управляются с помощью команды mysql_secure_installation. Эта команда выполняет несколько шагов, включая установку пароля для пользователя root, удаление анонимных учетных записей, отключение удаленного входа для пользователя root и удаление тестовых баз данных.**
2. Как настроить MariaDB для доступа через сеть? - **Для настройки MariaDB для доступа через сеть, вы можете отредактировать файл конфигурации MariaDB (обычно называемый my.cnf) и убедиться, что параметр bind-address установлен на IP-адрес, доступный в вашей сети. Также, убедитесь, что пользователь имеет права доступа извне, например, с использованием команды GRANT.**
3. Какая команда позволяет получить обзор доступных баз данных после входа в среду оболочки MariaDB? - **Обзор доступных баз данных после входа в среду оболочки MariaDB можно получить с помощью команды SHOW DATABASES;.**
4. Какая команда позволяет узнать, какие таблицы доступны в базе данных? - **Для просмотра доступных таблиц в базе данных используйте команду SHOW TABLES;.**
5. Какая команда позволяет узнать, какие поля доступны в таблице? - **Чтобы узнать, какие поля доступны в таблице, используйте команду DESCRIBE table_name; или SHOW COLUMNS FROM table_name;.**
6. Какая команда позволяет узнать, какие записи доступны в таблице? - **Для просмотра записей в таблице можно использовать команду SELECT * FROM table_name;.**

7. Как удалить запись из таблицы? - **Для удаления записи из таблицы используйте команду DELETE FROM table_name WHERE condition;, где condition - условие, определяющее, какие записи следует удалить.**
8. Где расположены файлы конфигурации MariaDB? Что можно настроить с их помощью? - **Файлы конфигурации MariaDB обычно располагаются в различных местах в зависимости от системы, но основной файл - my.cnf. Он может быть в /etc/my.cnf, /etc/mysql/my.cnf или /usr/etc/my.cnf. С помощью этих файлов можно настроить различные параметры, такие как порт, пути к файлам данных, параметры безопасности и другие.**
9. Где располагаются файлы с базами данных MariaDB? - **Файлы с базами данных MariaDB располагаются в директории данных. Обычно это /var/lib/mysql/ на Linux-системах.**
10. Как сделать резервную копию базы данных и затем её восстановить? - **Для создания резервной копии базы данных используйте команду mysqldump. Например, mysqldump -u username -p dbname > backup.sql. Для восстановления базы данных из резервной копии используйте команду mysql -u username -p dbname < backup.sql.**